

## FflasFpack

Generated on Thu Jan 16 2025 00:00:00 for FflasFpack by Doxygen 1.12.0

Thu Jan 16 2025 00:00:00



|   |           |
|---|-----------|
| <b>1 FFLAS-FFPACK Documentation.</b>                          | <b>1</b>  |
| 1.1 Introduction . . . . .                                    | 1         |
| 1.2 Goals . . . . .   | 1         |
| 1.3 Design . . . . .  | 1         |
| 1.4 Using FFLAS-FFPACK. . . . .                               | 1         |
| 1.5 Contributing to fflas-ffpack, getting assistance. . . . . | 2         |
| 1.6 Copying and Licence . . . . .                             | 2         |
| 1.7 Tutorial . . . . .  | 2         |
| 1.8 Configuring and Installing FFLAS-FFPACK . . . . .         | 2         |
| 1.9 Architecture of the library. . . . .                      | 2         |
| <b>2 Bug List</b>   | <b>3</b>  |
| <b>3 Bibliography</b>   | <b>7</b>  |
| <b>4 Todo List</b>  | <b>9</b>  |
| <b>5 Topic Index</b>  | <b>13</b> |
| 5.1 Topics . . . . .  | 13        |
| <b>6 Namespace Index</b>                                      | <b>15</b> |
| 6.1 Namespace List . . . . .                                  | 15        |
| <b>7 Hierarchical Index</b>                                   | <b>17</b> |
| 7.1 Class Hierarchy . . . . .                                 | 17        |
| <b>8 Data Structure Index</b>                                 | <b>25</b> |
| 8.1 Data Structures . . . . .                                 | 25        |
| <b>9 File Index</b>   | <b>33</b> |
| 9.1 File List . . . . .                                       | 33        |
| <b>10 Topic Documentation</b>                                 | <b>41</b> |
| 10.1 CHECKER . . . . .  | 41        |
| 10.2 FFLAS-FFPACK . . . . .                                   | 41        |
| 10.2.1 Detailed Description . . . . .                         | 41        |
| 10.2.2 FFLAS . . . . .  | 41        |
| 10.2.3 Interfaces . . . . .                                   | 42        |
| 10.3 Matrix Multiplication Algorithms . . . . .               | 42        |
| 10.3.1 Detailed Description . . . . .                         | 42        |
| 10.4 SIMD wrapper . . . . .                                   | 42        |
| 10.5 FFPACK . . . . .   | 42        |
| 10.5.1 Detailed Description . . . . .                         | 42        |
| 10.6 FFLAS-FFPACK fields . . . . .                            | 43        |
| 10.6.1 Detailed Description . . . . .                         | 43        |
| 10.7 RNS . . . . .  | 43        |

|                                       |           |
|---------------------------------------|-----------|
| <b>11 Namespace Documentation</b>     | <b>45</b> |
| 11.1 FFLAS Namespace Reference        | 45        |
| 11.1.1 Typedef Documentation          | 72        |
| 11.1.1.1 Checker_fgemm                | 72        |
| 11.1.1.2 Checker_ftrsm                | 72        |
| 11.1.1.3 ForceCheck_fgemm             | 72        |
| 11.1.1.4 ForceCheck_ftrsm             | 72        |
| 11.1.1.5 ZOSparseMatrix               | 72        |
| 11.1.1.6 NotZOSparseMatrix            | 72        |
| 11.1.1.7 SimdSparseMatrix             | 73        |
| 11.1.1.8 NoSimdSparseMatrix           | 73        |
| 11.1.1.9 MKLSparseMatrixFormat        | 73        |
| 11.1.1.10 NotMKLSparseMatrixFormat    | 73        |
| 11.1.1.11 has_plus                    | 73        |
| 11.1.1.12 has_minus                   | 73        |
| 11.1.1.13 has_equal                   | 73        |
| 11.1.1.14 has_plus_eq                 | 73        |
| 11.1.1.15 has_minus_eq                | 73        |
| 11.1.1.16 has_mul                     | 74        |
| 11.1.1.17 has_mul_eq                  | 74        |
| 11.1.1.18 Timer                       | 74        |
| 11.1.1.19 BaseTimer                   | 74        |
| 11.1.1.20 UserTimer                   | 74        |
| 11.1.1.21 SysTimer                    | 74        |
| 11.1.2 Enumeration Type Documentation | 74        |
| 11.1.2.1 FFLAS_ORDER                  | 74        |
| 11.1.2.2 FFLAS_TRANSPOSE              | 74        |
| 11.1.2.3 FFLAS_UPLO                   | 75        |
| 11.1.2.4 FFLAS_DIAG                   | 75        |
| 11.1.2.5 FFLAS_SIDE                   | 75        |
| 11.1.2.6 FFLAS_BASE                   | 75        |
| 11.1.2.7 number_kind                  | 76        |
| 11.1.2.8 SparseMatrix_t               | 76        |
| 11.1.2.9 FFLAS_FORMAT                 | 76        |
| 11.1.3 Function Documentation         | 77        |
| 11.1.3.1 InfNorm()                    | 77        |
| 11.1.3.2 min3()                       | 77        |
| 11.1.3.3 max3()                       | 77        |
| 11.1.3.4 min4()                       | 77        |
| 11.1.3.5 max4()                       | 77        |
| 11.1.3.6 fadd() [1/8]                 | 78        |
| 11.1.3.7 faddin() [1/5]               | 78        |

|                            |    |
|----------------------------|----|
| 11.1.3.8 fsub() [1/4]      | 78 |
| 11.1.3.9 fsubin() [1/3]    | 78 |
| 11.1.3.10 fadd() [2/8]     | 79 |
| 11.1.3.11 pfadd()          | 79 |
| 11.1.3.12 pfsub()          | 79 |
| 11.1.3.13 pfaddin()        | 80 |
| 11.1.3.14 pfsubin()        | 80 |
| 11.1.3.15 fadd() [3/8]     | 80 |
| 11.1.3.16 fsub() [2/4]     | 81 |
| 11.1.3.17 faddin() [2/5]   | 81 |
| 11.1.3.18 faddin() [3/5]   | 81 |
| 11.1.3.19 fsubin() [2/3]   | 82 |
| 11.1.3.20 fadd() [4/8]     | 82 |
| 11.1.3.21 fassign() [1/10] | 82 |
| 11.1.3.22 fassign() [2/10] | 83 |
| 11.1.3.23 fassign() [3/10] | 83 |
| 11.1.3.24 fassign() [4/10] | 83 |
| 11.1.3.25 fassign() [5/10] | 84 |
| 11.1.3.26 fassign() [6/10] | 84 |
| 11.1.3.27 fassign() [7/10] | 84 |
| 11.1.3.28 fassign() [8/10] | 84 |
| 11.1.3.29 faxpy() [1/6]    | 85 |
| 11.1.3.30 faxpy() [2/6]    | 85 |
| 11.1.3.31 faxpy() [3/6]    | 85 |
| 11.1.3.32 faxpy() [4/6]    | 86 |
| 11.1.3.33 fdot() [1/11]    | 86 |
| 11.1.3.34 fdot() [2/11]    | 86 |
| 11.1.3.35 fdot() [3/11]    | 87 |
| 11.1.3.36 fdot() [4/11]    | 87 |
| 11.1.3.37 fdot() [5/11]    | 87 |
| 11.1.3.38 fdot() [6/11]    | 87 |
| 11.1.3.39 fdot() [7/11]    | 88 |
| 11.1.3.40 fdot() [8/11]    | 88 |
| 11.1.3.41 fgemm() [1/23]   | 88 |
| 11.1.3.42 fgemm() [2/23]   | 89 |
| 11.1.3.43 fgemm() [3/23]   | 89 |
| 11.1.3.44 fgemm() [4/23]   | 89 |
| 11.1.3.45 fgemm() [5/23]   | 90 |
| 11.1.3.46 fgemm() [6/23]   | 91 |
| 11.1.3.47 fsquare() [1/6]  | 91 |
| 11.1.3.48 fsquare() [2/6]  | 92 |
| 11.1.3.49 fsquare() [3/6]  | 92 |

|                            |     |
|----------------------------|-----|
| 11.1.3.50 fsquare() [4/6]  | 92  |
| 11.1.3.51 fsquare() [5/6]  | 92  |
| 11.1.3.52 fgemm() [7/23]   | 93  |
| 11.1.3.53 fgemm() [8/23]   | 93  |
| 11.1.3.54 fgemm() [9/23]   | 93  |
| 11.1.3.55 fgemm() [10/23]  | 94  |
| 11.1.3.56 fgemm() [11/23]  | 94  |
| 11.1.3.57 fgemm() [12/23]  | 95  |
| 11.1.3.58 fgemm() [13/23]  | 95  |
| 11.1.3.59 fgemm() [14/23]  | 95  |
| 11.1.3.60 fgemm() [15/23]  | 96  |
| 11.1.3.61 fgemm() [16/23]  | 96  |
| 11.1.3.62 fgemm() [17/23]  | 96  |
| 11.1.3.63 fgemm() [18/23]  | 97  |
| 11.1.3.64 fgemv() [1/19]   | 97  |
| 11.1.3.65 fgemv() [2/19]   | 98  |
| 11.1.3.66 fgemv() [3/19]   | 98  |
| 11.1.3.67 fgemv() [4/19]   | 98  |
| 11.1.3.68 fgemv() [5/19]   | 99  |
| 11.1.3.69 fgemv() [6/19]   | 99  |
| 11.1.3.70 fgemv() [7/19]   | 100 |
| 11.1.3.71 fgemv() [8/19]   | 100 |
| 11.1.3.72 fgemv() [9/19]   | 100 |
| 11.1.3.73 fgemv() [10/19]  | 101 |
| 11.1.3.74 fgemv() [11/19]  | 101 |
| 11.1.3.75 fgemv() [12/19]  | 101 |
| 11.1.3.76 fgemv() [13/19]  | 102 |
| 11.1.3.77 fgemv() [14/19]  | 102 |
| 11.1.3.78 fgemv() [15/19]  | 102 |
| 11.1.3.79 fgemv() [16/19]  | 103 |
| 11.1.3.80 fger() [1/12]    | 103 |
| 11.1.3.81 fger() [2/12]    | 104 |
| 11.1.3.82 fger() [3/12]    | 104 |
| 11.1.3.83 fger() [4/12]    | 104 |
| 11.1.3.84 fger() [5/12]    | 105 |
| 11.1.3.85 fger() [6/12]    | 105 |
| 11.1.3.86 fger() [7/12]    | 105 |
| 11.1.3.87 fger() [8/12]    | 106 |
| 11.1.3.88 fger() [9/12]    | 106 |
| 11.1.3.89 fger() [10/12]   | 106 |
| 11.1.3.90 fger() [11/12]   | 107 |
| 11.1.3.91 freduce() [1/11] | 107 |

|   |     |
|---|-----|
| 11.1.3.92 <code>freduce()</code> [2/11]               | 107 |
| 11.1.3.93 <code>freduce_constoverride()</code> [1/2]  | 108 |
| 11.1.3.94 <code>finit()</code> [1/8]                  | 108 |
| 11.1.3.95 <code>finit()</code> [2/8]                  | 108 |
| 11.1.3.96 <code>freduce()</code> [3/11]               | 109 |
| 11.1.3.97 <code>freduce()</code> [4/11]               | 109 |
| 11.1.3.98 <code>pfreduce()</code>                     | 109 |
| 11.1.3.99 <code>freduce()</code> [5/11]               | 109 |
| 11.1.3.100 <code>freduce_constoverride()</code> [2/2] | 110 |
| 11.1.3.101 <code>finit()</code> [3/8]                 | 110 |
| 11.1.3.102 <code>finit()</code> [4/8]                 | 110 |
| 11.1.3.103 <code>freduce()</code> [6/11]              | 111 |
| 11.1.3.104 <code>freduce()</code> [7/11]              | 111 |
| 11.1.3.105 <code>freivalds()</code>                   | 111 |
| 11.1.3.106 <code>fscalin()</code> [1/10]              | 112 |
| 11.1.3.107 <code>fscal()</code> [1/10]                | 112 |
| 11.1.3.108 <code>fscal()</code> [2/10]                | 113 |
| 11.1.3.109 <code>fscal()</code> [3/10]                | 113 |
| 11.1.3.110 <code>fscalin()</code> [2/10]              | 113 |
| 11.1.3.111 <code>fscalin()</code> [3/10]              | 113 |
| 11.1.3.112 <code>fscalin()</code> [4/10]              | 113 |
| 11.1.3.113 <code>fscal()</code> [4/10]                | 114 |
| 11.1.3.114 <code>fscalin()</code> [5/10]              | 114 |
| 11.1.3.115 <code>fscal()</code> [5/10]                | 115 |
| 11.1.3.116 <code>fscalin()</code> [6/10]              | 115 |
| 11.1.3.117 <code>fscal()</code> [6/10]                | 115 |
| 11.1.3.118 <code>fscalin()</code> [7/10]              | 115 |
| 11.1.3.119 <code>fscal()</code> [7/10]                | 116 |
| 11.1.3.120 <code>fscalin()</code> [8/10]              | 116 |
| 11.1.3.121 <code>fscal()</code> [8/10]                | 116 |
| 11.1.3.122 <code>fsyr2k()</code>                      | 116 |
| 11.1.3.123 <code>fsyrk()</code> [1/16]                | 117 |
| 11.1.3.124 <code>fsyrk()</code> [2/16]                | 118 |
| 11.1.3.125 <code>fsyrk()</code> [3/16]                | 118 |
| 11.1.3.126 <code>fsyrk()</code> [4/16]                | 118 |
| 11.1.3.127 <code>fsyrk()</code> [5/16]                | 119 |
| 11.1.3.128 <code>fsyrk()</code> [6/16]                | 119 |
| 11.1.3.129 <code>fsyrk()</code> [7/16]                | 119 |
| 11.1.3.130 <code>fsyrk()</code> [8/16]                | 120 |
| 11.1.3.131 <code>fsyrk()</code> [9/16]                | 120 |
| 11.1.3.132 <code>fsyrk()</code> [10/16]               | 120 |
| 11.1.3.133 <code>fsyrk()</code> [11/16]               | 121 |

|                                   |     |
|-----------------------------------|-----|
| 11.1.3.134 fsyrk() [12/16]        | 121 |
| 11.1.3.135 fsyrk() [13/16]        | 122 |
| 11.1.3.136 fsyrk() [14/16]        | 122 |
| 11.1.3.137 computeS1S2()          | 123 |
| 11.1.3.138 fsyrk() [15/16]        | 123 |
| 11.1.3.139 fsyrk() [16/16]        | 124 |
| 11.1.3.140 fsyrk_strassen() [1/2] | 124 |
| 11.1.3.141 ftrmm() [1/3]          | 124 |
| 11.1.3.142 ftrmm() [2/3]          | 125 |
| 11.1.3.143 ftrsm() [1/9]          | 126 |
| 11.1.3.144 ftrsm() [2/9]          | 126 |
| 11.1.3.145 ftrsm() [3/9]          | 127 |
| 11.1.3.146 ftrsm() [4/9]          | 127 |
| 11.1.3.147 ftrsm() [5/9]          | 127 |
| 11.1.3.148 cblas_imptrsm()        | 128 |
| 11.1.3.149 ftrsv() [1/2]          | 128 |
| 11.1.3.150 igemm_()               | 128 |
| 11.1.3.151 finit() [5/8]          | 129 |
| 11.1.3.152 fconvert() [1/3]       | 129 |
| 11.1.3.153 fnegin() [1/4]         | 130 |
| 11.1.3.154 fneg() [1/4]           | 130 |
| 11.1.3.155 fzero() [1/5]          | 131 |
| 11.1.3.156 frand() [1/2]          | 131 |
| 11.1.3.157 fiszero() [1/4]        | 131 |
| 11.1.3.158 fequal() [1/4]         | 132 |
| 11.1.3.159 faxpby() [1/2]         | 132 |
| 11.1.3.160 fdot() [9/11]          | 133 |
| 11.1.3.161 fswap() [1/2]          | 133 |
| 11.1.3.162 fzero() [2/5]          | 134 |
| 11.1.3.163 fzero() [3/5]          | 135 |
| 11.1.3.164 frand() [2/2]          | 135 |
| 11.1.3.165 fequal() [2/4]         | 136 |
| 11.1.3.166 fiszero() [2/4]        | 136 |
| 11.1.3.167 fidentity() [1/4]      | 137 |
| 11.1.3.168 fidentity() [2/4]      | 137 |
| 11.1.3.169 finit() [6/8]          | 137 |
| 11.1.3.170 fconvert() [2/3]       | 137 |
| 11.1.3.171 fnegin() [2/4]         | 138 |
| 11.1.3.172 fneg() [2/4]           | 138 |
| 11.1.3.173 faxpby() [2/2]         | 139 |
| 11.1.3.174 fmove() [1/2]          | 139 |
| 11.1.3.175 bitsize()              | 140 |



|   |     |
|---|-----|
| 11.1.3.176 <code>bitsize&lt; Givaro::ZRing&lt; Givaro::Integer &gt; &gt;()</code> | 140 |
| 11.1.3.177 <code>ftmv()</code>  | 141 |
| 11.1.3.178 <code>ftsm()</code> [6/9]  | 141 |
| 11.1.3.179 <code>fsyrk_strassen()</code> [2/2]                                    | 142 |
| 11.1.3.180 <code>pfgemm()</code> [1/7]  | 142 |
| 11.1.3.181 <code>pfgemm_1D_rec()</code>   | 143 |
| 11.1.3.182 <code>pfgemm_2D_rec()</code>   | 143 |
| 11.1.3.183 <code>pfgemm_3D_rec()</code>   | 143 |
| 11.1.3.184 <code>pfgemm_3D_rec2()</code>  | 144 |
| 11.1.3.185 <code>fgemm()</code> [19/23]   | 144 |
| 11.1.3.186 <code>ftsm()</code> [7/9]  | 144 |
| 11.1.3.187 <code>ftsm()</code> [8/9]  | 145 |
| 11.1.3.188 <code>fspmv()</code> [1/2]   | 145 |
| 11.1.3.189 <code>fspmm()</code>   | 145 |
| 11.1.3.190 <code>sparse_init()</code> [1/16]                                      | 146 |
| 11.1.3.191 <code>sparse_init()</code> [2/16]                                      | 146 |
| 11.1.3.192 <code>sparse_delete()</code> [1/12]                                    | 146 |
| 11.1.3.193 <code>sparse_delete()</code> [2/12]                                    | 146 |
| 11.1.3.194 <code>sparse_init()</code> [3/16]                                      | 146 |
| 11.1.3.195 <code>sparse_init()</code> [4/16]                                      | 147 |
| 11.1.3.196 <code>sparse_delete()</code> [3/12]                                    | 147 |
| 11.1.3.197 <code>sparse_delete()</code> [4/12]                                    | 147 |
| 11.1.3.198 <code>sparse_print()</code> [1/3]                                      | 147 |
| 11.1.3.199 <code>sparse_init()</code> [5/16]                                      | 147 |
| 11.1.3.200 <code>sparse_init()</code> [6/16]                                      | 148 |
| 11.1.3.201 <code>sparse_init()</code> [7/16]                                      | 148 |
| 11.1.3.202 <code>sparse_init()</code> [8/16]                                      | 148 |
| 11.1.3.203 <code>sparse_delete()</code> [5/12]                                    | 148 |
| 11.1.3.204 <code>sparse_init()</code> [9/16]                                      | 149 |
| 11.1.3.205 <code>sparse_init()</code> [10/16]                                     | 149 |
| 11.1.3.206 <code>sparse_init()</code> [11/16]                                     | 149 |
| 11.1.3.207 <code>sparse_delete()</code> [6/12]                                    | 149 |
| 11.1.3.208 <code>sparse_delete()</code> [7/12]                                    | 149 |
| 11.1.3.209 <code>sparse_init()</code> [12/16]                                     | 150 |
| 11.1.3.210 <code>sparse_init()</code> [13/16]                                     | 150 |
| 11.1.3.211 <code>sparse_delete()</code> [8/12]                                    | 150 |
| 11.1.3.212 <code>sparse_delete()</code> [9/12]                                    | 150 |
| 11.1.3.213 <code>sparse_print()</code> [2/3]                                      | 150 |
| 11.1.3.214 <code>sparse_delete()</code> [10/12]                                   | 150 |
| 11.1.3.215 <code>sparse_init()</code> [14/16]                                     | 151 |
| 11.1.3.216 <code>operator&lt;&lt;()</code>  | 151 |
| 11.1.3.217 <code>readSmsFormat()</code>   | 151 |

|   |     |
|---|-----|
| 11.1.3.218 readSprFormat()                                | 151 |
| 11.1.3.219 getDataType() [1/4]                            | 151 |
| 11.1.3.220 getDataType() [2/4]                            | 152 |
| 11.1.3.221 getDataType() [3/4]                            | 152 |
| 11.1.3.222 getDataType() [4/4]                            | 152 |
| 11.1.3.223 readMachineType()                              | 152 |
| 11.1.3.224 readDnsFormat()                                | 152 |
| 11.1.3.225 writeDnsFormat()                               | 152 |
| 11.1.3.226 fspmv() [2/2]                                  | 153 |
| 11.1.3.227 sparse_delete() [11/12]                        | 153 |
| 11.1.3.228 sparse_delete() [12/12]                        | 153 |
| 11.1.3.229 sparse_print() [3/3]                           | 153 |
| 11.1.3.230 sparse_init() [15/16]                          | 153 |
| 11.1.3.231 sparse_init() [16/16]                          | 153 |
| 11.1.3.232 computeDeviation()                             | 154 |
| 11.1.3.233 getStat()                                      | 154 |
| 11.1.3.234 maxCardinality()                               | 154 |
| 11.1.3.235 maxCardinality< Givaro::Modular< int64_t > >() | 154 |
| 11.1.3.236 maxCardinality< Givaro::Modular< int32_t > >() | 154 |
| 11.1.3.237 minCardinality()                               | 154 |
| 11.1.3.238 fflas_delete() [1/4]                           | 154 |
| 11.1.3.239 fflas_delete() [2/4]                           | 155 |
| 11.1.3.240 fflas_new() [1/7]                              | 155 |
| 11.1.3.241 fflas_new() [2/7]                              | 155 |
| 11.1.3.242 finit_rns() [1/2]                              | 155 |
| 11.1.3.243 finit_trans_rns()                              | 155 |
| 11.1.3.244 fconvert_rns() [1/2]                           | 156 |
| 11.1.3.245 fconvert_trans_rns()                           | 156 |
| 11.1.3.246 fflas_new() [3/7]                              | 156 |
| 11.1.3.247 fflas_new() [4/7]                              | 156 |
| 11.1.3.248 finit_rns() [2/2]                              | 156 |
| 11.1.3.249 fconvert_rns() [2/2]                           | 157 |
| 11.1.3.250 freduce() [8/11]                               | 157 |
| 11.1.3.251 freduce() [9/11]                               | 157 |
| 11.1.3.252 finit() [7/8]                                  | 158 |
| 11.1.3.253 fconvert() [3/3]                               | 158 |
| 11.1.3.254 fnegin() [3/4]                                 | 158 |
| 11.1.3.255 fneg() [3/4]                                   | 159 |
| 11.1.3.256 fzero() [4/5]                                  | 159 |
| 11.1.3.257 fiszero() [3/4]                                | 160 |
| 11.1.3.258 fequal() [3/4]                                 | 160 |
| 11.1.3.259 fassign() [9/10]                               | 160 |

|   |         |     |
|---|---------|-----|
| 11.1.3.260 fscaln()   | [ 9/10] | 161 |
| 11.1.3.261 fscal()  | [ 9/10] | 161 |
| 11.1.3.262 faxpy()  | [ 5/6]  | 162 |
| 11.1.3.263 fdot()   | [10/11] | 162 |
| 11.1.3.264 fswap()  | [ 2/2]  | 163 |
| 11.1.3.265 fadd()   | [ 5/8]  | 164 |
| 11.1.3.266 fsub()   | [ 3/4]  | 164 |
| 11.1.3.267 faddin()   | [ 4/5]  | 164 |
| 11.1.3.268 fadd()   | [ 6/8]  | 164 |
| 11.1.3.269 fassign()  | [10/10] | 165 |
| 11.1.3.270 fzero()  | [ 5/5]  | 165 |
| 11.1.3.271 fequal()   | [ 4/4]  | 166 |
| 11.1.3.272 fiszero()  | [ 4/4]  | 166 |
| 11.1.3.273 fidentity()  | [ 3/4]  | 166 |
| 11.1.3.274 fidentity()  | [ 4/4]  | 167 |
| 11.1.3.275 freduce()  | [10/11] | 167 |
| 11.1.3.276 freduce()  | [11/11] | 167 |
| 11.1.3.277 finit()  | [ 8/8]  | 168 |
| 11.1.3.278 fnegin()   | [ 4/4]  | 168 |
| 11.1.3.279 fneg()   | [ 4/4]  | 168 |
| 11.1.3.280 fscaln()   | [10/10] | 169 |
| 11.1.3.281 fscal()  | [10/10] | 169 |
| 11.1.3.282 faxpy()  | [ 6/6]  | 170 |
| 11.1.3.283 fmove()  | [ 2/2]  | 170 |
| 11.1.3.284 fadd()   | [ 7/8]  | 171 |
| 11.1.3.285 fsub()   | [ 4/4]  | 171 |
| 11.1.3.286 fsubin()   | [ 3/3]  | 172 |
| 11.1.3.287 fadd()   | [ 8/8]  | 172 |
| 11.1.3.288 faddin()   | [ 5/5]  | 173 |
| 11.1.3.289 fgemv()  | [17/19] | 173 |
| 11.1.3.290 fger()   | [12/12] | 174 |
| 11.1.3.291 ftrsv()  | [ 2/2]  | 174 |
| 11.1.3.292 ftrsm()  | [ 9/9]  | 175 |
| 11.1.3.293 ftrmm()  | [ 3/3]  | 176 |
| 11.1.3.294 fgemm()  | [20/23] | 176 |
| 11.1.3.295 fgemm()  | [21/23] | 177 |
| 11.1.3.296 fgemm()  | [22/23] | 177 |
| 11.1.3.297 fgemm()  | [23/23] | 178 |
| 11.1.3.298 fsquare()  | [ 6/6]  | 178 |
| 11.1.3.299 BlockCuts()  | [ 1/2]  | 179 |
| 11.1.3.300 BlockCuts< CuttingStrategy::Single, StrategyParameter::Threads >() |         | 179 |
| 11.1.3.301 BlockCuts< CuttingStrategy::Row, StrategyParameter::Fixed >()      |         | 179 |

|   |     |
|---|-----|
| 11.1.3.302 BlockCuts< CuttingStrategy::Row, StrategyParameter::Grain >()      | 179 |
| 11.1.3.303 BlockCuts< CuttingStrategy::Block, StrategyParameter::Grain >()    | 180 |
| 11.1.3.304 BlockCuts< CuttingStrategy::Column, StrategyParameter::Fixed >()   | 180 |
| 11.1.3.305 BlockCuts< CuttingStrategy::Column, StrategyParameter::Grain >()   | 180 |
| 11.1.3.306 BlockCuts< CuttingStrategy::Block, StrategyParameter::Fixed >()    | 180 |
| 11.1.3.307 BlockCuts< CuttingStrategy::Row, StrategyParameter::Threads >()    | 180 |
| 11.1.3.308 BlockCuts< CuttingStrategy::Column, StrategyParameter::Threads >() | 181 |
| 11.1.3.309 BlockCuts< CuttingStrategy::Block, StrategyParameter::Threads >()  | 181 |
| 11.1.3.310 BlockCuts() [2/2]  | 181 |
| 11.1.3.311 pfzero()   | 181 |
| 11.1.3.312 pfrand()   | 181 |
| 11.1.3.313 fdot() [11/11]   | 182 |
| 11.1.3.314 pfgemm() [2/7]   | 182 |
| 11.1.3.315 pfgemm() [3/7]   | 182 |
| 11.1.3.316 pfgemm() [4/7]   | 183 |
| 11.1.3.317 pfgemm() [5/7]   | 183 |
| 11.1.3.318 pfgemm() [6/7]   | 183 |
| 11.1.3.319 pfgemm() [7/7]   | 184 |
| 11.1.3.320 fgemv() [18/19]  | 184 |
| 11.1.3.321 fgemv() [19/19]  | 184 |
| 11.1.3.322 parseArguments()   | 185 |
| 11.1.3.323 getArgumentValue()   | 185 |
| 11.1.3.324 writeCommandString()   | 185 |
| 11.1.3.325 WriteMatrix() [1/2]  | 186 |
| 11.1.3.326 preamble()   | 186 |
| 11.1.3.327 ReadMatrix() [1/2]   | 186 |
| 11.1.3.328 ReadMatrix() [2/2]   | 187 |
| 11.1.3.329 WriteMatrix() [2/2]  | 187 |
| 11.1.3.330 WritePermutation()   | 187 |
| 11.1.3.331 alignable()  | 188 |
| 11.1.3.332 alignable< Givaro::Integer * >()                                   | 188 |
| 11.1.3.333 fflas_new() [5/7]  | 188 |
| 11.1.3.334 fflas_new() [6/7]  | 188 |
| 11.1.3.335 fflas_new() [7/7]  | 188 |
| 11.1.3.336 fflas_delete() [3/4]   | 188 |
| 11.1.3.337 fflas_delete() [4/4]   | 189 |
| 11.1.3.338 prefetch()   | 189 |
| 11.1.3.339 getTLBSize()   | 189 |
| 11.1.3.340 queryCacheSizes()  | 189 |
| 11.1.3.341 queryL1CacheSize()   | 189 |
| 11.1.3.342 queryTopLevelCacheSize()   | 189 |
| 11.1.3.343 getSeed()  | 189 |

|  |     |
|--|-----|
| 11.2 FFLAS::_ftranspose_impl Namespace Reference | 190 |
| 11.2.1 Function Documentation                    | 190 |
| 11.2.1.1 not_inplace()                           | 190 |
| 11.2.1.2 square_inplace()                        | 190 |
| 11.2.1.3 nonsquare_inplace_v1()                  | 190 |
| 11.2.1.4 nonsquare_inplace_v2()                  | 191 |
| 11.3 FFLAS::BLAS3 Namespace Reference            | 191 |
| 11.3.1 Function Documentation                    | 192 |
| 11.3.1.1 Bini()                                  | 192 |
| 11.3.1.2 WinoPar()                               | 193 |
| 11.3.1.3 Winograd()                              | 193 |
| 11.3.1.4 WinogradAcc_3_23()                      | 193 |
| 11.3.1.5 WinogradAcc_3_21()                      | 194 |
| 11.3.1.6 WinogradAcc_2_24()                      | 194 |
| 11.3.1.7 WinogradAcc_2_27()                      | 195 |
| 11.3.1.8 WinogradAcc_LR()                        | 195 |
| 11.3.1.9 WinogradAcc_R_S()                       | 195 |
| 11.3.1.10 WinogradAcc_L_S()                      | 196 |
| 11.3.1.11 Winograd_LR_S()                        | 196 |
| 11.3.1.12 Winograd_L_S()                         | 196 |
| 11.3.1.13 Winograd_R_S()                         | 197 |
| 11.4 FFLAS::csr_hyb_details Namespace Reference  | 197 |
| 11.5 FFLAS::CuttingStrategy Namespace Reference  | 197 |
| 11.5.1 Typedef Documentation                     | 198 |
| 11.5.1.1 RNSModulus                              | 198 |
| 11.6 FFLAS::details Namespace Reference          | 198 |
| 11.6.1 Function Documentation                    | 199 |
| 11.6.1.1 fadd() [1/5]                            | 199 |
| 11.6.1.2 fadd() [2/5]                            | 200 |
| 11.6.1.3 fadd() [3/5]                            | 200 |
| 11.6.1.4 fadd() [4/5]                            | 200 |
| 11.6.1.5 fadd() [5/5]                            | 201 |
| 11.6.1.6 faxpy() [1/2]                           | 201 |
| 11.6.1.7 faxpy() [2/2]                           | 201 |
| 11.6.1.8 freduce() [1/4]                         | 201 |
| 11.6.1.9 freduce() [2/4]                         | 202 |
| 11.6.1.10 freduce() [3/4]                        | 202 |
| 11.6.1.11 freduce() [4/4]                        | 202 |
| 11.6.1.12 fscaln() [1/2]                         | 202 |
| 11.6.1.13 fscal() [1/2]                          | 203 |
| 11.6.1.14 fscaln() [2/2]                         | 203 |
| 11.6.1.15 fscal() [2/2]                          | 203 |

|   |     |
|---|-----|
| 11.6.1.16 igebb44()                               | 203 |
| 11.6.1.17 igebb24()                               | 204 |
| 11.6.1.18 igebb14()                               | 204 |
| 11.6.1.19 igebb41()                               | 204 |
| 11.6.1.20 igebb21()                               | 204 |
| 11.6.1.21 igebb11()                               | 205 |
| 11.6.1.22 igebp()                                 | 205 |
| 11.6.1.23 pack_lhs()                              | 205 |
| 11.6.1.24 pack_rhs()                              | 206 |
| 11.6.1.25 gebp()                                  | 206 |
| 11.6.1.26 BlockingFactor()                        | 206 |
| 11.7 FFLAS::details_spmv Namespace Reference      | 206 |
| 11.8 FFLAS::ElementCategories Namespace Reference | 207 |
| 11.9 FFLAS::FieldCategories Namespace Reference   | 207 |
| 11.9.1 Detailed Description                       | 207 |
| 11.10 FFLAS::MMHelperAlgo Namespace Reference     | 207 |
| 11.11 FFLAS::ModeCategories Namespace Reference   | 208 |
| 11.11.1 Detailed Description                      | 208 |
| 11.12 FFLAS::ParSeqHelper Namespace Reference     | 208 |
| 11.12.1 Detailed Description                      | 208 |
| 11.13 FFLAS::Protected Namespace Reference        | 209 |
| 11.13.1 Function Documentation                    | 212 |
| 11.13.1.1 computeFactorClassic() [1/3]            | 212 |
| 11.13.1.2 computeFactorClassic() [2/3]            | 212 |
| 11.13.1.3 computeFactorClassic() [3/3]            | 212 |
| 11.13.1.4 DotProdBoundClassic()                   | 212 |
| 11.13.1.5 TRSMBound() [1/3]                       | 213 |
| 11.13.1.6 TRSMBound() [2/3]                       | 213 |
| 11.13.1.7 TRSMBound() [3/3]                       | 213 |
| 11.13.1.8 fgemm_convert()                         | 213 |
| 11.13.1.9 NeedPreAddReduction() [1/2]             | 214 |
| 11.13.1.10 NeedPreAddReduction() [2/2]            | 214 |
| 11.13.1.11 NeedPreSubReduction() [1/2]            | 214 |
| 11.13.1.12 NeedPreSubReduction() [2/2]            | 214 |
| 11.13.1.13 NeedDoublePreAddReduction() [1/2]      | 215 |
| 11.13.1.14 NeedDoublePreAddReduction() [2/2]      | 215 |
| 11.13.1.15 ScalAndReduce() [1/3]                  | 215 |
| 11.13.1.16 ScalAndReduce() [2/3]                  | 215 |
| 11.13.1.17 fsquareCommon()                        | 216 |
| 11.13.1.18 WinogradThreshold() [1/4]              | 216 |
| 11.13.1.19 WinogradThreshold() [2/4]              | 216 |
| 11.13.1.20 WinogradThreshold() [3/4]              | 216 |

|   |     |
|---|-----|
| 11.13.1.21 WinogradThreshold() [4/4]            | 216 |
| 11.13.1.22 WinogradSteps()                      | 216 |
| 11.13.1.23 DynamicPeeling()                     | 217 |
| 11.13.1.24 DynamicPeeling2()                    | 217 |
| 11.13.1.25 WinogradCalc()                       | 218 |
| 11.13.1.26 fgemv_convert()                      | 218 |
| 11.13.1.27 fger_convert()                       | 218 |
| 11.13.1.28 fsyrk_convert()                      | 219 |
| 11.13.1.29 ScalAndReduce() [3/3]                | 219 |
| 11.13.1.30 NeedPreScalReduction() [1/2]         | 219 |
| 11.13.1.31 NeedPreScalReduction() [2/2]         | 219 |
| 11.13.1.32 NeedPreAxyReduction() [1/2]          | 220 |
| 11.13.1.33 NeedPreAxyReduction() [2/2]          | 220 |
| 11.13.1.34 min_types() [1/7]                    | 220 |
| 11.13.1.35 min_types() [2/7]                    | 220 |
| 11.13.1.36 min_types() [3/7]                    | 220 |
| 11.13.1.37 min_types() [4/7]                    | 220 |
| 11.13.1.38 min_types() [5/7]                    | 221 |
| 11.13.1.39 min_types() [6/7]                    | 221 |
| 11.13.1.40 min_types() [7/7]                    | 221 |
| 11.13.1.41 unfit() [1/4]                        | 221 |
| 11.13.1.42 unfit() [2/4]                        | 221 |
| 11.13.1.43 unfit() [3/4]                        | 221 |
| 11.13.1.44 unfit() [4/4]                        | 221 |
| 11.13.1.45 igemm_colmajor() [1/2]               | 222 |
| 11.13.1.46 igemm_colmajor() [2/2]               | 222 |
| 11.13.1.47 igemm()                              | 222 |
| 11.13.1.48 MatF2MatD_Triangular()               | 223 |
| 11.13.1.49 MatF2MatFI_Triangular()              | 223 |
| 11.14 FFLAS::sell_details Namespace Reference   | 223 |
| 11.15 FFLAS::sparse_details Namespace Reference | 223 |
| 11.15.1 Function Documentation                  | 226 |
| 11.15.1.1 init_y() [1/2]                        | 226 |
| 11.15.1.2 init_y() [2/2]                        | 227 |
| 11.15.1.3 fspmv_dispatch() [1/2]                | 227 |
| 11.15.1.4 fspmv_dispatch() [2/2]                | 227 |
| 11.15.1.5 fspmv() [1/12]                        | 227 |
| 11.15.1.6 fspmv() [2/12]                        | 228 |
| 11.15.1.7 fspmv() [3/12]                        | 228 |
| 11.15.1.8 fspmv() [4/12]                        | 228 |
| 11.15.1.9 fspmv() [5/12]                        | 228 |
| 11.15.1.10 fspmv() [6/12]                       | 228 |

|  |     |
|--|-----|
| 11.15.1.11 fspmv() [7/12]                            | 229 |
| 11.15.1.12 fspmv() [8/12]                            | 229 |
| 11.15.1.13 fspmv() [9/12]                            | 229 |
| 11.15.1.14 fspmm_dispatch() [1/2]                    | 229 |
| 11.15.1.15 fspmm_dispatch() [2/2]                    | 230 |
| 11.15.1.16 fspmm() [1/9]                             | 230 |
| 11.15.1.17 fspmm() [2/9]                             | 230 |
| 11.15.1.18 fspmm() [3/9]                             | 230 |
| 11.15.1.19 fspmm() [4/9]                             | 231 |
| 11.15.1.20 fspmm() [5/9]                             | 231 |
| 11.15.1.21 fspmm() [6/9]                             | 231 |
| 11.15.1.22 fspmm() [7/9]                             | 231 |
| 11.15.1.23 fspmm() [8/9]                             | 232 |
| 11.15.1.24 fspmm() [9/9]                             | 232 |
| 11.15.1.25 pfspmm_dispatch() [1/2]                   | 232 |
| 11.15.1.26 pfspmm_dispatch() [2/2]                   | 232 |
| 11.15.1.27 pfspmm() [1/9]                            | 233 |
| 11.15.1.28 pfspmm() [2/9]                            | 233 |
| 11.15.1.29 pfspmm() [3/9]                            | 233 |
| 11.15.1.30 pfspmm() [4/9]                            | 234 |
| 11.15.1.31 pfspmm() [5/9]                            | 234 |
| 11.15.1.32 pfspmm() [6/9]                            | 234 |
| 11.15.1.33 pfspmm() [7/9]                            | 234 |
| 11.15.1.34 pfspmm() [8/9]                            | 235 |
| 11.15.1.35 pfspmm() [9/9]                            | 235 |
| 11.15.1.36 pfspmv() [1/6]                            | 235 |
| 11.15.1.37 pfspmv() [2/6]                            | 235 |
| 11.15.1.38 pfspmv() [3/6]                            | 236 |
| 11.15.1.39 pfspmv() [4/6]                            | 236 |
| 11.15.1.40 pfspmv() [5/6]                            | 236 |
| 11.15.1.41 pfspmv() [6/6]                            | 236 |
| 11.15.1.42 fspmv() [10/12]                           | 236 |
| 11.15.1.43 fspmv() [11/12]                           | 237 |
| 11.15.1.44 fspmv() [12/12]                           | 237 |
| 11.16 FFLAS::sparse_details_impl Namespace Reference | 237 |
| 11.16.1 Function Documentation                       | 245 |
| 11.16.1.1 fspmm() [1/15]                             | 245 |
| 11.16.1.2 fspmm() [2/15]                             | 246 |
| 11.16.1.3 fspmm() [3/15]                             | 246 |
| 11.16.1.4 fspmm_simd_aligned() [1/2]                 | 246 |
| 11.16.1.5 fspmm_simd_unaligned() [1/2]               | 247 |
| 11.16.1.6 fspmm_one() [1/4]                          | 247 |



|  |     |
|--|-----|
| 11.16.1.7 fspmm_mone() [1/4]                 | 247 |
| 11.16.1.8 fspmm_one_simd_aligned() [1/3]     | 247 |
| 11.16.1.9 fspmm_one_simd_unaligned() [1/3]   | 248 |
| 11.16.1.10 fspmm_mone_simd_aligned() [1/3]   | 248 |
| 11.16.1.11 fspmm_mone_simd_unaligned() [1/3] | 248 |
| 11.16.1.12 fspmv() [1/21]                    | 248 |
| 11.16.1.13 fspmv() [2/21]                    | 249 |
| 11.16.1.14 fspmv() [3/21]                    | 249 |
| 11.16.1.15 fspmv_one() [1/10]                | 249 |
| 11.16.1.16 fspmv_mone() [1/10]               | 249 |
| 11.16.1.17 fspmv_one() [2/10]                | 249 |
| 11.16.1.18 fspmv_mone() [2/10]               | 250 |
| 11.16.1.19 pfspmm() [1/18]                   | 250 |
| 11.16.1.20 pfspmm() [2/18]                   | 250 |
| 11.16.1.21 pfspmm() [3/18]                   | 250 |
| 11.16.1.22 pfspmm_one() [1/2]                | 251 |
| 11.16.1.23 pfspmm_mone() [1/2]               | 251 |
| 11.16.1.24 pfspmm_one() [2/2]                | 251 |
| 11.16.1.25 pfspmm_mone() [2/2]               | 251 |
| 11.16.1.26 pfspmv() [1/18]                   | 252 |
| 11.16.1.27 pfspmv_task()                     | 252 |
| 11.16.1.28 pfspmv() [2/18]                   | 252 |
| 11.16.1.29 pfspmv() [3/18]                   | 252 |
| 11.16.1.30 pfspmv_one() [1/8]                | 252 |
| 11.16.1.31 pfspmv_mone() [1/8]               | 253 |
| 11.16.1.32 pfspmv_one() [2/8]                | 253 |
| 11.16.1.33 pfspmv_mone() [2/8]               | 253 |
| 11.16.1.34 fspmm() [4/15]                    | 253 |
| 11.16.1.35 fspmm() [5/15]                    | 253 |
| 11.16.1.36 fspmm_simd_aligned() [2/2]        | 254 |
| 11.16.1.37 fspmm_simd_unaligned() [2/2]      | 254 |
| 11.16.1.38 fspmm() [6/15]                    | 254 |
| 11.16.1.39 fspmm_one() [2/4]                 | 254 |
| 11.16.1.40 fspmm_mone() [2/4]                | 255 |
| 11.16.1.41 fspmm_one_simd_aligned() [2/3]    | 255 |
| 11.16.1.42 fspmm_one_simd_unaligned() [2/3]  | 255 |
| 11.16.1.43 fspmm_mone_simd_aligned() [2/3]   | 255 |
| 11.16.1.44 fspmm_mone_simd_unaligned() [2/3] | 256 |
| 11.16.1.45 fspmv() [4/21]                    | 256 |
| 11.16.1.46 fspmv() [5/21]                    | 256 |
| 11.16.1.47 fspmv() [6/21]                    | 256 |
| 11.16.1.48 fspmv_one() [3/10]                | 256 |

|                                       |         |     |
|---------------------------------------|---------|-----|
| 11.16.1.49 fspmv_mone()               | [3/10]  | 257 |
| 11.16.1.50 fspmv_one()                | [4/10]  | 257 |
| 11.16.1.51 fspmv_mone()               | [4/10]  | 257 |
| 11.16.1.52 pfspmm()                   | [4/18]  | 257 |
| 11.16.1.53 pfspmm()                   | [5/18]  | 257 |
| 11.16.1.54 pfspmm()                   | [6/18]  | 258 |
| 11.16.1.55 pfspmm()                   | [7/18]  | 258 |
| 11.16.1.56 pfspmm()                   | [8/18]  | 258 |
| 11.16.1.57 pfspmm()                   | [9/18]  | 258 |
| 11.16.1.58 pfspmv()                   | [4/18]  | 259 |
| 11.16.1.59 pfspmv()                   | [5/18]  | 259 |
| 11.16.1.60 pfspmv()                   | [6/18]  | 259 |
| 11.16.1.61 fspmm()                    | [7/15]  | 259 |
| 11.16.1.62 fspmm()                    | [8/15]  | 259 |
| 11.16.1.63 fspmm()                    | [9/15]  | 260 |
| 11.16.1.64 fspmv()                    | [7/21]  | 260 |
| 11.16.1.65 fspmv()                    | [8/21]  | 260 |
| 11.16.1.66 fspmv()                    | [9/21]  | 260 |
| 11.16.1.67 pfspmm()                   | [10/18] | 260 |
| 11.16.1.68 pfspmm()                   | [11/18] | 261 |
| 11.16.1.69 pfspmm()                   | [12/18] | 261 |
| 11.16.1.70 pfspmm()                   | [13/18] | 261 |
| 11.16.1.71 pfspmm()                   | [14/18] | 261 |
| 11.16.1.72 pfspmm()                   | [15/18] | 262 |
| 11.16.1.73 pfspmm_zo()                | [1/2]   | 262 |
| 11.16.1.74 pfspmm_zo()                | [2/2]   | 262 |
| 11.16.1.75 pfspmv()                   | [7/18]  | 262 |
| 11.16.1.76 pfspmv()                   | [8/18]  | 262 |
| 11.16.1.77 pfspmv()                   | [9/18]  | 263 |
| 11.16.1.78 pfspmv_one()               | [3/8]   | 263 |
| 11.16.1.79 pfspmv_mone()              | [3/8]   | 263 |
| 11.16.1.80 pfspmv_one()               | [4/8]   | 263 |
| 11.16.1.81 pfspmv_mone()              | [4/8]   | 263 |
| 11.16.1.82 fspmm()                    | [10/15] | 264 |
| 11.16.1.83 fspmm()                    | [11/15] | 264 |
| 11.16.1.84 fspmm()                    | [12/15] | 264 |
| 11.16.1.85 fspmm_mone()               | [3/4]   | 264 |
| 11.16.1.86 fspmm_one()                | [3/4]   | 265 |
| 11.16.1.87 fspmm_mone()               | [4/4]   | 265 |
| 11.16.1.88 fspmm_one()                | [4/4]   | 265 |
| 11.16.1.89 fspmm_one_simd_aligned()   | [3/3]   | 265 |
| 11.16.1.90 fspmm_one_simd_unaligned() | [3/3]   | 266 |

|  |     |
|--|-----|
| 11.16.1.91 fspmm_mone_simd_aligned() [3/3]   | 266 |
| 11.16.1.92 fspmm_mone_simd_unaligned() [3/3] | 266 |
| 11.16.1.93 fspmv() [10/21]                   | 266 |
| 11.16.1.94 fspmv() [11/21]                   | 267 |
| 11.16.1.95 fspmv() [12/21]                   | 267 |
| 11.16.1.96 fspmv_one() [5/10]                | 267 |
| 11.16.1.97 fspmv_mone() [5/10]               | 267 |
| 11.16.1.98 fspmv_one() [6/10]                | 267 |
| 11.16.1.99 fspmv_mone() [6/10]               | 268 |
| 11.16.1.100 pfspmv() [10/18]                 | 268 |
| 11.16.1.101 pfspmv() [11/18]                 | 268 |
| 11.16.1.102 pfspmv() [12/18]                 | 268 |
| 11.16.1.103 pfspmv_one() [5/8]               | 268 |
| 11.16.1.104 pfspmv_mone() [5/8]              | 269 |
| 11.16.1.105 pfspmv_one() [6/8]               | 269 |
| 11.16.1.106 pfspmv_mone() [6/8]              | 269 |
| 11.16.1.107 fspmv() [13/21]                  | 269 |
| 11.16.1.108 fspmv_simd() [1/4]               | 269 |
| 11.16.1.109 fspmv() [14/21]                  | 270 |
| 11.16.1.110 fspmv_simd() [2/4]               | 270 |
| 11.16.1.111 fspmv() [15/21]                  | 270 |
| 11.16.1.112 fspmv_one() [7/10]               | 270 |
| 11.16.1.113 fspmv_mone() [7/10]              | 270 |
| 11.16.1.114 fspmv_one() [8/10]               | 271 |
| 11.16.1.115 fspmv_mone() [8/10]              | 271 |
| 11.16.1.116 fspmv_one_simd() [1/2]           | 271 |
| 11.16.1.117 fspmv_mone_simd() [1/2]          | 271 |
| 11.16.1.118 pfspm() [16/18]                  | 271 |
| 11.16.1.119 pfspm() [17/18]                  | 272 |
| 11.16.1.120 pfspm() [18/18]                  | 272 |
| 11.16.1.121 pfspmv() [13/18]                 | 272 |
| 11.16.1.122 pfspmv() [14/18]                 | 272 |
| 11.16.1.123 pfspmv() [15/18]                 | 272 |
| 11.16.1.124 fspmm() [13/15]                  | 273 |
| 11.16.1.125 fspmm() [14/15]                  | 273 |
| 11.16.1.126 fspmm() [15/15]                  | 273 |
| 11.16.1.127 fspmv() [16/21]                  | 273 |
| 11.16.1.128 fspmv() [17/21]                  | 274 |
| 11.16.1.129 fspmv() [18/21]                  | 274 |
| 11.16.1.130 pfspmv() [16/18]                 | 274 |
| 11.16.1.131 pfspmv() [17/18]                 | 274 |
| 11.16.1.132 pfspmv() [18/18]                 | 274 |

|  |     |
|--|-----|
| 11.16.1.133 pfspmv_one() [7/8]                     | 275 |
| 11.16.1.134 pfspmv_mone() [7/8]                    | 275 |
| 11.16.1.135 pfspmv_one() [8/8]                     | 275 |
| 11.16.1.136 pfspmv_mone() [8/8]                    | 275 |
| 11.16.1.137 fspmv() [19/21]                        | 275 |
| 11.16.1.138 fspmv_simd() [3/4]                     | 276 |
| 11.16.1.139 fspmv() [20/21]                        | 276 |
| 11.16.1.140 fspmv_simd() [4/4]                     | 276 |
| 11.16.1.141 fspmv() [21/21]                        | 276 |
| 11.16.1.142 fspmv_one() [9/10]                     | 276 |
| 11.16.1.143 fspmv_mone() [9/10]                    | 277 |
| 11.16.1.144 fspmv_one_simd() [2/2]                 | 277 |
| 11.16.1.145 fspmv_mone_simd() [2/2]                | 277 |
| 11.16.1.146 fspmv_one() [10/10]                    | 277 |
| 11.16.1.147 fspmv_mone() [10/10]                   | 277 |
| 11.17 FFLAS::StrategyParameter Namespace Reference | 278 |
| 11.18 FFLAS::StructureHelper Namespace Reference   | 278 |
| 11.18.1 Detailed Description                       | 278 |
| 11.19 FFLAS::vectorised Namespace Reference        | 278 |
| 11.19.1 Function Documentation                     | 280 |
| 11.19.1.1 VEC_ADD()                                | 280 |
| 11.19.1.2 addp()                                   | 280 |
| 11.19.1.3 VEC_SUB()                                | 280 |
| 11.19.1.4 subp()                                   | 281 |
| 11.19.1.5 add()                                    | 281 |
| 11.19.1.6 sub()                                    | 281 |
| 11.19.1.7 axpyp() [1/2]                            | 281 |
| 11.19.1.8 axpyp() [2/2]                            | 281 |
| 11.19.1.9 reduce() [1/9]                           | 282 |
| 11.19.1.10 reduce() [2/9]                          | 282 |
| 11.19.1.11 reduce() [3/9]                          | 282 |
| 11.19.1.12 reduce() [4/9]                          | 282 |
| 11.19.1.13 reduce() [5/9]                          | 282 |
| 11.19.1.14 reduce() [6/9]                          | 282 |
| 11.19.1.15 reduce() [7/9]                          | 283 |
| 11.19.1.16 reduce() [8/9]                          | 283 |
| 11.19.1.17 reduce() [9/9]                          | 283 |
| 11.19.1.18 modp() [1/2]                            | 283 |
| 11.19.1.19 modp() [2/2]                            | 283 |
| 11.19.1.20 scalp() [1/3]                           | 283 |
| 11.19.1.21 scalp() [2/3]                           | 284 |
| 11.19.1.22 scalp() [3/3]                           | 284 |

|   |     |
|---|-----|
| 11.20 FFLAS::vectorised::unswitch Namespace Reference | 284 |
| 11.20.1 Function Documentation                        | 285 |
| 11.20.1.1 axpyp() [1/2]                               | 285 |
| 11.20.1.2 axpyp() [2/2]                               | 285 |
| 11.20.1.3 modp() [1/2]                                | 285 |
| 11.20.1.4 modp() [2/2]                                | 286 |
| 11.20.1.5 scalp() [1/3]                               | 286 |
| 11.20.1.6 scalp() [2/3]                               | 286 |
| 11.20.1.7 scalp() [3/3]                               | 286 |
| 11.21 FFPACK Namespace Reference                      | 287 |
| 11.21.1 Detailed Description                          | 303 |
| 11.21.2 Typedef Documentation                         | 303 |
| 11.21.2.1 Checker_PLUQ                                | 303 |
| 11.21.2.2 Checker_Det                                 | 303 |
| 11.21.2.3 Checker_invert                              | 303 |
| 11.21.2.4 Checker_charpoly                            | 303 |
| 11.21.2.5 ForceCheck_PLUQ                             | 304 |
| 11.21.2.6 ForceCheck_Det                              | 304 |
| 11.21.2.7 ForceCheck_invert                           | 304 |
| 11.21.2.8 ForceCheck_charpoly                         | 304 |
| 11.21.3 Function Documentation                        | 304 |
| 11.21.3.1 LAPACKPerm2MathPerm()                       | 304 |
| 11.21.3.2 MathPerm2LAPACKPerm()                       | 304 |
| 11.21.3.3 applyP() [1/4]                              | 304 |
| 11.21.3.4 applyP() [2/4]                              | 305 |
| 11.21.3.5 applyP() [3/4]                              | 305 |
| 11.21.3.6 MonotonicApplyP()                           | 306 |
| 11.21.3.7 fgetrs() [1/4]                              | 307 |
| 11.21.3.8 fgetrs() [2/4]                              | 307 |
| 11.21.3.9 fgesv() [1/4]                               | 308 |
| 11.21.3.10 fgesv() [2/4]                              | 309 |
| 11.21.3.11 ftrtri() [1/2]                             | 310 |
| 11.21.3.12 trinv_left() [1/2]                         | 310 |
| 11.21.3.13 ftrtrm() [1/2]                             | 310 |
| 11.21.3.14 ftrstr()                                   | 311 |
| 11.21.3.15 ftrssyr2k()                                | 311 |
| 11.21.3.16 fsytrf() [1/3]                             | 312 |
| 11.21.3.17 fsytrf() [2/3]                             | 313 |
| 11.21.3.18 fsytrf() [3/3]                             | 313 |
| 11.21.3.19 fsytrf_nonunit() [1/3]                     | 313 |
| 11.21.3.20 PLUQ() [1/6]                               | 314 |
| 11.21.3.21 pPLUQ()                                    | 314 |

|  |         |     |
|--|---------|-----|
| 11.21.3.22 PLUQ()                      | [ 2/6 ] | 315 |
| 11.21.3.23 PLUQ()                      | [ 3/6 ] | 315 |
| 11.21.3.24 LUdivine()                  | [ 1/4 ] | 315 |
| 11.21.3.25 ColumnEchelonForm()         | [ 1/3 ] | 316 |
| 11.21.3.26 pColumnEchelonForm()        |         | 317 |
| 11.21.3.27 ColumnEchelonForm()         | [ 2/3 ] | 317 |
| 11.21.3.28 RowEchelonForm()            | [ 1/3 ] | 317 |
| 11.21.3.29 pRowEchelonForm()           |         | 318 |
| 11.21.3.30 RowEchelonForm()            | [ 2/3 ] | 318 |
| 11.21.3.31 ReducedColumnEchelonForm()  | [ 1/3 ] | 318 |
| 11.21.3.32 pReducedColumnEchelonForm() |         | 319 |
| 11.21.3.33 ReducedColumnEchelonForm()  | [ 2/3 ] | 319 |
| 11.21.3.34 ReducedRowEchelonForm()     | [ 1/3 ] | 320 |
| 11.21.3.35 pReducedRowEchelonForm()    |         | 320 |
| 11.21.3.36 ReducedRowEchelonForm()     | [ 2/3 ] | 320 |
| 11.21.3.37 Invert()                    | [ 1/4 ] | 321 |
| 11.21.3.38 Invert()                    | [ 2/4 ] | 321 |
| 11.21.3.39 Invert2()                   | [ 1/2 ] | 322 |
| 11.21.3.40 CharPoly()                  | [ 1/8 ] | 323 |
| 11.21.3.41 CharPoly()                  | [ 2/8 ] | 323 |
| 11.21.3.42 CharPoly()                  | [ 3/8 ] | 324 |
| 11.21.3.43 MinPoly()                   | [ 1/4 ] | 324 |
| 11.21.3.44 MinPoly()                   | [ 2/4 ] | 325 |
| 11.21.3.45 MatVecMinPoly()             | [ 1/2 ] | 325 |
| 11.21.3.46 Rank()                      | [ 1/3 ] | 326 |
| 11.21.3.47 pRank()                     |         | 326 |
| 11.21.3.48 Rank()                      | [ 2/3 ] | 326 |
| 11.21.3.49 IsSingular()                | [ 1/2 ] | 327 |
| 11.21.3.50 Det()                       | [ 1/6 ] | 327 |
| 11.21.3.51 pDet()                      |         | 328 |
| 11.21.3.52 Det()                       | [ 2/6 ] | 328 |
| 11.21.3.53 Solve()                     | [ 1/3 ] | 328 |
| 11.21.3.54 Solve()                     | [ 2/3 ] | 329 |
| 11.21.3.55 pSolve()                    |         | 329 |
| 11.21.3.56 RandomNullSpaceVector()     | [ 1/3 ] | 329 |
| 11.21.3.57 NullSpaceBasis()            | [ 1/2 ] | 330 |
| 11.21.3.58 RowRankProfile()            | [ 1/3 ] | 330 |
| 11.21.3.59 pRowRankProfile()           |         | 331 |
| 11.21.3.60 RowRankProfile()            | [ 2/3 ] | 331 |
| 11.21.3.61 ColumnRankProfile()         | [ 1/3 ] | 331 |
| 11.21.3.62 pColumnRankProfile()        |         | 332 |
| 11.21.3.63 ColumnRankProfile()         | [ 2/3 ] | 332 |

|   |     |
|---|-----|
| 11.21.3.64 RankProfileFromLU()                    | 332 |
| 11.21.3.65 LeadingSubmatrixRankProfiles()         | 333 |
| 11.21.3.66 RowRankProfileSubmatrixIndices() [1/2] | 333 |
| 11.21.3.67 ColRankProfileSubmatrixIndices() [1/2] | 334 |
| 11.21.3.68 RowRankProfileSubmatrix() [1/2]        | 335 |
| 11.21.3.69 ColRankProfileSubmatrix() [1/2]        | 335 |
| 11.21.3.70 getTriangular() [1/2]                  | 336 |
| 11.21.3.71 getTriangular() [2/2]                  | 337 |
| 11.21.3.72 getEchelonForm() [1/2]                 | 337 |
| 11.21.3.73 getEchelonForm() [2/2]                 | 338 |
| 11.21.3.74 getEchelonTransform()                  | 339 |
| 11.21.3.75 getReducedEchelonForm() [1/2]          | 339 |
| 11.21.3.76 getReducedEchelonForm() [2/2]          | 340 |
| 11.21.3.77 getReducedEchelonTransform()           | 341 |
| 11.21.3.78 PLUQtoEchelonPermutation()             | 342 |
| 11.21.3.79 LTBruhatGen()                          | 342 |
| 11.21.3.80 getLTBruhatGen() [1/2]                 | 342 |
| 11.21.3.81 getLTBruhatGen() [2/2]                 | 343 |
| 11.21.3.82 LTQSorder()                            | 343 |
| 11.21.3.83 CompressToBlockBiDiagonal()            | 344 |
| 11.21.3.84 ExpandBlockBiDiagonalToBruhat()        | 344 |
| 11.21.3.85 Bruhat2EchelonPermutation()            | 345 |
| 11.21.3.86 TInverter() [1/2]                      | 346 |
| 11.21.3.87 ComputeRPermutation() [1/2]            | 346 |
| 11.21.3.88 productBruhatxTS() [1/2]               | 346 |
| 11.21.3.89 LQUPtoInverseOfFullRankMinor() [1/2]   | 347 |
| 11.21.3.90 RandomNullSpaceVector() [2/3]          | 347 |
| 11.21.3.91 solveLB() [1/2]                        | 348 |
| 11.21.3.92 solveLB2() [1/2]                       | 348 |
| 11.21.3.93 TInverter() [2/2]                      | 348 |
| 11.21.3.94 ComputeRPermutation() [2/2]            | 349 |
| 11.21.3.95 expandLCRE()                           | 349 |
| 11.21.3.96 productBruhatxTS() [2/2]               | 349 |
| 11.21.3.97 Danilevski()                           | 351 |
| 11.21.3.98 buildMatrix()                          | 351 |
| 11.21.3.99 CharPoly() [4/8]                       | 351 |
| 11.21.3.100 CharPoly() [5/8]                      | 351 |
| 11.21.3.101 Det() [3/6]                           | 352 |
| 11.21.3.102 Det() [4/6]                           | 352 |
| 11.21.3.103 fsytrf_BC_Crout()                     | 352 |
| 11.21.3.104 fsytrf_BC_RL()                        | 352 |
| 11.21.3.105 fsytrf_UP_RPM_BC_RL()                 | 353 |

|   |     |
|---|-----|
| 11.21.3.106 fsytrf_LOW_RPM_BC_Crout()     | 353 |
| 11.21.3.107 fsytrf_UP_RPM_BC_Crout()      | 353 |
| 11.21.3.108 fsytrf_UP_RPM()               | 353 |
| 11.21.3.109 fsytrf_nonunit() [2/3]        | 354 |
| 11.21.3.110 fsytrf_nonunit() [3/3]        | 354 |
| 11.21.3.111 fsytrf_RPM()                  | 354 |
| 11.21.3.112 getTridiagonal()              | 354 |
| 11.21.3.113 LUdivine_gauss() [1/2]        | 355 |
| 11.21.3.114 LUdivine_small() [1/2]        | 355 |
| 11.21.3.115 LUdivine() [2/4]              | 355 |
| 11.21.3.116 LUdivine() [3/4]              | 356 |
| 11.21.3.117 MonotonicCompress()           | 356 |
| 11.21.3.118 MonotonicCompressMorePivots() | 356 |
| 11.21.3.119 MonotonicCompressCycles()     | 356 |
| 11.21.3.120 MonotonicExpand()             | 357 |
| 11.21.3.121 applyP_block()                | 357 |
| 11.21.3.122 doApplyS()                    | 357 |
| 11.21.3.123 MatrixApplyS() [1/3]          | 358 |
| 11.21.3.124 MatrixApplyS() [2/3]          | 358 |
| 11.21.3.125 MatrixApplyS() [3/3]          | 358 |
| 11.21.3.126 PermApplyS()                  | 358 |
| 11.21.3.127 doApplyT()                    | 359 |
| 11.21.3.128 MatrixApplyT() [1/3]          | 359 |
| 11.21.3.129 MatrixApplyT() [2/3]          | 359 |
| 11.21.3.130 MatrixApplyT() [3/3]          | 359 |
| 11.21.3.131 PermApplyT()                  | 360 |
| 11.21.3.132 composePermutationsLLL()      | 360 |
| 11.21.3.133 composePermutationsLLM()      | 360 |
| 11.21.3.134 composePermutationsMLM()      | 361 |
| 11.21.3.135 cyclic_shift_mathPerm()       | 361 |
| 11.21.3.136 cyclic_shift_row_col() [1/2]  | 361 |
| 11.21.3.137 cyclic_shift_row() [1/3]      | 361 |
| 11.21.3.138 cyclic_shift_row() [2/3]      | 362 |
| 11.21.3.139 cyclic_shift_col() [1/3]      | 362 |
| 11.21.3.140 cyclic_shift_col() [2/3]      | 362 |
| 11.21.3.141 PLUQ_basecaseV3()             | 362 |
| 11.21.3.142 PLUQ_basecaseV2()             | 362 |
| 11.21.3.143 PLUQ_basecaseCrout()          | 363 |
| 11.21.3.144 _PLUQ()                       | 363 |
| 11.21.3.145 PLUQ() [4/6]                  | 363 |
| 11.21.3.146 threads_fgemm()               | 363 |
| 11.21.3.147 threads_ftsrm()               | 364 |



|  |     |
|--|-----|
| 11.21.3.148 PLUQ() [5/6]                     | 364 |
| 11.21.3.149 fflas_const_cast() [1/3]         | 364 |
| 11.21.3.150 fflas_const_cast() [2/3]         | 364 |
| 11.21.3.151 cyclic_shift_row_col() [2/2]     | 364 |
| 11.21.3.152 cyclic_shift_row() [3/3]         | 365 |
| 11.21.3.153 cyclic_shift_col() [3/3]         | 365 |
| 11.21.3.154 applyP() [4/4]                   | 365 |
| 11.21.3.155 fgetrs() [3/4]                   | 365 |
| 11.21.3.156 fgetrs() [4/4]                   | 366 |
| 11.21.3.157 fgesv() [3/4]                    | 366 |
| 11.21.3.158 fgesv() [4/4]                    | 366 |
| 11.21.3.159 ftrtri() [2/2]                   | 366 |
| 11.21.3.160 trinv_left() [2/2]               | 367 |
| 11.21.3.161 ftrtrm() [2/2]                   | 367 |
| 11.21.3.162 PLUQ() [6/6]                     | 367 |
| 11.21.3.163 LUdivine() [4/4]                 | 367 |
| 11.21.3.164 LUdivine_small() [2/2]           | 368 |
| 11.21.3.165 LUdivine_gauss() [2/2]           | 368 |
| 11.21.3.166 RowEchelonForm() [3/3]           | 368 |
| 11.21.3.167 ReducedRowEchelonForm() [3/3]    | 368 |
| 11.21.3.168 ColumnEchelonForm() [3/3]        | 369 |
| 11.21.3.169 ReducedColumnEchelonForm() [3/3] | 369 |
| 11.21.3.170 Invert() [3/4]                   | 369 |
| 11.21.3.171 Invert() [4/4]                   | 369 |
| 11.21.3.172 Invert2() [2/2]                  | 369 |
| 11.21.3.173 CharPoly() [6/8]                 | 370 |
| 11.21.3.174 CharPoly() [7/8]                 | 370 |
| 11.21.3.175 CharPoly() [8/8]                 | 370 |
| 11.21.3.176 MinPoly() [3/4]                  | 370 |
| 11.21.3.177 MinPoly() [4/4]                  | 370 |
| 11.21.3.178 MatVecMinPoly() [2/2]            | 371 |
| 11.21.3.179 KrylovElim()                     | 371 |
| 11.21.3.180 SpecRankProfile()                | 371 |
| 11.21.3.181 Rank() [3/3]                     | 371 |
| 11.21.3.182 IsSingular() [2/2]               | 371 |
| 11.21.3.183 Det() [5/6]                      | 372 |
| 11.21.3.184 Det() [6/6]                      | 372 |
| 11.21.3.185 Solve() [3/3]                    | 372 |
| 11.21.3.186 solveLB() [2/2]                  | 372 |
| 11.21.3.187 solveLB2() [2/2]                 | 373 |
| 11.21.3.188 RandomNullSpaceVector() [3/3]    | 373 |
| 11.21.3.189 NullSpaceBasis() [2/2]           | 373 |

|  |       |     |
|--|-------|-----|
| 11.21.3.190 RowRankProfile()   | [3/3] | 373 |
| 11.21.3.191 ColumnRankProfile()                                      | [3/3] | 374 |
| 11.21.3.192 RowRankProfileSubmatrixIndices()                         | [2/2] | 374 |
| 11.21.3.193 ColRankProfileSubmatrixIndices()                         | [2/2] | 374 |
| 11.21.3.194 RowRankProfileSubmatrix()                                | [2/2] | 374 |
| 11.21.3.195 ColRankProfileSubmatrix()                                | [2/2] | 374 |
| 11.21.3.196 getTriangular< FFLAS_FIELD< FFLAS_ELT > >()              | [1/2] | 375 |
| 11.21.3.197 getTriangular< FFLAS_FIELD< FFLAS_ELT > >()              | [2/2] | 375 |
| 11.21.3.198 getEchelonForm< FFLAS_FIELD< FFLAS_ELT > >()             | [1/2] | 375 |
| 11.21.3.199 getEchelonForm< FFLAS_FIELD< FFLAS_ELT > >()             | [2/2] | 375 |
| 11.21.3.200 getEchelonTransform< FFLAS_FIELD< FFLAS_ELT > >()        |       | 376 |
| 11.21.3.201 getReducedEchelonForm< FFLAS_FIELD< FFLAS_ELT > >()      | [1/2] | 376 |
| 11.21.3.202 getReducedEchelonForm< FFLAS_FIELD< FFLAS_ELT > >()      | [2/2] | 376 |
| 11.21.3.203 getReducedEchelonTransform< FFLAS_FIELD< FFLAS_ELT > >() |       | 376 |
| 11.21.3.204 LQUPtoInverseOfFullRankMinor()                           | [2/2] | 377 |
| 11.21.3.205 fflas_const_cast()                                       | [3/3] | 377 |
| 11.21.3.206 failure()  |       | 377 |
| 11.21.3.207 isOdd()  | [1/3] | 377 |
| 11.21.3.208 isOdd()  | [2/3] | 377 |
| 11.21.3.209 isOdd()  | [3/3] | 377 |
| 11.21.3.210 NonZeroRandomMatrix()                                    | [1/2] | 378 |
| 11.21.3.211 NonZeroRandomMatrix()                                    | [2/2] | 378 |
| 11.21.3.212 RandomMatrix()   | [1/2] | 379 |
| 11.21.3.213 RandomMatrix()   | [2/2] | 379 |
| 11.21.3.214 RandomTriangularMatrix()                                 | [1/2] | 380 |
| 11.21.3.215 RandomTriangularMatrix()                                 | [2/2] | 380 |
| 11.21.3.216 RandInt()  |       | 381 |
| 11.21.3.217 RandomSymmetricMatrix()                                  |       | 381 |
| 11.21.3.218 RandomMatrixWithRank()                                   | [1/2] | 382 |
| 11.21.3.219 RandomMatrixWithRank()                                   | [2/2] | 382 |
| 11.21.3.220 RandomIndexSubset()                                      |       | 383 |
| 11.21.3.221 RandomPermutation()                                      |       | 383 |
| 11.21.3.222 RandomRankProfileMatrix()                                |       | 383 |
| 11.21.3.223 swapval()  |       | 384 |
| 11.21.3.224 RandomSymmetricRankProfileMatrix()                       |       | 384 |
| 11.21.3.225 RandomLTQSRankProfileMatrix()                            |       | 384 |
| 11.21.3.226 RandomMatrixWithRankandRPM()                             | [1/2] | 384 |
| 11.21.3.227 RandomMatrixWithRankandRPM()                             | [2/2] | 385 |
| 11.21.3.228 RandomSymmetricMatrixWithRankandRPM()                    | [1/2] | 386 |
| 11.21.3.229 RandomSymmetricMatrixWithRankandRPM()                    | [2/2] | 386 |
| 11.21.3.230 RandomMatrixWithRankandRandomRPM()                       | [1/2] | 387 |
| 11.21.3.231 RandomMatrixWithRankandRandomRPM()                       | [2/2] | 387 |

|   |            |
|---|------------|
| 11.21.3.232 RandomSymmetricMatrixWithRankandRandomRPM() [1/2] | 388        |
| 11.21.3.233 RandomSymmetricMatrixWithRankandRandomRPM() [2/2] | 388        |
| 11.21.3.234 RandomMatrixWithDet() [1/2]                       | 389        |
| 11.21.3.235 RandomMatrixWithDet() [2/2]                       | 389        |
| 11.21.3.236 RandomLTQSMMatrixWithRankandQSorder()             | 390        |
| 11.21.3.237 chooseField()                                     | 390        |
| 11.21.3.238 chooseField< Givaro::ZRing< int32_t > >()         | 390        |
| 11.21.3.239 chooseField< Givaro::ZRing< int64_t > >()         | 390        |
| 11.21.3.240 chooseField< Givaro::ZRing< float > >()           | 391        |
| 11.21.3.241 chooseField< Givaro::ZRing< double > >()          | 391        |
| 11.22 FFPACK::Protected Namespace Reference                   | 391        |
| 11.22.1 Function Documentation                                | 392        |
| 11.22.1.1 LUdivine_construct() [1/2]                          | 392        |
| 11.22.1.2 GaussJordan()                                       | 393        |
| 11.22.1.3 KellerGehrig()                                      | 394        |
| 11.22.1.4 KGFast()  | 394        |
| 11.22.1.5 KGFast_generalized()                                | 394        |
| 11.22.1.6 fgemv_kgf()   | 394        |
| 11.22.1.7 LUKrylov()  | 394        |
| 11.22.1.8 Danilevski()  | 395        |
| 11.22.1.9 RandomKrylovPrecond()                               | 395        |
| 11.22.1.10 ArithProg()  | 395        |
| 11.22.1.11 LUKrylov_KGFast()                                  | 395        |
| 11.22.1.12 MatVecMinPoly()                                    | 396        |
| 11.22.1.13 Hybrid_KGF_LUK_MinPoly()                           | 396        |
| 11.22.1.14 updateD()  | 396        |
| 11.22.1.15 newD()   | 396        |
| 11.22.1.16 CompressRows()                                     | 397        |
| 11.22.1.17 CompressRowsQK()                                   | 397        |
| 11.22.1.18 DeCompressRows()                                   | 397        |
| 11.22.1.19 DeCompressRowsQK()                                 | 397        |
| 11.22.1.20 CompressRowsQA()                                   | 397        |
| 11.22.1.21 DeCompressRowsQA()                                 | 398        |
| 11.22.1.22 LUdivine_construct() [2/2]                         | 398        |
| 11.23 Givaro Namespace Reference                              | 398        |
| 11.24 MKL_CONFIG Namespace Reference                          | 398        |
| 11.25 Reclnt Namespace Reference                              | 398        |
| <b>12 Data Structure Documentation</b>                        | <b>401</b> |
| 12.1 AlgoChooser< ModeT, ParSeq > Struct Template Reference   | 401        |
| 12.1.1 Member Typedef Documentation                           | 401        |
| 12.1.1.1 value  | 401        |

|   |     |
|---|-----|
| 12.2 AlgoChooser< ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeq > Struct Template Reference | 401 |
| 12.2.1 Member Typedef Documentation   | 401 |
| 12.2.1.1 value  | 401 |
| 12.3 ALL< v > Struct Template Reference   | 401 |
| 12.4 ALL< false, v... > Struct Template Reference   | 402 |
| 12.4.1 Field Documentation  | 402 |
| 12.4.1.1 value  | 402 |
| 12.5 ALL< true, v... > Struct Template Reference  | 402 |
| 12.5.1 Field Documentation  | 402 |
| 12.5.1.1 value  | 402 |
| 12.6 ALL<> Struct Reference   | 402 |
| 12.6.1 Field Documentation  | 402 |
| 12.6.1.1 value  | 402 |
| 12.7 ArbitraryPrecIntTag Struct Reference   | 402 |
| 12.7.1 Detailed Description   | 402 |
| 12.8 AreEqual< X, Y > Class Template Reference  | 403 |
| 12.8.1 Field Documentation  | 403 |
| 12.8.1.1 value  | 403 |
| 12.9 AreEqual< X, X > Class Template Reference  | 403 |
| 12.9.1 Field Documentation  | 403 |
| 12.9.1.1 value  | 403 |
| 12.10 Argument Struct Reference   | 403 |
| 12.10.1 Field Documentation   | 403 |
| 12.10.1.1 c   | 403 |
| 12.10.1.2 example   | 403 |
| 12.10.1.3 helpString  | 404 |
| 12.10.1.4 type  | 404 |
| 12.10.1.5 data  | 404 |
| 12.11 associatedDelayedField< Field > Struct Template Reference   | 404 |
| 12.11.1 Member Typedef Documentation  | 404 |
| 12.11.1.1 field   | 404 |
| 12.11.1.2 type  | 404 |
| 12.12 associatedDelayedField< const FFPACK::RNSIntegerMod< RNS > > Struct Template Reference                        | 404 |
| 12.12.1 Member Typedef Documentation  | 404 |
| 12.12.1.1 field   | 404 |
| 12.12.1.2 type  | 405 |
| 12.13 associatedDelayedField< const Givaro::Modular< T, X > > Struct Template Reference                             | 405 |
| 12.13.1 Member Typedef Documentation  | 405 |
| 12.13.1.1 field   | 405 |
| 12.13.1.2 type  | 405 |
| 12.14 associatedDelayedField< const Givaro::ModularBalanced< T > > Struct Template Reference                        | 405 |

|  |     |
|--|-----|
| 12.14.1 Member Typedef Documentation   | 405 |
| 12.14.1.1 field  | 405 |
| 12.14.1.2 type   | 405 |
| 12.15 associatedDelayedField< const Givaro::ZRing< T > > Struct Template Reference | 406 |
| 12.15.1 Member Typedef Documentation   | 406 |
| 12.15.1.1 field  | 406 |
| 12.15.1.2 type   | 406 |
| 12.16 Auto Struct Reference  | 406 |
| 12.17 Bench< Elt > Class Template Reference  | 406 |
| 12.17.1 Member Typedef Documentation   | 407 |
| 12.17.1.1 Field  | 407 |
| 12.17.1.2 Elt_ptr  | 407 |
| 12.17.1.3 Residu   | 407 |
| 12.17.1.4 enable_if_t  | 407 |
| 12.17.1.5 is_same_element  | 407 |
| 12.17.1.6 enable_if_no_simd_t  | 407 |
| 12.17.1.7 enable_if_simd128_t  | 407 |
| 12.17.1.8 enable_if_simd256_t  | 407 |
| 12.17.1.9 enable_if_simd512_t  | 408 |
| 12.17.2 Constructor & Destructor Documentation                                     | 408 |
| 12.17.2.1 Bench()  | 408 |
| 12.17.3 Member Function Documentation  | 408 |
| 12.17.3.1 cardinality() [1/2]  | 408 |
| 12.17.3.2 cardinality() [2/2]  | 408 |
| 12.17.3.3 doBenches()  | 408 |
| 12.17.3.4 run()  | 408 |
| 12.17.4 Field Documentation  | 408 |
| 12.17.4.1 F  | 408 |
| 12.17.4.2 m  | 408 |
| 12.17.4.3 n  | 409 |
| 12.17.4.4 iters  | 409 |
| 12.17.4.5 inplace  | 409 |
| 12.18 Bini Struct Reference  | 409 |
| 12.19 Block Struct Reference   | 409 |
| 12.20 BlockTransposeSIMD< Field, Simd, > Struct Template Reference                 | 409 |
| 12.20.1 Member Function Documentation  | 409 |
| 12.20.1.1 size()   | 409 |
| 12.20.1.2 info()   | 410 |
| 12.20.1.3 transpose() [1/5]  | 410 |
| 12.20.1.4 transpose() [2/5]  | 410 |
| 12.20.1.5 transpose() [3/5]  | 410 |
| 12.20.1.6 transpose() [4/5]  | 410 |

|   |     |
|---|-----|
| 12.20.1.7 transpose() [5/5]   | 410 |
| 12.21 callLUdivine_small< Element > Class Template Reference  | 411 |
| 12.21.1 Member Function Documentation   | 411 |
| 12.21.1.1 operator()()  | 411 |
| 12.22 callLUdivine_small< double > Class Reference  | 411 |
| 12.22.1 Member Function Documentation   | 411 |
| 12.22.1.1 operator()()  | 411 |
| 12.23 callLUdivine_small< float > Class Reference   | 412 |
| 12.23.1 Member Function Documentation   | 412 |
| 12.23.1.1 operator()()  | 412 |
| 12.24 CharpolyFailed Class Reference  | 412 |
| 12.25 Checker_Empty< Field > Struct Template Reference  | 412 |
| 12.25.1 Constructor & Destructor Documentation  | 413 |
| 12.25.1.1 Checker_Empty()   | 413 |
| 12.25.2 Member Function Documentation   | 413 |
| 12.25.2.1 check()   | 413 |
| 12.26 CheckerImplem_charpoly< Field, Polynomial > Class Template Reference                            | 413 |
| 12.26.1 Constructor & Destructor Documentation  | 413 |
| 12.26.1.1 CheckerImplem_charpoly() [1/2]  | 413 |
| 12.26.1.2 CheckerImplem_charpoly() [2/2]  | 413 |
| 12.26.1.3 ~CheckerImplem_charpoly()   | 413 |
| 12.26.2 Member Function Documentation   | 414 |
| 12.26.2.1 check()   | 414 |
| 12.27 CheckerImplem_charpoly< Givaro::ZRing< Givaro::Integer >, Polynomial > Class Template Reference | 414 |
| 12.27.1 Member Typedef Documentation  | 414 |
| 12.27.1.1 Ring  | 414 |
| 12.27.2 Constructor & Destructor Documentation  | 414 |
| 12.27.2.1 CheckerImplem_charpoly() [1/2]  | 414 |
| 12.27.2.2 CheckerImplem_charpoly() [2/2]  | 414 |
| 12.27.2.3 ~CheckerImplem_charpoly()   | 414 |
| 12.27.3 Member Function Documentation   | 415 |
| 12.27.3.1 check()   | 415 |
| 12.28 CheckerImplem_Det< Field > Class Template Reference   | 415 |
| 12.28.1 Constructor & Destructor Documentation  | 415 |
| 12.28.1.1 CheckerImplem_Det() [1/2]   | 415 |
| 12.28.1.2 CheckerImplem_Det() [2/2]   | 415 |
| 12.28.1.3 ~CheckerImplem_Det()  | 415 |
| 12.28.2 Member Function Documentation   | 415 |
| 12.28.2.1 check()   | 415 |
| 12.29 CheckerImplem_fgemm< Field > Class Template Reference   | 417 |
| 12.29.1 Constructor & Destructor Documentation  | 417 |

|  |     |
|--|-----|
| 12.29.1.1 CheckerImplem_fgemm() [1/2]                        | 417 |
| 12.29.1.2 CheckerImplem_fgemm() [2/2]                        | 417 |
| 12.29.1.3 ~CheckerImplem_fgemm()                             | 417 |
| 12.29.2 Member Function Documentation                        | 418 |
| 12.29.2.1 check()  | 418 |
| 12.30 CheckerImplem_ftsm< Field > Class Template Reference   | 418 |
| 12.30.1 Constructor & Destructor Documentation               | 418 |
| 12.30.1.1 CheckerImplem_ftsm() [1/2]                         | 418 |
| 12.30.1.2 CheckerImplem_ftsm() [2/2]                         | 418 |
| 12.30.1.3 ~CheckerImplem_ftsm()                              | 418 |
| 12.30.2 Member Function Documentation                        | 419 |
| 12.30.2.1 check()  | 419 |
| 12.31 CheckerImplem_invert< Field > Class Template Reference | 419 |
| 12.31.1 Constructor & Destructor Documentation               | 419 |
| 12.31.1.1 CheckerImplem_invert() [1/2]                       | 419 |
| 12.31.1.2 CheckerImplem_invert() [2/2]                       | 419 |
| 12.31.1.3 ~CheckerImplem_invert()                            | 419 |
| 12.31.2 Member Function Documentation                        | 420 |
| 12.31.2.1 check()  | 420 |
| 12.32 CheckerImplem_PLUQ< Field > Class Template Reference   | 420 |
| 12.32.1 Constructor & Destructor Documentation               | 420 |
| 12.32.1.1 CheckerImplem_PLUQ() [1/2]                         | 420 |
| 12.32.1.2 CheckerImplem_PLUQ() [2/2]                         | 420 |
| 12.32.1.3 ~CheckerImplem_PLUQ()                              | 420 |
| 12.32.2 Member Function Documentation                        | 420 |
| 12.32.2.1 check()  | 420 |
| 12.33 Classic Struct Reference                               | 421 |
| 12.34 Column Struct Reference                                | 421 |
| 12.35 CompactElement< Element > Struct Template Reference    | 421 |
| 12.35.1 Member Typedef Documentation                         | 421 |
| 12.35.1.1 type   | 421 |
| 12.36 CompactElement< double > Struct Reference              | 421 |
| 12.36.1 Member Typedef Documentation                         | 422 |
| 12.36.1.1 type   | 422 |
| 12.37 CompactElement< float > Struct Reference               | 422 |
| 12.37.1 Member Typedef Documentation                         | 422 |
| 12.37.1.1 type   | 422 |
| 12.38 CompactElement< int16_t > Struct Reference             | 422 |
| 12.38.1 Member Typedef Documentation                         | 422 |
| 12.38.1.1 type   | 422 |
| 12.39 CompactElement< int32_t > Struct Reference             | 422 |
| 12.39.1 Member Typedef Documentation                         | 422 |

|  |     |
|--|-----|
| 12.39.1.1 type   | 422 |
| 12.40 CompactElement< int64_t > Struct Reference                       | 422 |
| 12.40.1 Member Typedef Documentation                                   | 423 |
| 12.40.1.1 type   | 423 |
| 12.41 compatible_data_type< Field > Struct Template Reference          | 423 |
| 12.41.1 Field Documentation  | 423 |
| 12.41.1.1 value  | 423 |
| 12.42 compatible_data_type< Givaro::ZRing< double > > Struct Reference | 423 |
| 12.42.1 Field Documentation  | 423 |
| 12.42.1.1 value  | 423 |
| 12.43 compatible_data_type< Givaro::ZRing< float > > Struct Reference  | 423 |
| 12.43.1 Field Documentation  | 423 |
| 12.43.1.1 value  | 423 |
| 12.44 Compose< H1, H2 > Struct Template Reference                      | 424 |
| 12.44.1 Constructor & Destructor Documentation                         | 424 |
| 12.44.1.1 Compose() [1/5]  | 424 |
| 12.44.1.2 Compose() [2/5]  | 424 |
| 12.44.1.3 Compose() [3/5]  | 424 |
| 12.44.1.4 Compose() [4/5]  | 424 |
| 12.44.1.5 Compose() [5/5]  | 424 |
| 12.44.2 Member Function Documentation                                  | 424 |
| 12.44.2.1 first_component()  | 424 |
| 12.44.2.2 second_component()   | 424 |
| 12.44.3 Friends And Related Symbol Documentation                       | 425 |
| 12.44.3.1 operator<<   | 425 |
| 12.45 Simd128_impl< true, true, false, 2 >::Converter Union Reference  | 425 |
| 12.45.1 Field Documentation  | 425 |
| 12.45.1.1 v  | 425 |
| 12.45.1.2 t  | 425 |
| 12.46 Simd128_impl< true, true, false, 4 >::Converter Union Reference  | 425 |
| 12.46.1 Field Documentation  | 425 |
| 12.46.1.1 v  | 425 |
| 12.46.1.2 t  | 425 |
| 12.47 Simd128_impl< true, true, false, 8 >::Converter Union Reference  | 425 |
| 12.47.1 Field Documentation  | 426 |
| 12.47.1.1 v  | 426 |
| 12.47.1.2 t  | 426 |
| 12.48 Simd128_impl< true, true, true, 2 >::Converter Union Reference   | 426 |
| 12.48.1 Field Documentation  | 426 |
| 12.48.1.1 v  | 426 |
| 12.48.1.2 t  | 426 |
| 12.49 Simd128_impl< true, true, true, 4 >::Converter Union Reference   | 426 |



|   |     |
|---|-----|
| 12.49.1 Field Documentation . . . . .   | 426 |
| 12.49.1.1 v . . . . .   | 426 |
| 12.49.1.2 t . . . . .   | 426 |
| 12.50 Simd128_impl< true, true, true, 8 >::Converter Union Reference . . . . .  | 426 |
| 12.50.1 Field Documentation . . . . .   | 427 |
| 12.50.1.1 v . . . . .   | 427 |
| 12.50.1.2 t . . . . .   | 427 |
| 12.51 Simd256_impl< true, false, true, 8 >::Converter Union Reference . . . . . | 427 |
| 12.51.1 Field Documentation . . . . .   | 427 |
| 12.51.1.1 v . . . . .   | 427 |
| 12.51.1.2 t . . . . .   | 427 |
| 12.52 Simd256_impl< true, true, false, 2 >::Converter Union Reference . . . . . | 427 |
| 12.52.1 Field Documentation . . . . .   | 427 |
| 12.52.1.1 v . . . . .   | 427 |
| 12.52.1.2 t . . . . .   | 427 |
| 12.53 Simd256_impl< true, true, false, 4 >::Converter Union Reference . . . . . | 427 |
| 12.53.1 Field Documentation . . . . .   | 428 |
| 12.53.1.1 v . . . . .   | 428 |
| 12.53.1.2 t . . . . .   | 428 |
| 12.54 Simd256_impl< true, true, false, 8 >::Converter Union Reference . . . . . | 428 |
| 12.54.1 Field Documentation . . . . .   | 428 |
| 12.54.1.1 v . . . . .   | 428 |
| 12.54.1.2 t . . . . .   | 428 |
| 12.55 Simd256_impl< true, true, true, 2 >::Converter Union Reference . . . . .  | 428 |
| 12.55.1 Field Documentation . . . . .   | 428 |
| 12.55.1.1 v . . . . .   | 428 |
| 12.55.1.2 t . . . . .   | 428 |
| 12.56 Simd256_impl< true, true, true, 4 >::Converter Union Reference . . . . .  | 428 |
| 12.56.1 Field Documentation . . . . .   | 429 |
| 12.56.1.1 v . . . . .   | 429 |
| 12.56.1.2 t . . . . .   | 429 |
| 12.57 Simd256_impl< true, true, true, 8 >::Converter Union Reference . . . . .  | 429 |
| 12.57.1 Field Documentation . . . . .   | 429 |
| 12.57.1.1 v . . . . .   | 429 |
| 12.57.1.2 t . . . . .   | 429 |
| 12.58 Simd512_impl< true, true, false, 8 >::Converter Union Reference . . . . . | 429 |
| 12.58.1 Field Documentation . . . . .   | 429 |
| 12.58.1.1 v . . . . .   | 429 |
| 12.58.1.2 t . . . . .   | 429 |
| 12.59 Simd512_impl< true, true, true, 8 >::Converter Union Reference . . . . .  | 429 |
| 12.59.1 Field Documentation . . . . .   | 430 |
| 12.59.1.1 v . . . . .   | 430 |

|   |     |
|---|-----|
| 12.59.1.2 t . . . . .                                       | 430 |
| 12.60 ConvertTo< T > Struct Template Reference . . . . .    | 430 |
| 12.60.1 Detailed Description . . . . .                      | 430 |
| 12.61 Coo< ValT, IdxT > Struct Template Reference . . . . . | 430 |
| 12.61.1 Member Typedef Documentation . . . . .              | 431 |
| 12.61.1.1 Self . . . . .                                    | 431 |
| 12.61.2 Constructor & Destructor Documentation . . . . .    | 431 |
| 12.61.2.1 Coo() [1/4] . . . . .                             | 431 |
| 12.61.2.2 Coo() [2/4] . . . . .                             | 431 |
| 12.61.2.3 Coo() [3/4] . . . . .                             | 431 |
| 12.61.2.4 Coo() [4/4] . . . . .                             | 431 |
| 12.61.3 Member Function Documentation . . . . .             | 431 |
| 12.61.3.1 operator=() [1/2] . . . . .                       | 431 |
| 12.61.3.2 operator=() [2/2] . . . . .                       | 431 |
| 12.61.4 Field Documentation . . . . .                       | 431 |
| 12.61.4.1 val . . . . .                                     | 431 |
| 12.61.4.2 row . . . . .                                     | 431 |
| 12.61.4.3 col . . . . .                                     | 432 |
| 12.62 Coo< Field > Struct Template Reference . . . . .      | 432 |
| 12.62.1 Constructor & Destructor Documentation . . . . .    | 432 |
| 12.62.1.1 Coo() [1/4] . . . . .                             | 432 |
| 12.62.1.2 Coo() [2/4] . . . . .                             | 432 |
| 12.62.1.3 Coo() [3/4] . . . . .                             | 432 |
| 12.62.1.4 Coo() [4/4] . . . . .                             | 432 |
| 12.62.2 Member Function Documentation . . . . .             | 433 |
| 12.62.2.1 operator=() [1/2] . . . . .                       | 433 |
| 12.62.2.2 operator=() [2/2] . . . . .                       | 433 |
| 12.62.3 Field Documentation . . . . .                       | 433 |
| 12.62.3.1 val . . . . .                                     | 433 |
| 12.62.3.2 col . . . . .                                     | 433 |
| 12.62.3.3 row . . . . .                                     | 433 |
| 12.62.3.4 deleted . . . . .                                 | 433 |
| 12.63 Coo< ValT, IdxT > Struct Template Reference . . . . . | 433 |
| 12.63.1 Member Typedef Documentation . . . . .              | 434 |
| 12.63.1.1 Self . . . . .                                    | 434 |
| 12.63.2 Constructor & Destructor Documentation . . . . .    | 434 |
| 12.63.2.1 Coo() [1/4] . . . . .                             | 434 |
| 12.63.2.2 Coo() [2/4] . . . . .                             | 434 |
| 12.63.2.3 Coo() [3/4] . . . . .                             | 434 |
| 12.63.2.4 Coo() [4/4] . . . . .                             | 434 |
| 12.63.3 Member Function Documentation . . . . .             | 434 |
| 12.63.3.1 operator=() [1/2] . . . . .                       | 434 |

|  |     |
|--|-----|
| 12.63.3.2 operator=() [2/2]  | 434 |
| 12.63.4 Field Documentation  | 434 |
| 12.63.4.1 val  | 434 |
| 12.63.4.2 row  | 434 |
| 12.63.4.3 col  | 435 |
| 12.64 CooMat< Field > Struct Template Reference                                    | 435 |
| 12.64.1 Field Documentation  | 435 |
| 12.64.1.1 _coo16   | 435 |
| 12.64.1.2 _coo32   | 435 |
| 12.64.1.3 _coo64   | 435 |
| 12.64.1.4 _coo16_zo  | 435 |
| 12.64.1.5 _coo32_zo  | 435 |
| 12.64.1.6 _coo64_zo  | 435 |
| 12.65 count_nonconst_lvalue_reference< T > Struct Template Reference               | 436 |
| 12.66 count_nonconst_lvalue_reference< const T &, O... > Struct Template Reference | 436 |
| 12.66.1 Field Documentation  | 436 |
| 12.66.1.1 n  | 436 |
| 12.67 count_nonconst_lvalue_reference< T &, O... > Struct Template Reference       | 436 |
| 12.67.1 Field Documentation  | 436 |
| 12.67.1.1 n  | 436 |
| 12.68 count_nonconst_lvalue_reference< T, O... > Struct Template Reference         | 436 |
| 12.68.1 Field Documentation  | 436 |
| 12.68.1.1 n  | 436 |
| 12.69 count_nonconst_lvalue_reference<> Struct Reference                           | 437 |
| 12.69.1 Field Documentation  | 437 |
| 12.69.1.1 n  | 437 |
| 12.70 CsrMat< Field > Struct Template Reference                                    | 437 |
| 12.70.1 Field Documentation  | 437 |
| 12.70.1.1 _csr16   | 437 |
| 12.70.1.2 _csr32   | 437 |
| 12.70.1.3 _csr64   | 437 |
| 12.70.1.4 _csr16_zo  | 437 |
| 12.70.1.5 _csr32_zo  | 437 |
| 12.70.1.6 _csr64_zo  | 437 |
| 12.71 DefaultBoundedTag Struct Reference   | 438 |
| 12.71.1 Detailed Description   | 438 |
| 12.72 DefaultTag Struct Reference  | 438 |
| 12.72.1 Detailed Description   | 438 |
| 12.73 DelayedTag Struct Reference  | 438 |
| 12.73.1 Detailed Description   | 438 |
| 12.74 DivideAndConquer Struct Reference  | 438 |
| 12.75 ElementTraits< Element > Struct Template Reference                           | 438 |

|   |     |
|---|-----|
| 12.75.1 Detailed Description . . . . .  | 438 |
| 12.75.2 Member Typedef Documentation . . . . .                                    | 439 |
| 12.75.2.1 value . . . . .   | 439 |
| 12.76 ElementTraits< double > Struct Reference . . . . .                          | 439 |
| 12.76.1 Member Typedef Documentation . . . . .                                    | 439 |
| 12.76.1.1 value . . . . .   | 439 |
| 12.77 ElementTraits< FFPACK::rns_double_elt > Struct Reference . . . . .          | 439 |
| 12.77.1 Member Typedef Documentation . . . . .                                    | 439 |
| 12.77.1.1 value . . . . .   | 439 |
| 12.78 ElementTraits< float > Struct Reference . . . . .                           | 439 |
| 12.78.1 Member Typedef Documentation . . . . .                                    | 439 |
| 12.78.1.1 value . . . . .   | 439 |
| 12.79 ElementTraits< Givaro::Integer > Struct Reference . . . . .                 | 440 |
| 12.79.1 Member Typedef Documentation . . . . .                                    | 440 |
| 12.79.1.1 value . . . . .   | 440 |
| 12.80 ElementTraits< int16_t > Struct Reference . . . . .                         | 440 |
| 12.80.1 Member Typedef Documentation . . . . .                                    | 440 |
| 12.80.1.1 value . . . . .   | 440 |
| 12.81 ElementTraits< int32_t > Struct Reference . . . . .                         | 440 |
| 12.81.1 Member Typedef Documentation . . . . .                                    | 440 |
| 12.81.1.1 value . . . . .   | 440 |
| 12.82 ElementTraits< int64_t > Struct Reference . . . . .                         | 440 |
| 12.82.1 Member Typedef Documentation . . . . .                                    | 441 |
| 12.82.1.1 value . . . . .   | 441 |
| 12.83 ElementTraits< int8_t > Struct Reference . . . . .                          | 441 |
| 12.83.1 Member Typedef Documentation . . . . .                                    | 441 |
| 12.83.1.1 value . . . . .   | 441 |
| 12.84 ElementTraits< RecInt::rint< K > > Struct Template Reference . . . . .      | 441 |
| 12.84.1 Member Typedef Documentation . . . . .                                    | 441 |
| 12.84.1.1 value . . . . .   | 441 |
| 12.85 ElementTraits< RecInt::rmint< K, MG > > Struct Template Reference . . . . . | 441 |
| 12.85.1 Member Typedef Documentation . . . . .                                    | 441 |
| 12.85.1.1 value . . . . .   | 441 |
| 12.86 ElementTraits< RecInt::ruint< K > > Struct Template Reference . . . . .     | 442 |
| 12.86.1 Member Typedef Documentation . . . . .                                    | 442 |
| 12.86.1.1 value . . . . .   | 442 |
| 12.87 ElementTraits< uint16_t > Struct Reference . . . . .                        | 442 |
| 12.87.1 Member Typedef Documentation . . . . .                                    | 442 |
| 12.87.1.1 value . . . . .   | 442 |
| 12.88 ElementTraits< uint32_t > Struct Reference . . . . .                        | 442 |
| 12.88.1 Member Typedef Documentation . . . . .                                    | 442 |
| 12.88.1.1 value . . . . .   | 442 |

|  |     |
|--|-----|
| 12.89 ElementTraits< uint64_t > Struct Reference . . . . .   | 442 |
| 12.89.1 Member Typedef Documentation . . . . .               | 443 |
| 12.89.1.1 value . . . . .                                    | 443 |
| 12.90 ElementTraits< uint8_t > Struct Reference . . . . .    | 443 |
| 12.90.1 Member Typedef Documentation . . . . .               | 443 |
| 12.90.1.1 value . . . . .                                    | 443 |
| 12.91 EllMat< Field > Struct Template Reference . . . . .    | 443 |
| 12.91.1 Field Documentation . . . . .                        | 443 |
| 12.91.1.1 _ell16 . . . . .                                   | 443 |
| 12.91.1.2 _ell32 . . . . .                                   | 443 |
| 12.91.1.3 _ell64 . . . . .                                   | 443 |
| 12.91.1.4 _ell16_zo . . . . .                                | 444 |
| 12.91.1.5 _ell32_zo . . . . .                                | 444 |
| 12.91.1.6 _ell64_zo . . . . .                                | 444 |
| 12.92 Failure Class Reference . . . . .                      | 444 |
| 12.92.1 Detailed Description . . . . .                       | 444 |
| 12.92.2 Constructor & Destructor Documentation . . . . .     | 444 |
| 12.92.2.1 Failure() . . . . .                                | 444 |
| 12.92.3 Member Function Documentation . . . . .              | 444 |
| 12.92.3.1 operator>() [1/2] . . . . .                        | 444 |
| 12.92.3.2 operator>() [2/2] . . . . .                        | 445 |
| 12.92.3.3 setErrorStream() . . . . .                         | 445 |
| 12.92.3.4 print() . . . . .                                  | 445 |
| 12.92.4 Field Documentation . . . . .                        | 445 |
| 12.92.4.1 _errorStream . . . . .                             | 445 |
| 12.93 FailureCharpolyCheck Class Reference . . . . .         | 445 |
| 12.94 FailureDetCheck Class Reference . . . . .              | 446 |
| 12.95 FailureFgemmCheck Class Reference . . . . .            | 446 |
| 12.96 FailureInvertCheck Class Reference . . . . .           | 446 |
| 12.97 FailurePLUQCheck Class Reference . . . . .             | 446 |
| 12.98 FailureTrsmCheck Class Reference . . . . .             | 446 |
| 12.99 FieldSimd< _Field > Class Template Reference . . . . . | 446 |
| 12.99.1 Member Typedef Documentation . . . . .               | 447 |
| 12.99.1.1 Field . . . . .                                    | 447 |
| 12.99.1.2 Element . . . . .                                  | 447 |
| 12.99.1.3 simd . . . . .                                     | 447 |
| 12.99.1.4 vect_t . . . . .                                   | 447 |
| 12.99.1.5 scalar_t . . . . .                                 | 448 |
| 12.99.2 Constructor & Destructor Documentation . . . . .     | 448 |
| 12.99.2.1 FieldSimd() [1/3] . . . . .                        | 448 |
| 12.99.2.2 FieldSimd() [2/3] . . . . .                        | 448 |
| 12.99.2.3 FieldSimd() [3/3] . . . . .                        | 448 |

|   |     |
|---|-----|
| 12.99.3 Member Function Documentation                 | 448 |
| 12.99.3.1 operator=() [1/2]                           | 448 |
| 12.99.3.2 operator=() [2/2]                           | 448 |
| 12.99.3.3 init() [1/2]                                | 448 |
| 12.99.3.4 init() [2/2]                                | 448 |
| 12.99.3.5 add() [1/2]                                 | 448 |
| 12.99.3.6 add() [2/2]                                 | 449 |
| 12.99.3.7 addin()                                     | 449 |
| 12.99.3.8 add_r() [1/2]                               | 449 |
| 12.99.3.9 add_r() [2/2]                               | 449 |
| 12.99.3.10 addin_r()                                  | 449 |
| 12.99.3.11 sub() [1/2]                                | 449 |
| 12.99.3.12 sub() [2/2]                                | 449 |
| 12.99.3.13 subin()                                    | 449 |
| 12.99.3.14 sub_r() [1/2]                              | 450 |
| 12.99.3.15 sub_r() [2/2]                              | 450 |
| 12.99.3.16 subin_r()                                  | 450 |
| 12.99.3.17 zero() [1/2]                               | 450 |
| 12.99.3.18 zero() [2/2]                               | 450 |
| 12.99.3.19 mod()                                      | 450 |
| 12.99.3.20 mul() [1/2]                                | 450 |
| 12.99.3.21 mul() [2/2]                                | 450 |
| 12.99.3.22 mulin()                                    | 450 |
| 12.99.3.23 mul_r() [1/2]                              | 451 |
| 12.99.3.24 mul_r() [2/2]                              | 451 |
| 12.99.3.25 axpy() [1/2]                               | 451 |
| 12.99.3.26 axpy() [2/2]                               | 451 |
| 12.99.3.27 axpyin()                                   | 451 |
| 12.99.3.28 axpy_r() [1/2]                             | 451 |
| 12.99.3.29 axpy_r() [2/2]                             | 451 |
| 12.99.3.30 axpyin_r()                                 | 452 |
| 12.99.3.31 maxpy() [1/2]                              | 452 |
| 12.99.3.32 maxpy() [2/2]                              | 452 |
| 12.99.3.33 maxpyin()                                  | 452 |
| 12.99.4 Field Documentation                           | 452 |
| 12.99.4.1 vect_size                                   | 452 |
| 12.99.4.2 alignment                                   | 452 |
| 12.100 FieldTraits< Field > Struct Template Reference | 452 |
| 12.100.1 Detailed Description                         | 453 |
| 12.100.2 Member Typedef Documentation                 | 453 |
| 12.100.2.1 category                                   | 453 |
| 12.100.3 Field Documentation                          | 453 |

|  |     |
|--|-----|
| 12.100.3.1 balanced  | 453 |
| 12.101 FieldTraits< FFPACK::RNSInteger< T > > Struct Template Reference            | 453 |
| 12.101.1 Member Typedef Documentation  | 453 |
| 12.101.1.1 category  | 453 |
| 12.101.2 Field Documentation   | 453 |
| 12.101.2.1 balanced  | 453 |
| 12.102 FieldTraits< FFPACK::RNSIntegerMod< T > > Struct Template Reference         | 453 |
| 12.102.1 Member Typedef Documentation  | 454 |
| 12.102.1.1 category  | 454 |
| 12.102.2 Field Documentation   | 454 |
| 12.102.2.1 balanced  | 454 |
| 12.103 FieldTraits< Givaro::Modular< Element > > Struct Template Reference         | 454 |
| 12.103.1 Member Typedef Documentation  | 454 |
| 12.103.1.1 category  | 454 |
| 12.103.2 Field Documentation   | 454 |
| 12.103.2.1 balanced  | 454 |
| 12.104 FieldTraits< Givaro::ModularBalanced< Element > > Struct Template Reference | 454 |
| 12.104.1 Member Typedef Documentation  | 455 |
| 12.104.1.1 category  | 455 |
| 12.104.2 Field Documentation   | 455 |
| 12.104.2.1 balanced  | 455 |
| 12.105 FieldTraits< Givaro::ZRing< double > > Struct Reference                     | 455 |
| 12.105.1 Member Typedef Documentation  | 455 |
| 12.105.1.1 category  | 455 |
| 12.105.2 Field Documentation   | 455 |
| 12.105.2.1 balanced  | 455 |
| 12.106 FieldTraits< Givaro::ZRing< float > > Struct Reference                      | 455 |
| 12.106.1 Member Typedef Documentation  | 456 |
| 12.106.1.1 category  | 456 |
| 12.106.2 Field Documentation   | 456 |
| 12.106.2.1 balanced  | 456 |
| 12.107 FieldTraits< Givaro::ZRing< Givaro::Integer > > Struct Reference            | 456 |
| 12.107.1 Member Typedef Documentation  | 456 |
| 12.107.1.1 category  | 456 |
| 12.107.2 Field Documentation   | 456 |
| 12.107.2.1 balanced  | 456 |
| 12.108 FieldTraits< Givaro::ZRing< int16_t > > Struct Reference                    | 456 |
| 12.108.1 Member Typedef Documentation  | 457 |
| 12.108.1.1 category  | 457 |
| 12.108.2 Field Documentation   | 457 |
| 12.108.2.1 balanced  | 457 |
| 12.109 FieldTraits< Givaro::ZRing< int32_t > > Struct Reference                    | 457 |

|   |     |
|---|-----|
| 12.109.1 Member Typedef Documentation   | 457 |
| 12.109.1.1 category   | 457 |
| 12.109.2 Field Documentation  | 457 |
| 12.109.2.1 balanced   | 457 |
| 12.110 FieldTraits< Givaro::ZRing< int64_t > > Struct Reference   | 457 |
| 12.110.1 Member Typedef Documentation   | 457 |
| 12.110.1.1 category   | 457 |
| 12.110.2 Field Documentation  | 458 |
| 12.110.2.1 balanced   | 458 |
| 12.111 FieldTraits< Givaro::ZRing< RecInt::ruint< K > > > Struct Template Reference   | 458 |
| 12.111.1 Member Typedef Documentation   | 458 |
| 12.111.1.1 category   | 458 |
| 12.111.2 Field Documentation  | 458 |
| 12.111.2.1 balanced   | 458 |
| 12.112 FieldTraits< Givaro::ZRing< uint16_t > > Struct Reference  | 458 |
| 12.112.1 Member Typedef Documentation   | 458 |
| 12.112.1.1 category   | 458 |
| 12.112.2 Field Documentation  | 459 |
| 12.112.2.1 balanced   | 459 |
| 12.113 FieldTraits< Givaro::ZRing< uint32_t > > Struct Reference  | 459 |
| 12.113.1 Member Typedef Documentation   | 459 |
| 12.113.1.1 category   | 459 |
| 12.113.2 Field Documentation  | 459 |
| 12.113.2.1 balanced   | 459 |
| 12.114 FieldTraits< Givaro::ZRing< uint64_t > > Struct Reference  | 459 |
| 12.114.1 Member Typedef Documentation   | 459 |
| 12.114.1.1 category   | 459 |
| 12.114.2 Field Documentation  | 459 |
| 12.114.2.1 balanced   | 459 |
| 12.115 Fixed Struct Reference   | 460 |
| 12.116 FixedPrecIntTag Struct Reference   | 460 |
| 12.116.1 Detailed Description   | 460 |
| 12.117 ScalFunctionsBase< Element, typename enable_if< is_floating_point< Element >::value >::type >::FloatingPointTestDistribution Class Reference | 460 |
| 12.117.1 Member Typedef Documentation   | 460 |
| 12.117.1.1 IntType  | 460 |
| 12.117.2 Constructor & Destructor Documentation   | 460 |
| 12.117.2.1 FloatingPointTestDistribution()  | 460 |
| 12.117.3 Member Function Documentation  | 460 |
| 12.117.3.1 operator>()  | 460 |
| 12.118 ForStrategy1D< blocksize_t, Cut, Param > Struct Template Reference   | 461 |
| 12.118.1 Constructor & Destructor Documentation   | 461 |



|   |     |
|---|-----|
| 12.118.1.1 ForStrategy1D() [1/2]  | 461 |
| 12.118.1.2 ForStrategy1D() [2/2]  | 461 |
| 12.118.2 Member Function Documentation                                    | 461 |
| 12.118.2.1 build()  | 461 |
| 12.118.2.2 initialize()   | 461 |
| 12.118.2.3 isTerminated()   | 462 |
| 12.118.2.4 begin()  | 462 |
| 12.118.2.5 end()  | 462 |
| 12.118.2.6 numblocks()  | 462 |
| 12.118.2.7 blockindex()   | 462 |
| 12.118.2.8 operator++()   | 462 |
| 12.118.3 Field Documentation  | 462 |
| 12.118.3.1 ibeg   | 462 |
| 12.118.3.2 iend   | 462 |
| 12.118.3.3 current  | 462 |
| 12.118.3.4 firstBlockSize   | 462 |
| 12.118.3.5 lastBlockSize  | 463 |
| 12.118.3.6 changeBS   | 463 |
| 12.118.3.7 numBlock   | 463 |
| 12.119 ForStrategy2D< blocksize_t, Cut, Param > Struct Template Reference | 463 |
| 12.119.1 Constructor & Destructor Documentation                           | 464 |
| 12.119.1.1 ForStrategy2D()  | 464 |
| 12.119.2 Member Function Documentation                                    | 464 |
| 12.119.2.1 initialize()   | 464 |
| 12.119.2.2 isTerminated()   | 464 |
| 12.119.2.3 ibegin()   | 464 |
| 12.119.2.4 jbegin()   | 464 |
| 12.119.2.5 iend()   | 464 |
| 12.119.2.6 jend()   | 464 |
| 12.119.2.7 operator++()   | 464 |
| 12.119.2.8 rownumblocks()   | 465 |
| 12.119.2.9 colnumblocks()   | 465 |
| 12.119.2.10 blockindex()  | 465 |
| 12.119.2.11 rowblockindex()   | 465 |
| 12.119.2.12 colblockindex()   | 465 |
| 12.119.3 Friends And Related Symbol Documentation                         | 465 |
| 12.119.3.1 operator<<   | 465 |
| 12.119.4 Field Documentation  | 465 |
| 12.119.4.1 _ibeg  | 465 |
| 12.119.4.2 _iend  | 465 |
| 12.119.4.3 _jbeg  | 465 |
| 12.119.4.4 _jend  | 466 |

|  |     |
|--|-----|
| 12.119.4.5 rowBlockSize . . . . .  | 466 |
| 12.119.4.6 colBlockSize . . . . .  | 466 |
| 12.119.4.7 current . . . . .   | 466 |
| 12.119.4.8 lastRBS . . . . .   | 466 |
| 12.119.4.9 lastCBS . . . . .   | 466 |
| 12.119.4.10 changeRBS . . . . .  | 466 |
| 12.119.4.11 changeCBS . . . . .  | 466 |
| 12.119.4.12 numRowsBlock . . . . .   | 466 |
| 12.119.4.13 numColBlock . . . . .  | 466 |
| 12.119.4.14 BLOCKS . . . . .   | 467 |
| 12.120 ftrmmLeftLowerNoTransNonUnit< Element > Class Template Reference . . . . .  | 467 |
| 12.121 ftrmmLeftLowerNoTransUnit< Element > Class Template Reference . . . . .     | 467 |
| 12.122 ftrmmLeftLowerTransNonUnit< Element > Class Template Reference . . . . .    | 467 |
| 12.123 ftrmmLeftLowerTransUnit< Element > Class Template Reference . . . . .       | 467 |
| 12.124 ftrmmLeftUpperNoTransNonUnit< Element > Class Template Reference . . . . .  | 467 |
| 12.125 ftrmmLeftUpperNoTransUnit< Element > Class Template Reference . . . . .     | 467 |
| 12.126 ftrmmLeftUpperTransNonUnit< Element > Class Template Reference . . . . .    | 467 |
| 12.127 ftrmmLeftUpperTransUnit< Element > Class Template Reference . . . . .       | 468 |
| 12.128 ftrmmRightLowerNoTransNonUnit< Element > Class Template Reference . . . . . | 468 |
| 12.129 ftrmmRightLowerNoTransUnit< Element > Class Template Reference . . . . .    | 468 |
| 12.130 ftrmmRightLowerTransNonUnit< Element > Class Template Reference . . . . .   | 468 |
| 12.131 ftrmmRightLowerTransUnit< Element > Class Template Reference . . . . .      | 468 |
| 12.132 ftrmmRightUpperNoTransNonUnit< Element > Class Template Reference . . . . . | 468 |
| 12.133 ftrmmRightUpperNoTransUnit< Element > Class Template Reference . . . . .    | 468 |
| 12.134 ftrmmRightUpperTransNonUnit< Element > Class Template Reference . . . . .   | 468 |
| 12.135 ftrmmRightUpperTransUnit< Element > Class Template Reference . . . . .      | 469 |
| 12.136 ftrsmLeftLowerNoTransNonUnit< Element > Class Template Reference . . . . .  | 469 |
| 12.137 ftrsmLeftLowerNoTransUnit< Element > Class Template Reference . . . . .     | 469 |
| 12.138 ftrsmLeftLowerTransNonUnit< Element > Class Template Reference . . . . .    | 469 |
| 12.139 ftrsmLeftLowerTransUnit< Element > Class Template Reference . . . . .       | 469 |
| 12.140 ftrsmLeftUpperNoTransNonUnit< Element > Class Template Reference . . . . .  | 469 |
| 12.140.1 Detailed Description . . . . .  | 469 |
| 12.141 ftrsmLeftUpperNoTransUnit< Element > Class Template Reference . . . . .     | 470 |
| 12.142 ftrsmLeftUpperTransNonUnit< Element > Class Template Reference . . . . .    | 470 |
| 12.143 ftrsmLeftUpperTransUnit< Element > Class Template Reference . . . . .       | 470 |
| 12.144 ftrsmRightLowerNoTransNonUnit< Element > Class Template Reference . . . . . | 470 |
| 12.145 ftrsmRightLowerNoTransUnit< Element > Class Template Reference . . . . .    | 470 |
| 12.146 ftrsmRightLowerTransNonUnit< Element > Class Template Reference . . . . .   | 470 |
| 12.147 ftrsmRightLowerTransUnit< Element > Class Template Reference . . . . .      | 470 |
| 12.148 ftrsmRightUpperNoTransNonUnit< Element > Class Template Reference . . . . . | 470 |
| 12.149 ftrsmRightUpperNoTransUnit< Element > Class Template Reference . . . . .    | 471 |
| 12.150 ftrsmRightUpperTransNonUnit< Element > Class Template Reference . . . . .   | 471 |

|   |     |
|---|-----|
| 12.151 frsmRightUpperTransUnit< Element > Class Template Reference . . . . .                    | 471 |
| 12.152 GenericTag Struct Reference . . . . .  | 471 |
| 12.152.1 Detailed Description . . . . .   | 471 |
| 12.153 GenericTag Struct Reference . . . . .  | 471 |
| 12.153.1 Detailed Description . . . . .   | 471 |
| 12.154 Grain Struct Reference . . . . .   | 471 |
| 12.155 has_minus_eq_impl< C > Struct Template Reference . . . . .                               | 471 |
| 12.155.1 Field Documentation . . . . .  | 472 |
| 12.155.1.1 value . . . . .  | 472 |
| 12.156 has_minus_impl< C > Struct Template Reference . . . . .                                  | 472 |
| 12.156.1 Field Documentation . . . . .  | 472 |
| 12.156.1.1 value . . . . .  | 472 |
| 12.157 has_mul_eq_impl< C > Struct Template Reference . . . . .                                 | 472 |
| 12.157.1 Field Documentation . . . . .  | 472 |
| 12.157.1.1 value . . . . .  | 472 |
| 12.158 has_mul_impl< C > Struct Template Reference . . . . .                                    | 472 |
| 12.158.1 Field Documentation . . . . .  | 473 |
| 12.158.1.1 value . . . . .  | 473 |
| 12.159 has_operation< T > Struct Template Reference . . . . .                                   | 473 |
| 12.159.1 Field Documentation . . . . .  | 473 |
| 12.159.1.1 value . . . . .  | 473 |
| 12.160 has_plus_eq_impl< C > Struct Template Reference . . . . .                                | 473 |
| 12.160.1 Field Documentation . . . . .  | 473 |
| 12.160.1.1 value . . . . .  | 473 |
| 12.161 has_plus_impl< C > Struct Template Reference . . . . .                                   | 473 |
| 12.161.1 Field Documentation . . . . .  | 474 |
| 12.161.1.1 value . . . . .  | 474 |
| 12.162 HelperFlag Struct Reference . . . . .  | 474 |
| 12.162.1 Field Documentation . . . . .  | 474 |
| 12.162.1.1 none . . . . .   | 474 |
| 12.162.1.2 coo . . . . .  | 474 |
| 12.162.1.3 csr . . . . .  | 474 |
| 12.162.1.4 ell . . . . .  | 474 |
| 12.162.1.5 aut . . . . .  | 474 |
| 12.162.1.6 pm1 . . . . .  | 474 |
| 12.163 HelperMod< Field, ElementTraits > Struct Template Reference . . . . .                    | 474 |
| 12.164 HelperMod< Field, ElementCategories::MachineIntTag > Struct Template Reference . . . . . | 475 |
| 12.164.1 Constructor & Destructor Documentation . . . . .                                       | 475 |
| 12.164.1.1 HelperMod() [1/2] . . . . .  | 475 |
| 12.164.1.2 HelperMod() [2/2] . . . . .  | 475 |
| 12.164.2 Field Documentation . . . . .  | 475 |
| 12.164.2.1 p . . . . .  | 475 |

|  |     |
|--|-----|
| 12.164.2.2 invp . . . . .  | 475 |
| 12.164.2.3 min . . . . .   | 475 |
| 12.164.2.4 max . . . . .   | 475 |
| 12.164.2.5 pow50rem . . . . .  | 475 |
| 12.165 HelperMod< Field, FFLAS::ElementCategories::ArbitraryPrecIntTag > Struct Template Reference | 476 |
| 12.165.1 Constructor & Destructor Documentation . . . . .  | 476 |
| 12.165.1.1 HelperMod() [1/2] . . . . .   | 476 |
| 12.165.1.2 HelperMod() [2/2] . . . . .   | 476 |
| 12.165.2 Field Documentation . . . . .   | 476 |
| 12.165.2.1 p . . . . .   | 476 |
| 12.166 HelperMod< Field, FFLAS::ElementCategories::FixedPrecIntTag > Struct Template Reference .   | 476 |
| 12.166.1 Constructor & Destructor Documentation . . . . .  | 476 |
| 12.166.1.1 HelperMod() [1/2] . . . . .   | 476 |
| 12.166.1.2 HelperMod() [2/2] . . . . .   | 476 |
| 12.166.2 Field Documentation . . . . .   | 477 |
| 12.166.2.1 p . . . . .   | 477 |
| 12.167 HelperMod< Field, FFLAS::ElementCategories::MachineFloatTag > Struct Template Reference .   | 477 |
| 12.167.1 Constructor & Destructor Documentation . . . . .  | 477 |
| 12.167.1.1 HelperMod() [1/2] . . . . .   | 477 |
| 12.167.1.2 HelperMod() [2/2] . . . . .   | 477 |
| 12.167.2 Field Documentation . . . . .   | 477 |
| 12.167.2.1 p . . . . .   | 477 |
| 12.167.2.2 invp . . . . .  | 477 |
| 12.167.2.3 min . . . . .   | 477 |
| 12.167.2.4 max . . . . .   | 477 |
| 12.168 Hybrid Struct Reference . . . . .   | 478 |
| 12.169 Info Struct Reference . . . . .   | 478 |
| 12.169.1 Constructor & Destructor Documentation . . . . .  | 478 |
| 12.169.1.1 Info() [1/4] . . . . .  | 478 |
| 12.169.1.2 Info() [2/4] . . . . .  | 478 |
| 12.169.1.3 Info() [3/4] . . . . .  | 478 |
| 12.169.1.4 Info() [4/4] . . . . .  | 478 |
| 12.169.2 Member Function Documentation . . . . .   | 478 |
| 12.169.2.1 operator=() [1/2] . . . . .   | 478 |
| 12.169.2.2 operator=() [2/2] . . . . .   | 478 |
| 12.169.3 Field Documentation . . . . .   | 479 |
| 12.169.3.1 size . . . . .  | 479 |
| 12.169.3.2 perm . . . . .  | 479 |
| 12.169.3.3 begin . . . . .   | 479 |
| 12.170 Info Struct Reference . . . . .   | 479 |
| 12.170.1 Constructor & Destructor Documentation . . . . .  | 479 |
| 12.170.1.1 Info() [1/4] . . . . .  | 479 |

|  |     |
|--|-----|
| 12.170.1.2 Info() [2/4] . . . . .  | 479 |
| 12.170.1.3 Info() [3/4] . . . . .  | 479 |
| 12.170.1.4 Info() [4/4] . . . . .  | 479 |
| 12.170.2 Member Function Documentation . . . . .   | 480 |
| 12.170.2.1 operator=() [1/2] . . . . .   | 480 |
| 12.170.2.2 operator=() [2/2] . . . . .   | 480 |
| 12.170.3 Field Documentation . . . . .   | 480 |
| 12.170.3.1 size . . . . .  | 480 |
| 12.170.3.2 perm . . . . .  | 480 |
| 12.170.3.3 begin . . . . .   | 480 |
| 12.171 is_all_same< Args > Struct Template Reference . . . . .   | 480 |
| 12.172 is_all_same< T, Args... > Struct Template Reference . . . . .   | 480 |
| 12.172.1 Field Documentation . . . . .   | 480 |
| 12.172.1.1 value . . . . .   | 480 |
| 12.173 is_all_same<> Struct Reference . . . . .  | 480 |
| 12.173.1 Field Documentation . . . . .   | 481 |
| 12.173.1.1 value . . . . .   | 481 |
| 12.174 is_simd< T > Struct Template Reference . . . . .  | 481 |
| 12.174.1 Member Typedef Documentation . . . . .  | 481 |
| 12.174.1.1 type . . . . .  | 481 |
| 12.174.2 Field Documentation . . . . .   | 481 |
| 12.174.2.1 value . . . . .   | 481 |
| 12.175 isSparseMatrix< Field, M > Struct Template Reference . . . . .  | 481 |
| 12.176 isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::COO > > Struct Template Reference . . . . .         | 481 |
| 12.177 isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::COO_ZO > > Struct Template Reference . . . . .      | 482 |
| 12.178 isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::CSR > > Struct Template Reference . . . . .         | 482 |
| 12.179 isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::CSR_HYB > > Struct Template Reference . . . . .     | 482 |
| 12.180 isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::CSR_ZO > > Struct Template Reference . . . . .      | 483 |
| 12.181 isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::ELL > > Struct Template Reference . . . . .         | 483 |
| 12.182 isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::ELL_simd > > Struct Template Reference . . . . .    | 483 |
| 12.183 isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::ELL_simd_ZO > > Struct Template Reference . . . . . | 484 |
| 12.184 isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::ELL_ZO > > Struct Template Reference . . . . .      | 484 |
| 12.185 isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::HYB_ZO > > Struct Template Reference . . . . .      | 484 |
| 12.186 isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::SELL > > Struct Template Reference . . . . .        | 484 |
| 12.187 isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::SELL_ZO > > Struct Template Reference . . . . .     | 485 |
| 12.188 isSparseMatrixMKLFormat< F, M > Struct Template Reference . . . . .                                       | 485 |
| 12.189 isSparseMatrixSimdFormat< F, M > Struct Template Reference . . . . .                                      | 485 |
| 12.190 isZOSparseMatrix< F, M > Struct Template Reference . . . . .  | 486 |
| 12.191 isZOSparseMatrix< Field, Sparse< Field, SparseMatrix_t::COO_ZO > > Struct Template Reference . . . . .    | 486 |
| 12.192 isZOSparseMatrix< Field, Sparse< Field, SparseMatrix_t::CSR_ZO > > Struct Template Reference . . . . .    | 486 |

|  |     |
|--|-----|
| 12.193 isZOSparseMatrix< Field, Sparse< Field, SparseMatrix_t::ELL_simd_ZO > > Struct Template Reference . . . . . | 486 |
| 12.194 isZOSparseMatrix< Field, Sparse< Field, SparseMatrix_t::ELL_ZO > > Struct Template Reference . . . . .      | 487 |
| 12.195 isZOSparseMatrix< Field, Sparse< Field, SparseMatrix_t::SELL_ZO > > Struct Template Reference . . . . .     | 487 |
| 12.196 Iterative Struct Reference . . . . .  | 487 |
| 12.197 LazyTag Struct Reference . . . . .  | 487 |
| 12.197.1 Detailed Description . . . . .  | 488 |
| 12.198 limits< T > Struct Template Reference . . . . .   | 488 |
| 12.199 limits< char > Struct Reference . . . . .   | 488 |
| 12.199.1 Member Typedef Documentation . . . . .  | 488 |
| 12.199.1.1 T . . . . .   | 488 |
| 12.199.2 Member Function Documentation . . . . .   | 488 |
| 12.199.2.1 max() . . . . .   | 488 |
| 12.199.2.2 min() . . . . .   | 488 |
| 12.199.2.3 digits() . . . . .  | 488 |
| 12.200 limits< double > Struct Reference . . . . .   | 488 |
| 12.200.1 Member Typedef Documentation . . . . .  | 489 |
| 12.200.1.1 T . . . . .   | 489 |
| 12.200.2 Member Function Documentation . . . . .   | 489 |
| 12.200.2.1 max() . . . . .   | 489 |
| 12.200.2.2 min() . . . . .   | 489 |
| 12.200.2.3 digits() . . . . .  | 489 |
| 12.201 limits< float > Struct Reference . . . . .  | 489 |
| 12.201.1 Member Typedef Documentation . . . . .  | 489 |
| 12.201.1.1 T . . . . .   | 489 |
| 12.201.2 Member Function Documentation . . . . .   | 489 |
| 12.201.2.1 max() . . . . .   | 489 |
| 12.201.2.2 min() . . . . .   | 489 |
| 12.201.2.3 digits() . . . . .  | 490 |
| 12.202 limits< Givaro::Integer > Struct Reference . . . . .  | 490 |
| 12.202.1 Member Typedef Documentation . . . . .  | 490 |
| 12.202.1.1 T . . . . .   | 490 |
| 12.202.2 Member Function Documentation . . . . .   | 490 |
| 12.202.2.1 max() . . . . .   | 490 |
| 12.202.2.2 min() . . . . .   | 490 |
| 12.203 limits< int > Struct Reference . . . . .  | 490 |
| 12.203.1 Member Typedef Documentation . . . . .  | 490 |
| 12.203.1.1 T . . . . .   | 490 |
| 12.203.2 Member Function Documentation . . . . .   | 491 |
| 12.203.2.1 max() . . . . .   | 491 |
| 12.203.2.2 min() . . . . .   | 491 |
| 12.203.2.3 digits() . . . . .  | 491 |

|   |     |
|---|-----|
| 12.204 limits< long > Struct Reference . . . . .                        | 491 |
| 12.204.1 Member Typedef Documentation . . . . .                         | 491 |
| 12.204.1.1 T . . . . .  | 491 |
| 12.204.2 Member Function Documentation . . . . .                        | 491 |
| 12.204.2.1 max() . . . . .  | 491 |
| 12.204.2.2 min() . . . . .  | 491 |
| 12.204.2.3 digits() . . . . .   | 491 |
| 12.205 limits< long long > Struct Reference . . . . .                   | 491 |
| 12.205.1 Member Typedef Documentation . . . . .                         | 492 |
| 12.205.1.1 T . . . . .  | 492 |
| 12.205.2 Member Function Documentation . . . . .                        | 492 |
| 12.205.2.1 max() . . . . .  | 492 |
| 12.205.2.2 min() . . . . .  | 492 |
| 12.205.2.3 digits() . . . . .   | 492 |
| 12.206 limits< Reclnt::rint< K > > Struct Template Reference . . . . .  | 492 |
| 12.206.1 Member Typedef Documentation . . . . .                         | 492 |
| 12.206.1.1 T . . . . .  | 492 |
| 12.206.2 Member Function Documentation . . . . .                        | 492 |
| 12.206.2.1 max() . . . . .  | 492 |
| 12.206.2.2 min() . . . . .  | 493 |
| 12.207 limits< Reclnt::ruint< K > > Struct Template Reference . . . . . | 493 |
| 12.207.1 Member Typedef Documentation . . . . .                         | 493 |
| 12.207.1.1 T . . . . .  | 493 |
| 12.207.2 Member Function Documentation . . . . .                        | 493 |
| 12.207.2.1 max() . . . . .  | 493 |
| 12.207.2.2 min() . . . . .  | 493 |
| 12.208 limits< short int > Struct Reference . . . . .                   | 493 |
| 12.208.1 Member Typedef Documentation . . . . .                         | 494 |
| 12.208.1.1 T . . . . .  | 494 |
| 12.208.2 Member Function Documentation . . . . .                        | 494 |
| 12.208.2.1 max() . . . . .  | 494 |
| 12.208.2.2 min() . . . . .  | 494 |
| 12.208.2.3 digits() . . . . .   | 494 |
| 12.209 limits< signed char > Struct Reference . . . . .                 | 494 |
| 12.209.1 Member Typedef Documentation . . . . .                         | 494 |
| 12.209.1.1 T . . . . .  | 494 |
| 12.209.2 Member Function Documentation . . . . .                        | 494 |
| 12.209.2.1 max() . . . . .  | 494 |
| 12.209.2.2 min() . . . . .  | 494 |
| 12.209.2.3 digits() . . . . .   | 494 |
| 12.210 limits< unsigned char > Struct Reference . . . . .               | 495 |
| 12.210.1 Member Typedef Documentation . . . . .                         | 495 |

|   |     |
|---|-----|
| 12.210.1.1 T  | 495 |
| 12.210.2 Member Function Documentation  | 495 |
| 12.210.2.1 max()  | 495 |
| 12.210.2.2 min()  | 495 |
| 12.210.2.3 digits()   | 495 |
| 12.211 limits< unsigned int > Struct Reference  | 495 |
| 12.211.1 Member Typedef Documentation   | 495 |
| 12.211.1.1 T  | 495 |
| 12.211.2 Member Function Documentation  | 496 |
| 12.211.2.1 max()  | 496 |
| 12.211.2.2 min()  | 496 |
| 12.211.2.3 digits()   | 496 |
| 12.212 limits< unsigned long > Struct Reference                                       | 496 |
| 12.212.1 Member Typedef Documentation   | 496 |
| 12.212.1.1 T  | 496 |
| 12.212.2 Member Function Documentation  | 496 |
| 12.212.2.1 max()  | 496 |
| 12.212.2.2 min()  | 496 |
| 12.212.2.3 digits()   | 496 |
| 12.213 limits< unsigned long long > Struct Reference                                  | 496 |
| 12.213.1 Member Typedef Documentation   | 497 |
| 12.213.1.1 T  | 497 |
| 12.213.2 Member Function Documentation  | 497 |
| 12.213.2.1 max()  | 497 |
| 12.213.2.2 min()  | 497 |
| 12.213.2.3 digits()   | 497 |
| 12.214 limits< unsigned short int > Struct Reference                                  | 497 |
| 12.214.1 Member Typedef Documentation   | 497 |
| 12.214.1.1 T  | 497 |
| 12.214.2 Member Function Documentation  | 497 |
| 12.214.2.1 max()  | 497 |
| 12.214.2.2 min()  | 497 |
| 12.214.2.3 digits()   | 498 |
| 12.215 MachineFloatTag Struct Reference   | 498 |
| 12.215.1 Detailed Description   | 498 |
| 12.216 MachineIntTag Struct Reference   | 498 |
| 12.216.1 Detailed Description   | 498 |
| 12.217 MMHelper< Field, AlgoTrait, ModeTrait, ParSeqTrait > Struct Template Reference | 498 |
| 12.217.1 Member Typedef Documentation   | 499 |
| 12.217.1.1 Self_t   | 499 |
| 12.217.1.2 DelayedField_t   | 499 |
| 12.217.1.3 DelayedField   | 499 |



|   |     |
|---|-----|
| 12.217.1.4 DFElt  | 499 |
| 12.217.2 Constructor & Destructor Documentation   | 499 |
| 12.217.2.1 MMHelper() [1/5]   | 499 |
| 12.217.2.2 MMHelper() [2/5]   | 500 |
| 12.217.2.3 MMHelper() [3/5]   | 500 |
| 12.217.2.4 MMHelper() [4/5]   | 500 |
| 12.217.2.5 MMHelper() [5/5]   | 500 |
| 12.217.3 Member Function Documentation  | 500 |
| 12.217.3.1 initC()  | 500 |
| 12.217.3.2 initA()  | 500 |
| 12.217.3.3 initB()  | 500 |
| 12.217.3.4 initOut()  | 500 |
| 12.217.3.5 MaxDelayedDim()  | 501 |
| 12.217.3.6 Aunfit()   | 501 |
| 12.217.3.7 Bunfit()   | 501 |
| 12.217.3.8 setOutBounds()   | 501 |
| 12.217.3.9 checkA()   | 501 |
| 12.217.3.10 checkB()  | 501 |
| 12.217.3.11 checkOut() [1/2]  | 501 |
| 12.217.3.12 checkOut() [2/2]  | 501 |
| 12.217.4 Friends And Related Symbol Documentation   | 502 |
| 12.217.4.1 operator<<   | 502 |
| 12.217.5 Field Documentation  | 502 |
| 12.217.5.1 recLevel   | 502 |
| 12.217.5.2 FieldMin   | 502 |
| 12.217.5.3 FieldMax   | 502 |
| 12.217.5.4 Amin   | 502 |
| 12.217.5.5 Amax   | 502 |
| 12.217.5.6 Bmin   | 502 |
| 12.217.5.7 Bmax   | 502 |
| 12.217.5.8 Cmin   | 502 |
| 12.217.5.9 Cmax   | 503 |
| 12.217.5.10 Outmin  | 503 |
| 12.217.5.11 Outmax  | 503 |
| 12.217.5.12 MaxStorableValue  | 503 |
| 12.217.5.13 delayedField  | 503 |
| 12.217.5.14 parseq  | 503 |
| 12.218 MMHelper< FFPACK::RNSInteger< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait ><br>Struct Template Reference | 503 |
| 12.218.1 Member Typedef Documentation   | 504 |
| 12.218.1.1 Self_t   | 504 |
| 12.218.2 Constructor & Destructor Documentation   | 504 |

|  |     |
|--|-----|
| 12.218.2.1 MMHelper() [1/5]  | 504 |
| 12.218.2.2 MMHelper() [2/5]  | 504 |
| 12.218.2.3 MMHelper() [3/5]  | 504 |
| 12.218.2.4 MMHelper() [4/5]  | 504 |
| 12.218.2.5 MMHelper() [5/5]  | 504 |
| 12.218.3 Member Function Documentation   | 504 |
| 12.218.3.1 setNorm()   | 504 |
| 12.218.4 Friends And Related Symbol Documentation  | 505 |
| 12.218.4.1 operator<<  | 505 |
| 12.218.5 Field Documentation   | 505 |
| 12.218.5.1 normA   | 505 |
| 12.218.5.2 normB   | 505 |
| 12.218.5.3 recLevel  | 505 |
| 12.218.5.4 parseq  | 505 |
| 12.219 MMHelper< FFPACK::RNSIntegerMod< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeq↵<br>Trait > Struct Template Reference | 505 |
| 12.219.1 Member Typedef Documentation  | 506 |
| 12.219.1.1 Self_t  | 506 |
| 12.219.2 Constructor & Destructor Documentation  | 506 |
| 12.219.2.1 MMHelper() [1/5]  | 506 |
| 12.219.2.2 MMHelper() [2/5]  | 506 |
| 12.219.2.3 MMHelper() [3/5]  | 506 |
| 12.219.2.4 MMHelper() [4/5]  | 506 |
| 12.219.2.5 MMHelper() [5/5]  | 506 |
| 12.219.3 Member Function Documentation   | 506 |
| 12.219.3.1 setNorm()   | 506 |
| 12.219.4 Friends And Related Symbol Documentation  | 507 |
| 12.219.4.1 operator<<  | 507 |
| 12.219.5 Field Documentation   | 507 |
| 12.219.5.1 normA   | 507 |
| 12.219.5.2 normB   | 507 |
| 12.219.5.3 recLevel  | 507 |
| 12.219.5.4 parseq  | 507 |
| 12.220 MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo< Dest >, ParSeqTrait > Struct Tem-<br>plate Reference               | 507 |
| 12.220.1 Member Typedef Documentation  | 508 |
| 12.220.1.1 Self_t  | 508 |
| 12.220.2 Constructor & Destructor Documentation  | 508 |
| 12.220.2.1 MMHelper() [1/4]  | 508 |
| 12.220.2.2 MMHelper() [2/4]  | 508 |
| 12.220.2.3 MMHelper() [3/4]  | 508 |
| 12.220.2.4 MMHelper() [4/4]  | 508 |
| 12.220.3 Friends And Related Symbol Documentation  | 508 |

|  |     |
|--|-----|
| 12.220.3.1 operator<<  | 508 |
| 12.220.4 Field Documentation   | 508 |
| 12.220.4.1 recLevel  | 508 |
| 12.220.4.2 parseq  | 508 |
| 12.221 MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo< ElementCategories::RNSElementTag<br>>, ParSeqTrait > Struct Template Reference | 509 |
| 12.221.1 Member Typedef Documentation  | 509 |
| 12.221.1.1 Self_t  | 509 |
| 12.221.2 Constructor & Destructor Documentation  | 509 |
| 12.221.2.1 MMHelper() [1/5]  | 509 |
| 12.221.2.2 MMHelper() [2/5]  | 509 |
| 12.221.2.3 MMHelper() [3/5]  | 509 |
| 12.221.2.4 MMHelper() [4/5]  | 510 |
| 12.221.2.5 MMHelper() [5/5]  | 510 |
| 12.221.3 Member Function Documentation   | 510 |
| 12.221.3.1 setNorm()   | 510 |
| 12.221.4 Friends And Related Symbol Documentation  | 510 |
| 12.221.4.1 operator<<  | 510 |
| 12.221.5 Field Documentation   | 510 |
| 12.221.5.1 normA   | 510 |
| 12.221.5.2 normB   | 510 |
| 12.221.5.3 recLevel  | 510 |
| 12.221.5.4 parseq  | 510 |
| 12.222 MMHelper< Field, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait > Struct Template Reference                                       | 511 |
| 12.222.1 Detailed Description  | 511 |
| 12.222.2 Member Typedef Documentation  | 511 |
| 12.222.2.1 Self_t  | 511 |
| 12.222.3 Constructor & Destructor Documentation  | 511 |
| 12.222.3.1 MMHelper() [1/4]  | 511 |
| 12.222.3.2 MMHelper() [2/4]  | 511 |
| 12.222.3.3 MMHelper() [3/4]  | 512 |
| 12.222.3.4 MMHelper() [4/4]  | 512 |
| 12.222.4 Friends And Related Symbol Documentation  | 512 |
| 12.222.4.1 operator<<  | 512 |
| 12.222.5 Field Documentation   | 512 |
| 12.222.5.1 recLevel  | 512 |
| 12.222.5.2 parseq  | 512 |
| 12.223 ModeTraits< Field > Struct Template Reference   | 512 |
| 12.223.1 Detailed Description  | 512 |
| 12.223.2 Member Typedef Documentation  | 512 |
| 12.223.2.1 value   | 512 |
| 12.224 ModeTraits< Givaro::Modular< Element, Compute > > Struct Template Reference   | 513 |

|   |     |
|---|-----|
| 12.224.1 Member Typedef Documentation   | 513 |
| 12.224.1.1 value  | 513 |
| 12.225 ModeTraits< Givaro::Modular< Givaro::Integer, Compute > > Struct Template Reference    | 513 |
| 12.225.1 Member Typedef Documentation   | 513 |
| 12.225.1.1 value  | 513 |
| 12.226 ModeTraits< Givaro::Modular< int16_t, Compute > > Struct Template Reference            | 513 |
| 12.226.1 Member Typedef Documentation   | 513 |
| 12.226.1.1 value  | 513 |
| 12.227 ModeTraits< Givaro::Modular< int32_t, Compute > > Struct Template Reference            | 514 |
| 12.227.1 Member Typedef Documentation   | 514 |
| 12.227.1.1 value  | 514 |
| 12.228 ModeTraits< Givaro::Modular< int64_t, uint64_t > > Struct Reference                    | 514 |
| 12.228.1 Member Typedef Documentation   | 514 |
| 12.228.1.1 value  | 514 |
| 12.229 ModeTraits< Givaro::Modular< int8_t, Compute > > Struct Template Reference             | 514 |
| 12.229.1 Member Typedef Documentation   | 514 |
| 12.229.1.1 value  | 514 |
| 12.230 ModeTraits< Givaro::Modular< RecInt::ruint< K >, Compute > > Struct Template Reference | 515 |
| 12.230.1 Member Typedef Documentation   | 515 |
| 12.230.1.1 value  | 515 |
| 12.231 ModeTraits< Givaro::Modular< uint16_t, Compute > > Struct Template Reference           | 515 |
| 12.231.1 Member Typedef Documentation   | 515 |
| 12.231.1.1 value  | 515 |
| 12.232 ModeTraits< Givaro::Modular< uint32_t, Compute > > Struct Template Reference           | 515 |
| 12.232.1 Member Typedef Documentation   | 515 |
| 12.232.1.1 value  | 515 |
| 12.233 ModeTraits< Givaro::Modular< uint8_t, Compute > > Struct Template Reference            | 516 |
| 12.233.1 Member Typedef Documentation   | 516 |
| 12.233.1.1 value  | 516 |
| 12.234 ModeTraits< Givaro::ModularBalanced< Element > > Struct Template Reference             | 516 |
| 12.234.1 Member Typedef Documentation   | 516 |
| 12.234.1.1 value  | 516 |
| 12.235 ModeTraits< Givaro::ModularBalanced< Givaro::Integer > > Struct Reference              | 516 |
| 12.235.1 Member Typedef Documentation   | 516 |
| 12.235.1.1 value  | 516 |
| 12.236 ModeTraits< Givaro::ModularBalanced< int16_t > > Struct Reference                      | 517 |
| 12.236.1 Member Typedef Documentation   | 517 |
| 12.236.1.1 value  | 517 |
| 12.237 ModeTraits< Givaro::ModularBalanced< int32_t > > Struct Reference                      | 517 |
| 12.237.1 Member Typedef Documentation   | 517 |
| 12.237.1.1 value  | 517 |
| 12.238 ModeTraits< Givaro::ModularBalanced< int8_t > > Struct Reference                       | 517 |

|  |     |
|--|-----|
| 12.238.1 Member Typedef Documentation  | 517 |
| 12.238.1.1 value   | 517 |
| 12.239 ModeTraits< Givaro::Montgomery< T > > Struct Template Reference                         | 517 |
| 12.239.1 Member Typedef Documentation  | 518 |
| 12.239.1.1 value   | 518 |
| 12.240 ModeTraits< Givaro::ZRing< double > > Struct Reference                                  | 518 |
| 12.240.1 Member Typedef Documentation  | 518 |
| 12.240.1.1 value   | 518 |
| 12.241 ModeTraits< Givaro::ZRing< float > > Struct Reference                                   | 518 |
| 12.241.1 Member Typedef Documentation  | 518 |
| 12.241.1.1 value   | 518 |
| 12.242 ModeTraits< Givaro::ZRing< Givaro::Integer > > Struct Reference                         | 518 |
| 12.242.1 Member Typedef Documentation  | 519 |
| 12.242.1.1 value   | 519 |
| 12.243 ModularBalanced< T > Class Template Reference   | 519 |
| 12.244 ModularTag Struct Reference   | 519 |
| 12.244.1 Detailed Description  | 519 |
| 12.245 Montgomery< T > Class Template Reference  | 519 |
| 12.246 need_field_characteristic< Field > Struct Template Reference                            | 519 |
| 12.246.1 Field Documentation   | 519 |
| 12.246.1.1 value   | 519 |
| 12.247 need_field_characteristic< Givaro::Modular< Field > > Struct Template Reference         | 519 |
| 12.247.1 Field Documentation   | 520 |
| 12.247.1.1 value   | 520 |
| 12.248 need_field_characteristic< Givaro::ModularBalanced< Field > > Struct Template Reference | 520 |
| 12.248.1 Field Documentation   | 520 |
| 12.248.1.1 value   | 520 |
| 12.249 NoSimd< T > Struct Template Reference   | 520 |
| 12.249.1 Member Typedef Documentation  | 520 |
| 12.249.1.1 vect_t  | 520 |
| 12.249.1.2 scalar_t  | 521 |
| 12.249.1.3 aligned_allocator   | 521 |
| 12.249.1.4 aligned_vector  | 521 |
| 12.249.1.5 is_same_element   | 521 |
| 12.249.2 Member Function Documentation   | 521 |
| 12.249.2.1 type_string()   | 521 |
| 12.249.2.2 valid()   | 521 |
| 12.249.2.3 compliant()   | 521 |
| 12.249.3 Field Documentation   | 521 |
| 12.249.3.1 vect_size   | 521 |
| 12.249.3.2 alignment   | 521 |
| 12.250 Parallel< C, P > Struct Template Reference  | 522 |

|  |     |
|--|-----|
| 12.250.1 Member Typedef Documentation                              | 522 |
| 12.250.1.1 Cut   | 522 |
| 12.250.1.2 Param   | 522 |
| 12.250.2 Constructor & Destructor Documentation                    | 522 |
| 12.250.2.1 Parallel()  | 522 |
| 12.250.3 Member Function Documentation                             | 522 |
| 12.250.3.1 numthreads()  | 522 |
| 12.250.3.2 set_numthreads()  | 522 |
| 12.250.4 Friends And Related Symbol Documentation                  | 522 |
| 12.250.4.1 operator<<  | 522 |
| 12.251 RNSInteger< RNS >::RandIter Class Reference                 | 523 |
| 12.251.1 Constructor & Destructor Documentation                    | 523 |
| 12.251.1.1 RandIter()  | 523 |
| 12.251.2 Member Function Documentation                             | 523 |
| 12.251.2.1 random() [1/2]  | 523 |
| 12.251.2.2 random() [2/2]  | 523 |
| 12.251.2.3 operator>() [1/2]                                       | 523 |
| 12.251.2.4 operator>() [2/2]                                       | 523 |
| 12.251.2.5 ring()  | 524 |
| 12.252 RNSIntegerMod< RNS >::RandIter Class Reference              | 524 |
| 12.252.1 Constructor & Destructor Documentation                    | 524 |
| 12.252.1.1 RandIter()  | 524 |
| 12.252.2 Member Function Documentation                             | 524 |
| 12.252.2.1 random() [1/2]  | 524 |
| 12.252.2.2 random() [2/2]  | 524 |
| 12.252.2.3 operator>() [1/2]                                       | 524 |
| 12.252.2.4 operator>() [2/2]                                       | 524 |
| 12.252.2.5 ring()  | 525 |
| 12.253 readMyMachineType< Field, T > Struct Template Reference     | 525 |
| 12.253.1 Member Typedef Documentation                              | 525 |
| 12.253.1.1 Element   | 525 |
| 12.253.1.2 Element_ptr   | 525 |
| 12.253.2 Member Function Documentation                             | 525 |
| 12.253.2.1 operator>()   | 525 |
| 12.254 readMyMachineType< Field, mpz_t > Struct Template Reference | 525 |
| 12.254.1 Member Typedef Documentation                              | 526 |
| 12.254.1.1 Element   | 526 |
| 12.254.1.2 Element_ptr   | 526 |
| 12.254.2 Member Function Documentation                             | 526 |
| 12.254.2.1 operator>()   | 526 |
| 12.255 Recursive Struct Reference                                  | 526 |
| 12.256 Recursive Struct Reference                                  | 526 |

|   |     |
|---|-----|
| 12.257 rint< K > Class Template Reference . . . . .       | 526 |
| 12.258 rns_double Struct Reference . . . . .              | 526 |
| 12.258.1 Member Typedef Documentation . . . . .           | 527 |
| 12.258.1.1 integer . . . . .                              | 527 |
| 12.258.1.2 ModField . . . . .                             | 528 |
| 12.258.1.3 BasisElement . . . . .                         | 528 |
| 12.258.1.4 Element . . . . .                              | 528 |
| 12.258.1.5 Element_ptr . . . . .                          | 528 |
| 12.258.1.6 ConstElement_ptr . . . . .                     | 528 |
| 12.258.2 Constructor & Destructor Documentation . . . . . | 528 |
| 12.258.2.1 rns_double() [1/4] . . . . .                   | 528 |
| 12.258.2.2 rns_double() [2/4] . . . . .                   | 528 |
| 12.258.2.3 rns_double() [3/4] . . . . .                   | 528 |
| 12.258.2.4 rns_double() [4/4] . . . . .                   | 528 |
| 12.258.3 Member Function Documentation . . . . .          | 528 |
| 12.258.3.1 precompute_cst() . . . . .                     | 528 |
| 12.258.3.2 init() [1/3] . . . . .                         | 529 |
| 12.258.3.3 init() [2/3] . . . . .                         | 529 |
| 12.258.3.4 init_transpose() . . . . .                     | 529 |
| 12.258.3.5 convert() [1/2] . . . . .                      | 529 |
| 12.258.3.6 convert_transpose() . . . . .                  | 529 |
| 12.258.3.7 reduce() . . . . .                             | 530 |
| 12.258.3.8 init() [3/3] . . . . .                         | 530 |
| 12.258.3.9 convert() [2/2] . . . . .                      | 530 |
| 12.258.4 Field Documentation . . . . .                    | 530 |
| 12.258.4.1 _basis . . . . .                               | 530 |
| 12.258.4.2 _basisMax . . . . .                            | 530 |
| 12.258.4.3 _negbasis . . . . .                            | 530 |
| 12.258.4.4 _invbasis . . . . .                            | 530 |
| 12.258.4.5 _field_rns . . . . .                           | 530 |
| 12.258.4.6 _M . . . . .                                   | 530 |
| 12.258.4.7 _Mi . . . . .                                  | 531 |
| 12.258.4.8 _MMi . . . . .                                 | 531 |
| 12.258.4.9 _crt_in . . . . .                              | 531 |
| 12.258.4.10 _crt_out . . . . .                            | 531 |
| 12.258.4.11 _size . . . . .                               | 531 |
| 12.258.4.12 _pbits . . . . .                              | 531 |
| 12.258.4.13 _ldm . . . . .                                | 531 |
| 12.258.4.14 _mi_sum . . . . .                             | 531 |
| 12.259 rns_double_elt Struct Reference . . . . .          | 531 |
| 12.259.1 Constructor & Destructor Documentation . . . . . | 532 |
| 12.259.1.1 rns_double_elt() [1/3] . . . . .               | 532 |

|  |     |
|--|-----|
| 12.259.1.2 <code>~rns_double_elt()</code>                  | 532 |
| 12.259.1.3 <code>rns_double_elt()</code> [2/3]             | 532 |
| 12.259.1.4 <code>rns_double_elt()</code> [3/3]             | 532 |
| 12.259.2 Member Function Documentation                     | 532 |
| 12.259.2.1 <code>operator&amp;()</code> [1/2]              | 532 |
| 12.259.2.2 <code>operator&amp;()</code> [2/2]              | 532 |
| 12.259.3 Field Documentation                               | 532 |
| 12.259.3.1 <code>_ptr</code>                               | 532 |
| 12.259.3.2 <code>_stride</code>                            | 532 |
| 12.259.3.3 <code>_alloc</code>                             | 532 |
| 12.260 <code>rns_double_elt_cstptr</code> Struct Reference | 533 |
| 12.260.1 Constructor & Destructor Documentation            | 533 |
| 12.260.1.1 <code>rns_double_elt_cstptr()</code> [1/5]      | 533 |
| 12.260.1.2 <code>rns_double_elt_cstptr()</code> [2/5]      | 533 |
| 12.260.1.3 <code>rns_double_elt_cstptr()</code> [3/5]      | 533 |
| 12.260.1.4 <code>rns_double_elt_cstptr()</code> [4/5]      | 534 |
| 12.260.1.5 <code>rns_double_elt_cstptr()</code> [5/5]      | 534 |
| 12.260.2 Member Function Documentation                     | 534 |
| 12.260.2.1 <code>operator&amp;()</code> [1/2]              | 534 |
| 12.260.2.2 <code>operator*()</code>                        | 534 |
| 12.260.2.3 <code>operator[]()</code> [1/2]                 | 534 |
| 12.260.2.4 <code>operator[]()</code> [2/2]                 | 534 |
| 12.260.2.5 <code>operator++()</code>                       | 534 |
| 12.260.2.6 <code>operator--()</code>                       | 534 |
| 12.260.2.7 <code>operator+()</code>                        | 534 |
| 12.260.2.8 <code>operator-()</code>                        | 534 |
| 12.260.2.9 <code>operator+=()</code>                       | 534 |
| 12.260.2.10 <code>operator-=()</code>                      | 534 |
| 12.260.2.11 <code>operator=()</code>                       | 535 |
| 12.260.2.12 <code>operator&lt;()</code>                    | 535 |
| 12.260.2.13 <code>operator"!=()</code>                     | 535 |
| 12.260.2.14 <code>operator&amp;()</code> [2/2]             | 535 |
| 12.260.3 Field Documentation                               | 535 |
| 12.260.3.1 <code>other</code>                              | 535 |
| 12.260.3.2 <code>_ptr</code>                               | 535 |
| 12.260.3.3 <code>_stride</code>                            | 535 |
| 12.260.3.4 <code>_alloc</code>                             | 535 |
| 12.261 <code>rns_double_elt_ptr</code> Struct Reference    | 535 |
| 12.261.1 Constructor & Destructor Documentation            | 536 |
| 12.261.1.1 <code>rns_double_elt_ptr()</code> [1/5]         | 536 |
| 12.261.1.2 <code>rns_double_elt_ptr()</code> [2/5]         | 536 |
| 12.261.1.3 <code>rns_double_elt_ptr()</code> [3/5]         | 536 |



|   |     |
|---|-----|
| 12.261.1.4 rns_double_elt_ptr() [4/5]           | 536 |
| 12.261.1.5 rns_double_elt_ptr() [5/5]           | 536 |
| 12.261.2 Member Function Documentation          | 536 |
| 12.261.2.1 operator&() [1/2]                    | 536 |
| 12.261.2.2 operator*()                          | 536 |
| 12.261.2.3 operator[]() [1/2]                   | 537 |
| 12.261.2.4 operator[]() [2/2]                   | 537 |
| 12.261.2.5 operator++()                         | 537 |
| 12.261.2.6 operator--()                         | 537 |
| 12.261.2.7 operator+()                          | 537 |
| 12.261.2.8 operator-()                          | 537 |
| 12.261.2.9 operator+=()                         | 537 |
| 12.261.2.10 operator-=()                        | 537 |
| 12.261.2.11 operator=()                         | 537 |
| 12.261.2.12 operator<()                         | 537 |
| 12.261.2.13 operator"!=(                        | 537 |
| 12.261.2.14 operator&() [2/2]                   | 537 |
| 12.261.3 Field Documentation                    | 538 |
| 12.261.3.1 other                                | 538 |
| 12.261.3.2 _ptr                                 | 538 |
| 12.261.3.3 _stride                              | 538 |
| 12.261.3.4 _alloc                               | 538 |
| 12.262 rns_double_extended Struct Reference     | 538 |
| 12.262.1 Member Typedef Documentation           | 539 |
| 12.262.1.1 integer                              | 539 |
| 12.262.1.2 ModField                             | 539 |
| 12.262.1.3 BasisElement                         | 539 |
| 12.262.1.4 Element                              | 539 |
| 12.262.1.5 Element_ptr                          | 539 |
| 12.262.1.6 ConstElement_ptr                     | 539 |
| 12.262.2 Constructor & Destructor Documentation | 539 |
| 12.262.2.1 rns_double_extended() [1/3]          | 539 |
| 12.262.2.2 rns_double_extended() [2/3]          | 539 |
| 12.262.2.3 rns_double_extended() [3/3]          | 539 |
| 12.262.3 Member Function Documentation          | 540 |
| 12.262.3.1 precompute_cst()                     | 540 |
| 12.262.3.2 init() [1/3]                         | 540 |
| 12.262.3.3 init() [2/3]                         | 540 |
| 12.262.3.4 convert() [1/2]                      | 540 |
| 12.262.3.5 init() [3/3]                         | 540 |
| 12.262.3.6 convert() [2/2]                      | 540 |
| 12.262.3.7 reduce()                             | 540 |

|   |     |
|---|-----|
| 12.262.4 Field Documentation                      | 541 |
| 12.262.4.1 <code>_basis</code>                    | 541 |
| 12.262.4.2 <code>_basisMax</code>                 | 541 |
| 12.262.4.3 <code>_negbasis</code>                 | 541 |
| 12.262.4.4 <code>_invbasis</code>                 | 541 |
| 12.262.4.5 <code>_field_rns</code>                | 541 |
| 12.262.4.6 <code>_M</code>                        | 541 |
| 12.262.4.7 <code>_Mi</code>                       | 541 |
| 12.262.4.8 <code>_MMi</code>                      | 541 |
| 12.262.4.9 <code>_crt_in</code>                   | 541 |
| 12.262.4.10 <code>_crt_out</code>                 | 541 |
| 12.262.4.11 <code>_size</code>                    | 541 |
| 12.262.4.12 <code>_pbits</code>                   | 541 |
| 12.262.4.13 <code>_ldm</code>                     | 541 |
| 12.263 RNSElementTag Struct Reference             | 542 |
| 12.263.1 Detailed Description                     | 542 |
| 12.264 RNSInteger< RNS > Class Template Reference | 542 |
| 12.264.1 Member Typedef Documentation             | 543 |
| 12.264.1.1 <code>BasisElement</code>              | 543 |
| 12.264.1.2 <code>integer</code>                   | 543 |
| 12.264.1.3 <code>Element</code>                   | 543 |
| 12.264.1.4 <code>Element_ptr</code>               | 543 |
| 12.264.1.5 <code>ConstElement_ptr</code>          | 543 |
| 12.264.2 Constructor & Destructor Documentation   | 543 |
| 12.264.2.1 <code>RNSInteger()</code> [1/2]        | 543 |
| 12.264.2.2 <code>RNSInteger()</code> [2/2]        | 543 |
| 12.264.3 Member Function Documentation            | 543 |
| 12.264.3.1 <code>rns()</code>                     | 543 |
| 12.264.3.2 <code>size()</code>                    | 543 |
| 12.264.3.3 <code>isOne()</code>                   | 544 |
| 12.264.3.4 <code>isMOne()</code>                  | 544 |
| 12.264.3.5 <code>isZero()</code>                  | 544 |
| 12.264.3.6 <code>characteristic()</code>          | 544 |
| 12.264.3.7 <code>cardinality()</code>             | 544 |
| 12.264.3.8 <code>init()</code> [1/2]              | 544 |
| 12.264.3.9 <code>init()</code> [2/2]              | 544 |
| 12.264.3.10 <code>reduce()</code> [1/2]           | 544 |
| 12.264.3.11 <code>reduce()</code> [2/2]           | 544 |
| 12.264.3.12 <code>convert()</code>                | 545 |
| 12.264.3.13 <code>assign()</code>                 | 545 |
| 12.264.3.14 <code>write()</code> [1/2]            | 545 |
| 12.264.3.15 <code>write()</code> [2/2]            | 545 |

|  |     |
|--|-----|
| 12.264.4 Field Documentation                         | 545 |
| 12.264.4.1 _rns                                      | 545 |
| 12.264.4.2 one                                       | 545 |
| 12.264.4.3 mOne                                      | 545 |
| 12.264.4.4 zero                                      | 545 |
| 12.265 RNSIntegerMod< RNS > Class Template Reference | 545 |
| 12.265.1 Member Typedef Documentation                | 547 |
| 12.265.1.1 Element                                   | 547 |
| 12.265.1.2 Element_ptr                               | 547 |
| 12.265.1.3 ConstElement_ptr                          | 547 |
| 12.265.1.4 BasisElement                              | 547 |
| 12.265.1.5 ModField                                  | 547 |
| 12.265.1.6 integer                                   | 547 |
| 12.265.2 Constructor & Destructor Documentation      | 547 |
| 12.265.2.1 RNSIntegerMod()                           | 547 |
| 12.265.3 Member Function Documentation               | 547 |
| 12.265.3.1 rns()                                     | 547 |
| 12.265.3.2 delayed()                                 | 547 |
| 12.265.3.3 size()                                    | 548 |
| 12.265.3.4 isOne()                                   | 548 |
| 12.265.3.5 isMOne()                                  | 548 |
| 12.265.3.6 isZero()                                  | 548 |
| 12.265.3.7 characteristic() [1/2]                    | 548 |
| 12.265.3.8 characteristic() [2/2]                    | 548 |
| 12.265.3.9 cardinality() [1/2]                       | 548 |
| 12.265.3.10 cardinality() [2/2]                      | 548 |
| 12.265.3.11 minElement()                             | 548 |
| 12.265.3.12 maxElement()                             | 548 |
| 12.265.3.13 init() [1/3]                             | 548 |
| 12.265.3.14 init() [2/3]                             | 549 |
| 12.265.3.15 reduce() [1/2]                           | 549 |
| 12.265.3.16 reduce() [2/2]                           | 549 |
| 12.265.3.17 init() [3/3]                             | 549 |
| 12.265.3.18 convert()                                | 549 |
| 12.265.3.19 assign()                                 | 549 |
| 12.265.3.20 add()                                    | 549 |
| 12.265.3.21 sub()                                    | 549 |
| 12.265.3.22 neg()                                    | 550 |
| 12.265.3.23 mul()                                    | 550 |
| 12.265.3.24 axpyin()                                 | 550 |
| 12.265.3.25 inv()                                    | 550 |
| 12.265.3.26 areEqual()                               | 550 |

|   |     |
|---|-----|
| 12.265.3.27 write() [1/2]                                 | 550 |
| 12.265.3.28 write() [2/2]                                 | 550 |
| 12.265.3.29 reduce_modp() [1/2]                           | 550 |
| 12.265.3.30 write_matrix()                                | 551 |
| 12.265.3.31 write_matrix_long()                           | 551 |
| 12.265.3.32 reduce_modp() [2/2]                           | 551 |
| 12.265.3.33 reduce_modp_rnsmajor()                        | 551 |
| 12.265.4 Field Documentation                              | 551 |
| 12.265.4.1 _p   | 551 |
| 12.265.4.2 _Mi_modp_rns                                   | 551 |
| 12.265.4.3 _iM_modp_rns                                   | 551 |
| 12.265.4.4 _rns   | 551 |
| 12.265.4.5 _F   | 552 |
| 12.265.4.6 _RNSdelayed                                    | 552 |
| 12.265.4.7 one  | 552 |
| 12.265.4.8 mOne   | 552 |
| 12.265.4.9 zero   | 552 |
| 12.266 rnsRandIter< RNS > Class Template Reference        | 552 |
| 12.266.1 Constructor & Destructor Documentation           | 552 |
| 12.266.1.1 rnsRandIter()                                  | 552 |
| 12.266.2 Member Function Documentation                    | 553 |
| 12.266.2.1 random() [1/2]                                 | 553 |
| 12.266.2.2 operator>() [1/2]                              | 553 |
| 12.266.2.3 operator>() [2/2]                              | 553 |
| 12.266.2.4 random() [2/2]                                 | 553 |
| 12.266.2.5 ring()   | 553 |
| 12.267 Row Struct Reference                               | 553 |
| 12.268 ruint< K > Class Template Reference                | 553 |
| 12.269 ScalFunctions< Element > Struct Template Reference | 553 |
| 12.269.1 Member Typedef Documentation                     | 554 |
| 12.269.1.1 vectElt  | 554 |
| 12.269.2 Member Function Documentation                    | 554 |
| 12.269.2.1 genInputs()                                    | 554 |
| 12.269.2.2 genInputsWithZero()                            | 555 |
| 12.269.2.3 zero()   | 555 |
| 12.269.2.4 vand()   | 555 |
| 12.269.2.5 vor()  | 555 |
| 12.269.2.6 vxor()   | 555 |
| 12.269.2.7 vandnot()                                      | 555 |
| 12.269.2.8 add()  | 555 |
| 12.269.2.9 addin()  | 555 |
| 12.269.2.10 sub()   | 555 |

|             |  |     |
|-------------|--|-----|
| 12.269.2.11 | subin()  | 556 |
| 12.269.2.12 | mul()  | 556 |
| 12.269.2.13 | mulin()  | 556 |
| 12.269.2.14 | div()  | 556 |
| 12.269.2.15 | fmadd()  | 556 |
| 12.269.2.16 | fmaddin()  | 556 |
| 12.269.2.17 | fmsub()  | 556 |
| 12.269.2.18 | fmsubin()  | 556 |
| 12.269.2.19 | fnmadd()   | 557 |
| 12.269.2.20 | fnmaddin()   | 557 |
| 12.269.2.21 | lesser()   | 557 |
| 12.269.2.22 | lesser_eq()  | 557 |
| 12.269.2.23 | greater()  | 557 |
| 12.269.2.24 | greater_eq()   | 557 |
| 12.269.2.25 | eq()   | 557 |
| 12.269.2.26 | unpacklo()   | 557 |
| 12.269.2.27 | unpackhi()   | 558 |
| 12.269.2.28 | unpacklohi()   | 558 |
| 12.269.2.29 | pack_even()  | 558 |
| 12.269.2.30 | pack_odd()   | 558 |
| 12.269.2.31 | pack()   | 558 |
| 12.269.2.32 | blend()  | 558 |
| 12.270      | ScalFunctionsBase< Element, Enable > Struct Template Reference   | 558 |
| 12.271      | ScalFunctionsBase< Element, typename enable_if< is_floating_point< Element >::value >::type<br>> Struct Template Reference | 559 |
| 12.271.1    | Member Function Documentation  | 559 |
| 12.271.1.1  | get_default_random_generator()   | 559 |
| 12.271.1.2  | ceil()   | 559 |
| 12.271.1.3  | floor()  | 559 |
| 12.271.1.4  | round()  | 559 |
| 12.271.1.5  | blendv()   | 560 |
| 12.271.1.6  | fma()  | 560 |
| 12.271.2    | Field Documentation  | 560 |
| 12.271.2.1  | _zero  | 560 |
| 12.271.2.2  | cmp_true   | 560 |
| 12.271.2.3  | cmp_false  | 560 |
| 12.272      | ScalFunctionsBase< Element, typename enable_if< is_integral< Element >::value >::type ><br>Struct Template Reference       | 560 |
| 12.272.1    | Member Function Documentation  | 561 |
| 12.272.1.1  | get_default_random_generator()   | 561 |
| 12.272.1.2  | round()  | 561 |
| 12.272.1.3  | fma()  | 561 |
| 12.272.1.4  | mullo()  | 561 |

|   |     |
|---|-----|
| 12.272.1.5 mulhi()  | 561 |
| 12.272.1.6 mulx()   | 561 |
| 12.272.1.7 fmaddx()   | 561 |
| 12.272.1.8 fmaddxin()   | 562 |
| 12.272.1.9 fmsubx()   | 562 |
| 12.272.1.10 fmsubxin()  | 562 |
| 12.272.1.11 fnmaddx()   | 562 |
| 12.272.1.12 fnmaddxin()   | 562 |
| 12.272.1.13 sra()   | 562 |
| 12.272.1.14 srl()   | 562 |
| 12.272.1.15 sll()   | 562 |
| 12.272.2 Field Documentation  | 563 |
| 12.272.2.1 _zero  | 563 |
| 12.272.2.2 cmp_true   | 563 |
| 12.272.2.3 cmp_false  | 563 |
| 12.273 Sequential Struct Reference  | 563 |
| 12.273.1 Constructor & Destructor Documentation                               | 563 |
| 12.273.1.1 Sequential() [1/3]   | 563 |
| 12.273.1.2 Sequential() [2/3]   | 563 |
| 12.273.1.3 Sequential() [3/3]   | 563 |
| 12.273.2 Member Function Documentation  | 563 |
| 12.273.2.1 numthreads()   | 563 |
| 12.273.3 Friends And Related Symbol Documentation                             | 564 |
| 12.273.3.1 operator<<   | 564 |
| 12.274 Simd128_impl< ArithType, Int, Signed, Size > Struct Template Reference | 564 |
| 12.275 Simd128_impl< true, false, true, 4 > Struct Reference                  | 564 |
| 12.276 Simd128_impl< true, false, true, 8 > Struct Reference                  | 564 |
| 12.277 Simd128_impl< true, true, false, 2 > Struct Reference                  | 564 |
| 12.277.1 Member Typedef Documentation   | 566 |
| 12.277.1.1 scalar_t   | 566 |
| 12.277.1.2 aligned_allocator  | 566 |
| 12.277.1.3 aligned_vector   | 566 |
| 12.277.1.4 is_same_element  | 566 |
| 12.277.1.5 vect_t   | 566 |
| 12.277.2 Member Function Documentation  | 567 |
| 12.277.2.1 type_string()  | 567 |
| 12.277.2.2 set1() [1/2]   | 567 |
| 12.277.2.3 set() [1/2]  | 567 |
| 12.277.2.4 gather() [1/2]   | 567 |
| 12.277.2.5 load() [1/2]   | 567 |
| 12.277.2.6 loadu() [1/2]  | 567 |
| 12.277.2.7 store() [1/2]  | 567 |

|                                  |     |
|----------------------------------|-----|
| 12.277.2.8 storeu() [1/2]        | 567 |
| 12.277.2.9 stream() [1/2]        | 567 |
| 12.277.2.10 sra()                | 568 |
| 12.277.2.11 greater()            | 568 |
| 12.277.2.12 lesser()             | 568 |
| 12.277.2.13 greater_eq()         | 568 |
| 12.277.2.14 lesser_eq()          | 568 |
| 12.277.2.15 mulhi()              | 568 |
| 12.277.2.16 mulx()               | 568 |
| 12.277.2.17 fmaddx()             | 568 |
| 12.277.2.18 fmaddxin()           | 568 |
| 12.277.2.19 fnmaddx()            | 569 |
| 12.277.2.20 fnmaddxin()          | 569 |
| 12.277.2.21 fmsubx()             | 569 |
| 12.277.2.22 fmsubxin()           | 569 |
| 12.277.2.23 hadd_to_scal()       | 569 |
| 12.277.2.24 valid()              | 569 |
| 12.277.2.25 compliant()          | 569 |
| 12.277.2.26 set1() [2/2]         | 569 |
| 12.277.2.27 set() [2/2]          | 569 |
| 12.277.2.28 gather() [2/2]       | 570 |
| 12.277.2.29 load() [2/2]         | 570 |
| 12.277.2.30 loadu() [2/2]        | 570 |
| 12.277.2.31 store() [2/2]        | 570 |
| 12.277.2.32 storeu() [2/2]       | 570 |
| 12.277.2.33 stream() [2/2]       | 570 |
| 12.277.2.34 sll()                | 570 |
| 12.277.2.35 srl()                | 570 |
| 12.277.2.36 shuffle()            | 570 |
| 12.277.2.37 unpacklo_intrinsic() | 571 |
| 12.277.2.38 unpackhi_intrinsic() | 571 |
| 12.277.2.39 unpacklo()           | 571 |
| 12.277.2.40 unpackhi()           | 571 |
| 12.277.2.41 unpacklohi()         | 571 |
| 12.277.2.42 pack_even()          | 571 |
| 12.277.2.43 pack_odd()           | 571 |
| 12.277.2.44 pack()               | 571 |
| 12.277.2.45 transpose()          | 571 |
| 12.277.2.46 blend()              | 572 |
| 12.277.2.47 add()                | 572 |
| 12.277.2.48 addin()              | 572 |
| 12.277.2.49 sub()                | 572 |

|  |     |
|--|-----|
| 12.277.2.50 subin()  | 572 |
| 12.277.2.51 mullo()  | 572 |
| 12.277.2.52 mul()  | 572 |
| 12.277.2.53 fmadd()  | 572 |
| 12.277.2.54 fmaddin()  | 572 |
| 12.277.2.55 fnmadd()   | 573 |
| 12.277.2.56 fnmaddin()                                       | 573 |
| 12.277.2.57 fmsub()  | 573 |
| 12.277.2.58 fmsubin()  | 573 |
| 12.277.2.59 eq()   | 573 |
| 12.277.2.60 round()  | 573 |
| 12.277.2.61 mod()  | 573 |
| 12.277.2.62 zero()   | 573 |
| 12.277.2.63 sll128()   | 573 |
| 12.277.2.64 srl128()   | 574 |
| 12.277.2.65 vand()   | 574 |
| 12.277.2.66 vor()  | 574 |
| 12.277.2.67 vxor()   | 574 |
| 12.277.2.68 vandnot()  | 574 |
| 12.277.3 Field Documentation                                 | 574 |
| 12.277.3.1 vect_size   | 574 |
| 12.277.3.2 alignment   | 574 |
| 12.278 Simd128_impl< true, true, false, 4 > Struct Reference | 574 |
| 12.278.1 Member Typedef Documentation                        | 576 |
| 12.278.1.1 scalar_t  | 576 |
| 12.278.1.2 aligned_allocator                                 | 576 |
| 12.278.1.3 aligned_vector                                    | 576 |
| 12.278.1.4 is_same_element                                   | 577 |
| 12.278.1.5 vect_t  | 577 |
| 12.278.2 Member Function Documentation                       | 577 |
| 12.278.2.1 type_string()                                     | 577 |
| 12.278.2.2 set1() [1/2]                                      | 577 |
| 12.278.2.3 set() [1/2]                                       | 577 |
| 12.278.2.4 gather() [1/2]                                    | 577 |
| 12.278.2.5 load() [1/2]                                      | 577 |
| 12.278.2.6 loadu() [1/2]                                     | 577 |
| 12.278.2.7 store() [1/2]                                     | 577 |
| 12.278.2.8 storeu() [1/2]                                    | 577 |
| 12.278.2.9 stream() [1/2]                                    | 578 |
| 12.278.2.10 sra()  | 578 |
| 12.278.2.11 greater()  | 578 |
| 12.278.2.12 lesser()   | 578 |



|                                  |     |
|----------------------------------|-----|
| 12.278.2.13 greater_eq()         | 578 |
| 12.278.2.14 lesser_eq()          | 578 |
| 12.278.2.15 mulhi()              | 578 |
| 12.278.2.16 mulx()               | 578 |
| 12.278.2.17 fmaddx()             | 578 |
| 12.278.2.18 fmaddxin()           | 578 |
| 12.278.2.19 fnmaddx()            | 579 |
| 12.278.2.20 fnmaddxin()          | 579 |
| 12.278.2.21 fmsubx()             | 579 |
| 12.278.2.22 fmsubxin()           | 579 |
| 12.278.2.23 hadd_to_scal()       | 579 |
| 12.278.2.24 valid()              | 579 |
| 12.278.2.25 compliant()          | 579 |
| 12.278.2.26 set1() [2/2]         | 579 |
| 12.278.2.27 set() [2/2]          | 579 |
| 12.278.2.28 gather() [2/2]       | 580 |
| 12.278.2.29 load() [2/2]         | 580 |
| 12.278.2.30 loadu() [2/2]        | 580 |
| 12.278.2.31 store() [2/2]        | 580 |
| 12.278.2.32 storeu() [2/2]       | 580 |
| 12.278.2.33 stream() [2/2]       | 580 |
| 12.278.2.34 sll()                | 580 |
| 12.278.2.35 srl()                | 580 |
| 12.278.2.36 shuffle()            | 580 |
| 12.278.2.37 unpacklo_intrinsic() | 580 |
| 12.278.2.38 unpackhi_intrinsic() | 581 |
| 12.278.2.39 unpacklo()           | 581 |
| 12.278.2.40 unpackhi()           | 581 |
| 12.278.2.41 unpacklohi()         | 581 |
| 12.278.2.42 pack_even()          | 581 |
| 12.278.2.43 pack_odd()           | 581 |
| 12.278.2.44 pack()               | 581 |
| 12.278.2.45 transpose()          | 581 |
| 12.278.2.46 blend()              | 581 |
| 12.278.2.47 add()                | 582 |
| 12.278.2.48 addin()              | 582 |
| 12.278.2.49 sub()                | 582 |
| 12.278.2.50 subin()              | 582 |
| 12.278.2.51 mullo()              | 582 |
| 12.278.2.52 mul()                | 582 |
| 12.278.2.53 fmadd()              | 582 |
| 12.278.2.54 fmaddin()            | 582 |

|  |     |
|--|-----|
| 12.278.2.55 fnmadd()   | 582 |
| 12.278.2.56 fnmaddin()                                       | 583 |
| 12.278.2.57 fmsub()  | 583 |
| 12.278.2.58 fmsubin()  | 583 |
| 12.278.2.59 eq()   | 583 |
| 12.278.2.60 round()  | 583 |
| 12.278.2.61 mod()  | 583 |
| 12.278.2.62 zero()   | 583 |
| 12.278.2.63 sll128()   | 583 |
| 12.278.2.64 srl128()   | 583 |
| 12.278.2.65 vand()   | 584 |
| 12.278.2.66 vor()  | 584 |
| 12.278.2.67 vxor()   | 584 |
| 12.278.2.68 vandnot()  | 584 |
| 12.278.3 Field Documentation                                 | 584 |
| 12.278.3.1 vect_size   | 584 |
| 12.278.3.2 alignment   | 584 |
| 12.279 Simd128_impl< true, true, false, 8 > Struct Reference | 584 |
| 12.279.1 Member Typedef Documentation                        | 586 |
| 12.279.1.1 scalar_t  | 586 |
| 12.279.1.2 aligned_allocator                                 | 586 |
| 12.279.1.3 aligned_vector                                    | 586 |
| 12.279.1.4 is_same_element                                   | 587 |
| 12.279.1.5 vect_t  | 587 |
| 12.279.2 Member Function Documentation                       | 587 |
| 12.279.2.1 type_string()                                     | 587 |
| 12.279.2.2 set1() [1/2]                                      | 587 |
| 12.279.2.3 set() [1/2]                                       | 587 |
| 12.279.2.4 gather() [1/2]                                    | 587 |
| 12.279.2.5 load() [1/2]                                      | 587 |
| 12.279.2.6 loadu() [1/2]                                     | 587 |
| 12.279.2.7 store() [1/2]                                     | 587 |
| 12.279.2.8 storeu() [1/2]                                    | 587 |
| 12.279.2.9 stream() [1/2]                                    | 587 |
| 12.279.2.10 sra()  | 588 |
| 12.279.2.11 greater()  | 588 |
| 12.279.2.12 lesser()   | 588 |
| 12.279.2.13 greater_eq()                                     | 588 |
| 12.279.2.14 lesser_eq()                                      | 588 |
| 12.279.2.15 mullo()  | 588 |
| 12.279.2.16 mulhi()  | 588 |
| 12.279.2.17 mulx()   | 588 |

|                                  |     |
|----------------------------------|-----|
| 12.279.2.18 fmaddx()             | 588 |
| 12.279.2.19 fmaddxin()           | 588 |
| 12.279.2.20 fnmaddx()            | 589 |
| 12.279.2.21 fnmaddxin()          | 589 |
| 12.279.2.22 fmsubx()             | 589 |
| 12.279.2.23 fmsubxin()           | 589 |
| 12.279.2.24 hadd_to_scal()       | 589 |
| 12.279.2.25 valid()              | 589 |
| 12.279.2.26 compliant()          | 589 |
| 12.279.2.27 set1() [2/2]         | 589 |
| 12.279.2.28 set() [2/2]          | 589 |
| 12.279.2.29 gather() [2/2]       | 590 |
| 12.279.2.30 get()                | 590 |
| 12.279.2.31 load() [2/2]         | 590 |
| 12.279.2.32 loadu() [2/2]        | 590 |
| 12.279.2.33 store() [2/2]        | 590 |
| 12.279.2.34 storeu() [2/2]       | 590 |
| 12.279.2.35 stream() [2/2]       | 590 |
| 12.279.2.36 sll()                | 590 |
| 12.279.2.37 srl()                | 590 |
| 12.279.2.38 shuffle()            | 590 |
| 12.279.2.39 unpacklo_intrinsic() | 591 |
| 12.279.2.40 unpackhi_intrinsic() | 591 |
| 12.279.2.41 unpacklo()           | 591 |
| 12.279.2.42 unpackhi()           | 591 |
| 12.279.2.43 unpacklohi()         | 591 |
| 12.279.2.44 pack_even()          | 591 |
| 12.279.2.45 pack_odd()           | 591 |
| 12.279.2.46 pack()               | 591 |
| 12.279.2.47 transpose()          | 591 |
| 12.279.2.48 blend()              | 592 |
| 12.279.2.49 add()                | 592 |
| 12.279.2.50 addin()              | 592 |
| 12.279.2.51 sub()                | 592 |
| 12.279.2.52 subin()              | 592 |
| 12.279.2.53 mul()                | 592 |
| 12.279.2.54 fmadd()              | 592 |
| 12.279.2.55 fmaddin()            | 592 |
| 12.279.2.56 fnmadd()             | 592 |
| 12.279.2.57 fnmaddin()           | 593 |
| 12.279.2.58 fmsub()              | 593 |
| 12.279.2.59 fmsubin()            | 593 |

|   |     |
|---|-----|
| 12.279.2.60 eq()  | 593 |
| 12.279.2.61 round()   | 593 |
| 12.279.2.62 mask_high()                                     | 593 |
| 12.279.2.63 mulhi_fast()                                    | 593 |
| 12.279.2.64 mod()   | 593 |
| 12.279.2.65 signbits()                                      | 593 |
| 12.279.2.66 zero()  | 594 |
| 12.279.2.67 sll128()  | 594 |
| 12.279.2.68 srl128()  | 594 |
| 12.279.2.69 vand()  | 594 |
| 12.279.2.70 vor()   | 594 |
| 12.279.2.71 vxor()  | 594 |
| 12.279.2.72 vandnot()                                       | 594 |
| 12.279.3 Field Documentation                                | 594 |
| 12.279.3.1 vect_size  | 594 |
| 12.279.3.2 alignment  | 594 |
| 12.280 Simd128_impl< true, true, true, 2 > Struct Reference | 594 |
| 12.280.1 Member Typedef Documentation                       | 596 |
| 12.280.1.1 vect_t   | 596 |
| 12.280.1.2 scalar_t   | 596 |
| 12.280.1.3 aligned_allocator                                | 597 |
| 12.280.1.4 aligned_vector                                   | 597 |
| 12.280.1.5 is_same_element                                  | 597 |
| 12.280.2 Member Function Documentation                      | 597 |
| 12.280.2.1 type_string()                                    | 597 |
| 12.280.2.2 valid()  | 597 |
| 12.280.2.3 compliant()                                      | 597 |
| 12.280.2.4 set1()   | 597 |
| 12.280.2.5 set()  | 597 |
| 12.280.2.6 gather()   | 597 |
| 12.280.2.7 load()   | 597 |
| 12.280.2.8 loadu()  | 598 |
| 12.280.2.9 store()  | 598 |
| 12.280.2.10 storeu()  | 598 |
| 12.280.2.11 stream()  | 598 |
| 12.280.2.12 sll()   | 598 |
| 12.280.2.13 srl()   | 598 |
| 12.280.2.14 sra()   | 598 |
| 12.280.2.15 shuffle()                                       | 598 |
| 12.280.2.16 unpacklo_intrinsic()                            | 598 |
| 12.280.2.17 unpackhi_intrinsic()                            | 598 |
| 12.280.2.18 unpacklo()                                      | 599 |

|                            |     |
|----------------------------|-----|
| 12.280.2.19 unpackhi()     | 599 |
| 12.280.2.20 unpacklohi()   | 599 |
| 12.280.2.21 pack_even()    | 599 |
| 12.280.2.22 pack_odd()     | 599 |
| 12.280.2.23 pack()         | 599 |
| 12.280.2.24 transpose()    | 599 |
| 12.280.2.25 blend()        | 599 |
| 12.280.2.26 add()          | 600 |
| 12.280.2.27 addin()        | 600 |
| 12.280.2.28 sub()          | 600 |
| 12.280.2.29 subin()        | 600 |
| 12.280.2.30 mullo()        | 600 |
| 12.280.2.31 mul()          | 600 |
| 12.280.2.32 mulhi()        | 600 |
| 12.280.2.33 mulx()         | 600 |
| 12.280.2.34 fmadd()        | 600 |
| 12.280.2.35 fmaddin()      | 600 |
| 12.280.2.36 fmaddx()       | 601 |
| 12.280.2.37 fmaddxin()     | 601 |
| 12.280.2.38 fnmadd()       | 601 |
| 12.280.2.39 fnmaddin()     | 601 |
| 12.280.2.40 fnmaddx()      | 601 |
| 12.280.2.41 fnmaddxin()    | 601 |
| 12.280.2.42 fmsub()        | 601 |
| 12.280.2.43 fmsubin()      | 601 |
| 12.280.2.44 fmsubx()       | 601 |
| 12.280.2.45 fmsubxin()     | 602 |
| 12.280.2.46 eq()           | 602 |
| 12.280.2.47 greater()      | 602 |
| 12.280.2.48 lesser()       | 602 |
| 12.280.2.49 greater_eq()   | 602 |
| 12.280.2.50 lesser_eq()    | 602 |
| 12.280.2.51 hadd_to_scal() | 602 |
| 12.280.2.52 round()        | 602 |
| 12.280.2.53 mod()          | 602 |
| 12.280.2.54 zero()         | 603 |
| 12.280.2.55 sl128()        | 603 |
| 12.280.2.56 srl128()       | 603 |
| 12.280.2.57 vand()         | 603 |
| 12.280.2.58 vor()          | 603 |
| 12.280.2.59 vxor()         | 603 |
| 12.280.2.60 vandnot()      | 603 |

|   |     |
|---|-----|
| 12.280.3 Field Documentation . . . . .                                | 603 |
| 12.280.3.1 vect_size . . . . .  | 603 |
| 12.280.3.2 alignment . . . . .  | 603 |
| 12.281 Simd128_impl< true, true, true, 4 > Struct Reference . . . . . | 604 |
| 12.281.1 Member Typedef Documentation . . . . .                       | 605 |
| 12.281.1.1 vect_t . . . . .   | 605 |
| 12.281.1.2 scalar_t . . . . .   | 605 |
| 12.281.1.3 aligned_allocator . . . . .                                | 606 |
| 12.281.1.4 aligned_vector . . . . .                                   | 606 |
| 12.281.1.5 is_same_element . . . . .                                  | 606 |
| 12.281.2 Member Function Documentation . . . . .                      | 606 |
| 12.281.2.1 type_string() . . . . .                                    | 606 |
| 12.281.2.2 valid() . . . . .  | 606 |
| 12.281.2.3 compliant() . . . . .                                      | 606 |
| 12.281.2.4 set1() . . . . .   | 606 |
| 12.281.2.5 set() . . . . .  | 606 |
| 12.281.2.6 gather() . . . . .   | 606 |
| 12.281.2.7 load() . . . . .   | 606 |
| 12.281.2.8 loadu() . . . . .  | 606 |
| 12.281.2.9 store() . . . . .  | 607 |
| 12.281.2.10 storeu() . . . . .  | 607 |
| 12.281.2.11 stream() . . . . .  | 607 |
| 12.281.2.12 sll() . . . . .   | 607 |
| 12.281.2.13 srl() . . . . .   | 607 |
| 12.281.2.14 sra() . . . . .   | 607 |
| 12.281.2.15 shuffle() . . . . .                                       | 607 |
| 12.281.2.16 unpacklo_intrinsic() . . . . .                            | 607 |
| 12.281.2.17 unpackhi_intrinsic() . . . . .                            | 607 |
| 12.281.2.18 unpacklo() . . . . .                                      | 607 |
| 12.281.2.19 unpackhi() . . . . .                                      | 608 |
| 12.281.2.20 unpacklohi() . . . . .                                    | 608 |
| 12.281.2.21 pack_even() . . . . .                                     | 608 |
| 12.281.2.22 pack_odd() . . . . .                                      | 608 |
| 12.281.2.23 pack() . . . . .  | 608 |
| 12.281.2.24 transpose() . . . . .                                     | 608 |
| 12.281.2.25 blend() . . . . .   | 608 |
| 12.281.2.26 add() . . . . .   | 608 |
| 12.281.2.27 addin() . . . . .   | 608 |
| 12.281.2.28 sub() . . . . .   | 609 |
| 12.281.2.29 subin() . . . . .   | 609 |
| 12.281.2.30 mullo() . . . . .   | 609 |
| 12.281.2.31 mul() . . . . .   | 609 |

|   |     |
|---|-----|
| 12.281.2.32 mulhi()   | 609 |
| 12.281.2.33 mulx()  | 609 |
| 12.281.2.34 fmadd()   | 609 |
| 12.281.2.35 fmaddin()                                       | 609 |
| 12.281.2.36 fmaddx()  | 609 |
| 12.281.2.37 fmaddxin()                                      | 610 |
| 12.281.2.38 fnmadd()  | 610 |
| 12.281.2.39 fnmaddin()                                      | 610 |
| 12.281.2.40 fnmaddx()                                       | 610 |
| 12.281.2.41 fnmaddxin()                                     | 610 |
| 12.281.2.42 fmsub()   | 610 |
| 12.281.2.43 fmsubin()                                       | 610 |
| 12.281.2.44 fmsubx()  | 610 |
| 12.281.2.45 fmsubxin()                                      | 610 |
| 12.281.2.46 eq()  | 611 |
| 12.281.2.47 greater()                                       | 611 |
| 12.281.2.48 lesser()  | 611 |
| 12.281.2.49 greater_eq()                                    | 611 |
| 12.281.2.50 lesser_eq()                                     | 611 |
| 12.281.2.51 hadd_to_scal()                                  | 611 |
| 12.281.2.52 round()   | 611 |
| 12.281.2.53 mod()   | 611 |
| 12.281.2.54 zero()  | 611 |
| 12.281.2.55 sll128()  | 612 |
| 12.281.2.56 srl128()  | 612 |
| 12.281.2.57 vand()  | 612 |
| 12.281.2.58 vor()   | 612 |
| 12.281.2.59 vxor()  | 612 |
| 12.281.2.60 vandnot()                                       | 612 |
| 12.281.3 Field Documentation                                | 612 |
| 12.281.3.1 vect_size  | 612 |
| 12.281.3.2 alignment  | 612 |
| 12.282 Simd128_impl< true, true, true, 8 > Struct Reference | 612 |
| 12.282.1 Member Typedef Documentation                       | 614 |
| 12.282.1.1 vect_t   | 614 |
| 12.282.1.2 scalar_t   | 615 |
| 12.282.1.3 aligned_allocator                                | 615 |
| 12.282.1.4 aligned_vector                                   | 615 |
| 12.282.1.5 is_same_element                                  | 615 |
| 12.282.2 Member Function Documentation                      | 615 |
| 12.282.2.1 type_string()                                    | 615 |
| 12.282.2.2 valid()  | 615 |

|                                  |     |
|----------------------------------|-----|
| 12.282.2.3 compliant()           | 615 |
| 12.282.2.4 set1()                | 615 |
| 12.282.2.5 set()                 | 615 |
| 12.282.2.6 gather()              | 615 |
| 12.282.2.7 get()                 | 615 |
| 12.282.2.8 load()                | 616 |
| 12.282.2.9 loadu()               | 616 |
| 12.282.2.10 store()              | 616 |
| 12.282.2.11 storeu()             | 616 |
| 12.282.2.12 stream()             | 616 |
| 12.282.2.13 sll()                | 616 |
| 12.282.2.14 srl()                | 616 |
| 12.282.2.15 sra()                | 616 |
| 12.282.2.16 shuffle()            | 616 |
| 12.282.2.17 unpacklo_intrinsic() | 616 |
| 12.282.2.18 unpackhi_intrinsic() | 617 |
| 12.282.2.19 unpacklo()           | 617 |
| 12.282.2.20 unpackhi()           | 617 |
| 12.282.2.21 unpacklohi()         | 617 |
| 12.282.2.22 pack_even()          | 617 |
| 12.282.2.23 pack_odd()           | 617 |
| 12.282.2.24 pack()               | 617 |
| 12.282.2.25 transpose()          | 617 |
| 12.282.2.26 blend()              | 617 |
| 12.282.2.27 add()                | 618 |
| 12.282.2.28 addin()              | 618 |
| 12.282.2.29 sub()                | 618 |
| 12.282.2.30 subin()              | 618 |
| 12.282.2.31 mullo()              | 618 |
| 12.282.2.32 mul()                | 618 |
| 12.282.2.33 mulhi()              | 618 |
| 12.282.2.34 mulx()               | 618 |
| 12.282.2.35 fmadd()              | 618 |
| 12.282.2.36 fmaddin()            | 618 |
| 12.282.2.37 fmaddx()             | 619 |
| 12.282.2.38 fmaddxin()           | 619 |
| 12.282.2.39 fnmadd()             | 619 |
| 12.282.2.40 fnmaddin()           | 619 |
| 12.282.2.41 fnmaddx()            | 619 |
| 12.282.2.42 fnmaddxin()          | 619 |
| 12.282.2.43 fmsub()              | 619 |
| 12.282.2.44 fmsubin()            | 619 |



|   |     |
|---|-----|
| 12.282.2.45 fmsubx()  | 619 |
| 12.282.2.46 fmsubxin()  | 620 |
| 12.282.2.47 eq()  | 620 |
| 12.282.2.48 greater()   | 620 |
| 12.282.2.49 lesser()  | 620 |
| 12.282.2.50 greater_eq()  | 620 |
| 12.282.2.51 lesser_eq()   | 620 |
| 12.282.2.52 hadd_to_scal()  | 620 |
| 12.282.2.53 round()   | 620 |
| 12.282.2.54 mask_high()   | 620 |
| 12.282.2.55 mulhi_fast()  | 620 |
| 12.282.2.56 mod()   | 621 |
| 12.282.2.57 signbits()  | 621 |
| 12.282.2.58 zero()  | 621 |
| 12.282.2.59 sll128()  | 621 |
| 12.282.2.60 srl128()  | 621 |
| 12.282.2.61 vand()  | 621 |
| 12.282.2.62 vor()   | 621 |
| 12.282.2.63 vxor()  | 621 |
| 12.282.2.64 vandnot()   | 621 |
| 12.282.3 Field Documentation  | 622 |
| 12.282.3.1 vect_size  | 622 |
| 12.282.3.2 alignment  | 622 |
| 12.283 Simd128i_base Struct Reference   | 622 |
| 12.283.1 Member Typedef Documentation   | 622 |
| 12.283.1.1 vect_t   | 622 |
| 12.283.2 Member Function Documentation  | 622 |
| 12.283.2.1 zero()   | 622 |
| 12.283.2.2 sll128()   | 622 |
| 12.283.2.3 srl128()   | 623 |
| 12.283.2.4 vand()   | 623 |
| 12.283.2.5 vor()  | 623 |
| 12.283.2.6 vxor()   | 623 |
| 12.283.2.7 vandnot()  | 623 |
| 12.284 Simd256_impl< ArithType, Int, Signed, Size > Struct Template Reference | 623 |
| 12.285 Simd256_impl< true, false, true, 4 > Struct Reference                  | 623 |
| 12.286 Simd256_impl< true, false, true, 8 > Struct Reference                  | 624 |
| 12.286.1 Member Typedef Documentation   | 625 |
| 12.286.1.1 vect_t   | 625 |
| 12.286.1.2 scalar_t   | 625 |
| 12.286.1.3 aligned_allocator  | 625 |
| 12.286.1.4 aligned_vector   | 625 |

|  |     |
|--|-----|
| 12.286.1.5 is_same_element . . . . .             | 625 |
| 12.286.2 Member Function Documentation . . . . . | 625 |
| 12.286.2.1 type_string() . . . . .               | 625 |
| 12.286.2.2 valid() . . . . .                     | 626 |
| 12.286.2.3 compliant() . . . . .                 | 626 |
| 12.286.2.4 zero() . . . . .                      | 626 |
| 12.286.2.5 set1() . . . . .                      | 626 |
| 12.286.2.6 set() . . . . .                       | 626 |
| 12.286.2.7 gather() . . . . .                    | 626 |
| 12.286.2.8 load() . . . . .                      | 626 |
| 12.286.2.9 loadu() . . . . .                     | 626 |
| 12.286.2.10 store() . . . . .                    | 626 |
| 12.286.2.11 storeu() . . . . .                   | 626 |
| 12.286.2.12 stream() . . . . .                   | 627 |
| 12.286.2.13 unpacklo_intrinsic() . . . . .       | 627 |
| 12.286.2.14 unpackhi_intrinsic() . . . . .       | 627 |
| 12.286.2.15 unpacklo() . . . . .                 | 627 |
| 12.286.2.16 unpackhi() . . . . .                 | 627 |
| 12.286.2.17 unpacklohi() . . . . .               | 627 |
| 12.286.2.18 pack_even() . . . . .                | 627 |
| 12.286.2.19 pack_odd() . . . . .                 | 627 |
| 12.286.2.20 pack() . . . . .                     | 627 |
| 12.286.2.21 transpose() . . . . .                | 628 |
| 12.286.2.22 blend() . . . . .                    | 628 |
| 12.286.2.23 blendv() . . . . .                   | 628 |
| 12.286.2.24 add() . . . . .                      | 628 |
| 12.286.2.25 addin() . . . . .                    | 628 |
| 12.286.2.26 sub() . . . . .                      | 628 |
| 12.286.2.27 subin() . . . . .                    | 628 |
| 12.286.2.28 mul() . . . . .                      | 628 |
| 12.286.2.29 mulin() . . . . .                    | 628 |
| 12.286.2.30 div() . . . . .                      | 629 |
| 12.286.2.31 fmadd() . . . . .                    | 629 |
| 12.286.2.32 fmaddin() . . . . .                  | 629 |
| 12.286.2.33 fnmadd() . . . . .                   | 629 |
| 12.286.2.34 fnmaddin() . . . . .                 | 629 |
| 12.286.2.35 fmsub() . . . . .                    | 629 |
| 12.286.2.36 fmsubin() . . . . .                  | 629 |
| 12.286.2.37 eq() . . . . .                       | 629 |
| 12.286.2.38 lesser() . . . . .                   | 629 |
| 12.286.2.39 lesser_eq() . . . . .                | 630 |
| 12.286.2.40 greater() . . . . .                  | 630 |

|  |     |
|--|-----|
| 12.286.2.41 greater_eq()                                     | 630 |
| 12.286.2.42 vand()   | 630 |
| 12.286.2.43 vor()  | 630 |
| 12.286.2.44 vxor()   | 630 |
| 12.286.2.45 vandnot()  | 630 |
| 12.286.2.46 floor()  | 630 |
| 12.286.2.47 ceil()   | 630 |
| 12.286.2.48 round()  | 630 |
| 12.286.2.49 hadd()   | 631 |
| 12.286.2.50 hadd_to_scal()                                   | 631 |
| 12.286.2.51 mod()  | 631 |
| 12.286.3 Field Documentation                                 | 631 |
| 12.286.3.1 vect_size   | 631 |
| 12.286.3.2 alignment   | 631 |
| 12.287 Simd256_impl< true, true, false, 2 > Struct Reference | 631 |
| 12.287.1 Member Typedef Documentation                        | 633 |
| 12.287.1.1 scalar_t  | 633 |
| 12.287.1.2 aligned_allocator                                 | 633 |
| 12.287.1.3 aligned_vector                                    | 633 |
| 12.287.1.4 is_same_element                                   | 633 |
| 12.287.1.5 simdHalf  | 634 |
| 12.287.1.6 vect_t  | 634 |
| 12.287.1.7 half_t  | 634 |
| 12.287.2 Member Function Documentation                       | 634 |
| 12.287.2.1 type_string()                                     | 634 |
| 12.287.2.2 set1() [1/2]                                      | 634 |
| 12.287.2.3 set() [1/2]                                       | 634 |
| 12.287.2.4 gather() [1/2]                                    | 634 |
| 12.287.2.5 load() [1/2]                                      | 634 |
| 12.287.2.6 loadu() [1/2]                                     | 634 |
| 12.287.2.7 store() [1/2]                                     | 635 |
| 12.287.2.8 storeu() [1/2]                                    | 635 |
| 12.287.2.9 stream() [1/2]                                    | 635 |
| 12.287.2.10 sra()  | 635 |
| 12.287.2.11 greater()  | 635 |
| 12.287.2.12 lesser()   | 635 |
| 12.287.2.13 greater_eq()                                     | 635 |
| 12.287.2.14 lesser_eq()                                      | 635 |
| 12.287.2.15 mulhi()  | 635 |
| 12.287.2.16 mulx()   | 635 |
| 12.287.2.17 fmaddx()   | 636 |
| 12.287.2.18 fmaddxin()                                       | 636 |

|                                  |     |
|----------------------------------|-----|
| 12.287.2.19 fnmaddx()            | 636 |
| 12.287.2.20 fnmaddxin()          | 636 |
| 12.287.2.21 fmsubx()             | 636 |
| 12.287.2.22 fmsubxin()           | 636 |
| 12.287.2.23 hadd_to_scal()       | 636 |
| 12.287.2.24 valid()              | 636 |
| 12.287.2.25 compliant()          | 636 |
| 12.287.2.26 set1() [2/2]         | 637 |
| 12.287.2.27 set() [2/2]          | 637 |
| 12.287.2.28 gather() [2/2]       | 637 |
| 12.287.2.29 load() [2/2]         | 637 |
| 12.287.2.30 loadu() [2/2]        | 637 |
| 12.287.2.31 store() [2/2]        | 637 |
| 12.287.2.32 storeu() [2/2]       | 637 |
| 12.287.2.33 stream() [2/2]       | 637 |
| 12.287.2.34 sll()                | 638 |
| 12.287.2.35 srl()                | 638 |
| 12.287.2.36 shuffle()            | 638 |
| 12.287.2.37 unpacklo_intrinsic() | 638 |
| 12.287.2.38 unpackhi_intrinsic() | 638 |
| 12.287.2.39 unpacklo()           | 638 |
| 12.287.2.40 unpackhi()           | 638 |
| 12.287.2.41 unpacklohi()         | 638 |
| 12.287.2.42 pack_even()          | 638 |
| 12.287.2.43 pack_odd()           | 638 |
| 12.287.2.44 pack()               | 639 |
| 12.287.2.45 transpose()          | 639 |
| 12.287.2.46 blend() [1/2]        | 639 |
| 12.287.2.47 blend() [2/2]        | 639 |
| 12.287.2.48 add()                | 639 |
| 12.287.2.49 addin()              | 639 |
| 12.287.2.50 sub()                | 639 |
| 12.287.2.51 subin()              | 640 |
| 12.287.2.52 mullo()              | 640 |
| 12.287.2.53 mul()                | 640 |
| 12.287.2.54 fmadd()              | 640 |
| 12.287.2.55 fmaddin()            | 640 |
| 12.287.2.56 fnmadd()             | 640 |
| 12.287.2.57 fnmaddin()           | 640 |
| 12.287.2.58 fmsub()              | 640 |
| 12.287.2.59 fmsubin()            | 640 |
| 12.287.2.60 eq()                 | 641 |

|  |     |
|--|-----|
| 12.287.2.61 round()  | 641 |
| 12.287.2.62 mod()  | 641 |
| 12.287.2.63 zero()   | 641 |
| 12.287.3 Field Documentation                                 | 641 |
| 12.287.3.1 vect_size   | 641 |
| 12.287.3.2 alignment   | 641 |
| 12.288 Simd256_impl< true, true, false, 4 > Struct Reference | 641 |
| 12.288.1 Member Typedef Documentation                        | 645 |
| 12.288.1.1 scalar_t  | 645 |
| 12.288.1.2 aligned_allocator                                 | 645 |
| 12.288.1.3 aligned_vector                                    | 645 |
| 12.288.1.4 is_same_element                                   | 645 |
| 12.288.1.5 simdHalf  | 645 |
| 12.288.1.6 vect_t [1/2]                                      | 645 |
| 12.288.1.7 vect_t [2/2]                                      | 645 |
| 12.288.1.8 half_t [1/2]                                      | 645 |
| 12.288.1.9 half_t [2/2]                                      | 645 |
| 12.288.2 Member Function Documentation                       | 645 |
| 12.288.2.1 type_string() [1/2]                               | 645 |
| 12.288.2.2 set1() [1/3]                                      | 645 |
| 12.288.2.3 set() [1/4]                                       | 646 |
| 12.288.2.4 gather() [1/3]                                    | 646 |
| 12.288.2.5 load() [1/3]                                      | 646 |
| 12.288.2.6 loadu() [1/3]                                     | 646 |
| 12.288.2.7 store() [1/3]                                     | 646 |
| 12.288.2.8 storeu() [1/3]                                    | 646 |
| 12.288.2.9 stream() [1/3]                                    | 646 |
| 12.288.2.10 sra() [1/2]                                      | 646 |
| 12.288.2.11 greater() [1/2]                                  | 646 |
| 12.288.2.12 lesser() [1/2]                                   | 647 |
| 12.288.2.13 greater_eq() [1/2]                               | 647 |
| 12.288.2.14 lesser_eq() [1/2]                                | 647 |
| 12.288.2.15 mulhi() [1/2]                                    | 647 |
| 12.288.2.16 mulx() [1/2]                                     | 647 |
| 12.288.2.17 fmaddx() [1/2]                                   | 647 |
| 12.288.2.18 fmaddxin() [1/2]                                 | 647 |
| 12.288.2.19 fnmaddx() [1/2]                                  | 647 |
| 12.288.2.20 fnmaddxin() [1/2]                                | 647 |
| 12.288.2.21 fmsubx() [1/2]                                   | 648 |
| 12.288.2.22 fmsubxin() [1/2]                                 | 648 |
| 12.288.2.23 hadd_to_scal() [1/2]                             | 648 |
| 12.288.2.24 type_string() [2/2]                              | 648 |

|                                   |     |
|-----------------------------------|-----|
| 12.288.2.25 set1() [2/3]          | 648 |
| 12.288.2.26 set() [2/4]           | 648 |
| 12.288.2.27 gather() [2/3]        | 648 |
| 12.288.2.28 load() [2/3]          | 648 |
| 12.288.2.29 loadu() [2/3]         | 648 |
| 12.288.2.30 store() [2/3]         | 649 |
| 12.288.2.31 storeu() [2/3]        | 649 |
| 12.288.2.32 stream() [2/3]        | 649 |
| 12.288.2.33 sra() [2/2]           | 649 |
| 12.288.2.34 greater() [2/2]       | 649 |
| 12.288.2.35 lesser() [2/2]        | 649 |
| 12.288.2.36 greater_eq() [2/2]    | 649 |
| 12.288.2.37 lesser_eq() [2/2]     | 649 |
| 12.288.2.38 mulhi() [2/2]         | 649 |
| 12.288.2.39 mulx() [2/2]          | 649 |
| 12.288.2.40 fmaddx() [2/2]        | 650 |
| 12.288.2.41 fmaddxin() [2/2]      | 650 |
| 12.288.2.42 fnmaddx() [2/2]       | 650 |
| 12.288.2.43 fnmaddxin() [2/2]     | 650 |
| 12.288.2.44 fmsubx() [2/2]        | 650 |
| 12.288.2.45 fmsubxin() [2/2]      | 650 |
| 12.288.2.46 hadd_to_scal() [2/2]  | 650 |
| 12.288.2.47 is_same_element()     | 650 |
| 12.288.2.48 valid() [1/2]         | 650 |
| 12.288.2.49 valid() [2/2]         | 651 |
| 12.288.2.50 compliant() [1/2]     | 651 |
| 12.288.2.51 compliant() [2/2]     | 651 |
| 12.288.2.52 set1() [3/3]          | 651 |
| 12.288.2.53 set() [3/4]           | 651 |
| 12.288.2.54 set() [4/4]           | 651 |
| 12.288.2.55 gather() [3/3]        | 651 |
| 12.288.2.56 load() [3/3]          | 652 |
| 12.288.2.57 loadu() [3/3]         | 652 |
| 12.288.2.58 store() [3/3]         | 652 |
| 12.288.2.59 storeu() [3/3]        | 652 |
| 12.288.2.60 stream() [3/3]        | 652 |
| 12.288.2.61 sll() [1/2]           | 652 |
| 12.288.2.62 sll() [2/2]           | 652 |
| 12.288.2.63 srl() [1/2]           | 652 |
| 12.288.2.64 srl() [2/2]           | 652 |
| 12.288.2.65 shuffle_twice() [1/2] | 652 |
| 12.288.2.66 shuffle_twice() [2/2] | 653 |

|  |     |
|--|-----|
| 12.288.2.67 shuffle() [1/2]            | 653 |
| 12.288.2.68 shuffle() [2/2]            | 653 |
| 12.288.2.69 unpacklo_intrinsic() [1/2] | 653 |
| 12.288.2.70 unpacklo_intrinsic() [2/2] | 653 |
| 12.288.2.71 unpackhi_intrinsic() [1/2] | 653 |
| 12.288.2.72 unpackhi_intrinsic() [2/2] | 653 |
| 12.288.2.73 unpacklo() [1/2]           | 653 |
| 12.288.2.74 unpacklo() [2/2]           | 653 |
| 12.288.2.75 unpackhi() [1/2]           | 653 |
| 12.288.2.76 unpackhi() [2/2]           | 654 |
| 12.288.2.77 unpacklohi() [1/2]         | 654 |
| 12.288.2.78 unpacklohi() [2/2]         | 654 |
| 12.288.2.79 pack_even() [1/2]          | 654 |
| 12.288.2.80 pack_even() [2/2]          | 654 |
| 12.288.2.81 pack_odd() [1/2]           | 654 |
| 12.288.2.82 pack_odd() [2/2]           | 654 |
| 12.288.2.83 pack() [1/2]               | 654 |
| 12.288.2.84 pack() [2/2]               | 654 |
| 12.288.2.85 transpose() [1/2]          | 655 |
| 12.288.2.86 transpose() [2/2]          | 655 |
| 12.288.2.87 blend() [1/2]              | 655 |
| 12.288.2.88 blend() [2/2]              | 655 |
| 12.288.2.89 add() [1/2]                | 655 |
| 12.288.2.90 add() [2/2]                | 655 |
| 12.288.2.91 addin() [1/2]              | 656 |
| 12.288.2.92 addin() [2/2]              | 656 |
| 12.288.2.93 sub() [1/2]                | 656 |
| 12.288.2.94 sub() [2/2]                | 656 |
| 12.288.2.95 subin() [1/2]              | 656 |
| 12.288.2.96 subin() [2/2]              | 656 |
| 12.288.2.97 mullo() [1/2]              | 656 |
| 12.288.2.98 mullo() [2/2]              | 656 |
| 12.288.2.99 mul() [1/2]                | 656 |
| 12.288.2.100 mul() [2/2]               | 656 |
| 12.288.2.101 fmadd() [1/2]             | 657 |
| 12.288.2.102 fmadd() [2/2]             | 657 |
| 12.288.2.103 fmaddin() [1/2]           | 657 |
| 12.288.2.104 fmaddin() [2/2]           | 657 |
| 12.288.2.105 fnmadd() [1/2]            | 657 |
| 12.288.2.106 fnmadd() [2/2]            | 657 |
| 12.288.2.107 fnmaddin() [1/2]          | 657 |
| 12.288.2.108 fnmaddin() [2/2]          | 657 |

|  |     |
|--|-----|
| 12.288.2.109 fmsub() [1/2]                                   | 657 |
| 12.288.2.110 fmsub() [2/2]                                   | 658 |
| 12.288.2.111 fmsubin() [1/2]                                 | 658 |
| 12.288.2.112 fmsubin() [2/2]                                 | 658 |
| 12.288.2.113 eq() [1/2]                                      | 658 |
| 12.288.2.114 eq() [2/2]                                      | 658 |
| 12.288.2.115 round() [1/2]                                   | 658 |
| 12.288.2.116 round() [2/2]                                   | 658 |
| 12.288.2.117 mod() [1/2]                                     | 658 |
| 12.288.2.118 mod() [2/2]                                     | 659 |
| 12.288.2.119 zero() [1/2]                                    | 659 |
| 12.288.2.120 zero() [2/2]                                    | 659 |
| 12.288.2.121 vor()   | 659 |
| 12.288.2.122 vxor()  | 659 |
| 12.288.2.123 vand()  | 659 |
| 12.288.2.124 vandnot()                                       | 659 |
| 12.288.3 Field Documentation                                 | 659 |
| 12.288.3.1 vect_size   | 659 |
| 12.288.3.2 alignment   | 659 |
| 12.289 Simd256_impl< true, true, false, 8 > Struct Reference | 660 |
| 12.289.1 Member Typedef Documentation                        | 662 |
| 12.289.1.1 scalar_t  | 662 |
| 12.289.1.2 aligned_allocator                                 | 662 |
| 12.289.1.3 aligned_vector                                    | 662 |
| 12.289.1.4 is_same_element                                   | 662 |
| 12.289.1.5 simdHalf  | 662 |
| 12.289.1.6 vect_t  | 662 |
| 12.289.1.7 half_t  | 662 |
| 12.289.2 Member Function Documentation                       | 662 |
| 12.289.2.1 type_string()                                     | 662 |
| 12.289.2.2 set1() [1/2]                                      | 662 |
| 12.289.2.3 set() [1/2]                                       | 662 |
| 12.289.2.4 gather() [1/2]                                    | 662 |
| 12.289.2.5 load() [1/2]                                      | 663 |
| 12.289.2.6 loadu() [1/2]                                     | 663 |
| 12.289.2.7 store() [1/2]                                     | 663 |
| 12.289.2.8 storeu() [1/2]                                    | 663 |
| 12.289.2.9 stream() [1/2]                                    | 663 |
| 12.289.2.10 sra()  | 663 |
| 12.289.2.11 greater()  | 663 |
| 12.289.2.12 lesser()   | 663 |
| 12.289.2.13 greater_eq()                                     | 663 |



|                                  |     |
|----------------------------------|-----|
| 12.289.2.14 lesser_eq()          | 663 |
| 12.289.2.15 mullo()              | 664 |
| 12.289.2.16 mulhi()              | 664 |
| 12.289.2.17 mulx()               | 664 |
| 12.289.2.18 fmaddx()             | 664 |
| 12.289.2.19 fmaddxin()           | 664 |
| 12.289.2.20 fnmaddx()            | 664 |
| 12.289.2.21 fnmaddxin()          | 664 |
| 12.289.2.22 fmsubx()             | 664 |
| 12.289.2.23 fmsubxin()           | 664 |
| 12.289.2.24 hadd_to_scal()       | 665 |
| 12.289.2.25 valid()              | 665 |
| 12.289.2.26 compliant()          | 665 |
| 12.289.2.27 set1() [2/2]         | 665 |
| 12.289.2.28 set() [2/2]          | 665 |
| 12.289.2.29 gather() [2/2]       | 665 |
| 12.289.2.30 get()                | 665 |
| 12.289.2.31 load() [2/2]         | 665 |
| 12.289.2.32 loadu() [2/2]        | 665 |
| 12.289.2.33 store() [2/2]        | 665 |
| 12.289.2.34 storeu() [2/2]       | 666 |
| 12.289.2.35 stream() [2/2]       | 666 |
| 12.289.2.36 sll()                | 666 |
| 12.289.2.37 srl()                | 666 |
| 12.289.2.38 shuffle()            | 666 |
| 12.289.2.39 unpacklo_intrinsic() | 666 |
| 12.289.2.40 unpackhi_intrinsic() | 666 |
| 12.289.2.41 unpacklo()           | 666 |
| 12.289.2.42 unpackhi()           | 666 |
| 12.289.2.43 unpacklohi()         | 666 |
| 12.289.2.44 pack_even()          | 667 |
| 12.289.2.45 pack_odd()           | 667 |
| 12.289.2.46 pack()               | 667 |
| 12.289.2.47 transpose()          | 667 |
| 12.289.2.48 blend()              | 667 |
| 12.289.2.49 add()                | 667 |
| 12.289.2.50 addin()              | 667 |
| 12.289.2.51 sub()                | 667 |
| 12.289.2.52 subin()              | 667 |
| 12.289.2.53 mul()                | 668 |
| 12.289.2.54 fmadd()              | 668 |
| 12.289.2.55 fmaddin()            | 668 |

|   |     |
|---|-----|
| 12.289.2.56 fnmadd()  | 668 |
| 12.289.2.57 fnmaddin()                                      | 668 |
| 12.289.2.58 fmsub()   | 668 |
| 12.289.2.59 fmsubin()                                       | 668 |
| 12.289.2.60 eq()  | 668 |
| 12.289.2.61 round()   | 668 |
| 12.289.2.62 mask_high()                                     | 669 |
| 12.289.2.63 mulhi_fast()                                    | 669 |
| 12.289.2.64 mod()   | 669 |
| 12.289.2.65 signbits()                                      | 669 |
| 12.289.2.66 zero()  | 669 |
| 12.289.3 Field Documentation                                | 669 |
| 12.289.3.1 vect_size  | 669 |
| 12.289.3.2 alignment  | 669 |
| 12.290 Simd256_impl< true, true, true, 2 > Struct Reference | 669 |
| 12.290.1 Member Typedef Documentation                       | 671 |
| 12.290.1.1 vect_t   | 671 |
| 12.290.1.2 half_t   | 671 |
| 12.290.1.3 scalar_t   | 671 |
| 12.290.1.4 simdHalf   | 671 |
| 12.290.1.5 aligned_allocator                                | 671 |
| 12.290.1.6 aligned_vector                                   | 672 |
| 12.290.1.7 is_same_element                                  | 672 |
| 12.290.2 Member Function Documentation                      | 672 |
| 12.290.2.1 type_string()                                    | 672 |
| 12.290.2.2 valid()  | 672 |
| 12.290.2.3 compliant()                                      | 672 |
| 12.290.2.4 set1()   | 672 |
| 12.290.2.5 set()  | 672 |
| 12.290.2.6 gather()   | 672 |
| 12.290.2.7 load()   | 673 |
| 12.290.2.8 loadu()  | 673 |
| 12.290.2.9 store()  | 673 |
| 12.290.2.10 storeu()  | 673 |
| 12.290.2.11 stream()  | 673 |
| 12.290.2.12 sll()   | 673 |
| 12.290.2.13 srl()   | 673 |
| 12.290.2.14 sra()   | 673 |
| 12.290.2.15 shuffle()                                       | 673 |
| 12.290.2.16 unpacklo_intrinsic()                            | 673 |
| 12.290.2.17 unpackhi_intrinsic()                            | 674 |
| 12.290.2.18 unpacklo()                                      | 674 |

|   |     |
|---|-----|
| 12.290.2.19 unpackhi()                                      | 674 |
| 12.290.2.20 unpacklohi()                                    | 674 |
| 12.290.2.21 pack_even()                                     | 674 |
| 12.290.2.22 pack_odd()                                      | 674 |
| 12.290.2.23 pack()  | 674 |
| 12.290.2.24 transpose()                                     | 674 |
| 12.290.2.25 blend() [1/2]                                   | 675 |
| 12.290.2.26 blend() [2/2]                                   | 675 |
| 12.290.2.27 add()   | 675 |
| 12.290.2.28 addin()   | 675 |
| 12.290.2.29 sub()   | 675 |
| 12.290.2.30 subin()   | 675 |
| 12.290.2.31 mullo()   | 675 |
| 12.290.2.32 mul()   | 675 |
| 12.290.2.33 mulhi()   | 676 |
| 12.290.2.34 mulx()  | 676 |
| 12.290.2.35 fmadd()   | 676 |
| 12.290.2.36 fmaddin()                                       | 676 |
| 12.290.2.37 fmaddx()  | 676 |
| 12.290.2.38 fmaddxin()                                      | 676 |
| 12.290.2.39 fnmadd()  | 676 |
| 12.290.2.40 fnmaddin()                                      | 676 |
| 12.290.2.41 fnmaddx()                                       | 676 |
| 12.290.2.42 fnmaddxin()                                     | 677 |
| 12.290.2.43 fmsub()   | 677 |
| 12.290.2.44 fmsubin()                                       | 677 |
| 12.290.2.45 fmsubx()  | 677 |
| 12.290.2.46 fmsubxin()                                      | 677 |
| 12.290.2.47 eq()  | 677 |
| 12.290.2.48 greater()                                       | 677 |
| 12.290.2.49 lesser()  | 677 |
| 12.290.2.50 greater_eq()                                    | 677 |
| 12.290.2.51 lesser_eq()                                     | 678 |
| 12.290.2.52 hadd_to_scal()                                  | 678 |
| 12.290.2.53 round()   | 678 |
| 12.290.2.54 mod()   | 678 |
| 12.290.2.55 zero()  | 678 |
| 12.290.3 Field Documentation                                | 678 |
| 12.290.3.1 vect_size  | 678 |
| 12.290.3.2 alignment  | 678 |
| 12.291 Simd256_impl< true, true, true, 4 > Struct Reference | 678 |
| 12.291.1 Member Typedef Documentation                       | 682 |

|  |     |
|--|-----|
| 12.291.1.1 vect_t [1/2]                | 682 |
| 12.291.1.2 half_t [1/2]                | 682 |
| 12.291.1.3 scalar_t                    | 682 |
| 12.291.1.4 simdHalf [1/2]              | 682 |
| 12.291.1.5 aligned_allocator           | 682 |
| 12.291.1.6 aligned_vector              | 682 |
| 12.291.1.7 is_same_element             | 682 |
| 12.291.1.8 vect_t [2/2]                | 682 |
| 12.291.1.9 half_t [2/2]                | 682 |
| 12.291.1.10 simdHalf [2/2]             | 682 |
| 12.291.2 Member Function Documentation | 682 |
| 12.291.2.1 type_string() [1/2]         | 682 |
| 12.291.2.2 valid() [1/2]               | 682 |
| 12.291.2.3 compliant() [1/2]           | 683 |
| 12.291.2.4 set1() [1/2]                | 683 |
| 12.291.2.5 set() [1/2]                 | 683 |
| 12.291.2.6 gather() [1/2]              | 683 |
| 12.291.2.7 load() [1/2]                | 683 |
| 12.291.2.8 loadu() [1/2]               | 683 |
| 12.291.2.9 store() [1/2]               | 683 |
| 12.291.2.10 storeu() [1/2]             | 683 |
| 12.291.2.11 stream() [1/2]             | 683 |
| 12.291.2.12 sll() [1/2]                | 684 |
| 12.291.2.13 srl() [1/2]                | 684 |
| 12.291.2.14 sra() [1/2]                | 684 |
| 12.291.2.15 shuffle_twice() [1/2]      | 684 |
| 12.291.2.16 shuffle() [1/2]            | 684 |
| 12.291.2.17 unpacklo_intrinsic() [1/2] | 684 |
| 12.291.2.18 unpackhi_intrinsic() [1/2] | 684 |
| 12.291.2.19 unpacklo() [1/2]           | 684 |
| 12.291.2.20 unpackhi() [1/2]           | 684 |
| 12.291.2.21 unpacklohi() [1/2]         | 684 |
| 12.291.2.22 pack_even() [1/2]          | 685 |
| 12.291.2.23 pack_odd() [1/2]           | 685 |
| 12.291.2.24 pack() [1/2]               | 685 |
| 12.291.2.25 transpose() [1/2]          | 685 |
| 12.291.2.26 blend() [1/2]              | 685 |
| 12.291.2.27 add() [1/2]                | 685 |
| 12.291.2.28 addin() [1/2]              | 685 |
| 12.291.2.29 sub() [1/2]                | 685 |
| 12.291.2.30 subin() [1/2]              | 686 |
| 12.291.2.31 mullo() [1/2]              | 686 |

|  |     |
|--|-----|
| 12.291.2.32 mul() [1/2]                | 686 |
| 12.291.2.33 mulhi() [1/2]              | 686 |
| 12.291.2.34 mulx() [1/2]               | 686 |
| 12.291.2.35 fmadd() [1/2]              | 686 |
| 12.291.2.36 fmaddin() [1/2]            | 686 |
| 12.291.2.37 fmaddx() [1/2]             | 686 |
| 12.291.2.38 fmaddxin() [1/2]           | 686 |
| 12.291.2.39 fnmadd() [1/2]             | 687 |
| 12.291.2.40 fnmaddin() [1/2]           | 687 |
| 12.291.2.41 fnmaddx() [1/2]            | 687 |
| 12.291.2.42 fnmaddxin() [1/2]          | 687 |
| 12.291.2.43 fmsub() [1/2]              | 687 |
| 12.291.2.44 fmsubin() [1/2]            | 687 |
| 12.291.2.45 fmsubx() [1/2]             | 687 |
| 12.291.2.46 fmsubxin() [1/2]           | 687 |
| 12.291.2.47 eq() [1/2]                 | 688 |
| 12.291.2.48 greater() [1/2]            | 688 |
| 12.291.2.49 lesser() [1/2]             | 688 |
| 12.291.2.50 greater_eq() [1/2]         | 688 |
| 12.291.2.51 lesser_eq() [1/2]          | 688 |
| 12.291.2.52 hadd_to_scal() [1/2]       | 688 |
| 12.291.2.53 round() [1/2]              | 688 |
| 12.291.2.54 mod() [1/2]                | 688 |
| 12.291.2.55 type_string() [2/2]        | 688 |
| 12.291.2.56 valid() [2/2]              | 688 |
| 12.291.2.57 compliant() [2/2]          | 689 |
| 12.291.2.58 set1() [2/2]               | 689 |
| 12.291.2.59 set() [2/2]                | 689 |
| 12.291.2.60 gather() [2/2]             | 689 |
| 12.291.2.61 load() [2/2]               | 689 |
| 12.291.2.62 loadu() [2/2]              | 689 |
| 12.291.2.63 store() [2/2]              | 689 |
| 12.291.2.64 storeu() [2/2]             | 689 |
| 12.291.2.65 stream() [2/2]             | 690 |
| 12.291.2.66 sll() [2/2]                | 690 |
| 12.291.2.67 srl() [2/2]                | 690 |
| 12.291.2.68 sra() [2/2]                | 690 |
| 12.291.2.69 shuffle_twice() [2/2]      | 690 |
| 12.291.2.70 shuffle() [2/2]            | 690 |
| 12.291.2.71 unpacklo_intrinsic() [2/2] | 690 |
| 12.291.2.72 unpackhi_intrinsic() [2/2] | 690 |
| 12.291.2.73 unpacklo() [2/2]           | 690 |

|                                   |     |
|-----------------------------------|-----|
| 12.291.2.74 unpackhi() [2/2]      | 690 |
| 12.291.2.75 unpacklohi() [2/2]    | 691 |
| 12.291.2.76 pack_even() [2/2]     | 691 |
| 12.291.2.77 pack_odd() [2/2]      | 691 |
| 12.291.2.78 pack() [2/2]          | 691 |
| 12.291.2.79 transpose() [2/2]     | 691 |
| 12.291.2.80 blend() [2/2]         | 691 |
| 12.291.2.81 add() [2/2]           | 691 |
| 12.291.2.82 addin() [2/2]         | 692 |
| 12.291.2.83 sub() [2/2]           | 692 |
| 12.291.2.84 subin() [2/2]         | 692 |
| 12.291.2.85 mullo() [2/2]         | 692 |
| 12.291.2.86 mul() [2/2]           | 692 |
| 12.291.2.87 mulhi() [2/2]         | 692 |
| 12.291.2.88 mulx() [2/2]          | 692 |
| 12.291.2.89 fmadd() [2/2]         | 692 |
| 12.291.2.90 fmaddin() [2/2]       | 692 |
| 12.291.2.91 fmaddx() [2/2]        | 693 |
| 12.291.2.92 fmaddxin() [2/2]      | 693 |
| 12.291.2.93 fnmadd() [2/2]        | 693 |
| 12.291.2.94 fnmaddin() [2/2]      | 693 |
| 12.291.2.95 fnmaddx() [2/2]       | 693 |
| 12.291.2.96 fnmaddxin() [2/2]     | 693 |
| 12.291.2.97 fmsub() [2/2]         | 693 |
| 12.291.2.98 fmsubin() [2/2]       | 693 |
| 12.291.2.99 fmsubx() [2/2]        | 693 |
| 12.291.2.100 fmsubxin() [2/2]     | 694 |
| 12.291.2.101 eq() [2/2]           | 694 |
| 12.291.2.102 greater() [2/2]      | 694 |
| 12.291.2.103 lesser() [2/2]       | 694 |
| 12.291.2.104 greater_eq() [2/2]   | 694 |
| 12.291.2.105 lesser_eq() [2/2]    | 694 |
| 12.291.2.106 hadd_to_scal() [2/2] | 694 |
| 12.291.2.107 round() [2/2]        | 694 |
| 12.291.2.108 mod() [2/2]          | 694 |
| 12.291.2.109 is_same_element()    | 695 |
| 12.291.2.110 zero() [1/2]         | 695 |
| 12.291.2.111 zero() [2/2]         | 695 |
| 12.291.2.112 vor()                | 695 |
| 12.291.2.113 vxor()               | 695 |
| 12.291.2.114 vand()               | 695 |
| 12.291.2.115 vandnot()            | 695 |

|   |     |
|---|-----|
| 12.291.3 Field Documentation                                | 695 |
| 12.291.3.1 vect_size  | 695 |
| 12.291.3.2 alignment  | 695 |
| 12.292 Simd256_impl< true, true, true, 8 > Struct Reference | 695 |
| 12.292.1 Member Typedef Documentation                       | 697 |
| 12.292.1.1 vect_t   | 697 |
| 12.292.1.2 half_t   | 697 |
| 12.292.1.3 scalar_t   | 698 |
| 12.292.1.4 simdHalf   | 698 |
| 12.292.1.5 aligned_allocator                                | 698 |
| 12.292.1.6 aligned_vector                                   | 698 |
| 12.292.1.7 is_same_element                                  | 698 |
| 12.292.2 Member Function Documentation                      | 698 |
| 12.292.2.1 type_string()                                    | 698 |
| 12.292.2.2 valid()  | 698 |
| 12.292.2.3 compliant()                                      | 698 |
| 12.292.2.4 set1()   | 698 |
| 12.292.2.5 set()  | 698 |
| 12.292.2.6 gather()   | 698 |
| 12.292.2.7 get()  | 699 |
| 12.292.2.8 load()   | 699 |
| 12.292.2.9 loadu()  | 699 |
| 12.292.2.10 store()   | 699 |
| 12.292.2.11 storeu()  | 699 |
| 12.292.2.12 stream()  | 699 |
| 12.292.2.13 sll()   | 699 |
| 12.292.2.14 srl()   | 699 |
| 12.292.2.15 sra()   | 699 |
| 12.292.2.16 shuffle()                                       | 699 |
| 12.292.2.17 unpacklo_intrinsic()                            | 700 |
| 12.292.2.18 unpackhi_intrinsic()                            | 700 |
| 12.292.2.19 unpacklo()                                      | 700 |
| 12.292.2.20 unpackhi()                                      | 700 |
| 12.292.2.21 unpacklohi()                                    | 700 |
| 12.292.2.22 pack_even()                                     | 700 |
| 12.292.2.23 pack_odd()                                      | 700 |
| 12.292.2.24 pack()  | 700 |
| 12.292.2.25 transpose()                                     | 700 |
| 12.292.2.26 blend()   | 701 |
| 12.292.2.27 add()   | 701 |
| 12.292.2.28 addin()   | 701 |
| 12.292.2.29 sub()   | 701 |

|   |     |
|---|-----|
| 12.292.2.30 subin()   | 701 |
| 12.292.2.31 mullo()   | 701 |
| 12.292.2.32 mul()   | 701 |
| 12.292.2.33 mulhi()   | 701 |
| 12.292.2.34 mulx()  | 701 |
| 12.292.2.35 fmadd()   | 701 |
| 12.292.2.36 fmaddin()   | 702 |
| 12.292.2.37 fmaddx()  | 702 |
| 12.292.2.38 fmaddxin()  | 702 |
| 12.292.2.39 fnmadd()  | 702 |
| 12.292.2.40 fnmaddin()  | 702 |
| 12.292.2.41 fnmaddx()   | 702 |
| 12.292.2.42 fnmaddxin()   | 702 |
| 12.292.2.43 fmsub()   | 702 |
| 12.292.2.44 fmsubin()   | 702 |
| 12.292.2.45 fmsubx()  | 703 |
| 12.292.2.46 fmsubxin()  | 703 |
| 12.292.2.47 eq()  | 703 |
| 12.292.2.48 greater()   | 703 |
| 12.292.2.49 lesser()  | 703 |
| 12.292.2.50 greater_eq()  | 703 |
| 12.292.2.51 lesser_eq()   | 703 |
| 12.292.2.52 hadd_to_scal()  | 703 |
| 12.292.2.53 round()   | 703 |
| 12.292.2.54 mask_high()   | 703 |
| 12.292.2.55 mulhi_fast()  | 704 |
| 12.292.2.56 mod()   | 704 |
| 12.292.2.57 signbits()  | 704 |
| 12.292.2.58 zero()  | 704 |
| 12.292.3 Field Documentation  | 704 |
| 12.292.3.1 vect_size  | 704 |
| 12.292.3.2 alignment  | 704 |
| 12.293 Simd256fp_base Struct Reference  | 704 |
| 12.294 Simd256i_base Struct Reference   | 705 |
| 12.294.1 Member Typedef Documentation   | 705 |
| 12.294.1.1 vect_t   | 705 |
| 12.294.2 Member Function Documentation  | 705 |
| 12.294.2.1 zero()   | 705 |
| 12.295 Simd512_impl< ArithType, Int, Signed, Size > Struct Template Reference | 705 |
| 12.296 Simd512_impl< true, false, true, 4 > Struct Reference                  | 705 |
| 12.297 Simd512_impl< true, false, true, 8 > Struct Reference                  | 705 |
| 12.297.1 Member Typedef Documentation   | 707 |



|  |     |
|--|-----|
| 12.297.1.1 vect_t                      | 707 |
| 12.297.1.2 scalar_t                    | 707 |
| 12.297.1.3 aligned_allocator           | 707 |
| 12.297.1.4 aligned_vector              | 707 |
| 12.297.1.5 is_same_element             | 707 |
| 12.297.2 Member Function Documentation | 707 |
| 12.297.2.1 type_string()               | 707 |
| 12.297.2.2 valid()                     | 707 |
| 12.297.2.3 compliant()                 | 707 |
| 12.297.2.4 zero()                      | 707 |
| 12.297.2.5 set1()                      | 707 |
| 12.297.2.6 set()                       | 708 |
| 12.297.2.7 gather()                    | 708 |
| 12.297.2.8 load()                      | 708 |
| 12.297.2.9 loadu()                     | 708 |
| 12.297.2.10 store()                    | 708 |
| 12.297.2.11 storeu()                   | 708 |
| 12.297.2.12 stream()                   | 708 |
| 12.297.2.13 shuffle()                  | 708 |
| 12.297.2.14 unpacklo_intrinsic()       | 708 |
| 12.297.2.15 unpackhi_intrinsic()       | 709 |
| 12.297.2.16 unpacklo()                 | 709 |
| 12.297.2.17 unpackhi()                 | 709 |
| 12.297.2.18 unpacklohi()               | 709 |
| 12.297.2.19 pack_even()                | 709 |
| 12.297.2.20 pack_odd()                 | 709 |
| 12.297.2.21 pack()                     | 709 |
| 12.297.2.22 transpose()                | 709 |
| 12.297.2.23 blend()                    | 710 |
| 12.297.2.24 blendv()                   | 710 |
| 12.297.2.25 add()                      | 710 |
| 12.297.2.26 addin()                    | 710 |
| 12.297.2.27 sub()                      | 710 |
| 12.297.2.28 subin()                    | 710 |
| 12.297.2.29 mul()                      | 710 |
| 12.297.2.30 mulin()                    | 710 |
| 12.297.2.31 div()                      | 710 |
| 12.297.2.32 fmadd()                    | 711 |
| 12.297.2.33 fmaddin()                  | 711 |
| 12.297.2.34 fnmadd()                   | 711 |
| 12.297.2.35 fnmaddin()                 | 711 |
| 12.297.2.36 fmsub()                    | 711 |

|  |     |
|--|-----|
| 12.297.2.37 fmsubin()  | 711 |
| 12.297.2.38 eq()   | 711 |
| 12.297.2.39 lesser()   | 711 |
| 12.297.2.40 lesser_eq()                                      | 711 |
| 12.297.2.41 greater()  | 712 |
| 12.297.2.42 greater_eq()                                     | 712 |
| 12.297.2.43 floor()  | 712 |
| 12.297.2.44 ceil()   | 712 |
| 12.297.2.45 round()  | 712 |
| 12.297.2.46 hadd()   | 712 |
| 12.297.2.47 hadd_to_scal()                                   | 712 |
| 12.297.3 Field Documentation                                 | 712 |
| 12.297.3.1 vect_size   | 712 |
| 12.297.3.2 alignment   | 712 |
| 12.298 Simd512_impl< true, true, false, 8 > Struct Reference | 712 |
| 12.298.1 Member Typedef Documentation                        | 715 |
| 12.298.1.1 scalar_t  | 715 |
| 12.298.1.2 aligned_allocator                                 | 715 |
| 12.298.1.3 aligned_vector                                    | 715 |
| 12.298.1.4 is_same_element                                   | 715 |
| 12.298.1.5 simdHalf  | 715 |
| 12.298.1.6 vect_t  | 715 |
| 12.298.1.7 half_t  | 715 |
| 12.298.2 Member Function Documentation                       | 715 |
| 12.298.2.1 type_string()                                     | 715 |
| 12.298.2.2 set1() [1/2]                                      | 715 |
| 12.298.2.3 set() [1/3]                                       | 715 |
| 12.298.2.4 gather() [1/2]                                    | 716 |
| 12.298.2.5 load() [1/2]                                      | 716 |
| 12.298.2.6 loadu() [1/2]                                     | 716 |
| 12.298.2.7 store() [1/2]                                     | 716 |
| 12.298.2.8 maskstore() [1/2]                                 | 716 |
| 12.298.2.9 storeu() [1/2]                                    | 716 |
| 12.298.2.10 stream() [1/2]                                   | 716 |
| 12.298.2.11 sra()  | 716 |
| 12.298.2.12 greater()  | 716 |
| 12.298.2.13 lesser()   | 716 |
| 12.298.2.14 greater_eq()                                     | 717 |
| 12.298.2.15 lesser_eq()                                      | 717 |
| 12.298.2.16 mullo()  | 717 |
| 12.298.2.17 mulhi()  | 717 |
| 12.298.2.18 mulx()   | 717 |

|                                  |     |
|----------------------------------|-----|
| 12.298.2.19 fmaddx()             | 717 |
| 12.298.2.20 fmaddxin()           | 717 |
| 12.298.2.21 fnmaddx()            | 717 |
| 12.298.2.22 fnmaddxin()          | 717 |
| 12.298.2.23 fmsubx()             | 718 |
| 12.298.2.24 fmsubxin()           | 718 |
| 12.298.2.25 hadd_to_scal()       | 718 |
| 12.298.2.26 valid()              | 718 |
| 12.298.2.27 compliant()          | 718 |
| 12.298.2.28 set1() [2/2]         | 718 |
| 12.298.2.29 set() [2/3]          | 718 |
| 12.298.2.30 set() [3/3]          | 718 |
| 12.298.2.31 gather() [2/2]       | 718 |
| 12.298.2.32 load() [2/2]         | 719 |
| 12.298.2.33 loadu() [2/2]        | 719 |
| 12.298.2.34 store() [2/2]        | 719 |
| 12.298.2.35 maskstore() [2/2]    | 719 |
| 12.298.2.36 storeu() [2/2]       | 719 |
| 12.298.2.37 stream() [2/2]       | 719 |
| 12.298.2.38 sll()                | 719 |
| 12.298.2.39 srl()                | 719 |
| 12.298.2.40 shuffle()            | 719 |
| 12.298.2.41 unpacklo_intrinsic() | 720 |
| 12.298.2.42 unpackhi_intrinsic() | 720 |
| 12.298.2.43 unpacklo()           | 720 |
| 12.298.2.44 unpackhi()           | 720 |
| 12.298.2.45 unpacklohi()         | 720 |
| 12.298.2.46 pack_even()          | 720 |
| 12.298.2.47 pack_odd()           | 720 |
| 12.298.2.48 pack()               | 720 |
| 12.298.2.49 transpose()          | 720 |
| 12.298.2.50 blend()              | 721 |
| 12.298.2.51 add()                | 721 |
| 12.298.2.52 addin()              | 721 |
| 12.298.2.53 sub()                | 721 |
| 12.298.2.54 subin()              | 721 |
| 12.298.2.55 mul()                | 721 |
| 12.298.2.56 fmadd()              | 721 |
| 12.298.2.57 fmaddin()            | 721 |
| 12.298.2.58 fnmadd()             | 721 |
| 12.298.2.59 fnmaddin()           | 722 |
| 12.298.2.60 fmsub()              | 722 |

|   |     |
|---|-----|
| 12.298.2.61 fmsubin()                                       | 722 |
| 12.298.2.62 eq()  | 722 |
| 12.298.2.63 round()   | 722 |
| 12.298.2.64 mask_high()                                     | 722 |
| 12.298.2.65 mulhi_fast()                                    | 722 |
| 12.298.2.66 mod()   | 722 |
| 12.298.2.67 signbits()                                      | 723 |
| 12.298.2.68 zero()  | 723 |
| 12.298.2.69 vor()   | 723 |
| 12.298.2.70 vxor()  | 723 |
| 12.298.2.71 vand()  | 723 |
| 12.298.2.72 vandnot()                                       | 723 |
| 12.298.3 Field Documentation                                | 723 |
| 12.298.3.1 vect_size  | 723 |
| 12.298.3.2 alignment  | 723 |
| 12.299 Simd512_impl< true, true, true, 8 > Struct Reference | 723 |
| 12.299.1 Member Typedef Documentation                       | 725 |
| 12.299.1.1 vect_t   | 725 |
| 12.299.1.2 half_t   | 725 |
| 12.299.1.3 scalar_t   | 725 |
| 12.299.1.4 simdHalf   | 726 |
| 12.299.1.5 aligned_allocator                                | 726 |
| 12.299.1.6 aligned_vector                                   | 726 |
| 12.299.1.7 is_same_element                                  | 726 |
| 12.299.2 Member Function Documentation                      | 726 |
| 12.299.2.1 type_string()                                    | 726 |
| 12.299.2.2 valid()  | 726 |
| 12.299.2.3 compliant()                                      | 726 |
| 12.299.2.4 set1()   | 726 |
| 12.299.2.5 set() [1/2]                                      | 726 |
| 12.299.2.6 set() [2/2]                                      | 726 |
| 12.299.2.7 gather()   | 727 |
| 12.299.2.8 load()   | 727 |
| 12.299.2.9 loadu()  | 727 |
| 12.299.2.10 store()   | 727 |
| 12.299.2.11 maskstore()                                     | 727 |
| 12.299.2.12 storeu()  | 727 |
| 12.299.2.13 stream()  | 727 |
| 12.299.2.14 sll()   | 727 |
| 12.299.2.15 srl()   | 727 |
| 12.299.2.16 sra()   | 727 |
| 12.299.2.17 shuffle()                                       | 728 |

|                                  |     |
|----------------------------------|-----|
| 12.299.2.18 unpacklo_intrinsic() | 728 |
| 12.299.2.19 unpackhi_intrinsic() | 728 |
| 12.299.2.20 unpacklo()           | 728 |
| 12.299.2.21 unpackhi()           | 728 |
| 12.299.2.22 unpacklohi()         | 728 |
| 12.299.2.23 pack_even()          | 728 |
| 12.299.2.24 pack_odd()           | 728 |
| 12.299.2.25 pack()               | 728 |
| 12.299.2.26 transpose()          | 729 |
| 12.299.2.27 blend()              | 729 |
| 12.299.2.28 add()                | 729 |
| 12.299.2.29 addin()              | 729 |
| 12.299.2.30 sub()                | 729 |
| 12.299.2.31 subin()              | 729 |
| 12.299.2.32 mullo()              | 729 |
| 12.299.2.33 mul()                | 729 |
| 12.299.2.34 mulhi()              | 729 |
| 12.299.2.35 mulx()               | 730 |
| 12.299.2.36 fmadd()              | 730 |
| 12.299.2.37 fmaddin()            | 730 |
| 12.299.2.38 fmaddx()             | 730 |
| 12.299.2.39 fmaddxin()           | 730 |
| 12.299.2.40 fnmadd()             | 730 |
| 12.299.2.41 fnmaddin()           | 730 |
| 12.299.2.42 fnmaddx()            | 730 |
| 12.299.2.43 fnmaddxin()          | 730 |
| 12.299.2.44 fmsub()              | 731 |
| 12.299.2.45 fmsubin()            | 731 |
| 12.299.2.46 fmsubx()             | 731 |
| 12.299.2.47 fmsubxin()           | 731 |
| 12.299.2.48 eq()                 | 731 |
| 12.299.2.49 greater()            | 731 |
| 12.299.2.50 lesser()             | 731 |
| 12.299.2.51 greater_eq()         | 731 |
| 12.299.2.52 lesser_eq()          | 731 |
| 12.299.2.53 hadd_to_scal()       | 732 |
| 12.299.2.54 round()              | 732 |
| 12.299.2.55 mask_high()          | 732 |
| 12.299.2.56 mulhi_fast()         | 732 |
| 12.299.2.57 mod()                | 732 |
| 12.299.2.58 signbits()           | 732 |
| 12.299.2.59 zero()               | 732 |

|  |     |
|--|-----|
| 12.299.2.60 vor()  | 732 |
| 12.299.2.61 vxor()   | 732 |
| 12.299.2.62 vand()   | 732 |
| 12.299.2.63 vandnot()  | 733 |
| 12.299.3 Field Documentation   | 733 |
| 12.299.3.1 vect_size   | 733 |
| 12.299.3.2 alignment   | 733 |
| 12.300 Simd512i_base Struct Reference  | 733 |
| 12.300.1 Member Typedef Documentation  | 733 |
| 12.300.1.1 vect_t  | 733 |
| 12.300.2 Member Function Documentation                                       | 733 |
| 12.300.2.1 zero()  | 733 |
| 12.300.2.2 vor()   | 733 |
| 12.300.2.3 vxor()  | 734 |
| 12.300.2.4 vand()  | 734 |
| 12.300.2.5 vandnot()   | 734 |
| 12.301 SimdChooser< T, bool, bool > Struct Template Reference                | 734 |
| 12.302 SimdChooser< T, false, b > Struct Template Reference                  | 734 |
| 12.302.1 Member Typedef Documentation  | 734 |
| 12.302.1.1 value   | 734 |
| 12.303 SimdChooser< T, true, false > Struct Template Reference               | 734 |
| 12.303.1 Member Typedef Documentation  | 735 |
| 12.303.1.1 value   | 735 |
| 12.304 SimdChooser< T, true, true > Struct Template Reference                | 735 |
| 12.304.1 Member Typedef Documentation  | 735 |
| 12.304.1.1 value   | 735 |
| 12.305 simdToType< T > Struct Template Reference                             | 735 |
| 12.306 Single Struct Reference   | 735 |
| 12.307 Sparse< Field, SparseMatrix_t, IdxT, PtrT > Struct Template Reference | 735 |
| 12.308 Sparse< _Field, SparseMatrix_t::COO > Struct Template Reference       | 735 |
| 12.308.1 Member Typedef Documentation  | 736 |
| 12.308.1.1 Field   | 736 |
| 12.308.2 Field Documentation   | 736 |
| 12.308.2.1 col   | 736 |
| 12.308.2.2 row   | 736 |
| 12.308.2.3 dat   | 736 |
| 12.308.2.4 delayed   | 736 |
| 12.308.2.5 kmax  | 736 |
| 12.308.2.6 m   | 736 |
| 12.308.2.7 n   | 736 |
| 12.308.2.8 nnz   | 737 |
| 12.308.2.9 nElements   | 737 |

|  |     |
|--|-----|
| 12.308.2.10 maxrow   | 737 |
| 12.309 Sparse< _Field, SparseMatrix_t::COO_ZO > Struct Template Reference  | 737 |
| 12.309.1 Member Typedef Documentation                                      | 737 |
| 12.309.1.1 Field   | 737 |
| 12.309.2 Field Documentation   | 738 |
| 12.309.2.1 cst   | 738 |
| 12.309.2.2 col   | 738 |
| 12.309.2.3 row   | 738 |
| 12.309.2.4 dat   | 738 |
| 12.309.2.5 delayed   | 738 |
| 12.309.2.6 kmax  | 738 |
| 12.309.2.7 m   | 738 |
| 12.309.2.8 n   | 738 |
| 12.309.2.9 nnz   | 738 |
| 12.309.2.10 nElements  | 738 |
| 12.309.2.11 maxrow   | 738 |
| 12.310 Sparse< _Field, SparseMatrix_t::CSR > Struct Template Reference     | 739 |
| 12.310.1 Member Typedef Documentation                                      | 739 |
| 12.310.1.1 Field   | 739 |
| 12.310.2 Field Documentation   | 739 |
| 12.310.2.1 delayed   | 739 |
| 12.310.2.2 kmax  | 739 |
| 12.310.2.3 m   | 739 |
| 12.310.2.4 n   | 739 |
| 12.310.2.5 nnz   | 740 |
| 12.310.2.6 nElements   | 740 |
| 12.310.2.7 maxrow  | 740 |
| 12.310.2.8 col   | 740 |
| 12.310.2.9 st  | 740 |
| 12.310.2.10 stend  | 740 |
| 12.310.2.11 dat  | 740 |
| 12.311 Sparse< _Field, SparseMatrix_t::CSR_HYB > Struct Template Reference | 740 |
| 12.311.1 Member Typedef Documentation                                      | 741 |
| 12.311.1.1 Field   | 741 |
| 12.311.2 Field Documentation   | 741 |
| 12.311.2.1 delayed   | 741 |
| 12.311.2.2 col   | 741 |
| 12.311.2.3 st  | 741 |
| 12.311.2.4 dat   | 741 |
| 12.311.2.5 kmax  | 741 |
| 12.311.2.6 m   | 741 |
| 12.311.2.7 n   | 741 |

|   |     |
|---|-----|
| 12.311.2.8 nnz  | 741 |
| 12.311.2.9 nElements  | 741 |
| 12.311.2.10 maxrow  | 742 |
| 12.311.2.11 nOnes   | 742 |
| 12.311.2.12 nMOnes  | 742 |
| 12.311.2.13 nOthers   | 742 |
| 12.312 Sparse< _Field, SparseMatrix_t::CSR_ZO > Struct Template Reference   | 742 |
| 12.312.1 Member Typedef Documentation                                       | 743 |
| 12.312.1.1 Field  | 743 |
| 12.312.2 Field Documentation  | 743 |
| 12.312.2.1 cst  | 743 |
| 12.312.2.2 delayed  | 743 |
| 12.312.2.3 kmax   | 743 |
| 12.312.2.4 m  | 743 |
| 12.312.2.5 n  | 743 |
| 12.312.2.6 nnz  | 743 |
| 12.312.2.7 nElements  | 743 |
| 12.312.2.8 maxrow   | 743 |
| 12.312.2.9 col  | 743 |
| 12.312.2.10 st  | 743 |
| 12.312.2.11 stend   | 744 |
| 12.312.2.12 dat   | 744 |
| 12.313 Sparse< _Field, SparseMatrix_t::ELL > Struct Template Reference      | 744 |
| 12.313.1 Member Typedef Documentation                                       | 744 |
| 12.313.1.1 Field  | 744 |
| 12.313.2 Field Documentation  | 744 |
| 12.313.2.1 delayed  | 744 |
| 12.313.2.2 kmax   | 745 |
| 12.313.2.3 m  | 745 |
| 12.313.2.4 n  | 745 |
| 12.313.2.5 ld   | 745 |
| 12.313.2.6 nnz  | 745 |
| 12.313.2.7 nElements  | 745 |
| 12.313.2.8 maxrow   | 745 |
| 12.313.2.9 col  | 745 |
| 12.313.2.10 dat   | 745 |
| 12.314 Sparse< _Field, SparseMatrix_t::ELL_simd > Struct Template Reference | 745 |
| 12.314.1 Field Documentation  | 746 |
| 12.314.1.1 delayed  | 746 |
| 12.314.1.2 chunk  | 746 |
| 12.314.1.3 m  | 746 |
| 12.314.1.4 n  | 746 |



|  |     |
|--|-----|
| 12.314.1.5 ld  | 746 |
| 12.314.1.6 kmax  | 746 |
| 12.314.1.7 nnz   | 746 |
| 12.314.1.8 nElements   | 746 |
| 12.314.1.9 maxrow  | 747 |
| 12.314.1.10 nChunks  | 747 |
| 12.314.1.11 col  | 747 |
| 12.314.1.12 dat  | 747 |
| 12.315 Sparse< _Field, SparseMatrix_t::ELL_simd_ZO > Struct Template Reference | 747 |
| 12.315.1 Field Documentation   | 747 |
| 12.315.1.1 cst   | 747 |
| 12.315.1.2 delayed   | 748 |
| 12.315.1.3 chunk   | 748 |
| 12.315.1.4 m   | 748 |
| 12.315.1.5 n   | 748 |
| 12.315.1.6 ld  | 748 |
| 12.315.1.7 kmax  | 748 |
| 12.315.1.8 nnz   | 748 |
| 12.315.1.9 nElements   | 748 |
| 12.315.1.10 maxrow   | 748 |
| 12.315.1.11 nChunks  | 748 |
| 12.315.1.12 col  | 748 |
| 12.315.1.13 dat  | 748 |
| 12.316 Sparse< _Field, SparseMatrix_t::ELL_ZO > Struct Template Reference      | 749 |
| 12.316.1 Member Typedef Documentation  | 749 |
| 12.316.1.1 Field   | 749 |
| 12.316.2 Field Documentation   | 749 |
| 12.316.2.1 cst   | 749 |
| 12.316.2.2 delayed   | 749 |
| 12.316.2.3 kmax  | 749 |
| 12.316.2.4 m   | 749 |
| 12.316.2.5 n   | 750 |
| 12.316.2.6 ld  | 750 |
| 12.316.2.7 nnz   | 750 |
| 12.316.2.8 nElements   | 750 |
| 12.316.2.9 maxrow  | 750 |
| 12.316.2.10 col  | 750 |
| 12.316.2.11 dat  | 750 |
| 12.317 Sparse< _Field, SparseMatrix_t::HYB_ZO > Struct Template Reference      | 750 |
| 12.317.1 Member Typedef Documentation  | 751 |
| 12.317.1.1 Field   | 751 |
| 12.317.1.2 Self_t  | 751 |

|  |     |
|--|-----|
| 12.317.2 Field Documentation   | 751 |
| 12.317.2.1 delayed   | 751 |
| 12.317.2.2 kmax  | 751 |
| 12.317.2.3 m   | 751 |
| 12.317.2.4 n   | 751 |
| 12.317.2.5 nnz   | 751 |
| 12.317.2.6 maxrow  | 751 |
| 12.317.2.7 nElements   | 751 |
| 12.317.2.8 dat   | 751 |
| 12.317.2.9 one   | 751 |
| 12.317.2.10 mone   | 752 |
| 12.318 Sparse< _Field, SparseMatrix_t::SELL > Struct Template Reference    | 752 |
| 12.318.1 Member Typedef Documentation                                      | 752 |
| 12.318.1.1 Field   | 752 |
| 12.318.2 Field Documentation   | 752 |
| 12.318.2.1 delayed   | 752 |
| 12.318.2.2 chunk   | 753 |
| 12.318.2.3 kmax  | 753 |
| 12.318.2.4 m   | 753 |
| 12.318.2.5 n   | 753 |
| 12.318.2.6 maxrow  | 753 |
| 12.318.2.7 sigma   | 753 |
| 12.318.2.8 nChunks   | 753 |
| 12.318.2.9 nnz   | 753 |
| 12.318.2.10 nElements  | 753 |
| 12.318.2.11 perm   | 753 |
| 12.318.2.12 st   | 753 |
| 12.318.2.13 chunkSize  | 753 |
| 12.318.2.14 col  | 754 |
| 12.318.2.15 dat  | 754 |
| 12.319 Sparse< _Field, SparseMatrix_t::SELL_ZO > Struct Template Reference | 754 |
| 12.319.1 Member Typedef Documentation                                      | 754 |
| 12.319.1.1 Field   | 754 |
| 12.319.2 Field Documentation   | 755 |
| 12.319.2.1 cst   | 755 |
| 12.319.2.2 delayed   | 755 |
| 12.319.2.3 chunk   | 755 |
| 12.319.2.4 kmax  | 755 |
| 12.319.2.5 m   | 755 |
| 12.319.2.6 n   | 755 |
| 12.319.2.7 maxrow  | 755 |
| 12.319.2.8 sigma   | 755 |

|   |     |
|---|-----|
| 12.319.2.9 nChunks                                    | 755 |
| 12.319.2.10 nnz                                       | 755 |
| 12.319.2.11 nElements                                 | 755 |
| 12.319.2.12 perm                                      | 755 |
| 12.319.2.13 st  | 756 |
| 12.319.2.14 chunkSize                                 | 756 |
| 12.319.2.15 col                                       | 756 |
| 12.319.2.16 dat                                       | 756 |
| 12.320 SpMat< Field, flag > Struct Template Reference | 756 |
| 12.320.1 Field Documentation                          | 756 |
| 12.320.1.1 _coo                                       | 756 |
| 12.320.1.2 _csr                                       | 756 |
| 12.320.1.3 _ell                                       | 756 |
| 12.321 StatsMatrix Struct Reference                   | 756 |
| 12.321.1 Field Documentation                          | 757 |
| 12.321.1.1 rowdim                                     | 757 |
| 12.321.1.2 coldim                                     | 757 |
| 12.321.1.3 nOnes                                      | 757 |
| 12.321.1.4 nMOnes                                     | 757 |
| 12.321.1.5 nOthers                                    | 757 |
| 12.321.1.6 nnz  | 757 |
| 12.321.1.7 maxRow                                     | 758 |
| 12.321.1.8 minRow                                     | 758 |
| 12.321.1.9 averageRow                                 | 758 |
| 12.321.1.10 deviationRow                              | 758 |
| 12.321.1.11 maxCol                                    | 758 |
| 12.321.1.12 minCol                                    | 758 |
| 12.321.1.13 averageCol                                | 758 |
| 12.321.1.14 deviationCol                              | 758 |
| 12.321.1.15 minColDifference                          | 758 |
| 12.321.1.16 maxColDifference                          | 758 |
| 12.321.1.17 averageColDifference                      | 758 |
| 12.321.1.18 deviationColDifference                    | 758 |
| 12.321.1.19 minRowDifference                          | 758 |
| 12.321.1.20 maxRowDifference                          | 758 |
| 12.321.1.21 averageRowDifference                      | 758 |
| 12.321.1.22 deviationRowDifference                    | 759 |
| 12.321.1.23 nDenseRows                                | 759 |
| 12.321.1.24 nDenseCols                                | 759 |
| 12.321.1.25 nEmptyRows                                | 759 |
| 12.321.1.26 nEmptyCols                                | 759 |
| 12.321.1.27 nEmptyColsEnd                             | 759 |

|  |     |
|--|-----|
| 12.321.1.28 denseRows                                  | 759 |
| 12.321.1.29 denseCols                                  | 759 |
| 12.322 support_fast_mod< T > Struct Template Reference | 759 |
| 12.323 support_fast_mod< double > Struct Reference     | 759 |
| 12.324 support_fast_mod< float > Struct Reference      | 760 |
| 12.325 support_fast_mod< int64_t > Struct Reference    | 760 |
| 12.326 support_simd< T > Struct Template Reference     | 760 |
| 12.327 support_simd_add< T > Struct Template Reference | 761 |
| 12.328 support_simd_mod< T > Struct Template Reference | 761 |
| 12.329 Test< Elt > Class Template Reference            | 761 |
| 12.329.1 Member Typedef Documentation                  | 762 |
| 12.329.1.1 Field                                       | 762 |
| 12.329.1.2 Elt_ptr                                     | 762 |
| 12.329.1.3 Residu                                      | 762 |
| 12.329.1.4 enable_if_t                                 | 762 |
| 12.329.1.5 is_same_element                             | 762 |
| 12.329.1.6 enable_if_no_simd_t                         | 762 |
| 12.329.1.7 enable_if_simd128_t                         | 762 |
| 12.329.1.8 enable_if_simd256_t                         | 763 |
| 12.329.1.9 enable_if_simd512_t                         | 763 |
| 12.329.2 Constructor & Destructor Documentation        | 763 |
| 12.329.2.1 Test()                                      | 763 |
| 12.329.3 Member Function Documentation                 | 763 |
| 12.329.3.1 cardinality() [1/2]                         | 763 |
| 12.329.3.2 cardinality() [2/2]                         | 763 |
| 12.329.3.3 test_ftranspose()                           | 763 |
| 12.329.3.4 doTests()                                   | 763 |
| 12.329.3.5 run()                                       | 763 |
| 12.329.4 Field Documentation                           | 764 |
| 12.329.4.1 F   | 764 |
| 12.329.4.2 _mm   | 764 |
| 12.329.4.3 _nn   | 764 |
| 12.330 TestOneMethod< Simd > Class Template Reference  | 764 |
| 12.330.1 Member Typedef Documentation                  | 765 |
| 12.330.1.1 Element                                     | 765 |
| 12.330.1.2 vect_t                                      | 765 |
| 12.330.1.3 vectElt                                     | 765 |
| 12.330.1.4 enable_if_t                                 | 765 |
| 12.330.2 Constructor & Destructor Documentation        | 765 |
| 12.330.2.1 TestOneMethod()                             | 765 |
| 12.330.3 Member Function Documentation                 | 765 |
| 12.330.3.1 evaluate_scalar_method() [1/3]              | 765 |

|  |     |
|--|-----|
| 12.330.3.2 evaluate_scalar_method() [2/3]                                | 766 |
| 12.330.3.3 evaluate_scalar_method() [3/3]                                | 766 |
| 12.330.3.4 evaluate_simd_method() [1/2]                                  | 766 |
| 12.330.3.5 evaluate_simd_method() [2/2]                                  | 766 |
| 12.330.3.6 getStatus()   | 766 |
| 12.330.3.7 getTestName()   | 766 |
| 12.330.3.8 writeResultLine()   | 766 |
| 12.330.3.9 writeDebugData()  | 766 |
| 12.330.4 Field Documentation   | 766 |
| 12.330.4.1 vect_size   | 766 |
| 12.330.4.2 nb_lref   | 767 |
| 12.330.4.3 name  | 767 |
| 12.330.4.4 inputs  | 767 |
| 12.330.4.5 outputs_simd  | 767 |
| 12.330.4.6 outputs_scalar  | 767 |
| 12.331 tfn_minus Struct Reference  | 767 |
| 12.331.1 Member Function Documentation                                   | 767 |
| 12.331.1.1 operator>()   | 767 |
| 12.332 tfn_minus_eq Struct Reference                                     | 767 |
| 12.332.1 Member Function Documentation                                   | 768 |
| 12.332.1.1 operator>()   | 768 |
| 12.333 tfn_mul Struct Reference  | 768 |
| 12.333.1 Member Function Documentation                                   | 768 |
| 12.333.1.1 operator>()   | 768 |
| 12.334 tfn_mul_eq Struct Reference                                       | 768 |
| 12.334.1 Member Function Documentation                                   | 768 |
| 12.334.1.1 operator>()   | 768 |
| 12.335 tfn_plus Struct Reference   | 768 |
| 12.335.1 Member Function Documentation                                   | 769 |
| 12.335.1.1 operator>()   | 769 |
| 12.336 tfn_plus_eq Struct Reference                                      | 769 |
| 12.336.1 Member Function Documentation                                   | 769 |
| 12.336.1.1 operator>()   | 769 |
| 12.337 Threads Struct Reference  | 769 |
| 12.338 ThreeD Struct Reference   | 769 |
| 12.339 ThreeDAdaptive Struct Reference                                   | 769 |
| 12.340 ThreeDInPlace Struct Reference                                    | 770 |
| 12.341 TRSMHelper< ReclterTrait, ParSeqTrait > Struct Template Reference | 770 |
| 12.341.1 Detailed Description  | 770 |
| 12.341.2 Constructor & Destructor Documentation                          | 770 |
| 12.341.2.1 TRSMHelper() [1/3]  | 770 |
| 12.341.2.2 TRSMHelper() [2/3]  | 770 |

|   |            |
|---|------------|
| 12.341.2.3 TRSMHelper() [3/3]               | 770        |
| 12.341.3 Member Function Documentation      | 771        |
| 12.341.3.1 pMMH() [1/2]                     | 771        |
| 12.341.3.2 pMMH() [2/2]                     | 771        |
| 12.341.4 Field Documentation                | 771        |
| 12.341.4.1 parseq                           | 771        |
| 12.342 TwoD Struct Reference                | 771        |
| 12.343 TwoDAdaptive Struct Reference        | 771        |
| 12.344 UnparametricTag Struct Reference     | 771        |
| 12.344.1 Detailed Description               | 771        |
| 12.345 width< T > Struct Template Reference | 772        |
| 12.345.1 Field Documentation                | 772        |
| 12.345.1.1 value                            | 772        |
| 12.346 width< double > Struct Reference     | 772        |
| 12.346.1 Field Documentation                | 772        |
| 12.346.1.1 value                            | 772        |
| 12.347 width< float > Struct Reference      | 772        |
| 12.347.1 Field Documentation                | 772        |
| 12.347.1.1 value                            | 772        |
| 12.348 Winograd Struct Reference            | 772        |
| 12.349 WinogradPar Struct Reference         | 772        |
| <b>13 File Documentation</b>                | <b>773</b> |
| 13.1 arithprog.C File Reference             | 773        |
| 13.1.1 Typedef Documentation                | 773        |
| 13.1.1.1 TTimer                             | 773        |
| 13.1.2 Function Documentation               | 773        |
| 13.1.2.1 main()                             | 773        |
| 13.2 autotune/charpoly.C File Reference     | 773        |
| 13.2.1 Macro Definition Documentation       | 774        |
| 13.2.1.1 CUBE                               | 774        |
| 13.2.1.2 GFOPS                              | 774        |
| 13.2.2 Typedef Documentation                | 774        |
| 13.2.2.1 TTimer                             | 774        |
| 13.2.3 Function Documentation               | 774        |
| 13.2.3.1 main()                             | 774        |
| 13.3 examples/charpoly.C File Reference     | 774        |
| 13.3.1 Function Documentation               | 774        |
| 13.3.1.1 main()                             | 774        |
| 13.4 fsyrk.C File Reference                 | 775        |
| 13.4.1 Macro Definition Documentation       | 775        |
| 13.4.1.1 CUBE                               | 775        |

|   |     |
|---|-----|
| 13.4.1.2 GFOPS                                  | 775 |
| 13.4.2 Function Documentation                   | 775 |
| 13.4.2.1 main()                                 | 775 |
| 13.5 fsytrf.C File Reference                    | 775 |
| 13.5.1 Macro Definition Documentation           | 776 |
| 13.5.1.1 CUBE                                   | 776 |
| 13.5.1.2 GFOPS                                  | 776 |
| 13.5.2 Function Documentation                   | 776 |
| 13.5.2.1 main()                                 | 776 |
| 13.6 ftrtri.C File Reference                    | 776 |
| 13.6.1 Macro Definition Documentation           | 776 |
| 13.6.1.1 CUBE                                   | 776 |
| 13.6.1.2 GFOPS                                  | 777 |
| 13.6.2 Function Documentation                   | 777 |
| 13.6.2.1 main()                                 | 777 |
| 13.7 autotune/pluq.C File Reference             | 777 |
| 13.7.1 Macro Definition Documentation           | 777 |
| 13.7.1.1 CUBE                                   | 777 |
| 13.7.1.2 GFOPS                                  | 777 |
| 13.7.2 Function Documentation                   | 777 |
| 13.7.2.1 main()                                 | 777 |
| 13.8 examples/pluq.C File Reference             | 778 |
| 13.8.1 Function Documentation                   | 778 |
| 13.8.1.1 main()                                 | 778 |
| 13.9 winograd.C File Reference                  | 778 |
| 13.9.1 Macro Definition Documentation           | 778 |
| 13.9.1.1 DOUBLE_TO_FLOAT_CROSSOVER              | 778 |
| 13.9.1.2 GFOPS                                  | 778 |
| 13.9.2 Function Documentation                   | 779 |
| 13.9.2.1 balanced() [1/2]                       | 779 |
| 13.9.2.2 balanced() [2/2]                       | 779 |
| 13.9.2.3 main()                                 | 779 |
| 13.10 benchmark-charpoly-mp.C File Reference    | 779 |
| 13.10.1 Macro Definition Documentation          | 779 |
| 13.10.1.1 __FFLASFFPACK_FORCE_SEQ               | 779 |
| 13.10.2 Function Documentation                  | 779 |
| 13.10.2.1 main()                                | 779 |
| 13.11 benchmark-charpoly.C File Reference       | 779 |
| 13.11.1 Macro Definition Documentation          | 780 |
| 13.11.1.1 __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET | 780 |
| 13.11.2 Function Documentation                  | 780 |
| 13.11.2.1 run_with_field()                      | 780 |

|   |     |
|---|-----|
| 13.11.2.2 main()                                | 780 |
| 13.12 benchmark-checkers.C File Reference       | 780 |
| 13.12.1 Macro Definition Documentation          | 781 |
| 13.12.1.1 ENABLE_ALL_CHECKINGS                  | 781 |
| 13.12.1.2 _NR_TESTS                             | 781 |
| 13.12.1.3 _MAX_SIZE_MATRICES                    | 781 |
| 13.12.1.4 CUBE                                  | 781 |
| 13.12.2 Function Documentation                  | 781 |
| 13.12.2.1 main()                                | 781 |
| 13.13 benchmark-dgemm.C File Reference          | 781 |
| 13.13.1 Macro Definition Documentation          | 782 |
| 13.13.1.1 CBLAS_GEMM                            | 782 |
| 13.13.2 Typedef Documentation                   | 782 |
| 13.13.2.1 TTimer                                | 782 |
| 13.13.2.2 Floats                                | 782 |
| 13.13.3 Function Documentation                  | 782 |
| 13.13.3.1 main()                                | 782 |
| 13.14 benchmark-dgetrf.C File Reference         | 782 |
| 13.14.1 Macro Definition Documentation          | 782 |
| 13.14.1.1 __FFLASFFPACK_HAVE_DGETRF             | 782 |
| 13.14.2 Function Documentation                  | 783 |
| 13.14.2.1 main()                                | 783 |
| 13.15 benchmark-dgetri.C File Reference         | 783 |
| 13.15.1 Function Documentation                  | 783 |
| 13.15.1.1 main()                                | 783 |
| 13.16 benchmark-dsytrf.C File Reference         | 783 |
| 13.16.1 Macro Definition Documentation          | 783 |
| 13.16.1.1 EFFGFF                                | 783 |
| 13.16.2 Function Documentation                  | 784 |
| 13.16.2.1 main()                                | 784 |
| 13.17 benchmark-dtrsm.C File Reference          | 784 |
| 13.17.1 Function Documentation                  | 784 |
| 13.17.1.1 main()                                | 784 |
| 13.18 benchmark-dtrtri.C File Reference         | 784 |
| 13.18.1 Macro Definition Documentation          | 785 |
| 13.18.1.1 __FFLASFFPACK_HAVE_DTRTRI             | 785 |
| 13.18.2 Function Documentation                  | 785 |
| 13.18.2.1 main()                                | 785 |
| 13.19 benchmark-fadd-lvl2.C File Reference      | 785 |
| 13.19.1 Macro Definition Documentation          | 785 |
| 13.19.1.1 __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET | 785 |
| 13.19.2 Function Documentation                  | 785 |



|   |     |
|---|-----|
| 13.19.2.1 main()                                | 785 |
| 13.20 benchmark-fdot.C File Reference           | 785 |
| 13.20.1 Macro Definition Documentation          | 786 |
| 13.20.1.1 __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET | 786 |
| 13.20.2 Function Documentation                  | 786 |
| 13.20.2.1 run_with_field()                      | 786 |
| 13.20.2.2 main()                                | 786 |
| 13.21 benchmark-fgemm-mp.C File Reference       | 786 |
| 13.21.1 Macro Definition Documentation          | 787 |
| 13.21.1.1 __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET | 787 |
| 13.21.1.2 MG_DEFAULT                            | 787 |
| 13.21.1.3 STD_RECINT_SIZE                       | 787 |
| 13.21.2 Function Documentation                  | 787 |
| 13.21.2.1 tmain()                               | 787 |
| 13.21.2.2 main()                                | 787 |
| 13.22 benchmark-fgemm-rns.C File Reference      | 787 |
| 13.22.1 Macro Definition Documentation          | 788 |
| 13.22.1.1 __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET | 788 |
| 13.22.2 Typedef Documentation                   | 788 |
| 13.22.2.1 RNS                                   | 788 |
| 13.22.2.2 Field                                 | 788 |
| 13.22.2.3 Element_ptr                           | 788 |
| 13.22.2.4 ConstElement_ptr                      | 788 |
| 13.22.2.5 THREADS                               | 788 |
| 13.22.2.6 GRAIN                                 | 788 |
| 13.22.2.7 TWOD                                  | 788 |
| 13.22.2.8 TWODA                                 | 788 |
| 13.22.2.9 THREEED                               | 788 |
| 13.22.2.10 THREEEDA                             | 788 |
| 13.22.2.11 THREEEDIP                            | 789 |
| 13.22.2.12 PSeq                                 | 789 |
| 13.22.3 Function Documentation                  | 789 |
| 13.22.3.1 main()                                | 789 |
| 13.23 benchmark-fgemm.C File Reference          | 789 |
| 13.23.1 Macro Definition Documentation          | 789 |
| 13.23.1.1 CLASSIC_HYBRID                        | 789 |
| 13.23.2 Function Documentation                  | 789 |
| 13.23.2.1 main()                                | 789 |
| 13.24 benchmark-fgemv-mp.C File Reference       | 789 |
| 13.24.1 Macro Definition Documentation          | 790 |
| 13.24.1.1 __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET | 790 |
| 13.24.1.2 MG_DEFAULT                            | 790 |

|           |                                       |     |
|-----------|---------------------------------------|-----|
| 13.24.1.3 | STD_RECINT_SIZE                       | 790 |
| 13.24.2   | Function Documentation                | 790 |
| 13.24.2.1 | write_matrix()                        | 790 |
| 13.24.2.2 | tmain()                               | 790 |
| 13.24.2.3 | main()                                | 790 |
| 13.25     | benchmark-fgemv.C File Reference      | 791 |
| 13.25.1   | Macro Definition Documentation        | 791 |
| 13.25.1.1 | __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET | 791 |
| 13.25.2   | Function Documentation                | 792 |
| 13.25.2.1 | fill_value()                          | 792 |
| 13.25.2.2 | genData()                             | 792 |
| 13.25.2.3 | check_result()                        | 792 |
| 13.25.2.4 | benchmark_with_timer()                | 792 |
| 13.25.2.5 | benchmark_disp()                      | 793 |
| 13.25.2.6 | benchmark_in_Field()                  | 793 |
| 13.25.2.7 | benchmark_with_field() [1/2]          | 793 |
| 13.25.2.8 | benchmark_with_field() [2/2]          | 793 |
| 13.25.2.9 | main()                                | 794 |
| 13.26     | benchmark-fgesv.C File Reference      | 794 |
| 13.26.1   | Macro Definition Documentation        | 794 |
| 13.26.1.1 | __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET | 794 |
| 13.26.2   | Function Documentation                | 794 |
| 13.26.2.1 | main()                                | 794 |
| 13.27     | benchmark-fsyr2k.C File Reference     | 794 |
| 13.27.1   | Function Documentation                | 795 |
| 13.27.1.1 | main()                                | 795 |
| 13.28     | benchmark-fsyrk.C File Reference      | 795 |
| 13.28.1   | Macro Definition Documentation        | 795 |
| 13.28.1.1 | __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET | 795 |
| 13.28.2   | Function Documentation                | 795 |
| 13.28.2.1 | main()                                | 795 |
| 13.29     | benchmark-fsytrf.C File Reference     | 795 |
| 13.29.1   | Macro Definition Documentation        | 796 |
| 13.29.1.1 | __FFPACK_FSYTRF_BC_CROUT              | 796 |
| 13.29.1.2 | __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET | 796 |
| 13.29.1.3 | CUBE                                  | 796 |
| 13.29.2   | Function Documentation                | 796 |
| 13.29.2.1 | main()                                | 796 |
| 13.30     | benchmark-ftsm-mp.C File Reference    | 796 |
| 13.30.1   | Macro Definition Documentation        | 796 |
| 13.30.1.1 | __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET | 796 |
| 13.30.2   | Function Documentation                | 797 |

|   |     |
|---|-----|
| 13.30.2.1 main()                                | 797 |
| 13.31 benchmark-ftsrm.C File Reference          | 797 |
| 13.31.1 Macro Definition Documentation          | 797 |
| 13.31.1.1 __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET | 797 |
| 13.31.2 Function Documentation                  | 797 |
| 13.31.2.1 main()                                | 797 |
| 13.32 benchmark-ftsrv.C File Reference          | 797 |
| 13.32.1 Macro Definition Documentation          | 798 |
| 13.32.1.1 __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET | 798 |
| 13.32.2 Function Documentation                  | 798 |
| 13.32.2.1 main()                                | 798 |
| 13.33 benchmark-ftsrti.C File Reference         | 798 |
| 13.33.1 Macro Definition Documentation          | 798 |
| 13.33.1.1 __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET | 798 |
| 13.33.1.2 CUBE                                  | 798 |
| 13.33.2 Function Documentation                  | 798 |
| 13.33.2.1 main()                                | 798 |
| 13.34 benchmark-inverse.C File Reference        | 798 |
| 13.34.1 Macro Definition Documentation          | 799 |
| 13.34.1.1 CUBE                                  | 799 |
| 13.34.2 Function Documentation                  | 799 |
| 13.34.2.1 main()                                | 799 |
| 13.35 benchmark-lqup-mp.C File Reference        | 799 |
| 13.35.1 Function Documentation                  | 799 |
| 13.35.1.1 main()                                | 799 |
| 13.36 benchmark-lqup.C File Reference           | 800 |
| 13.36.1 Macro Definition Documentation          | 800 |
| 13.36.1.1 CUBE                                  | 800 |
| 13.36.2 Function Documentation                  | 800 |
| 13.36.2.1 main()                                | 800 |
| 13.37 benchmark-pluq.C File Reference           | 800 |
| 13.37.1 Macro Definition Documentation          | 801 |
| 13.37.1.1 __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET | 801 |
| 13.37.1.2 CUBE                                  | 801 |
| 13.37.2 Typedef Documentation                   | 801 |
| 13.37.2.1 Field                                 | 801 |
| 13.37.3 Function Documentation                  | 801 |
| 13.37.3.1 verification_PLUQ()                   | 801 |
| 13.37.3.2 Rec_Initialize()                      | 801 |
| 13.37.3.3 main()                                | 801 |
| 13.38 benchmark-quasisep.C File Reference       | 801 |
| 13.38.1 Macro Definition Documentation          | 802 |

|   |     |
|---|-----|
| 13.38.1.1 <a href="#">__FFLASFFPACK_OPENBLAS_NT_ALREADY_SET</a> | 802 |
| 13.38.2 Function Documentation                                  | 802 |
| 13.38.2.1 <a href="#">run_with_field()</a>                      | 802 |
| 13.38.2.2 <a href="#">main()</a>                                | 802 |
| 13.39 benchmark-storage-transpose.C File Reference              | 802 |
| 13.39.1 Function Documentation                                  | 803 |
| 13.39.1.1 <a href="#">main()</a>                                | 803 |
| 13.40 benchmark-wino.C File Reference                           | 803 |
| 13.40.1 Macro Definition Documentation                          | 803 |
| 13.40.1.1 <a href="#">CUBE</a>                                  | 803 |
| 13.40.2 Function Documentation                                  | 803 |
| 13.40.2.1 <a href="#">launch_wino()</a>                         | 803 |
| 13.40.2.2 <a href="#">main()</a>                                | 804 |
| 13.41 mainpage.doxy File Reference                              | 804 |
| 13.42 det.C File Reference                                      | 804 |
| 13.42.1 Function Documentation                                  | 804 |
| 13.42.1.1 <a href="#">main()</a>                                | 804 |
| 13.43 matmul.C File Reference                                   | 804 |
| 13.43.1 Function Documentation                                  | 804 |
| 13.43.1.1 <a href="#">main()</a>                                | 804 |
| 13.44 rank.C File Reference                                     | 805 |
| 13.44.1 Function Documentation                                  | 805 |
| 13.44.1.1 <a href="#">main()</a>                                | 805 |
| 13.45 solve.C File Reference                                    | 805 |
| 13.45.1 Function Documentation                                  | 805 |
| 13.45.1.1 <a href="#">main()</a>                                | 805 |
| 13.46 checker_charpoly.inl File Reference                       | 805 |
| 13.46.1 Macro Definition Documentation                          | 806 |
| 13.46.1.1 <a href="#">__FFLASFFPACK_checker_charpoly_INL</a>    | 806 |
| 13.47 checker_det.inl File Reference                            | 806 |
| 13.47.1 Macro Definition Documentation                          | 806 |
| 13.47.1.1 <a href="#">__FFLASFFPACK_checker_det_INL</a>         | 806 |
| 13.48 checker_empty.h File Reference                            | 806 |
| 13.49 checker_fgemm.inl File Reference                          | 806 |
| 13.49.1 Macro Definition Documentation                          | 807 |
| 13.49.1.1 <a href="#">__FFLASFFPACK_checker_fgemm_INL</a>       | 807 |
| 13.50 checker_ftsm.inl File Reference                           | 807 |
| 13.50.1 Macro Definition Documentation                          | 807 |
| 13.50.1.1 <a href="#">__FFLASFFPACK_checker_ftsm_INL</a>        | 807 |
| 13.51 checker_invert.inl File Reference                         | 807 |
| 13.51.1 Macro Definition Documentation                          | 807 |
| 13.51.1.1 <a href="#">__FFLASFFPACK_checker_invert_INL</a>      | 807 |

|   |     |
|---|-----|
| 13.52 checker_pluq.inl File Reference . . . . .       | 807 |
| 13.52.1 Macro Definition Documentation . . . . .      | 808 |
| 13.52.1.1 __FFLASFFPACK_checker_pluq_INL . . . . .    | 808 |
| 13.53 checkers.doxy File Reference . . . . .          | 808 |
| 13.54 checkers_fflas.h File Reference . . . . .       | 808 |
| 13.55 checkers_fflas.inl File Reference . . . . .     | 808 |
| 13.55.1 Macro Definition Documentation . . . . .      | 809 |
| 13.55.1.1 FFLASFFPACK_checkers_fflas_inl_H . . . . .  | 809 |
| 13.56 checkers_ffpack.h File Reference . . . . .      | 809 |
| 13.57 checkers_ffpack.inl File Reference . . . . .    | 809 |
| 13.57.1 Macro Definition Documentation . . . . .      | 810 |
| 13.57.1.1 FFLASFFPACK_checkers_ffpack_inl_H . . . . . | 810 |
| 13.58 config-blas.h File Reference . . . . .          | 810 |
| 13.58.1 Macro Definition Documentation . . . . .      | 811 |
| 13.58.1.1 CBLAS_INT . . . . .                         | 811 |
| 13.58.1.2 CBLAS_ENUM_DEFINED_H . . . . .              | 811 |
| 13.58.1.3 CBLAS_EXTERNALS . . . . .                   | 811 |
| 13.58.1.4 blas_enum . . . . .                         | 811 |
| 13.58.2 Enumeration Type Documentation . . . . .      | 811 |
| 13.58.2.1 CBLAS_ORDER . . . . .                       | 811 |
| 13.58.2.2 CBLAS_TRANSPOSE . . . . .                   | 811 |
| 13.58.2.3 CBLAS_UPLO . . . . .                        | 812 |
| 13.58.2.4 CBLAS_DIAG . . . . .                        | 812 |
| 13.58.2.5 CBLAS_SIDE . . . . .                        | 812 |
| 13.58.3 Function Documentation . . . . .              | 812 |
| 13.58.3.1 daxpy_() . . . . .                          | 812 |
| 13.58.3.2 saxpy_() . . . . .                          | 812 |
| 13.58.3.3 ddot_() . . . . .                           | 813 |
| 13.58.3.4 sdot_() . . . . .                           | 813 |
| 13.58.3.5 dasum_() . . . . .                          | 813 |
| 13.58.3.6 idamax_() . . . . .                         | 813 |
| 13.58.3.7 dnrm2_() . . . . .                          | 813 |
| 13.58.3.8 dgemv_() . . . . .                          | 813 |
| 13.58.3.9 sgemv_() . . . . .                          | 813 |
| 13.58.3.10 dger_() . . . . .                          | 814 |
| 13.58.3.11 sger_() . . . . .                          | 814 |
| 13.58.3.12 dcopy_() . . . . .                         | 814 |
| 13.58.3.13 scopy_() . . . . .                         | 814 |
| 13.58.3.14 dscal_() . . . . .                         | 814 |
| 13.58.3.15 sscal_() . . . . .                         | 815 |
| 13.58.3.16 dtrsm_() . . . . .                         | 815 |
| 13.58.3.17 strsm_() . . . . .                         | 815 |

|  |     |
|--|-----|
| 13.58.3.18 dtrmm_()                    | 815 |
| 13.58.3.19 strmm_()                    | 815 |
| 13.58.3.20 sgemm_()                    | 816 |
| 13.58.3.21 dgemm_()                    | 816 |
| 13.58.3.22 cblas_dsyrk()               | 816 |
| 13.59 config.h File Reference          | 817 |
| 13.59.1 Macro Definition Documentation | 817 |
| 13.59.1.1 HAVE_BLAS                    | 817 |
| 13.59.1.2 HAVE_CBLAS                   | 817 |
| 13.59.1.3 HAVE_CXX11                   | 818 |
| 13.59.1.4 HAVE_DLFCN_H                 | 818 |
| 13.59.1.5 HAVE_FLOAT_H                 | 818 |
| 13.59.1.6 HAVE_INTTYPES_H              | 818 |
| 13.59.1.7 HAVE_LAPACK                  | 818 |
| 13.59.1.8 HAVE_LIMITS_H                | 818 |
| 13.59.1.9 HAVE_LITTLE_ENDIAN           | 818 |
| 13.59.1.10 HAVE_PTHREAD_H              | 818 |
| 13.59.1.11 HAVE_STDDEF_H               | 818 |
| 13.59.1.12 HAVE_STDINT_H               | 818 |
| 13.59.1.13 HAVE_STDIO_H                | 818 |
| 13.59.1.14 HAVE_STDLIB_H               | 818 |
| 13.59.1.15 HAVE_STRINGS_H              | 818 |
| 13.59.1.16 HAVE_STRING_H               | 818 |
| 13.59.1.17 HAVE_SYS_STAT_H             | 818 |
| 13.59.1.18 HAVE_SYS_TIME_H             | 819 |
| 13.59.1.19 HAVE_SYS_TYPES_H            | 819 |
| 13.59.1.20 HAVE_UNISTD_H               | 819 |
| 13.59.1.21 LT_OBJDIR                   | 819 |
| 13.59.1.22 OPENBLAS_NUM_THREADS        | 819 |
| 13.59.1.23 PACKAGE                     | 819 |
| 13.59.1.24 PACKAGE_BUGREPORT           | 819 |
| 13.59.1.25 PACKAGE_NAME                | 819 |
| 13.59.1.26 PACKAGE_STRING              | 819 |
| 13.59.1.27 PACKAGE_TARNAME             | 819 |
| 13.59.1.28 PACKAGE_URL                 | 819 |
| 13.59.1.29 PACKAGE_VERSION             | 819 |
| 13.59.1.30 SIZEOF_CHAR                 | 819 |
| 13.59.1.31 SIZEOF_INT                  | 819 |
| 13.59.1.32 SIZEOF_LONG                 | 819 |
| 13.59.1.33 SIZEOF_LONG_LONG            | 820 |
| 13.59.1.34 SIZEOF_SHORT                | 820 |
| 13.59.1.35 SIZEOF__INT64_T             | 820 |

|   |     |
|---|-----|
| 13.59.1.36 STDC_HEADERS . . . . .                       | 820 |
| 13.59.1.37 USE_OPENMP . . . . .                         | 820 |
| 13.59.1.38 VERSION . . . . .                            | 820 |
| 13.60 fflas-ffpack/config.h File Reference . . . . .    | 820 |
| 13.60.1 Macro Definition Documentation . . . . .        | 821 |
| 13.60.1.1 __FFLASFFPACK_HAVE_BLAS . . . . .             | 821 |
| 13.60.1.2 __FFLASFFPACK_HAVE_CBLAS . . . . .            | 821 |
| 13.60.1.3 __FFLASFFPACK_HAVE_CXX11 . . . . .            | 821 |
| 13.60.1.4 __FFLASFFPACK_HAVE_DLFCN_H . . . . .          | 821 |
| 13.60.1.5 __FFLASFFPACK_HAVE_FLOAT_H . . . . .          | 821 |
| 13.60.1.6 __FFLASFFPACK_HAVE_INTTYPES_H . . . . .       | 821 |
| 13.60.1.7 __FFLASFFPACK_HAVE_LAPACK . . . . .           | 821 |
| 13.60.1.8 __FFLASFFPACK_HAVE_LIMITS_H . . . . .         | 821 |
| 13.60.1.9 __FFLASFFPACK_HAVE_LITTLE_ENDIAN . . . . .    | 821 |
| 13.60.1.10 __FFLASFFPACK_HAVE_PTHREAD_H . . . . .       | 821 |
| 13.60.1.11 __FFLASFFPACK_HAVE_STDDEF_H . . . . .        | 821 |
| 13.60.1.12 __FFLASFFPACK_HAVE_STDINT_H . . . . .        | 821 |
| 13.60.1.13 __FFLASFFPACK_HAVE_STDIO_H . . . . .         | 822 |
| 13.60.1.14 __FFLASFFPACK_HAVE_STDLIB_H . . . . .        | 822 |
| 13.60.1.15 __FFLASFFPACK_HAVE_STRINGS_H . . . . .       | 822 |
| 13.60.1.16 __FFLASFFPACK_HAVE_STRING_H . . . . .        | 822 |
| 13.60.1.17 __FFLASFFPACK_HAVE_SYS_STAT_H . . . . .      | 822 |
| 13.60.1.18 __FFLASFFPACK_HAVE_SYS_TIME_H . . . . .      | 822 |
| 13.60.1.19 __FFLASFFPACK_HAVE_SYS_TYPES_H . . . . .     | 822 |
| 13.60.1.20 __FFLASFFPACK_HAVE_UNISTD_H . . . . .        | 822 |
| 13.60.1.21 __FFLASFFPACK_LT_OBJDIR . . . . .            | 822 |
| 13.60.1.22 __FFLASFFPACK_OPENBLAS_NUM_THREADS . . . . . | 822 |
| 13.60.1.23 __FFLASFFPACK_PACKAGE . . . . .              | 822 |
| 13.60.1.24 __FFLASFFPACK_PACKAGE_BUGREPORT . . . . .    | 822 |
| 13.60.1.25 __FFLASFFPACK_PACKAGE_NAME . . . . .         | 822 |
| 13.60.1.26 __FFLASFFPACK_PACKAGE_STRING . . . . .       | 822 |
| 13.60.1.27 __FFLASFFPACK_PACKAGE_TARNAME . . . . .      | 822 |
| 13.60.1.28 __FFLASFFPACK_PACKAGE_URL . . . . .          | 823 |
| 13.60.1.29 __FFLASFFPACK_PACKAGE_VERSION . . . . .      | 823 |
| 13.60.1.30 __FFLASFFPACK_SIZEOF_CHAR . . . . .          | 823 |
| 13.60.1.31 __FFLASFFPACK_SIZEOF_INT . . . . .           | 823 |
| 13.60.1.32 __FFLASFFPACK_SIZEOF_LONG . . . . .          | 823 |
| 13.60.1.33 __FFLASFFPACK_SIZEOF_LONG_LONG . . . . .     | 823 |
| 13.60.1.34 __FFLASFFPACK_SIZEOF_SHORT . . . . .         | 823 |
| 13.60.1.35 __FFLASFFPACK_SIZEOF__INT64_T . . . . .      | 823 |
| 13.60.1.36 __FFLASFFPACK_STDC_HEADERS . . . . .         | 823 |
| 13.60.1.37 __FFLASFFPACK_USE_OPENMP . . . . .           | 823 |

|            |   |     |
|------------|---|-----|
| 13.60.1.38 | <a href="#">__FFLASFFPACK_VERSION</a>                                 | 823 |
| 13.61      | <a href="#">fflas-ffpack-config.h File Reference</a>                  | 823 |
| 13.61.1    | <a href="#">Detailed Description</a>                                  | 824 |
| 13.61.2    | <a href="#">Macro Definition Documentation</a>                        | 824 |
| 13.61.2.1  | <a href="#">GCC_VERSION</a>   | 824 |
| 13.62      | <a href="#">fflas-ffpack-default-thresholds.h File Reference</a>      | 824 |
| 13.62.1    | <a href="#">Macro Definition Documentation</a>                        | 824 |
| 13.62.1.1  | <a href="#">__FFLASFFPACK_WINOTHRESHOLD</a>                           | 824 |
| 13.62.1.2  | <a href="#">__FFLASFFPACK_WINOTHRESHOLD_FLT</a>                       | 824 |
| 13.62.1.3  | <a href="#">__FFLASFFPACK_WINOTHRESHOLD_BAL</a>                       | 824 |
| 13.62.1.4  | <a href="#">__FFLASFFPACK_WINOTHRESHOLD_BAL_FLT</a>                   | 824 |
| 13.62.1.5  | <a href="#">__FFLASFFPACK_PLUQ_THRESHOLD</a>                          | 824 |
| 13.62.1.6  | <a href="#">__FFLASFFPACK_CHARPOLY_LUKrylov_ArithProg_THRESHOLD</a>   | 824 |
| 13.62.1.7  | <a href="#">__FFLASFFPACK_CHARPOLY_Danilevskii_LUKrylov_THRESHOLD</a> | 824 |
| 13.62.1.8  | <a href="#">__FFLASFFPACK_ARITHPROG_THRESHOLD</a>                     | 825 |
| 13.62.1.9  | <a href="#">__FFLASFFPACK_FTRTRI_THRESHOLD</a>                        | 825 |
| 13.62.1.10 | <a href="#">__FFLASFFPACK_FSYTRF_THRESHOLD</a>                        | 825 |
| 13.62.1.11 | <a href="#">__FFLASFFPACK_FSYRK_THRESHOLD</a>                         | 825 |
| 13.63      | <a href="#">fflas-ffpack-thresholds.h File Reference</a>              | 825 |
| 13.64      | <a href="#">fflas-ffpack.doxy File Reference</a>                      | 825 |
| 13.65      | <a href="#">fflas-ffpack.h File Reference</a>                         | 825 |
| 13.65.1    | <a href="#">Detailed Description</a>                                  | 825 |
| 13.66      | <a href="#">fflas.doxy File Reference</a>                             | 825 |
| 13.67      | <a href="#">fflas.h File Reference</a>                                | 825 |
| 13.67.1    | <a href="#">Detailed Description</a>                                  | 826 |
| 13.67.2    | <a href="#">Macro Definition Documentation</a>                        | 826 |
| 13.67.2.1  | <a href="#">WINOTHRESHOLD</a>   | 826 |
| 13.67.2.2  | <a href="#">DOUBLE_TO_FLOAT_CROSSOVER</a>                             | 826 |
| 13.68      | <a href="#">fflas_bounds.inl File Reference</a>                       | 826 |
| 13.68.1    | <a href="#">Macro Definition Documentation</a>                        | 827 |
| 13.68.1.1  | <a href="#">__FFLASFFPACK_fflas_bounds_INL</a>                        | 827 |
| 13.68.1.2  | <a href="#">FFLAS_INT_TYPE</a>  | 827 |
| 13.69      | <a href="#">fflas_enum.h File Reference</a>                           | 827 |
| 13.70      | <a href="#">fflas_fadd.h File Reference</a>                           | 828 |
| 13.71      | <a href="#">fflas_fadd.inl File Reference</a>                         | 829 |
| 13.71.1    | <a href="#">Macro Definition Documentation</a>                        | 830 |
| 13.71.1.1  | <a href="#">__FFLASFFPACK_fadd_INL</a>                                | 830 |
| 13.72      | <a href="#">fflas_fassign.h File Reference</a>                        | 830 |
| 13.73      | <a href="#">fflas_fassign.inl File Reference</a>                      | 831 |
| 13.73.1    | <a href="#">Macro Definition Documentation</a>                        | 831 |
| 13.73.1.1  | <a href="#">__FFLASFFPACK_fassign_INL</a>                             | 831 |
| 13.74      | <a href="#">fflas_faxpy.inl File Reference</a>                        | 831 |



|  |     |
|--|-----|
| 13.74.1 Macro Definition Documentation                 | 832 |
| 13.74.1.1 __FFLASFFPACK_faxpy_INL                      | 832 |
| 13.75 fflas_fdot.inl File Reference                    | 832 |
| 13.75.1 Macro Definition Documentation                 | 833 |
| 13.75.1.1 __FFLASFFPACK_fdot_INL                       | 833 |
| 13.76 fflas_fgemm.inl File Reference                   | 833 |
| 13.76.1 Macro Definition Documentation                 | 835 |
| 13.76.1.1 __FFLASFFPACK_fgemm_INL                      | 835 |
| 13.77 fgemm_classical.inl File Reference               | 835 |
| 13.78 fgemm_classical_mp.inl File Reference            | 835 |
| 13.78.1 Detailed Description                           | 837 |
| 13.78.2 Macro Definition Documentation                 | 837 |
| 13.78.2.1 __FFPACK_fgemm_classical_INL                 | 837 |
| 13.79 fgemm_winograd.inl File Reference                | 837 |
| 13.79.1 Macro Definition Documentation                 | 839 |
| 13.79.1.1 __FFLASFFPACK_fflas_fflas_fgemm_winograd_INL | 839 |
| 13.79.1.2 NEWWINO                                      | 839 |
| 13.80 matmul.doxy File Reference                       | 839 |
| 13.81 schedule_bini.inl File Reference                 | 839 |
| 13.81.1 Detailed Description                           | 839 |
| 13.81.2 Macro Definition Documentation                 | 839 |
| 13.81.2.1 __FFLASFFPACK_fgemm_bini_INL                 | 839 |
| 13.82 schedule_winograd.inl File Reference             | 839 |
| 13.82.1 Macro Definition Documentation                 | 840 |
| 13.82.1.1 __FFLASFFPACK_fgemm_winograd_INL             | 840 |
| 13.83 schedule_winograd_acc.inl File Reference         | 840 |
| 13.83.1 Macro Definition Documentation                 | 841 |
| 13.83.1.1 __FFLASFFPACK_fgemm_winograd_acc_INL         | 841 |
| 13.84 schedule_winograd_acc_ip.inl File Reference      | 841 |
| 13.84.1 Macro Definition Documentation                 | 841 |
| 13.84.1.1 __FFLASFFPACK_fgemm_winograd_acc_ip_INL      | 841 |
| 13.85 schedule_winograd_ip.inl File Reference          | 841 |
| 13.85.1 Macro Definition Documentation                 | 842 |
| 13.85.1.1 __FFLASFFPACK_fgemm_winograd_ip_INL          | 842 |
| 13.86 fflas_fgenv.inl File Reference                   | 842 |
| 13.86.1 Macro Definition Documentation                 | 843 |
| 13.86.1.1 __FFLASFFPACK_fgenv_INL                      | 843 |
| 13.87 fflas_fgenv_mp.inl File Reference                | 844 |
| 13.87.1 Macro Definition Documentation                 | 844 |
| 13.87.1.1 __FFLASFFPACK_fgenv_mp_INL                   | 844 |
| 13.88 fflas_fger.inl File Reference                    | 844 |
| 13.88.1 Macro Definition Documentation                 | 845 |

|            |   |     |
|------------|---|-----|
| 13.88.1.1  | <a href="#">__FFLASFFPACK_fger_INL</a>                  | 845 |
| 13.89      | <a href="#">fflas_fger_mp.inl</a> File Reference        | 845 |
| 13.89.1    | Macro Definition Documentation                          | 846 |
| 13.89.1.1  | <a href="#">__FFPACK_fger_mp_INL</a>                    | 846 |
| 13.90      | <a href="#">fflas_freduce.h</a> File Reference          | 846 |
| 13.91      | <a href="#">fflas_freduce.inl</a> File Reference        | 847 |
| 13.91.1    | Macro Definition Documentation                          | 849 |
| 13.91.1.1  | <a href="#">__FFLASFFPACK_fflas_freduce_INL</a>         | 849 |
| 13.91.1.2  | <a href="#">FFLASFFPACK_COPY_REDUCE</a>                 | 849 |
| 13.92      | <a href="#">fflas_freduce_mp.inl</a> File Reference     | 849 |
| 13.92.1    | Macro Definition Documentation                          | 849 |
| 13.92.1.1  | <a href="#">__FFLASFFPACK_fflas_freduce_mp_INL</a>      | 849 |
| 13.93      | <a href="#">fflas_freivalds.inl</a> File Reference      | 849 |
| 13.93.1    | Macro Definition Documentation                          | 849 |
| 13.93.1.1  | <a href="#">__FFLASFFPACK_freivalds_INL</a>             | 849 |
| 13.94      | <a href="#">fflas_fscal.h</a> File Reference            | 850 |
| 13.95      | <a href="#">fflas_fscal.inl</a> File Reference          | 850 |
| 13.95.1    | Macro Definition Documentation                          | 851 |
| 13.95.1.1  | <a href="#">__FFLASFFPACK_fscal_INL</a>                 | 851 |
| 13.96      | <a href="#">fflas_fscal_mp.inl</a> File Reference       | 851 |
| 13.96.1    | Macro Definition Documentation                          | 852 |
| 13.96.1.1  | <a href="#">__FFLASFFPACK_fscal_mp_INL</a>              | 852 |
| 13.97      | <a href="#">fflas_fsyr2k.inl</a> File Reference         | 852 |
| 13.97.1    | Macro Definition Documentation                          | 852 |
| 13.97.1.1  | <a href="#">__FFLASFFPACK_fflas_fsyr2k_INL</a>          | 852 |
| 13.98      | <a href="#">fflas_fsyrk.inl</a> File Reference          | 853 |
| 13.98.1    | Macro Definition Documentation                          | 854 |
| 13.98.1.1  | <a href="#">__FFLASFFPACK_fflas_fsyrk_INL</a>           | 854 |
| 13.99      | <a href="#">fflas_fsyrk_strassen.inl</a> File Reference | 854 |
| 13.99.1    | Macro Definition Documentation                          | 855 |
| 13.99.1.1  | <a href="#">__FFLASFFPACK_fflas_fsyrk_strassen_INL</a>  | 855 |
| 13.100     | <a href="#">fflas_ftrmm.inl</a> File Reference          | 855 |
| 13.100.1   | Macro Definition Documentation                          | 856 |
| 13.100.1.1 | <a href="#">__FFLASFFPACK_ftrmm_INL</a>                 | 856 |
| 13.101     | <a href="#">fflas_ftrsm.inl</a> File Reference          | 856 |
| 13.101.1   | Macro Definition Documentation                          | 856 |
| 13.101.1.1 | <a href="#">__FFLASFFPACK_ftrsm_INL</a>                 | 856 |
| 13.102     | <a href="#">fflas_ftrsm_mp.inl</a> File Reference       | 857 |
| 13.102.1   | Detailed Description                                    | 857 |
| 13.102.2   | Macro Definition Documentation                          | 857 |
| 13.102.2.1 | <a href="#">__FFPACK_ftrsm_mp_INL</a>                   | 857 |
| 13.103     | <a href="#">fflas_ftrsv.inl</a> File Reference          | 857 |

|  |     |
|--|-----|
| 13.103.1 Macro Definition Documentation                | 858 |
| 13.103.1.1 __FFLASFFPACK_ftrsv_INL                     | 858 |
| 13.104 fflas_helpers.inl File Reference                | 858 |
| 13.104.1 Macro Definition Documentation                | 859 |
| 13.104.1.1 __FFLASFFPACK_fflas_fflas_mmhelper_INL      | 859 |
| 13.105 igemm.doxy File Reference                       | 859 |
| 13.106 igemm.h File Reference                          | 859 |
| 13.107 igemm.inl File Reference                        | 859 |
| 13.107.1 Macro Definition Documentation                | 860 |
| 13.107.1.1 __FFLASFFPACK_fflas_igemm_igemm_INL         | 860 |
| 13.108 igemm_kernels.h File Reference                  | 860 |
| 13.109 igemm_kernels.inl File Reference                | 861 |
| 13.109.1 Macro Definition Documentation                | 861 |
| 13.109.1.1 __FFLASFFPACK_fflas_igemm_igemm_kernels_INL | 861 |
| 13.110 igemm_tools.h File Reference                    | 861 |
| 13.111 igemm_tools.inl File Reference                  | 862 |
| 13.111.1 Macro Definition Documentation                | 862 |
| 13.111.1.1 __FFLASFFPACK_fflas_igemm_igemm_tools_INL   | 862 |
| 13.112 fflas_level1.inl File Reference                 | 862 |
| 13.112.1 Macro Definition Documentation                | 864 |
| 13.112.1.1 __FFLASFFPACK_fflas_fflas_level1_INL        | 864 |
| 13.113 fflas_level2.inl File Reference                 | 865 |
| 13.113.1 Macro Definition Documentation                | 867 |
| 13.113.1.1 __FFLASFFPACK_fflas_fflas_level2_INL        | 867 |
| 13.114 fflas_level3.inl File Reference                 | 867 |
| 13.114.1 Macro Definition Documentation                | 870 |
| 13.114.1.1 __FFLASFFPACK_fflas_fflas_level3_INL        | 870 |
| 13.114.1.2 __FFLAS__TRSM_READONLY                      | 870 |
| 13.115 fflas_pfgemm.inl File Reference                 | 870 |
| 13.115.1 Macro Definition Documentation                | 870 |
| 13.115.1.1 __FFLASFFPACK_fflas_pfgemm_INL              | 870 |
| 13.115.1.2 __FFLASFFPACK_SEQPARTHRESHOLD               | 870 |
| 13.115.1.3 __FFLASFFPACK_DIMKPENALTY                   | 870 |
| 13.116 fflas_pftrsm.inl File Reference                 | 871 |
| 13.116.1 Macro Definition Documentation                | 871 |
| 13.116.1.1 __FFLASFFPACK_fflas_pftrsm_INL              | 871 |
| 13.116.1.2 PTRSM_HYBRID_THRESHOLD                      | 871 |
| 13.117 fflas_simd.h File Reference                     | 871 |
| 13.117.1 Macro Definition Documentation                | 872 |
| 13.117.1.1 SIMD_INT                                    | 872 |
| 13.117.1.2 INLINE                                      | 872 |
| 13.117.1.3 CONST                                       | 872 |

|  |     |
|--|-----|
| 13.117.1.4 PURE  | 872 |
| 13.117.1.5 NORML_MOD   | 872 |
| 13.117.1.6 FLOAT_MOD   | 873 |
| 13.117.2 Typedef Documentation                                 | 873 |
| 13.117.2.1 Simd  | 873 |
| 13.118 simd.doxy File Reference                                | 873 |
| 13.119 simd128.inl File Reference                              | 873 |
| 13.119.1 Macro Definition Documentation                        | 873 |
| 13.119.1.1 __FFLASFFPACK_fflas_ffpack_utils_simd128_INL        | 873 |
| 13.119.2 Typedef Documentation                                 | 873 |
| 13.119.2.1 Simd128   | 873 |
| 13.120 simd128_double.inl File Reference                       | 874 |
| 13.120.1 Macro Definition Documentation                        | 874 |
| 13.120.1.1 __FFLASFFPACK_fflas_ffpack_utils_simd128_double_INL | 874 |
| 13.121 simd128_float.inl File Reference                        | 874 |
| 13.121.1 Macro Definition Documentation                        | 874 |
| 13.121.1.1 __FFLASFFPACK_fflas_ffpack_utils_simd128_float_INL  | 874 |
| 13.122 simd128_int16.inl File Reference                        | 874 |
| 13.122.1 Macro Definition Documentation                        | 875 |
| 13.122.1.1 __FFLASFFPACK_fflas_ffpack_utils_simd128_int16_INL  | 875 |
| 13.123 simd128_int32.inl File Reference                        | 875 |
| 13.123.1 Macro Definition Documentation                        | 875 |
| 13.123.1.1 __FFLASFFPACK_fflas_ffpack_utils_simd128_int32_INL  | 875 |
| 13.124 simd128_int64.inl File Reference                        | 875 |
| 13.124.1 Macro Definition Documentation                        | 876 |
| 13.124.1.1 __FFLASFFPACK_fflas_ffpack_utils_simd128_int64_INL  | 876 |
| 13.124.1.2 vect_t  | 876 |
| 13.125 simd256.inl File Reference                              | 876 |
| 13.125.1 Macro Definition Documentation                        | 876 |
| 13.125.1.1 __FFLASFFPACK_fflas_ffpack_utils_simd256_INL        | 876 |
| 13.125.2 Typedef Documentation                                 | 876 |
| 13.125.2.1 Simd256   | 876 |
| 13.126 simd256_double.inl File Reference                       | 876 |
| 13.126.1 Macro Definition Documentation                        | 877 |
| 13.126.1.1 __FFLASFFPACK_fflas_ffpack_utils_simd256_double_INL | 877 |
| 13.127 simd256_float.inl File Reference                        | 877 |
| 13.127.1 Macro Definition Documentation                        | 877 |
| 13.127.1.1 __FFLASFFPACK_fflas_ffpack_utils_simd256_float_INL  | 877 |
| 13.128 simd256_int16.inl File Reference                        | 877 |
| 13.128.1 Macro Definition Documentation                        | 878 |
| 13.128.1.1 __FFLASFFPACK_fflas_ffpack_utils_simd256_int16_INL  | 878 |
| 13.129 simd256_int32.inl File Reference                        | 878 |

|   |     |
|---|-----|
| 13.129.1 Macro Definition Documentation                                       | 878 |
| 13.129.1.1 <a href="#">__FFLASFFPACK_fflas_ffpack_utils_simd256_int32_INL</a> | 878 |
| 13.130 simd256_int64.inl File Reference                                       | 878 |
| 13.130.1 Macro Definition Documentation                                       | 878 |
| 13.130.1.1 <a href="#">__FFLASFFPACK_fflas_ffpack_utils_simd256_int64_INL</a> | 878 |
| 13.130.1.2 vect_t   | 879 |
| 13.131 simd512.inl File Reference   | 879 |
| 13.131.1 Macro Definition Documentation                                       | 879 |
| 13.131.1.1 <a href="#">__FFLASFFPACK_simd512_INL</a>                          | 879 |
| 13.131.2 Typedef Documentation  | 879 |
| 13.131.2.1 Simd512  | 879 |
| 13.132 simd512_double.inl File Reference                                      | 879 |
| 13.132.1 Macro Definition Documentation                                       | 880 |
| 13.132.1.1 <a href="#">__FFLASFFPACK_simd512_double_INL</a>                   | 880 |
| 13.133 simd512_float.inl File Reference                                       | 880 |
| 13.133.1 Macro Definition Documentation                                       | 880 |
| 13.133.1.1 <a href="#">__FFLASFFPACK_simd512_float_INL</a>                    | 880 |
| 13.134 simd512_int32.inl File Reference                                       | 880 |
| 13.134.1 Macro Definition Documentation                                       | 880 |
| 13.134.1.1 <a href="#">__FFLASFFPACK_simd512_int32_INL</a>                    | 880 |
| 13.135 simd512_int64.inl File Reference                                       | 881 |
| 13.135.1 Macro Definition Documentation                                       | 881 |
| 13.135.1.1 <a href="#">_simd512_int64_INL</a>                                 | 881 |
| 13.135.1.2 vect_t   | 881 |
| 13.136 simd_modular.inl File Reference  | 881 |
| 13.137 fflas_sparse.h File Reference  | 881 |
| 13.137.1 Macro Definition Documentation                                       | 885 |
| 13.137.1.1 index_t  | 885 |
| 13.137.1.2 ROUND_DOWN   | 885 |
| 13.137.1.3 <a href="#">__FFLASFFPACK_CACHE_LINE_SIZE</a>                      | 885 |
| 13.137.1.4 assume_aligned   | 885 |
| 13.137.1.5 DENSE_THRESHOLD  | 885 |
| 13.138 fflas_sparse.inl File Reference  | 886 |
| 13.138.1 Macro Definition Documentation                                       | 887 |
| 13.138.1.1 <a href="#">__FFLASFFPACK_fflas_fflas_sparse_INL</a>               | 887 |
| 13.139 coo.h File Reference   | 888 |
| 13.140 coo_spmv.inl File Reference  | 888 |
| 13.140.1 Macro Definition Documentation                                       | 889 |
| 13.140.1.1 <a href="#">__FFLASFFPACK_fflas_sparse_coo_spmv_INL</a>            | 889 |
| 13.141 coo_spmv.inl File Reference  | 889 |
| 13.141.1 Macro Definition Documentation                                       | 890 |
| 13.141.1.1 <a href="#">__FFLASFFPACK_fflas_sparse_coo_spmv_INL</a>            | 890 |

|            |  |     |
|------------|--|-----|
| 13.142     | coo_utils.inl File Reference                 | 890 |
| 13.142.1   | Macro Definition Documentation               | 890 |
| 13.142.1.1 | __FFLASFFPACK_fflas_sparse_coo_utils_INL     | 890 |
| 13.143     | csr.h File Reference                         | 890 |
| 13.144     | csr_pspmm.inl File Reference                 | 891 |
| 13.144.1   | Macro Definition Documentation               | 892 |
| 13.144.1.1 | __FFLASFFPACK_fflas_sparse_CSR_pspmm_INL     | 892 |
| 13.145     | csr_pspmv.inl File Reference                 | 892 |
| 13.145.1   | Macro Definition Documentation               | 892 |
| 13.145.1.1 | __FFLASFFPACK_fflas_sparse_CSR_pspmv_INL     | 892 |
| 13.146     | csr_spm্ম.inl File Reference                 | 892 |
| 13.146.1   | Macro Definition Documentation               | 893 |
| 13.146.1.1 | __FFLASFFPACK_fflas_sparse_CSR_spm্ম_INL     | 893 |
| 13.147     | csr_spmv.inl File Reference                  | 894 |
| 13.147.1   | Macro Definition Documentation               | 894 |
| 13.147.1.1 | __FFLASFFPACK_fflas_sparse_CSR_spmv_INL      | 894 |
| 13.148     | csr_utils.inl File Reference                 | 894 |
| 13.149     | csr_hyb.h File Reference                     | 895 |
| 13.150     | csr_hyb_pspmm.inl File Reference             | 895 |
| 13.150.1   | Macro Definition Documentation               | 896 |
| 13.150.1.1 | __FFLASFFPACK_fflas_sparse_CSR_HYB_pspmm_INL | 896 |
| 13.151     | csr_hyb_pspmv.inl File Reference             | 896 |
| 13.151.1   | Macro Definition Documentation               | 896 |
| 13.151.1.1 | __FFLASFFPACK_fflas_sparse_CSR_HYB_pspmv_INL | 896 |
| 13.152     | csr_hyb_spm্ম.inl File Reference             | 897 |
| 13.152.1   | Macro Definition Documentation               | 897 |
| 13.152.1.1 | __FFLASFFPACK_fflas_sparse_CSR_HYB_spm্ম_INL | 897 |
| 13.153     | csr_hyb_spmv.inl File Reference              | 897 |
| 13.153.1   | Macro Definition Documentation               | 897 |
| 13.153.1.1 | __FFLASFFPACK_fflas_sparse_CSR_HYB_spmv_INL  | 897 |
| 13.154     | csr_hyb_utils.inl File Reference             | 898 |
| 13.154.1   | Macro Definition Documentation               | 898 |
| 13.154.1.1 | __FFLASFFPACK_fflas_sparse_CSR_HYB_utils_INL | 898 |
| 13.155     | ell.h File Reference                         | 898 |
| 13.156     | ell_pspmm.inl File Reference                 | 899 |
| 13.156.1   | Macro Definition Documentation               | 899 |
| 13.156.1.1 | __FFLASFFPACK_fflas_sparse_ELL_pspmm_INL     | 899 |
| 13.157     | ell_pspmv.inl File Reference                 | 899 |
| 13.157.1   | Macro Definition Documentation               | 900 |
| 13.157.1.1 | __FFLASFFPACK_fflas_sparse_ELL_pspmv_INL     | 900 |
| 13.158     | ell_spm্ম.inl File Reference                 | 900 |
| 13.158.1   | Macro Definition Documentation               | 901 |

|  |     |
|--|-----|
| 13.158.1.1 <a href="#">__FFLASFFPACK_fflas_sparse_ELL_spmv_INL</a>       | 901 |
| 13.159 <a href="#">ell_spmv.inl</a> File Reference                       | 901 |
| 13.159.1 Macro Definition Documentation                                  | 902 |
| 13.159.1.1 <a href="#">__FFLASFFPACK_fflas_sparse_ELL_spmv_INL</a>       | 902 |
| 13.160 <a href="#">ell_utils.inl</a> File Reference                      | 902 |
| 13.160.1 Macro Definition Documentation                                  | 902 |
| 13.160.1.1 <a href="#">__FFLASFFPACK_fflas_sparse_ELL_utils_INL</a>      | 902 |
| 13.161 <a href="#">ell_simd.h</a> File Reference                         | 902 |
| 13.162 <a href="#">ell_simd_pspmv.inl</a> File Reference                 | 903 |
| 13.162.1 Macro Definition Documentation                                  | 904 |
| 13.162.1.1 <a href="#">__FFLASFFPACK_fflas_sparse_ELL_simd_pspmv_INL</a> | 904 |
| 13.163 <a href="#">ell_simd_spmv.inl</a> File Reference                  | 904 |
| 13.163.1 Macro Definition Documentation                                  | 904 |
| 13.163.1.1 <a href="#">__FFLASFFPACK_fflas_sparse_ELL_simd_spmv_INL</a>  | 904 |
| 13.164 <a href="#">ell_simd_utils.inl</a> File Reference                 | 905 |
| 13.164.1 Macro Definition Documentation                                  | 905 |
| 13.164.1.1 <a href="#">__FFLASFFPACK_fflas_sparse_ELL_simd_utils_INL</a> | 905 |
| 13.165 <a href="#">hyb_zo.h</a> File Reference                           | 905 |
| 13.166 <a href="#">hyb_zo_pspmm.inl</a> File Reference                   | 905 |
| 13.166.1 Macro Definition Documentation                                  | 906 |
| 13.166.1.1 <a href="#">__FFLASFFPACK_fflas_sparse_HYB_ZO_pspmm_INL</a>   | 906 |
| 13.167 <a href="#">hyb_zo_pspmv.inl</a> File Reference                   | 906 |
| 13.167.1 Macro Definition Documentation                                  | 906 |
| 13.167.1.1 <a href="#">__FFLASFFPACK_fflas_sparse_HYB_ZO_pspmv_INL</a>   | 906 |
| 13.168 <a href="#">hyb_zo_spmv.inl</a> File Reference                    | 906 |
| 13.168.1 Macro Definition Documentation                                  | 907 |
| 13.168.1.1 <a href="#">__FFLASFFPACK_fflas_sparse_HYB_ZO_spmv_INL</a>    | 907 |
| 13.169 <a href="#">hyb_zo_spmv.inl</a> File Reference                    | 907 |
| 13.169.1 Macro Definition Documentation                                  | 907 |
| 13.169.1.1 <a href="#">__FFLASFFPACK_fflas_sparse_HYB_ZO_spmv_INL</a>    | 907 |
| 13.170 <a href="#">hyb_zo_utils.inl</a> File Reference                   | 907 |
| 13.170.1 Macro Definition Documentation                                  | 908 |
| 13.170.1.1 <a href="#">__FFLASFFPACK_fflas_sparse_HYB_ZO_utils_INL</a>   | 908 |
| 13.171 <a href="#">read_sparse.h</a> File Reference                      | 908 |
| 13.171.1 Macro Definition Documentation                                  | 909 |
| 13.171.1.1 <a href="#">DNS_BIN_VER</a>                                   | 909 |
| 13.171.1.2 <a href="#">mask_t</a>  | 909 |
| 13.172 <a href="#">sell.h</a> File Reference                             | 909 |
| 13.173 <a href="#">sell_pspmv.inl</a> File Reference                     | 909 |
| 13.173.1 Macro Definition Documentation                                  | 910 |
| 13.173.1.1 <a href="#">__FFLASFFPACK_fflas_sparse_sell_pspmv_INL</a>     | 910 |
| 13.174 <a href="#">sell_spmv.inl</a> File Reference                      | 910 |

|  |     |
|--|-----|
| 13.174.1 Macro Definition Documentation                        | 911 |
| 13.174.1.1 __FFLASFFPACK_fflas_sparse_sell_spmv_INL            | 911 |
| 13.175 sell_utils.inl File Reference                           | 911 |
| 13.175.1 Macro Definition Documentation                        | 911 |
| 13.175.1.1 __FFLASFFPACK_fflas_sparse_sell_utils_INL           | 911 |
| 13.176 sparse_matrix_traits.h File Reference                   | 912 |
| 13.177 utils.h File Reference                                  | 913 |
| 13.178 fflas_transpose.h File Reference                        | 913 |
| 13.178.1 Detailed Description                                  | 914 |
| 13.178.2 Macro Definition Documentation                        | 914 |
| 13.178.2.1 FFLAS_TRANSPOSE_BLOCKSIZE                           | 914 |
| 13.178.2.2 LD  | 914 |
| 13.178.2.3 ST  | 914 |
| 13.179 ffpack.doxy File Reference                              | 914 |
| 13.180 ffpack.h File Reference                                 | 914 |
| 13.180.1 Detailed Description                                  | 923 |
| 13.180.2 Macro Definition Documentation                        | 923 |
| 13.180.2.1 __FFLASFFPACK_FTRSTR_THRESHOLD                      | 923 |
| 13.180.2.2 __FFLASFFPACK_FTRSSYR2K_THRESHOLD                   | 923 |
| 13.181 ffpack.inl File Reference                               | 924 |
| 13.181.1 Macro Definition Documentation                        | 925 |
| 13.181.1.1 __FFLASFFPACK_ffpack_INL                            | 925 |
| 13.182 ffpack_bruhatgen.inl File Reference                     | 925 |
| 13.182.1 Macro Definition Documentation                        | 926 |
| 13.182.1.1 __FFLASFFPACK_ffpack_bruhatgen_inl                  | 926 |
| 13.183 ffpack_charpoly.inl File Reference                      | 926 |
| 13.183.1 Macro Definition Documentation                        | 927 |
| 13.183.1.1 __FFLASFFPACK_charpoly_INL                          | 927 |
| 13.184 ffpack_charpoly_danilevski.inl File Reference           | 927 |
| 13.184.1 Macro Definition Documentation                        | 927 |
| 13.184.1.1 __FFLASFFPACK_ffpack_charpoly_danilveski_INL        | 927 |
| 13.185 ffpack_charpoly_kgfast.inl File Reference               | 927 |
| 13.185.1 Macro Definition Documentation                        | 928 |
| 13.185.1.1 __FFLASFFPACK_ffpack_charpoly_kgfast_INL            | 928 |
| 13.186 ffpack_charpoly_kgfastgeneralized.inl File Reference    | 928 |
| 13.186.1 Macro Definition Documentation                        | 928 |
| 13.186.1.1 __FFLASFFPACK_ffpack_charpoly_kgfastgeneralized_INL | 928 |
| 13.187 ffpack_charpoly_kglu.inl File Reference                 | 928 |
| 13.187.1 Macro Definition Documentation                        | 929 |
| 13.187.1.1 __FFLASFFPACK_ffpack_charpoly_kglu_INL              | 929 |
| 13.188 ffpack_charpoly_mp.inl File Reference                   | 929 |
| 13.188.1 Macro Definition Documentation                        | 929 |



|            |  |     |
|------------|--|-----|
| 13.188.1.1 | <a href="#">__FFPACK_charpoly_mp_INL</a>               | 929 |
| 13.189     | <a href="#">ffpack_det_mp.inl</a> File Reference       | 929 |
| 13.189.1   | Macro Definition Documentation                         | 930 |
| 13.189.1.1 | <a href="#">__FFPACK_det_mp_INL</a>                    | 930 |
| 13.190     | <a href="#">ffpack_echelonforms.inl</a> File Reference | 930 |
| 13.190.1   | Macro Definition Documentation                         | 931 |
| 13.190.1.1 | <a href="#">__FFLASFFPACK_ffpack_echelon_forms_INL</a> | 931 |
| 13.190.1.2 | <a href="#">__FFLASFFPACK_GAUSSJORDAN_BASECASE</a>     | 931 |
| 13.191     | <a href="#">ffpack_fgesv.inl</a> File Reference        | 931 |
| 13.191.1   | Macro Definition Documentation                         | 932 |
| 13.191.1.1 | <a href="#">__FFLASFFPACK_ffpack_fgesv_INL</a>         | 932 |
| 13.192     | <a href="#">ffpack_fgetrs.inl</a> File Reference       | 932 |
| 13.192.1   | Macro Definition Documentation                         | 932 |
| 13.192.1.1 | <a href="#">__FFLASFFPACK_ffpack_fgetrs_INL</a>        | 932 |
| 13.193     | <a href="#">ffpack_frobenius.inl</a> File Reference    | 932 |
| 13.194     | <a href="#">ffpack_fsytrf.inl</a> File Reference       | 933 |
| 13.194.1   | Macro Definition Documentation                         | 934 |
| 13.194.1.1 | <a href="#">__FFLASFFPACK_ffpack_fsytrf_INL</a>        | 934 |
| 13.195     | <a href="#">ffpack_ftrssyr2k.inl</a> File Reference    | 934 |
| 13.195.1   | Macro Definition Documentation                         | 935 |
| 13.195.1.1 | <a href="#">__FFLASFFPACK_ffpack_ftrssyr2k_INL</a>     | 935 |
| 13.196     | <a href="#">ffpack_ftrstr.inl</a> File Reference       | 935 |
| 13.196.1   | Macro Definition Documentation                         | 935 |
| 13.196.1.1 | <a href="#">__FFLASFFPACK_ffpack_ftrstr_INL</a>        | 935 |
| 13.197     | <a href="#">ffpack_ftrtr.inl</a> File Reference        | 935 |
| 13.197.1   | Macro Definition Documentation                         | 936 |
| 13.197.1.1 | <a href="#">ENABLE_ALL_CHECKINGS</a>                   | 936 |
| 13.197.1.2 | <a href="#">__FFLASFFPACK_ffpack_ftrtr_INL</a>         | 936 |
| 13.198     | <a href="#">ffpack_invert.inl</a> File Reference       | 936 |
| 13.198.1   | Macro Definition Documentation                         | 936 |
| 13.198.1.1 | <a href="#">__FFLASFFPACK_ffpack_invert_INL</a>        | 936 |
| 13.199     | <a href="#">ffpack_krylovelim.inl</a> File Reference   | 937 |
| 13.199.1   | Macro Definition Documentation                         | 937 |
| 13.199.1.1 | <a href="#">__FFLASFFPACK_ffpack_krylovelim_INL</a>    | 937 |
| 13.200     | <a href="#">ffpack_ludivine.inl</a> File Reference     | 937 |
| 13.200.1   | Macro Definition Documentation                         | 937 |
| 13.200.1.1 | <a href="#">__FFLASFFPACK_ffpack_ludivine_INL</a>      | 937 |
| 13.201     | <a href="#">ffpack_ludivine_mp.inl</a> File Reference  | 938 |
| 13.201.1   | Macro Definition Documentation                         | 938 |
| 13.201.1.1 | <a href="#">__FFPACK_ludivine_mp_INL</a>               | 938 |
| 13.202     | <a href="#">ffpack_minpoly.inl</a> File Reference      | 938 |
| 13.202.1   | Macro Definition Documentation                         | 939 |

|            |   |     |
|------------|---|-----|
| 13.202.1.1 | <a href="#">__FFLASFFPACK_ffpack_minpoly_INL</a>          | 939 |
| 13.203     | <a href="#">ffpack_permutation.inl</a> File Reference     | 939 |
| 13.203.1   | Macro Definition Documentation                            | 941 |
| 13.203.1.1 | <a href="#">__FFLASFFPACK_ffpack_permutation_INL</a>      | 941 |
| 13.203.1.2 | <a href="#">FFLASFFPACK_PERM_BKSIZE</a>                   | 941 |
| 13.204     | <a href="#">ffpack_pluq.inl</a> File Reference            | 941 |
| 13.204.1   | Macro Definition Documentation                            | 942 |
| 13.204.1.1 | <a href="#">__FFLASFFPACK_ffpack_pluq_INL</a>             | 942 |
| 13.204.1.2 | <a href="#">CROUT</a>                                     | 942 |
| 13.205     | <a href="#">ffpack_pluq_mp.inl</a> File Reference         | 942 |
| 13.205.1   | Macro Definition Documentation                            | 942 |
| 13.205.1.1 | <a href="#">__FFPACK_pluq_mp_INL</a>                      | 942 |
| 13.206     | <a href="#">ffpack_ppluq.inl</a> File Reference           | 942 |
| 13.206.1   | Macro Definition Documentation                            | 943 |
| 13.206.1.1 | <a href="#">__FFLASFFPACK_ffpack_ppluq_INL</a>            | 943 |
| 13.206.1.2 | <a href="#">__FFLAS__TRSM_READONLY</a>                    | 943 |
| 13.206.1.3 | <a href="#">PBASECASE_K</a>                               | 943 |
| 13.207     | <a href="#">ffpack_rankprofiles.inl</a> File Reference    | 943 |
| 13.207.1   | Macro Definition Documentation                            | 944 |
| 13.207.1.1 | <a href="#">__FFLASFFPACK_ffpack_rank_profiles_INL</a>    | 944 |
| 13.208     | <a href="#">field-traits.h</a> File Reference             | 944 |
| 13.208.1   | Detailed Description                                      | 947 |
| 13.209     | <a href="#">field.doxy</a> File Reference                 | 947 |
| 13.210     | <a href="#">rns-double-elt.h</a> File Reference           | 947 |
| 13.210.1   | Detailed Description                                      | 947 |
| 13.211     | <a href="#">rns-double-recint.inl</a> File Reference      | 947 |
| 13.211.1   | Macro Definition Documentation                            | 948 |
| 13.211.1.1 | <a href="#">__FFLASFFPACK_field_rns_double_recint_INL</a> | 948 |
| 13.212     | <a href="#">rns-double.h</a> File Reference               | 948 |
| 13.212.1   | Detailed Description                                      | 948 |
| 13.212.2   | Macro Definition Documentation                            | 948 |
| 13.212.2.1 | <a href="#">ROUND_DOWN</a>                                | 948 |
| 13.213     | <a href="#">rns-double.inl</a> File Reference             | 949 |
| 13.213.1   | Macro Definition Documentation                            | 949 |
| 13.213.1.1 | <a href="#">__FFLASFFPACK_field_rns_double_INL</a>        | 949 |
| 13.214     | <a href="#">rns-integer-mod.h</a> File Reference          | 949 |
| 13.214.1   | Detailed Description                                      | 950 |
| 13.215     | <a href="#">rns-integer.h</a> File Reference              | 950 |
| 13.215.1   | Detailed Description                                      | 950 |
| 13.216     | <a href="#">rns.h</a> File Reference                      | 950 |
| 13.217     | <a href="#">rns.inl</a> File Reference                    | 951 |
| 13.217.1   | Macro Definition Documentation                            | 951 |

|  |     |
|--|-----|
| 13.217.1.1 __FflasFFPACK_field_rns_INL . . . . .   | 951 |
| 13.218 interfaces.doxy File Reference . . . . .    | 951 |
| 13.219 fflas_c.h File Reference . . . . .          | 951 |
| 13.219.1 Macro Definition Documentation . . . . .  | 953 |
| 13.219.1.1 FFLAS_COMPILED . . . . .                | 953 |
| 13.219.2 Enumeration Type Documentation . . . . .  | 953 |
| 13.219.2.1 FFLAS_C_ORDER . . . . .                 | 953 |
| 13.219.2.2 FFLAS_C_TRANSPOSE . . . . .             | 953 |
| 13.219.2.3 FFLAS_C_UPLO . . . . .                  | 953 |
| 13.219.2.4 FFLAS_C_DIAG . . . . .                  | 954 |
| 13.219.2.5 FFLAS_C_SIDE . . . . .                  | 954 |
| 13.219.2.6 FFLAS_C_BASE . . . . .                  | 954 |
| 13.219.3 Function Documentation . . . . .          | 954 |
| 13.219.3.1 freducein_1_modular_double() . . . . .  | 954 |
| 13.219.3.2 freduce_1_modular_double() . . . . .    | 955 |
| 13.219.3.3 fnegin_1_modular_double() . . . . .     | 955 |
| 13.219.3.4 fneg_1_modular_double() . . . . .       | 955 |
| 13.219.3.5 fzero_1_modular_double() . . . . .      | 955 |
| 13.219.3.6 fiszero_1_modular_double() . . . . .    | 955 |
| 13.219.3.7 fequal_1_modular_double() . . . . .     | 955 |
| 13.219.3.8 fassign_1_modular_double() . . . . .    | 956 |
| 13.219.3.9 fscal_1_modular_double() . . . . .      | 956 |
| 13.219.3.10 fscal_1_modular_double() . . . . .     | 956 |
| 13.219.3.11 faxpy_1_modular_double() . . . . .     | 956 |
| 13.219.3.12 fdot_1_modular_double() . . . . .      | 956 |
| 13.219.3.13 fswap_1_modular_double() . . . . .     | 956 |
| 13.219.3.14 fadd_1_modular_double() . . . . .      | 957 |
| 13.219.3.15 fsub_1_modular_double() . . . . .      | 957 |
| 13.219.3.16 faddin_1_modular_double() . . . . .    | 957 |
| 13.219.3.17 fsubin_1_modular_double() . . . . .    | 957 |
| 13.219.3.18 fassign_2_modular_double() . . . . .   | 957 |
| 13.219.3.19 fzero_2_modular_double() . . . . .     | 958 |
| 13.219.3.20 fequal_2_modular_double() . . . . .    | 958 |
| 13.219.3.21 fiszero_2_modular_double() . . . . .   | 958 |
| 13.219.3.22 fidentity_2_modular_double() . . . . . | 958 |
| 13.219.3.23 freducein_2_modular_double() . . . . . | 958 |
| 13.219.3.24 freduce_2_modular_double() . . . . .   | 959 |
| 13.219.3.25 fnegin_2_modular_double() . . . . .    | 959 |
| 13.219.3.26 fneg_2_modular_double() . . . . .      | 959 |
| 13.219.3.27 fscal_2_modular_double() . . . . .     | 959 |
| 13.219.3.28 fscal_2_modular_double() . . . . .     | 959 |
| 13.219.3.29 faxpy_2_modular_double() . . . . .     | 960 |

|  |     |
|--|-----|
| 13.219.3.30 fmove_2_modular_double()           | 960 |
| 13.219.3.31 fadd_2_modular_double()            | 960 |
| 13.219.3.32 fsub_2_modular_double()            | 960 |
| 13.219.3.33 fsubin_2_modular_double()          | 960 |
| 13.219.3.34 faddin_2_modular_double()          | 961 |
| 13.219.3.35 fgemv_2_modular_double()           | 961 |
| 13.219.3.36 fger_2_modular_double()            | 961 |
| 13.219.3.37 ftrsv_2_modular_double()           | 961 |
| 13.219.3.38 ftrsm_3_modular_double()           | 962 |
| 13.219.3.39 ftrmm_3_modular_double()           | 962 |
| 13.219.3.40 fgemm_3_modular_double()           | 962 |
| 13.219.3.41 fsquare_3_modular_double()         | 963 |
| 13.220 fflas_L1_inst.C File Reference          | 963 |
| 13.220.1 Macro Definition Documentation        | 963 |
| 13.220.1.1 __FFLAS_L1_INST_C                   | 963 |
| 13.220.1.2 INST_OR_DECL                        | 963 |
| 13.220.1.3 FFLAS_FIELD [1/2]                   | 963 |
| 13.220.1.4 FFLAS_ELT [1/6]                     | 963 |
| 13.220.1.5 FFLAS_ELT [2/6]                     | 964 |
| 13.220.1.6 FFLAS_ELT [3/6]                     | 964 |
| 13.220.1.7 FFLAS_FIELD [2/2]                   | 964 |
| 13.220.1.8 FFLAS_ELT [4/6]                     | 964 |
| 13.220.1.9 FFLAS_ELT [5/6]                     | 964 |
| 13.220.1.10 FFLAS_ELT [6/6]                    | 964 |
| 13.221 fflas_L1_inst.h File Reference          | 964 |
| 13.221.1 Macro Definition Documentation        | 964 |
| 13.221.1.1 INST_OR_DECL                        | 964 |
| 13.221.1.2 FFLAS_FIELD [1/2]                   | 964 |
| 13.221.1.3 FFLAS_ELT [1/6]                     | 964 |
| 13.221.1.4 FFLAS_ELT [2/6]                     | 965 |
| 13.221.1.5 FFLAS_ELT [3/6]                     | 965 |
| 13.221.1.6 FFLAS_FIELD [2/2]                   | 965 |
| 13.221.1.7 FFLAS_ELT [4/6]                     | 965 |
| 13.221.1.8 FFLAS_ELT [5/6]                     | 965 |
| 13.221.1.9 FFLAS_ELT [6/6]                     | 965 |
| 13.222 fflas_L1_inst_implem.inl File Reference | 965 |
| 13.223 fflas_L2_inst.C File Reference          | 966 |
| 13.223.1 Macro Definition Documentation        | 967 |
| 13.223.1.1 __FFLAS_L2_INST_C                   | 967 |
| 13.223.1.2 INST_OR_DECL                        | 967 |
| 13.223.1.3 FFLAS_FIELD [1/2]                   | 967 |
| 13.223.1.4 FFLAS_ELT [1/6]                     | 967 |

|  |     |
|--|-----|
| 13.223.1.5 FFLAS_ELT [2/6] . . . . .                     | 967 |
| 13.223.1.6 FFLAS_ELT [3/6] . . . . .                     | 967 |
| 13.223.1.7 FFLAS_FIELD [2/2] . . . . .                   | 967 |
| 13.223.1.8 FFLAS_ELT [4/6] . . . . .                     | 967 |
| 13.223.1.9 FFLAS_ELT [5/6] . . . . .                     | 967 |
| 13.223.1.10 FFLAS_ELT [6/6] . . . . .                    | 967 |
| 13.224 fflas_L2_inst.h File Reference . . . . .          | 967 |
| 13.224.1 Macro Definition Documentation . . . . .        | 968 |
| 13.224.1.1 INST_OR_DECL . . . . .                        | 968 |
| 13.224.1.2 FFLAS_FIELD [1/2] . . . . .                   | 968 |
| 13.224.1.3 FFLAS_ELT [1/6] . . . . .                     | 968 |
| 13.224.1.4 FFLAS_ELT [2/6] . . . . .                     | 968 |
| 13.224.1.5 FFLAS_ELT [3/6] . . . . .                     | 968 |
| 13.224.1.6 FFLAS_FIELD [2/2] . . . . .                   | 968 |
| 13.224.1.7 FFLAS_ELT [4/6] . . . . .                     | 968 |
| 13.224.1.8 FFLAS_ELT [5/6] . . . . .                     | 968 |
| 13.224.1.9 FFLAS_ELT [6/6] . . . . .                     | 968 |
| 13.225 fflas_L2_inst_implem.inl File Reference . . . . . | 968 |
| 13.226 fflas_L3_inst.C File Reference . . . . .          | 970 |
| 13.226.1 Macro Definition Documentation . . . . .        | 970 |
| 13.226.1.1 __FFLAS_L3_INST_C . . . . .                   | 970 |
| 13.226.1.2 INST_OR_DECL . . . . .                        | 970 |
| 13.226.1.3 FFLAS_FIELD [1/2] . . . . .                   | 970 |
| 13.226.1.4 FFLAS_ELT [1/6] . . . . .                     | 970 |
| 13.226.1.5 FFLAS_ELT [2/6] . . . . .                     | 971 |
| 13.226.1.6 FFLAS_ELT [3/6] . . . . .                     | 971 |
| 13.226.1.7 FFLAS_FIELD [2/2] . . . . .                   | 971 |
| 13.226.1.8 FFLAS_ELT [4/6] . . . . .                     | 971 |
| 13.226.1.9 FFLAS_ELT [5/6] . . . . .                     | 971 |
| 13.226.1.10 FFLAS_ELT [6/6] . . . . .                    | 971 |
| 13.227 fflas_L3_inst.h File Reference . . . . .          | 971 |
| 13.227.1 Macro Definition Documentation . . . . .        | 971 |
| 13.227.1.1 INST_OR_DECL . . . . .                        | 971 |
| 13.227.1.2 FFLAS_FIELD [1/2] . . . . .                   | 971 |
| 13.227.1.3 FFLAS_ELT [1/6] . . . . .                     | 971 |
| 13.227.1.4 FFLAS_ELT [2/6] . . . . .                     | 972 |
| 13.227.1.5 FFLAS_ELT [3/6] . . . . .                     | 972 |
| 13.227.1.6 FFLAS_FIELD [2/2] . . . . .                   | 972 |
| 13.227.1.7 FFLAS_ELT [4/6] . . . . .                     | 972 |
| 13.227.1.8 FFLAS_ELT [5/6] . . . . .                     | 972 |
| 13.227.1.9 FFLAS_ELT [6/6] . . . . .                     | 972 |
| 13.228 fflas_L3_inst_implem.inl File Reference . . . . . | 972 |

|   |     |
|---|-----|
| 13.228.1 Macro Definition Documentation . . . . . | 973 |
| 13.228.1.1 __FFLAS__TRSM_READONLY . . . . .       | 973 |
| 13.229 fflas_lvl1.C File Reference . . . . .      | 973 |
| 13.229.1 Detailed Description . . . . .           | 974 |
| 13.229.2 Function Documentation . . . . .         | 974 |
| 13.229.2.1 freducein_1_modular_double() . . . . . | 974 |
| 13.229.2.2 freduce_1_modular_double() . . . . .   | 974 |
| 13.229.2.3 fnegin_1_modular_double() . . . . .    | 974 |
| 13.229.2.4 fneg_1_modular_double() . . . . .      | 974 |
| 13.229.2.5 fzero_1_modular_double() . . . . .     | 975 |
| 13.229.2.6 fiszero_1_modular_double() . . . . .   | 975 |
| 13.229.2.7 fequal_1_modular_double() . . . . .    | 975 |
| 13.229.2.8 fassign_1_modular_double() . . . . .   | 975 |
| 13.229.2.9 fscaln_1_modular_double() . . . . .    | 975 |
| 13.229.2.10 fscal_1_modular_double() . . . . .    | 975 |
| 13.229.2.11 faxpy_1_modular_double() . . . . .    | 976 |
| 13.229.2.12 fdot_1_modular_double() . . . . .     | 976 |
| 13.229.2.13 fswap_1_modular_double() . . . . .    | 976 |
| 13.229.2.14 fadd_1_modular_double() . . . . .     | 976 |
| 13.229.2.15 fsub_1_modular_double() . . . . .     | 976 |
| 13.229.2.16 faddin_1_modular_double() . . . . .   | 977 |
| 13.229.2.17 fsubin_1_modular_double() . . . . .   | 977 |
| 13.230 fflas_lvl2.C File Reference . . . . .      | 977 |
| 13.230.1 Detailed Description . . . . .           | 978 |
| 13.230.2 Function Documentation . . . . .         | 978 |
| 13.230.2.1 fassign_2_modular_double() . . . . .   | 978 |
| 13.230.2.2 fzero_2_modular_double() . . . . .     | 978 |
| 13.230.2.3 fequal_2_modular_double() . . . . .    | 979 |
| 13.230.2.4 fiszero_2_modular_double() . . . . .   | 979 |
| 13.230.2.5 fidentity_2_modular_double() . . . . . | 979 |
| 13.230.2.6 freducein_2_modular_double() . . . . . | 979 |
| 13.230.2.7 freduce_2_modular_double() . . . . .   | 979 |
| 13.230.2.8 fnegin_2_modular_double() . . . . .    | 979 |
| 13.230.2.9 fneg_2_modular_double() . . . . .      | 980 |
| 13.230.2.10 fscaln_2_modular_double() . . . . .   | 980 |
| 13.230.2.11 fscal_2_modular_double() . . . . .    | 980 |
| 13.230.2.12 faxpy_2_modular_double() . . . . .    | 980 |
| 13.230.2.13 fmove_2_modular_double() . . . . .    | 980 |
| 13.230.2.14 fadd_2_modular_double() . . . . .     | 981 |
| 13.230.2.15 fsub_2_modular_double() . . . . .     | 981 |
| 13.230.2.16 fsubin_2_modular_double() . . . . .   | 981 |
| 13.230.2.17 faddin_2_modular_double() . . . . .   | 981 |

|   |     |
|---|-----|
| 13.230.2.18 fgemv_2_modular_double()                  | 982 |
| 13.230.2.19 fger_2_modular_double()                   | 982 |
| 13.230.2.20 ftrsv_2_modular_double()                  | 982 |
| 13.231 fflas_lvl3.C File Reference                    | 982 |
| 13.231.1 Detailed Description                         | 983 |
| 13.231.2 Function Documentation                       | 983 |
| 13.231.2.1 ftrsm_3_modular_double()                   | 983 |
| 13.231.2.2 ftrmm_3_modular_double()                   | 983 |
| 13.231.2.3 fgemm_3_modular_double()                   | 984 |
| 13.231.2.4 fsquare_3_modular_double()                 | 984 |
| 13.232 fflas_sparse.C File Reference                  | 984 |
| 13.232.1 Detailed Description                         | 984 |
| 13.233 ffpack.C File Reference                        | 984 |
| 13.233.1 Detailed Description                         | 988 |
| 13.233.2 Function Documentation                       | 988 |
| 13.233.2.1 LAPACKPerm2MathPerm()                      | 988 |
| 13.233.2.2 MathPerm2LAPACKPerm()                      | 988 |
| 13.233.2.3 MatrixApplyS_modular_double()              | 988 |
| 13.233.2.4 PermApplyS_double()                        | 988 |
| 13.233.2.5 MatrixApplyT_modular_double()              | 989 |
| 13.233.2.6 PermApplyT_double()                        | 989 |
| 13.233.2.7 composePermutationsLLM()                   | 989 |
| 13.233.2.8 composePermutationsLLL()                   | 989 |
| 13.233.2.9 composePermutationsMLM()                   | 989 |
| 13.233.2.10 cyclic_shift_mathPerm()                   | 989 |
| 13.233.2.11 cyclic_shift_row_modular_double()         | 990 |
| 13.233.2.12 cyclic_shift_col_modular_double()         | 990 |
| 13.233.2.13 applyP_modular_double()                   | 990 |
| 13.233.2.14 fgetrsin_modular_double()                 | 990 |
| 13.233.2.15 fgetrsv_modular_double()                  | 990 |
| 13.233.2.16 fgesvin_modular_double()                  | 991 |
| 13.233.2.17 fgesv_modular_double()                    | 991 |
| 13.233.2.18 ftrtri_modular_double()                   | 991 |
| 13.233.2.19 trinv_left_modular_double()               | 991 |
| 13.233.2.20 ftrtrm_modular_double()                   | 992 |
| 13.233.2.21 PLUQ_modular_double()                     | 992 |
| 13.233.2.22 LUdivine_modular_double()                 | 992 |
| 13.233.2.23 ColumnEchelonForm_modular_double()        | 992 |
| 13.233.2.24 RowEchelonForm_modular_double()           | 993 |
| 13.233.2.25 ReducedColumnEchelonForm_modular_double() | 993 |
| 13.233.2.26 ReducedRowEchelonForm_modular_double()    | 993 |
| 13.233.2.27 ColumnEchelonForm_modular_float()         | 993 |

|   |      |
|---|------|
| 13.233.2.28 RowEchelonForm_modular_float()                  | 993  |
| 13.233.2.29 ReducedColumnEchelonForm_modular_float()        | 994  |
| 13.233.2.30 ReducedRowEchelonForm_modular_float()           | 994  |
| 13.233.2.31 ColumnEchelonForm_modular_int32_t()             | 994  |
| 13.233.2.32 RowEchelonForm_modular_int32_t()                | 994  |
| 13.233.2.33 ReducedColumnEchelonForm_modular_int32_t()      | 995  |
| 13.233.2.34 ReducedRowEchelonForm_modular_int32_t()         | 995  |
| 13.233.2.35 pColumnEchelonForm_modular_double()             | 995  |
| 13.233.2.36 pRowEchelonForm_modular_double()                | 995  |
| 13.233.2.37 pReducedColumnEchelonForm_modular_double()      | 996  |
| 13.233.2.38 pReducedRowEchelonForm_modular_double()         | 996  |
| 13.233.2.39 pColumnEchelonForm_modular_float()              | 996  |
| 13.233.2.40 pRowEchelonForm_modular_float()                 | 996  |
| 13.233.2.41 pReducedColumnEchelonForm_modular_float()       | 997  |
| 13.233.2.42 pReducedRowEchelonForm_modular_float()          | 997  |
| 13.233.2.43 pColumnEchelonForm_modular_int32_t()            | 997  |
| 13.233.2.44 pRowEchelonForm_modular_int32_t()               | 997  |
| 13.233.2.45 pReducedColumnEchelonForm_modular_int32_t()     | 997  |
| 13.233.2.46 pReducedRowEchelonForm_modular_int32_t()        | 998  |
| 13.233.2.47 Invertin_modular_double()                       | 998  |
| 13.233.2.48 Invert_modular_double()                         | 998  |
| 13.233.2.49 Invert2_modular_double()                        | 998  |
| 13.233.2.50 KrylovElim_modular_double()                     | 999  |
| 13.233.2.51 SpecRankProfile_modular_double()                | 999  |
| 13.233.2.52 Rank_modular_double()                           | 999  |
| 13.233.2.53 IsSingular_modular_double()                     | 999  |
| 13.233.2.54 Det_modular_double()                            | 999  |
| 13.233.2.55 Solve_modular_double()                          | 1000 |
| 13.233.2.56 solveLB_modular_double()                        | 1000 |
| 13.233.2.57 solveLB2_modular_double()                       | 1000 |
| 13.233.2.58 RandomNullSpaceVector_modular_double()          | 1000 |
| 13.233.2.59 NullSpaceBasis_modular_double()                 | 1000 |
| 13.233.2.60 RowRankProfile_modular_double()                 | 1001 |
| 13.233.2.61 ColumnRankProfile_modular_double()              | 1001 |
| 13.233.2.62 RankProfileFromLU()                             | 1001 |
| 13.233.2.63 LeadingSubmatrixRankProfiles()                  | 1001 |
| 13.233.2.64 RowRankProfileSubmatrixIndices_modular_double() | 1001 |
| 13.233.2.65 ColRankProfileSubmatrixIndices_modular_double() | 1002 |
| 13.233.2.66 RowRankProfileSubmatrix_modular_double()        | 1002 |
| 13.233.2.67 ColRankProfileSubmatrix_modular_double()        | 1002 |
| 13.233.2.68 getTriangular_modular_double()                  | 1002 |
| 13.233.2.69 getTriangularin_modular_double()                | 1003 |



|             |   |      |
|-------------|---|------|
| 13.233.2.70 | <a href="#">getEchelonForm_modular_double()</a>             | 1003 |
| 13.233.2.71 | <a href="#">getEchelonFormin_modular_double()</a>           | 1003 |
| 13.233.2.72 | <a href="#">getEchelonTransform_modular_double()</a>        | 1003 |
| 13.233.2.73 | <a href="#">getReducedEchelonForm_modular_double()</a>      | 1004 |
| 13.233.2.74 | <a href="#">getReducedEchelonFormin_modular_double()</a>    | 1004 |
| 13.233.2.75 | <a href="#">getReducedEchelonTransform_modular_double()</a> | 1004 |
| 13.233.2.76 | <a href="#">PLUQtoEchelonPermutation()</a>                  | 1005 |
| 13.234      | <a href="#">ffpack_c.h File Reference</a>                   | 1005 |
| 13.234.1    | <a href="#">Macro Definition Documentation</a>              | 1008 |
| 13.234.1.1  | <a href="#">FFPACK_COMPILED</a>                             | 1008 |
| 13.234.2    | <a href="#">Enumeration Type Documentation</a>              | 1008 |
| 13.234.2.1  | <a href="#">FFLAS_C_ORDER</a>                               | 1008 |
| 13.234.2.2  | <a href="#">FFLAS_C_TRANSPOSE</a>                           | 1008 |
| 13.234.2.3  | <a href="#">FFLAS_C_UPLO</a>                                | 1008 |
| 13.234.2.4  | <a href="#">FFLAS_C_DIAG</a>                                | 1008 |
| 13.234.2.5  | <a href="#">FFLAS_C_SIDE</a>                                | 1009 |
| 13.234.2.6  | <a href="#">FFPACK_C_LU_TAG</a>                             | 1009 |
| 13.234.2.7  | <a href="#">FFPACK_C_CHARPOLY_TAG</a>                       | 1009 |
| 13.234.2.8  | <a href="#">FFPACK_C_MINPOLY_TAG</a>                        | 1009 |
| 13.234.3    | <a href="#">Function Documentation</a>                      | 1009 |
| 13.234.3.1  | <a href="#">LAPACKPerm2MathPerm()</a>                       | 1009 |
| 13.234.3.2  | <a href="#">MathPerm2LAPACKPerm()</a>                       | 1010 |
| 13.234.3.3  | <a href="#">MatrixApplyS_modular_double()</a>               | 1010 |
| 13.234.3.4  | <a href="#">PermApplyS_double()</a>                         | 1010 |
| 13.234.3.5  | <a href="#">MatrixApplyT_modular_double()</a>               | 1010 |
| 13.234.3.6  | <a href="#">PermApplyT_double()</a>                         | 1010 |
| 13.234.3.7  | <a href="#">composePermutationsLLM()</a>                    | 1011 |
| 13.234.3.8  | <a href="#">composePermutationsLLL()</a>                    | 1011 |
| 13.234.3.9  | <a href="#">composePermutationsMLM()</a>                    | 1011 |
| 13.234.3.10 | <a href="#">cyclic_shift_mathPerm()</a>                     | 1011 |
| 13.234.3.11 | <a href="#">cyclic_shift_row_modular_double()</a>           | 1011 |
| 13.234.3.12 | <a href="#">cyclic_shift_col_modular_double()</a>           | 1011 |
| 13.234.3.13 | <a href="#">applyP_modular_double()</a>                     | 1011 |
| 13.234.3.14 | <a href="#">fgetrsin_modular_double()</a>                   | 1012 |
| 13.234.3.15 | <a href="#">fgetrs_modular_double()</a>                     | 1012 |
| 13.234.3.16 | <a href="#">fgesvin_modular_double()</a>                    | 1012 |
| 13.234.3.17 | <a href="#">fgesv_modular_double()</a>                      | 1012 |
| 13.234.3.18 | <a href="#">ftrtri_modular_double()</a>                     | 1013 |
| 13.234.3.19 | <a href="#">trinv_left_modular_double()</a>                 | 1013 |
| 13.234.3.20 | <a href="#">ftrtrm_modular_double()</a>                     | 1013 |
| 13.234.3.21 | <a href="#">PLUQ_modular_double()</a>                       | 1013 |
| 13.234.3.22 | <a href="#">LUdivine_modular_double()</a>                   | 1014 |

|   |      |
|---|------|
| 13.234.3.23 LUdivine_small_modular_double()                 | 1014 |
| 13.234.3.24 LUdivine_gauss_modular_double()                 | 1014 |
| 13.234.3.25 ColumnEchelonForm_modular_double()              | 1014 |
| 13.234.3.26 RowEchelonForm_modular_double()                 | 1015 |
| 13.234.3.27 ColumnEchelonForm_modular_float()               | 1015 |
| 13.234.3.28 RowEchelonForm_modular_float()                  | 1015 |
| 13.234.3.29 ColumnEchelonForm_modular_int32_t()             | 1015 |
| 13.234.3.30 RowEchelonForm_modular_int32_t()                | 1015 |
| 13.234.3.31 ReducedColumnEchelonForm_modular_double()       | 1016 |
| 13.234.3.32 ReducedRowEchelonForm_modular_double()          | 1016 |
| 13.234.3.33 ReducedColumnEchelonForm_modular_float()        | 1016 |
| 13.234.3.34 ReducedRowEchelonForm_modular_float()           | 1016 |
| 13.234.3.35 ReducedColumnEchelonForm_modular_int32_t()      | 1017 |
| 13.234.3.36 ReducedRowEchelonForm_modular_int32_t()         | 1017 |
| 13.234.3.37 ReducedRowEchelonForm2_modular_double()         | 1017 |
| 13.234.3.38 REF_modular_double()                            | 1017 |
| 13.234.3.39 Invertin_modular_double()                       | 1018 |
| 13.234.3.40 Invert_modular_double()                         | 1018 |
| 13.234.3.41 Invert2_modular_double()                        | 1018 |
| 13.234.3.42 KrylovElim_modular_double()                     | 1018 |
| 13.234.3.43 SpecRankProfile_modular_double()                | 1018 |
| 13.234.3.44 Rank_modular_double()                           | 1019 |
| 13.234.3.45 IsSingular_modular_double()                     | 1019 |
| 13.234.3.46 Det_modular_double()                            | 1019 |
| 13.234.3.47 Solve_modular_double()                          | 1019 |
| 13.234.3.48 solveLB_modular_double()                        | 1019 |
| 13.234.3.49 solveLB2_modular_double()                       | 1020 |
| 13.234.3.50 RandomNullSpaceVector_modular_double()          | 1020 |
| 13.234.3.51 NullSpaceBasis_modular_double()                 | 1020 |
| 13.234.3.52 RowRankProfile_modular_double()                 | 1020 |
| 13.234.3.53 ColumnRankProfile_modular_double()              | 1021 |
| 13.234.3.54 RankProfileFromLU()                             | 1021 |
| 13.234.3.55 LeadingSubmatrixRankProfiles()                  | 1021 |
| 13.234.3.56 RowRankProfileSubmatrixIndices_modular_double() | 1021 |
| 13.234.3.57 ColRankProfileSubmatrixIndices_modular_double() | 1021 |
| 13.234.3.58 RowRankProfileSubmatrix_modular_double()        | 1022 |
| 13.234.3.59 ColRankProfileSubmatrix_modular_double()        | 1022 |
| 13.234.3.60 getTriangular_modular_double()                  | 1022 |
| 13.234.3.61 getTriangularin_modular_double()                | 1022 |
| 13.234.3.62 getEchelonForm_modular_double()                 | 1022 |
| 13.234.3.63 getEchelonFormin_modular_double()               | 1023 |
| 13.234.3.64 getEchelonTransform_modular_double()            | 1023 |

|   |      |
|---|------|
| 13.234.3.65 getReducedEchelonForm_modular_double()      | 1023 |
| 13.234.3.66 getReducedEchelonFormin_modular_double()    | 1024 |
| 13.234.3.67 getReducedEchelonTransform_modular_double() | 1024 |
| 13.234.3.68 PLUQtoEchelonPermutation()                  | 1024 |
| 13.235 fpack_inst.C File Reference                      | 1024 |
| 13.235.1 Macro Definition Documentation                 | 1025 |
| 13.235.1.1 __FFPACK_INST_C                              | 1025 |
| 13.235.1.2 FFLAS_COMPILED                               | 1025 |
| 13.235.1.3 INST_OR_DECL                                 | 1025 |
| 13.235.1.4 FFLAS_FIELD [1/2]                            | 1025 |
| 13.235.1.5 FFLAS_ELT [1/6]                              | 1025 |
| 13.235.1.6 FFLAS_ELT [2/6]                              | 1025 |
| 13.235.1.7 FFLAS_ELT [3/6]                              | 1025 |
| 13.235.1.8 FFLAS_FIELD [2/2]                            | 1025 |
| 13.235.1.9 FFLAS_ELT [4/6]                              | 1025 |
| 13.235.1.10 FFLAS_ELT [5/6]                             | 1025 |
| 13.235.1.11 FFLAS_ELT [6/6]                             | 1025 |
| 13.236 fpack_inst.h File Reference                      | 1025 |
| 13.236.1 Macro Definition Documentation                 | 1026 |
| 13.236.1.1 FFLAS_COMPILED                               | 1026 |
| 13.236.1.2 INST_OR_DECL                                 | 1026 |
| 13.236.1.3 FFLAS_FIELD [1/2]                            | 1026 |
| 13.236.1.4 FFLAS_ELT [1/6]                              | 1026 |
| 13.236.1.5 FFLAS_ELT [2/6]                              | 1026 |
| 13.236.1.6 FFLAS_ELT [3/6]                              | 1026 |
| 13.236.1.7 FFLAS_FIELD [2/2]                            | 1026 |
| 13.236.1.8 FFLAS_ELT [4/6]                              | 1026 |
| 13.236.1.9 FFLAS_ELT [5/6]                              | 1026 |
| 13.236.1.10 FFLAS_ELT [6/6]                             | 1026 |
| 13.237 fpack_inst_implem.inl File Reference             | 1027 |
| 13.238 blockcuts.inl File Reference                     | 1030 |
| 13.238.1 Macro Definition Documentation                 | 1031 |
| 13.238.1.1 __FFLASFFPACK_fflas_blockcuts_INL            | 1031 |
| 13.238.1.2 __FFLASFFPACK_MINBLOCKCUTS                   | 1031 |
| 13.239 fflas_plevel1.h File Reference                   | 1031 |
| 13.240 kaapi_routines.inl File Reference                | 1032 |
| 13.240.1 Macro Definition Documentation                 | 1032 |
| 13.240.1.1 __FFLASFFPACK_KAAPI_ROUTINES_INL             | 1032 |
| 13.241 parallel.h File Reference                        | 1032 |
| 13.241.1 Macro Definition Documentation                 | 1033 |
| 13.241.1.1 __FFLASFFPACK_SEQUENTIAL                     | 1033 |
| 13.241.1.2 index_t                                      | 1033 |

|   |      |
|---|------|
| 13.241.1.3 TASK                           | 1033 |
| 13.241.1.4 WAIT                           | 1033 |
| 13.241.1.5 CHECK_DEPENDENCIES             | 1033 |
| 13.241.1.6 BARRIER                        | 1033 |
| 13.241.1.7 PAR_BLOCK                      | 1033 |
| 13.241.1.8 SYNCH_GROUP                    | 1033 |
| 13.241.1.9 THREAD_INDEX                   | 1034 |
| 13.241.1.10 NUM_THREADS                   | 1034 |
| 13.241.1.11 SET_THREADS                   | 1034 |
| 13.241.1.12 MAX_THREADS                   | 1034 |
| 13.241.1.13 READ                          | 1034 |
| 13.241.1.14 WRITE                         | 1034 |
| 13.241.1.15 READWRITE                     | 1034 |
| 13.241.1.16 CONSTREFERENCE                | 1034 |
| 13.241.1.17 VALUE                         | 1034 |
| 13.241.1.18 BEGIN_PARALLEL_MAIN           | 1034 |
| 13.241.1.19 END_PARALLEL_MAIN             | 1034 |
| 13.241.1.20 FORBLOCK1D                    | 1035 |
| 13.241.1.21 FOR1D                         | 1035 |
| 13.241.1.22 PARFORBLOCK1D                 | 1035 |
| 13.241.1.23 PARFOR1D                      | 1035 |
| 13.241.1.24 FORBLOCK2D                    | 1035 |
| 13.241.1.25 FOR2D                         | 1035 |
| 13.241.1.26 PARFORBLOCK2D                 | 1036 |
| 13.241.1.27 PARFOR2D                      | 1036 |
| 13.241.1.28 COMMA                         | 1036 |
| 13.241.1.29 MODE                          | 1036 |
| 13.241.1.30 RETURNPARAM                   | 1036 |
| 13.241.1.31 NUMARGS                       | 1036 |
| 13.241.1.32 PP_NARG_                      | 1037 |
| 13.241.1.33 PP_ARG_N                      | 1037 |
| 13.241.1.34 PP_RSEQ_N                     | 1038 |
| 13.241.1.35 NOSPLIT                       | 1038 |
| 13.241.1.36 splitting_0                   | 1038 |
| 13.241.1.37 splitting_1                   | 1038 |
| 13.241.1.38 splitting_2                   | 1038 |
| 13.241.1.39 splitting_3                   | 1038 |
| 13.241.1.40 splitt                        | 1039 |
| 13.241.1.41 SPLITTER                      | 1039 |
| 13.242 pfgemm_variants.inl File Reference | 1039 |
| 13.243 pfgemv.inl File Reference          | 1040 |
| 13.244 align-allocator.h File Reference   | 1040 |

|  |      |
|--|------|
| 13.245 args-parser.h File Reference        | 1040 |
| 13.245.1 Macro Definition Documentation    | 1041 |
| 13.245.1.1 TYPE_BOOL                       | 1041 |
| 13.245.1.2 END_OF_ARGUMENTS                | 1041 |
| 13.245.1.3 type_integer                    | 1041 |
| 13.245.2 Enumeration Type Documentation    | 1041 |
| 13.245.2.1 ArgumentType                    | 1041 |
| 13.245.3 Function Documentation            | 1042 |
| 13.245.3.1 printHelpMessage()              | 1042 |
| 13.245.3.2 findArgument()                  | 1042 |
| 13.245.3.3 getListArgs()                   | 1042 |
| 13.246 bit_manipulation.h File Reference   | 1042 |
| 13.246.1 Macro Definition Documentation    | 1042 |
| 13.246.1.1 __has_builtin                   | 1042 |
| 13.246.2 Function Documentation            | 1043 |
| 13.246.2.1 clz() [1/2]                     | 1043 |
| 13.246.2.2 clz() [2/2]                     | 1043 |
| 13.246.2.3 ctz() [1/2]                     | 1043 |
| 13.246.2.4 ctz() [2/2]                     | 1043 |
| 13.247 cast.h File Reference               | 1043 |
| 13.248 debug.h File Reference              | 1043 |
| 13.248.1 Detailed Description              | 1044 |
| 13.248.2 Macro Definition Documentation    | 1044 |
| 13.248.2.1 FFLASFFPACK_check               | 1044 |
| 13.248.2.2 FFLASFFPACK_abort               | 1044 |
| 13.249 fflas_intrinsic.h File Reference    | 1044 |
| 13.250 fflas_io.h File Reference           | 1044 |
| 13.251 fflas_memory.h File Reference       | 1045 |
| 13.252 fflas_randommatrix.h File Reference | 1046 |
| 13.253 flimits.h File Reference            | 1048 |
| 13.253.1 Function Documentation            | 1048 |
| 13.253.1.1 in_range() [1/3]                | 1048 |
| 13.253.1.2 in_range() [2/3]                | 1049 |
| 13.253.1.3 in_range() [3/3]                | 1049 |
| 13.254 Matio.h File Reference              | 1049 |
| 13.254.1 Function Documentation            | 1049 |
| 13.254.1.1 read_field()                    | 1049 |
| 13.254.1.2 write_field()                   | 1049 |
| 13.255 test-utils.h File Reference         | 1049 |
| 13.256 timer.h File Reference              | 1050 |
| 13.257 cblas.C File Reference              | 1050 |
| 13.257.1 Macro Definition Documentation    | 1051 |

|            |   |      |
|------------|---|------|
| 13.257.1.1 | <a href="#">__FFLASFFPACK_CONFIGURATION</a> | 1051 |
| 13.257.1.2 | <a href="#">__FFLASFFPACK_HAVE_CBLAS</a>    | 1051 |
| 13.257.2   | Function Documentation                      | 1051 |
| 13.257.2.1 | <a href="#">main()</a>                      | 1051 |
| 13.258     | clapack.C File Reference                    | 1051 |
| 13.258.1   | Macro Definition Documentation              | 1051 |
| 13.258.1.1 | <a href="#">__FFLASFFPACK_CONFIGURATION</a> | 1051 |
| 13.258.1.2 | <a href="#">__FFLASFFPACK_HAVE_LAPACK</a>   | 1051 |
| 13.258.1.3 | <a href="#">__FFLASFFPACK_HAVE_CLAPACK</a>  | 1051 |
| 13.258.2   | Function Documentation                      | 1051 |
| 13.258.2.1 | <a href="#">main()</a>                      | 1051 |
| 13.259     | cuda.C File Reference                       | 1052 |
| 13.259.1   | Function Documentation                      | 1052 |
| 13.259.1.1 | <a href="#">main()</a>                      | 1052 |
| 13.260     | fblas.C File Reference                      | 1052 |
| 13.260.1   | Macro Definition Documentation              | 1052 |
| 13.260.1.1 | <a href="#">__FFLASFFPACK_CONFIGURATION</a> | 1052 |
| 13.260.2   | Function Documentation                      | 1052 |
| 13.260.2.1 | <a href="#">dgemm_()</a>                    | 1052 |
| 13.260.2.2 | <a href="#">main()</a>                      | 1053 |
| 13.261     | lapack.C File Reference                     | 1053 |
| 13.261.1   | Macro Definition Documentation              | 1053 |
| 13.261.1.1 | <a href="#">__FFLASFFPACK_CONFIGURATION</a> | 1053 |
| 13.261.1.2 | <a href="#">__FFLASFFPACK_HAVE_LAPACK</a>   | 1053 |
| 13.261.2   | Function Documentation                      | 1053 |
| 13.261.2.1 | <a href="#">main()</a>                      | 1053 |
| 13.262     | regression-check.C File Reference           | 1053 |
| 13.262.1   | Function Documentation                      | 1053 |
| 13.262.1.1 | <a href="#">check1()</a>                    | 1053 |
| 13.262.1.2 | <a href="#">check2()</a>                    | 1054 |
| 13.262.1.3 | <a href="#">check3()</a>                    | 1054 |
| 13.262.1.4 | <a href="#">check4()</a>                    | 1054 |
| 13.262.1.5 | <a href="#">checkZeroDimCharpoly()</a>      | 1054 |
| 13.262.1.6 | <a href="#">checkZeroDimMinPoly()</a>       | 1054 |
| 13.262.1.7 | <a href="#">gf2ModularBalanced()</a>        | 1054 |
| 13.262.1.8 | <a href="#">main()</a>                      | 1054 |
| 13.263     | test-charpoly-check.C File Reference        | 1054 |
| 13.263.1   | Macro Definition Documentation              | 1054 |
| 13.263.1.1 | <a href="#">ENABLE_CHECKER_charpoly</a>     | 1054 |
| 13.263.1.2 | <a href="#">TIME_CHECKER_CHARPOLY</a>       | 1054 |
| 13.263.2   | Function Documentation                      | 1055 |
| 13.263.2.1 | <a href="#">printPolynomial()</a>           | 1055 |

|   |      |
|---|------|
| 13.263.2.2 main()                             | 1055 |
| 13.264 test-charpoly.C File Reference         | 1055 |
| 13.264.1 Function Documentation               | 1055 |
| 13.264.1.1 launch_test()                      | 1055 |
| 13.264.1.2 run_with_field()                   | 1055 |
| 13.264.1.3 main()                             | 1056 |
| 13.265 test-compressQ.C File Reference        | 1056 |
| 13.265.1 Typedef Documentation                | 1056 |
| 13.265.1.1 Field                              | 1056 |
| 13.265.2 Function Documentation               | 1056 |
| 13.265.2.1 printvect()                        | 1056 |
| 13.265.2.2 main()                             | 1056 |
| 13.266 test-det-check.C File Reference        | 1057 |
| 13.266.1 Macro Definition Documentation       | 1057 |
| 13.266.1.1 ENABLE_CHECKER_Det                 | 1057 |
| 13.266.1.2 TIME_CHECKER_Det                   | 1057 |
| 13.266.2 Function Documentation               | 1057 |
| 13.266.2.1 main()                             | 1057 |
| 13.267 test-det.C File Reference              | 1057 |
| 13.267.1 Function Documentation               | 1058 |
| 13.267.1.1 test_det()                         | 1058 |
| 13.267.1.2 main()                             | 1058 |
| 13.268 test-echelon.C File Reference          | 1058 |
| 13.268.1 Macro Definition Documentation       | 1059 |
| 13.268.1.1 __FFLASFFPACK_SEQUENTIAL           | 1059 |
| 13.268.1.2 __FFLASFFPACK_GAUSSJORDAN_BASECASE | 1059 |
| 13.268.1.3 __FFLASFFPACK_PLUQ_THRESHOLD       | 1059 |
| 13.268.2 Function Documentation               | 1059 |
| 13.268.2.1 test_colechelon()                  | 1059 |
| 13.268.2.2 test_rowechelon()                  | 1059 |
| 13.268.2.3 test_redcolechelon()               | 1059 |
| 13.268.2.4 test_redrowechelon()               | 1060 |
| 13.268.2.5 run_with_field()                   | 1060 |
| 13.268.2.6 main()                             | 1060 |
| 13.269 test-fadd.C File Reference             | 1060 |
| 13.269.1 Function Documentation               | 1061 |
| 13.269.1.1 test_fadd()                        | 1061 |
| 13.269.1.2 test_faddin()                      | 1061 |
| 13.269.1.3 test_fsub()                        | 1061 |
| 13.269.1.4 test_fsubin()                      | 1061 |
| 13.269.1.5 main()                             | 1061 |
| 13.270 test-fdot.C File Reference             | 1061 |

|  |      |
|--|------|
| 13.270.1 Macro Definition Documentation  | 1062 |
| 13.270.1.1 ENABLE_ALL_CHECKINGS          | 1062 |
| 13.270.2 Function Documentation          | 1062 |
| 13.270.2.1 check_fdot()                  | 1062 |
| 13.270.2.2 run_with_field()              | 1062 |
| 13.270.2.3 run_with_Integer()            | 1062 |
| 13.270.2.4 main()                        | 1063 |
| 13.271 test-fgemm-check.C File Reference | 1063 |
| 13.271.1 Macro Definition Documentation  | 1063 |
| 13.271.1.1 ENABLE_ALL_CHECKINGS          | 1063 |
| 13.271.2 Function Documentation          | 1063 |
| 13.271.2.1 launch_MM_dispatch()          | 1063 |
| 13.271.2.2 run_with_field()              | 1064 |
| 13.271.2.3 main()                        | 1064 |
| 13.272 test-fgemm.C File Reference       | 1064 |
| 13.272.1 Macro Definition Documentation  | 1065 |
| 13.272.1.1 ENABLE_CHECKER_fgemm          | 1065 |
| 13.272.2 Function Documentation          | 1065 |
| 13.272.2.1 check_MM()                    | 1065 |
| 13.272.2.2 launch_MM()                   | 1065 |
| 13.272.2.3 launch_MM_dispatch()          | 1065 |
| 13.272.2.4 run_with_field()              | 1066 |
| 13.272.2.5 main()                        | 1066 |
| 13.273 test-fgemv.C File Reference       | 1066 |
| 13.273.1 Function Documentation          | 1067 |
| 13.273.1.1 check_MV()                    | 1067 |
| 13.273.1.2 launch_MV()                   | 1067 |
| 13.273.1.3 launch_MV_dispatch()          | 1067 |
| 13.273.1.4 run_with_field()              | 1068 |
| 13.273.1.5 main()                        | 1068 |
| 13.274 test-fger.C File Reference        | 1068 |
| 13.274.1 Macro Definition Documentation  | 1068 |
| 13.274.1.1 TIME                          | 1068 |
| 13.274.2 Function Documentation          | 1069 |
| 13.274.2.1 check_fger()                  | 1069 |
| 13.274.2.2 launch_fger()                 | 1069 |
| 13.274.2.3 launch_fger_dispatch()        | 1069 |
| 13.274.2.4 run_with_field()              | 1069 |
| 13.274.2.5 main()                        | 1070 |
| 13.275 test-fgesv.C File Reference       | 1070 |
| 13.275.1 Function Documentation          | 1070 |
| 13.275.1.1 test_square_fgesv()           | 1070 |



|   |      |
|---|------|
| 13.275.1.2 test_rect_fgesv()            | 1070 |
| 13.275.1.3 run_with_field()             | 1071 |
| 13.275.1.4 main()                       | 1071 |
| 13.276 test-finit.C File Reference      | 1071 |
| 13.276.1 Function Documentation         | 1071 |
| 13.276.1.1 test_freduce()               | 1071 |
| 13.276.1.2 run_with_field()             | 1072 |
| 13.276.1.3 main()                       | 1072 |
| 13.277 test-fscal.C File Reference      | 1072 |
| 13.277.1 Function Documentation         | 1072 |
| 13.277.1.1 test_fscal() [1/2]           | 1072 |
| 13.277.1.2 test_fscal() [2/2]           | 1073 |
| 13.277.1.3 test_fscaln() [1/2]          | 1073 |
| 13.277.1.4 test_fscaln() [2/2]          | 1073 |
| 13.277.1.5 main()                       | 1073 |
| 13.278 test-fsyr2k.C File Reference     | 1073 |
| 13.278.1 Macro Definition Documentation | 1074 |
| 13.278.1.1 ENABLE_ALL_CHECKINGS         | 1074 |
| 13.278.2 Function Documentation         | 1074 |
| 13.278.2.1 check_fsyr2k()               | 1074 |
| 13.278.2.2 run_with_field()             | 1074 |
| 13.278.2.3 main()                       | 1074 |
| 13.279 test-fsyrk.C File Reference      | 1074 |
| 13.279.1 Macro Definition Documentation | 1075 |
| 13.279.1.1 ENABLE_ALL_CHECKINGS         | 1075 |
| 13.279.2 Function Documentation         | 1075 |
| 13.279.2.1 check_fsyrk()                | 1075 |
| 13.279.2.2 check_fsyrk_diag()           | 1075 |
| 13.279.2.3 check_fsyrk_bkdiag()         | 1076 |
| 13.279.2.4 check_computeS1S2()          | 1076 |
| 13.279.2.5 run_with_field()             | 1076 |
| 13.279.2.6 main()                       | 1076 |
| 13.280 test-fsytrf.C File Reference     | 1076 |
| 13.280.1 Function Documentation         | 1077 |
| 13.280.1.1 operator<<()                 | 1077 |
| 13.280.1.2 test_RPM_fsytrf()            | 1077 |
| 13.280.1.3 test_generic_fsytrf()        | 1077 |
| 13.280.1.4 run_with_field()             | 1077 |
| 13.280.1.5 main()                       | 1078 |
| 13.281 test-ftnmm.C File Reference      | 1078 |
| 13.281.1 Macro Definition Documentation | 1078 |
| 13.281.1.1 __FFLASFFPACK_SEQUENTIAL     | 1078 |

|   |      |
|---|------|
| 13.281.2 Function Documentation                   | 1078 |
| 13.281.2.1 check_frm() . . . . .                  | 1078 |
| 13.281.2.2 run_with_field() . . . . .             | 1079 |
| 13.281.2.3 main() . . . . .                       | 1079 |
| 13.282 test-frmv.C File Reference . . . . .       | 1079 |
| 13.282.1 Macro Definition Documentation . . . . . | 1079 |
| 13.282.1.1 __FFLASFFPACK_SEQUENTIAL . . . . .     | 1079 |
| 13.282.1.2 ENABLE_ALL_CHECKINGS . . . . .         | 1079 |
| 13.282.2 Function Documentation . . . . .         | 1080 |
| 13.282.2.1 check_frmv() . . . . .                 | 1080 |
| 13.282.2.2 run_with_field() . . . . .             | 1080 |
| 13.282.2.3 main() . . . . .                       | 1080 |
| 13.283 test-frsm-check.C File Reference . . . . . | 1080 |
| 13.283.1 Macro Definition Documentation . . . . . | 1080 |
| 13.283.1.1 ENABLE_ALL_CHECKINGS . . . . .         | 1080 |
| 13.283.2 Function Documentation . . . . .         | 1080 |
| 13.283.2.1 main() . . . . .                       | 1080 |
| 13.284 test-frsm.C File Reference . . . . .       | 1081 |
| 13.284.1 Macro Definition Documentation . . . . . | 1081 |
| 13.284.1.1 __FFLASFFPACK_SEQUENTIAL . . . . .     | 1081 |
| 13.284.1.2 ENABLE_ALL_CHECKINGS . . . . .         | 1081 |
| 13.284.2 Function Documentation . . . . .         | 1081 |
| 13.284.2.1 check_frsm() . . . . .                 | 1081 |
| 13.284.2.2 run_with_field() . . . . .             | 1082 |
| 13.284.2.3 main() . . . . .                       | 1082 |
| 13.285 test-frssyr2k.C File Reference . . . . .   | 1082 |
| 13.285.1 Macro Definition Documentation . . . . . | 1082 |
| 13.285.1.1 ENABLE_ALL_CHECKINGS . . . . .         | 1082 |
| 13.285.2 Function Documentation . . . . .         | 1082 |
| 13.285.2.1 check_frssyr2k() . . . . .             | 1082 |
| 13.285.2.2 run_with_field() . . . . .             | 1083 |
| 13.285.2.3 main() . . . . .                       | 1083 |
| 13.286 test-frstr.C File Reference . . . . .      | 1083 |
| 13.286.1 Macro Definition Documentation . . . . . | 1083 |
| 13.286.1.1 ENABLE_ALL_CHECKINGS . . . . .         | 1083 |
| 13.286.2 Function Documentation . . . . .         | 1084 |
| 13.286.2.1 check_frstr() . . . . .                | 1084 |
| 13.286.2.2 run_with_field() . . . . .             | 1084 |
| 13.286.2.3 main() . . . . .                       | 1084 |
| 13.287 test-frsv.C File Reference . . . . .       | 1084 |
| 13.287.1 Macro Definition Documentation . . . . . | 1085 |
| 13.287.1.1 __FFLASFFPACK_SEQUENTIAL . . . . .     | 1085 |

|   |      |
|---|------|
| 13.287.1.2 <a href="#">ENABLE_ALL_CHECKINGS</a>     | 1085 |
| 13.287.2 Function Documentation                     | 1085 |
| 13.287.2.1 <a href="#">check_ftsv()</a>             | 1085 |
| 13.287.2.2 <a href="#">run_with_field()</a>         | 1085 |
| 13.287.2.3 <a href="#">main()</a>                   | 1085 |
| 13.288 test-ftsri.C File Reference                  | 1085 |
| 13.288.1 Macro Definition Documentation             | 1086 |
| 13.288.1.1 <a href="#">__FFLASFFPACK_SEQUENTIAL</a> | 1086 |
| 13.288.1.2 <a href="#">ENABLE_ALL_CHECKINGS</a>     | 1086 |
| 13.288.2 Function Documentation                     | 1086 |
| 13.288.2.1 <a href="#">check_ftsri()</a>            | 1086 |
| 13.288.2.2 <a href="#">run_with_field()</a>         | 1086 |
| 13.288.2.3 <a href="#">main()</a>                   | 1086 |
| 13.289 test-interfaces-c.c File Reference           | 1086 |
| 13.289.1 Function Documentation                     | 1087 |
| 13.289.1.1 <a href="#">main()</a>                   | 1087 |
| 13.290 test-invert-check.C File Reference           | 1087 |
| 13.290.1 Macro Definition Documentation             | 1087 |
| 13.290.1.1 <a href="#">ENABLE_ALL_CHECKINGS</a>     | 1087 |
| 13.290.2 Function Documentation                     | 1087 |
| 13.290.2.1 <a href="#">main()</a>                   | 1087 |
| 13.291 test-io.C File Reference                     | 1087 |
| 13.291.1 Function Documentation                     | 1088 |
| 13.291.1.1 <a href="#">run_with_field()</a>         | 1088 |
| 13.291.1.2 <a href="#">main()</a>                   | 1088 |
| 13.292 test-lu.C File Reference                     | 1088 |
| 13.292.1 Macro Definition Documentation             | 1089 |
| 13.292.1.1 <a href="#">BASECASE_K</a>               | 1089 |
| 13.292.1.2 <a href="#">__FFLASFFPACK_SEQUENTIAL</a> | 1089 |
| 13.292.1.3 <a href="#">__LUDIVINE_CUTOFF</a>        | 1089 |
| 13.292.2 Function Documentation                     | 1089 |
| 13.292.2.1 <a href="#">test_LUdivine()</a>          | 1089 |
| 13.292.2.2 <a href="#">verifPLUQ()</a>              | 1090 |
| 13.292.2.3 <a href="#">test_pluq()</a>              | 1090 |
| 13.292.2.4 <a href="#">launch_test()</a>            | 1091 |
| 13.292.2.5 <a href="#">run_with_field()</a>         | 1091 |
| 13.292.2.6 <a href="#">main()</a>                   | 1091 |
| 13.292.3 Variable Documentation                     | 1091 |
| 13.292.3.1 <a href="#">tperm</a>                    | 1091 |
| 13.292.3.2 <a href="#">tgemm</a>                    | 1091 |
| 13.292.3.3 <a href="#">tBC</a>                      | 1092 |
| 13.292.3.4 <a href="#">ttrsm</a>                    | 1092 |

|   |      |
|---|------|
| 13.292.3.5 trest                                    | 1092 |
| 13.292.3.6 timtot                                   | 1092 |
| 13.292.3.7 mvcnt                                    | 1092 |
| 13.293 test-maxdelayeddim.C File Reference          | 1092 |
| 13.293.1 Macro Definition Documentation             | 1092 |
| 13.293.1.1 MAX_WITH_SIZE_T                          | 1092 |
| 13.293.2 Function Documentation                     | 1092 |
| 13.293.2.1 test()                                   | 1092 |
| 13.293.2.2 main()                                   | 1092 |
| 13.294 test-minpoly.C File Reference                | 1093 |
| 13.294.1 Function Documentation                     | 1093 |
| 13.294.1.1 check_minpoly()                          | 1093 |
| 13.294.1.2 run_with_field()                         | 1093 |
| 13.294.1.3 main()                                   | 1093 |
| 13.295 test-multifile1.C File Reference             | 1093 |
| 13.296 test-multifile2.C File Reference             | 1094 |
| 13.296.1 Function Documentation                     | 1094 |
| 13.296.1.1 main()                                   | 1094 |
| 13.297 test-nullspace.C File Reference              | 1094 |
| 13.297.1 Function Documentation                     | 1094 |
| 13.297.1.1 checkingMessage()                        | 1094 |
| 13.297.1.2 readOrRandomMatrixWithRankAndRandomRPM() | 1094 |
| 13.297.1.3 test_nullspace()                         | 1095 |
| 13.297.1.4 run_with_field()                         | 1095 |
| 13.297.1.5 main()                                   | 1095 |
| 13.298 test-permutations.C File Reference           | 1095 |
| 13.298.1 Function Documentation                     | 1096 |
| 13.298.1.1 checkMonotonicApplyP()                   | 1096 |
| 13.298.1.2 main()                                   | 1096 |
| 13.298.2 Variable Documentation                     | 1096 |
| 13.298.2.1 tperm                                    | 1096 |
| 13.298.2.2 tgemm                                    | 1096 |
| 13.298.2.3 tBC                                      | 1096 |
| 13.298.2.4 ttrsm                                    | 1096 |
| 13.298.2.5 trest                                    | 1096 |
| 13.298.2.6 timtot                                   | 1096 |
| 13.299 test-pluq-check.C File Reference             | 1096 |
| 13.299.1 Macro Definition Documentation             | 1097 |
| 13.299.1.1 ENABLE_ALL_CHECKINGS                     | 1097 |
| 13.299.2 Function Documentation                     | 1097 |
| 13.299.2.1 main()                                   | 1097 |
| 13.300 test-quasisep.C File Reference               | 1097 |

|  |      |
|--|------|
| 13.300.1 Function Documentation                | 1097 |
| 13.300.1.1 test_BruhatGenerator()              | 1097 |
| 13.300.1.2 launch_test()                       | 1098 |
| 13.300.1.3 testLTQSRPM()                       | 1098 |
| 13.300.1.4 run_with_field()                    | 1098 |
| 13.300.1.5 main()                              | 1098 |
| 13.301 test-rankprofiles.C File Reference      | 1098 |
| 13.301.1 Macro Definition Documentation        | 1099 |
| 13.301.1.1 __FFLASFFPACK_SEQUENTIAL            | 1099 |
| 13.301.2 Function Documentation                | 1099 |
| 13.301.2.1 run_with_field()                    | 1099 |
| 13.301.2.2 main()                              | 1099 |
| 13.302 test-rpm.C File Reference               | 1099 |
| 13.302.1 Function Documentation                | 1099 |
| 13.302.1.1 checkRPM()                          | 1099 |
| 13.302.1.2 checkSymmetricRPM()                 | 1100 |
| 13.302.1.3 main()                              | 1100 |
| 13.303 test-simd.C File Reference              | 1100 |
| 13.303.1 Macro Definition Documentation        | 1101 |
| 13.303.1.1 _TEST_ONE                           | 1101 |
| 13.303.1.2 TEST_ONE_OP                         | 1101 |
| 13.303.1.3 TEST_ONE_OP_WZ                      | 1101 |
| 13.303.1.4 TEST_IMPL                           | 1102 |
| 13.303.2 Function Documentation                | 1102 |
| 13.303.2.1 check_eq() [1/2]                    | 1102 |
| 13.303.2.2 check_eq() [2/2]                    | 1102 |
| 13.303.2.3 cmp()                               | 1102 |
| 13.303.2.4 eval_func_on_array() [1/3]          | 1102 |
| 13.303.2.5 eval_func_on_array() [2/3]          | 1102 |
| 13.303.2.6 eval_func_on_array() [3/3]          | 1102 |
| 13.303.2.7 operator<<()                        | 1102 |
| 13.303.2.8 test_impl_base() [1/2]              | 1103 |
| 13.303.2.9 test_impl_base() [2/2]              | 1103 |
| 13.303.2.10 test_impl()                        | 1103 |
| 13.303.2.11 main()                             | 1103 |
| 13.304 test-solve.C File Reference             | 1103 |
| 13.304.1 Function Documentation                | 1103 |
| 13.304.1.1 check_solve()                       | 1103 |
| 13.304.1.2 run_with_field()                    | 1103 |
| 13.304.1.3 main()                              | 1104 |
| 13.305 test-storage-transpose.C File Reference | 1104 |
| 13.305.1 Function Documentation                | 1104 |

|  |      |
|--|------|
| 13.305.1.1 main()                      | 1104 |
| 13.306 101-fgemv.C File Reference      | 1104 |
| 13.306.1 Function Documentation        | 1105 |
| 13.306.1.1 main()                      | 1105 |
| 13.307 2x2-fgemv.C File Reference      | 1105 |
| 13.307.1 Function Documentation        | 1105 |
| 13.307.1.1 main()                      | 1105 |
| 13.308 2x2-ftrsv.C File Reference      | 1105 |
| 13.308.1 Function Documentation        | 1105 |
| 13.308.1.1 main()                      | 1105 |
| 13.309 2x2-pluq.C File Reference       | 1106 |
| 13.309.1 Function Documentation        | 1106 |
| 13.309.1.1 main()                      | 1106 |
| 13.310 fflas-101_1.C File Reference    | 1106 |
| 13.310.1 Function Documentation        | 1106 |
| 13.310.1.1 main()                      | 1106 |
| 13.311 fflas-101_3.C File Reference    | 1106 |
| 13.311.1 Function Documentation        | 1107 |
| 13.311.1.1 main()                      | 1107 |
| 13.312 fflas_101.C File Reference      | 1107 |
| 13.312.1 Function Documentation        | 1107 |
| 13.312.1.1 main()                      | 1107 |
| 13.313 fflas_101_lvl1.C File Reference | 1107 |
| 13.313.1 Function Documentation        | 1107 |
| 13.313.1.1 main()                      | 1107 |
| 13.314 ffpac-fgesv.C File Reference    | 1107 |
| 13.314.1 Function Documentation        | 1108 |
| 13.314.1.1 main()                      | 1108 |
| 13.315 ffpac-solve.C File Reference    | 1108 |
| 13.315.1 Function Documentation        | 1108 |
| 13.315.1.1 main()                      | 1108 |

# Chapter 1

## FFLAS-FFPACK Documentation.

### 1.1 Introduction

FFLAS-FFPACK is a LGPL-2.1+ source code library for basic linear algebra operations over a finite field. It is inspired by BLAS interface (Basic Linear Algebra Subprograms) and the LAPACK library for numerical linear algebra, and shares part of their design. Yet it differs in many aspects due to the specifics of computing over a finite field:

- it is generic with respect to the finite field, so as to accomodate a large variety of field sizes and implementations;
- it is a pure source code library, to be included and compiled in the user's software. Its build system is only used for tests and benchmarks.

### 1.2 Goals

### 1.3 Design

### 1.4 Using FFLAS-FFPACK.

- [Copying and Licence](#).
- [Tutorial](#). This is a brief introduction to FFLAS-[FFPACK](#) capabilities.
- [Configuring and Installing FFLAS-FFPACK](#). Explains how to configure/install from sources or from the latest svn version.
- [Architecture of the library](#).. Describes how FFLAS-FFPACK is organized
- [Documentation for Users](#). If everything around is blue, then you are reading the lighter, user-oriented, documentation.
- [Documentation for Developers](#). If everything around is green, then you can get to everything (not necessarily yet) documented.

## 1.5 Contributing to fflas-ffpack, getting assistance.

Version

2.5.0

## 1.6 Copying and Licence

The FFLAS-FFPACK library is licensed under the terms of the GNU LGPL v2.1 or later.

See <https://www.gnu.org/licenses/lgpl-2.1.html>

## 1.7 Tutorial

no doc.

## 1.8 Configuring and Installing FFLAS-FFPACK

FFLAS-FFPACK is a header-only package.

Howver configuration process can be tweaked a lot. Configure looks for BLAS routines and [Givaro](#) library which are both mandatory dependencies. See the output of `./configure -help` for information about the LAPACK/↔ BLAS discovering strategies.

## 1.9 Architecture of the library.

no doc.



## Chapter 2

# Bug List

Global **DOUBLE\_TO\_FLOAT\_CROSSOVER**

to be benchmarked.

Global **FFLAS::details::pack\_lhs** (int64\_t \*XX, const int64\_t \*X, size\_t ldx, size\_t rows, size\_t cols)

this is fassign

this is fassign

Global **FFLAS::details::pack\_rhs** (int64\_t \*XX, const int64\_t \*X, size\_t ldx, size\_t rows, size\_t cols)

this is fassign

this is fassign

Global **FFLAS::fconvert** (const Field &F, const size\_t n, OtherElement\_ptr X, const size\_t incX, typename **Field::ConstElement\_ptr** Y, const size\_t incY)

use cblas\_(d)scal when possible

Global **FFLAS::fconvert** (const FFLAS\_FIELD< FFLAS\_ELT > &F, const size\_t n, FFLAS\_ELT \*X, const size\_t incX, const FFLAS\_ELT \*Y, const size\_t incY)

use cblas\_(d)scal when possible

Global **FFLAS::finit** (const Field &F, const size\_t n, const OtherElement\_ptr Y, const size\_t incY, typename **Field::Element\_ptr** X, const size\_t incX)

use cblas\_(d)scal when possible

Global **FFLAS::finit** (const FFLAS\_FIELD< FFLAS\_ELT > &F, const size\_t n, const FFLAS\_ELT \*Y, const size\_t incY, FFLAS\_ELT \*X, const size\_t incX)

use cblas\_(d)scal when possible

Global **FFLAS::fneg** (const Field &F, const size\_t n, typename **Field::ConstElement\_ptr** Y, const size\_t incY, typename **Field::Element\_ptr** X, const size\_t incX)

use cblas\_(d)scal when possible

Global **FFLAS::fneg** (const FFLAS\_FIELD< FFLAS\_ELT > &F, const size\_t n, const FFLAS\_ELT \*Y, const size\_t incY, FFLAS\_ELT \*X, const size\_t incX)

use cblas\_(d)scal when possible

Global **FFLAS::fnegin** (const Field &F, const size\_t n, typename **Field::Element\_ptr** X, const size\_t incX)

use cblas\_(d)scal when possible

Global **FFLAS::fnegin** (const FFLAS\_FIELD< FFLAS\_ELT > &F, const size\_t n, FFLAS\_ELT \*X, const size\_t incX)

use cblas\_(d)scal when possible

Global **FFLAS::freduce** (const Field &F, const size\_t n, typename Field::Element\_ptr X, const size\_t incX)

use cblas\_(d)scal when possible

Global **FFLAS::freduce** (const Field &F, const size\_t n, typename Field::ConstElement\_ptr Y, const size\_t incY, typename Field::Element\_ptr X, const size\_t incX)

use cblas\_(d)scal when possible

Global **FFLAS::freduce** (const FFLAS\_FIELD< FFLAS\_ELT > &F, const size\_t n, FFLAS\_ELT \*X, const size\_t incX)

use cblas\_(d)scal when possible

Global **FFLAS::freduce** (const FFLAS\_FIELD< FFLAS\_ELT > &F, const size\_t n, const FFLAS\_ELT \*Y, const size\_t incY, FFLAS\_ELT \*X, const size\_t incX)

use cblas\_(d)scal when possible

Global **FFLAS::fscale** (const Field &F, const size\_t n, const typename Field::Element alpha, typename Field::ConstElement\_ptr X, const size\_t incX, typename Field::Element\_ptr Y, const size\_t incY)

use cblas\_(d)scal when possible

Global **FFLAS::fscale** (const FFLAS\_FIELD< FFLAS\_ELT > &F, const size\_t n, const FFLAS\_ELT alpha, const FFLAS\_ELT \*X, const size\_t incX, FFLAS\_ELT \*Y, const size\_t incY)

use cblas\_(d)scal when possible

Global **FFLAS::fscalein** (const Field &F, const size\_t n, const typename Field::Element alpha, typename Field::Element\_ptr X, const size\_t incX)

use cblas\_(d)scal when possible

Global **FFLAS::fscalein** (const FFLAS\_FIELD< FFLAS\_ELT > &F, const size\_t n, const FFLAS\_ELT alpha, FFLAS\_ELT \*X, const size\_t incX)

use cblas\_(d)scal when possible

Global **FFLAS::fsquare** (const Field &F, const FFLAS\_TRANSPOSE ta, const size\_t n, const typename Field::Element alpha, typename Field::ConstElement\_ptr A, const size\_t lda, const typename Field::Element beta, typename Field::Element\_ptr C, const size\_t ldc)

why double ?

Global **FFLAS::fswap** (const Field &F, const size\_t N, typename Field::Element\_ptr X, const size\_t incX, typename Field::Element\_ptr Y, const size\_t incY)

use cblas\_dswap when double

Global **FFLAS::fswap** (const FFLAS\_FIELD< FFLAS\_ELT > &F, const size\_t N, FFLAS\_ELT \*X, const size\_t incX, FFLAS\_ELT \*Y, const size\_t incY)

use cblas\_dswap when double

Global **FFLAS::ftrsm** (const Field &F, const FFLAS\_SIDE Side, const FFLAS\_UPLO Uplo, const FFLAS\_TRANSPOSE TransA, const FFLAS\_DIAG Diag, const size\_t M, const size\_t N, const typename Field::Element alpha, typename Field::ConstElement\_ptr A, const size\_t lda, typename Field::Element\_ptr B, const size\_t ldb)

$\alpha$  must be non zero.

---

Global **FFLAS::ftrsm** (const FFLAS\_FIELD< FFLAS\_ELT > &F, const FFLAS\_SIDE Side, const FFLAS\_UPLO Uplo, const FFLAS\_TRANSPOSE TransA, const FFLAS\_DIAG Diag, const size\_t M, const size\_t N, const FFLAS\_ELT alpha, const FFLAS\_ELT \*A, const size\_t lda, FFLAS\_ELT \*B, const size\_t ldb)

$\alpha$  must be non zero.

Global **FFPACK::buildMatrix** (const Field &F, typename **Field::ConstElement\_ptr** E, typename **Field::ConstElement\_ptr** C, const size\_t lda, const size\_t \*B, const size\_t \*T, const size\_t me, const size\_t mc, const size\_t lambda, const size\_t mu)

is this :

Global **FFPACK::invert2** (const Field &F, const size\_t M, typename **Field::Element\_ptr** A, const size\_t lda, typename **Field::Element\_ptr** X, const size\_t ldx, int &>nullity)

not tested.

Global **launch\_fger\_dispatch** (const Field &F, const size\_t nn, const typename **Field::Element** alpha, const size\_t iters, RandIter &G)

test for incx equal

test for transpo

Global **launch\_MM\_dispatch** (const Field &F, const int mm, const int nn, const int kk, const typename **Field::Element** alpha, const typename **Field::Element** beta, const size\_t iters, RandIter &G)

test for ldX equal

test for transpo

Global **launch\_MM\_dispatch** (const Field &F, const int mm, const int nn, const int kk, const typename **Field::Element** alpha, const typename **Field::Element** beta, const size\_t iters, const int nbw, const bool par, RandIter &G)

test for ldX equal

test for transpo

Global **printvect** (std::ostream &o, vector< T > &vect)

does not belong here



## Chapter 3

# Bibliography

Global **FFLAS::Protected::TRSMBound** (const Givaro::ModularBalanced< Element > &F)

- Dumas Giorgi Pernet 06, arXiv:cs/0601133

Global **FFPACK::LeadingSubmatrixRankProfiles** (const size\_t M, const size\_t N, const size\_t R, const size\_t LSm, const size\_t LSn, const size\_t \*P, const size\_t \*Q, size\_t \*RRP, size\_t \*CRP)

- Dumas J-G., Pernet C., and Sultan Z. *Simultaneous computation of the row and column rank profiles*, ISSAC'13.

Global **FFPACK::LUdivine** (const Field &F, const **FFLAS::FFLAS\_DIAG** Diag, const **FFLAS::FFLAS\_TRANSPOSE** trans, const size\_t M, const size\_t N, typename **Field::Element\_ptr** A, const size\_t lda, size\_t \*P, size\_t \*Qt, const FFPACK\_LU\_TAG LuTag=FfpackSlabRecursive, const size\_t cutoff=\_\_FFLASFFPACK\_LUDIVINE\_THRESHOLD)

- Jeannerod C-P, Pernet, C. and Storjohann, A. *Rank-profile revealing Gaussian elimination and the CUP matrix decomposition*, J. of Symbolic Comp., 2013
- Pernet C, Brassel M *LUdivine, une divine factorisation LU*, 2002

Global **FFPACK::PLUQ** (const Field &F, const **FFLAS::FFLAS\_DIAG** Diag, const size\_t M, const size\_t N, typename **Field::Element\_ptr** A, const size\_t lda, size\_t \*P, size\_t \*Q)

- Dumas J-G., Pernet C., and Sultan Z. *Simultaneous computation of the row and column rank profiles*, ISSAC'13, 2013

Global **FFPACK::productBruhatxTS** (const Field &Fi, size\_t N, size\_t s, size\_t r, size\_t t, const size\_t \*P, const size\_t \*Q, typename **Field::ConstElement\_ptr** Xu, size\_t ldu, size\_t NbBlocksU, const size\_t \*Ku, const size\_t \*Tu, const size\_t \*MU, typename **Field::ConstElement\_ptr** XI, size\_t ldl, size\_t NbBlocksL, const size\_t \*KI, const size\_t \*TI, const size\_t \*ML, typename **Field::Element\_ptr** B, size\_t ldb, const typename **Field::Element** beta, typename **Field::Element\_ptr** D, size\_t ldd)

Pernet C. and Storjohann A. *Time and space efficient generators for quasiseparable matrices*, JSC (85), 2018, doi:10.1016/j.jsc.2017.07.010

Global `FFPACK::Protected::GaussJordan` (const Field &F, const size\_t M, const size\_t N, typename Field::Element\_ptr A, const size\_t lda, const size\_t colbeg, const size\_t rowbeg, const size\_t colsize, size\_t \*P, size\_t \*Q, const FFPACK::FFPACK\_LU\_TAG LuTag)

- Algorithm 2.8 of A. Storjohann Thesis 2000,
- Algorithm 11 of Jeannerod C-P., Pernet, C. and Storjohann, A. *Rank-profile revealing Gaussian elimination and the CUP matrix decomposition*, J. of Symbolic Comp., 2013

Class `ftsrmlLeftUpperNoTransNonUnit` < Element >

- Dumas, Giorgi, Pernet 06, arXiv:cs/0601133.

## Chapter 4

# Todo List

File [debug.h](#)

we should put vector printing elsewhere.

Global [FFLAS::fadd](#) (const Field &F, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t incA, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) B, const size\_t incB, typename [Field::Element\\_ptr](#) C, const size\_t incC)

optimise here

Global [FFLAS::fassign](#) (const Field &F, const size\_t N, typename [Field::ConstElement\\_ptr](#) Y, const size\_t incY, typename [Field::Element\\_ptr](#) X, const size\_t incX)

variant for triangular matrix

Global [FFLAS::fassign](#) (const FFLAS\_FIELD< FFLAS\_ELT > &F, const size\_t N, const FFLAS\_ELT \*Y, const size\_t incY, FFLAS\_ELT \*X, const size\_t incX)

variant for triangular matrix

Global [FFLAS::fconvert](#) (const Field &F, const size\_t m, const size\_t n, OtherElement\_ptr A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb)

check if n == lda

Global [FFLAS::fneg](#) (const Field &F, const size\_t m, const size\_t n, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, typename [Field::Element\\_ptr](#) A, const size\_t lda)

check if n == lda

Global [FFLAS::fnegin](#) (const Field &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda)

check if n == lda

Global [FFLAS::fscal](#) (const Field &F, const size\_t n, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, typename [Field::Element\\_ptr](#) Y, const size\_t incY)

check if comparison with +/-1,0 is necessary.

Global [FFLAS::fscal](#) (const FFLAS\_FIELD< FFLAS\_ELT > &F, const size\_t n, const FFLAS\_ELT alpha, const FFLAS\_ELT \*X, const size\_t incX, FFLAS\_ELT \*Y, const size\_t incY)

check if comparison with +/-1,0 is necessary.

Global [FFLAS::fscalin](#) (const Field &F, const size\_t n, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) X, const size\_t incX)

check if comparison with +/-1,0 is necessary.

Global **FFLAS::fscaln** (const FFLAS\_FIELD< FFLAS\_ELT > &F, const size\_t n, const FFLAS\_ELT alpha, FFLAS\_ELT \*X, const size\_t incX)

check if comparison with +/-1,0 is necessary.

Global **FFLAS::Protected::igemm** (const enum FFLAS\_TRANSPOSE TransA, const enum FFLAS\_TRANSPOSE TransB, size\_t rows, size\_t cols, size\_t depth, const int64\_t alpha, const int64\_t \*A, size\_t lda, const int64\_t \*B, size\_t ldb, const int64\_t beta, int64\_t \*C, size\_t ldc)

use primitive (no **Field()**) and specialise for int64.

Global **FFLAS::Protected::MatF2MatFI\_Triangular** (const Field &F, Givaro::FloatDomain::Element\_ptr S, const size\_t lds, typename **Field::ConstElement\_ptr** const E, const size\_t lde, const size\_t m, const size\_t n)

do finit(...,FFLAS\_TRANS,FFLAS\_DIAG)

do fconvert(...,FFLAS\_TRANS,FFLAS\_DIAG)

Global **FFPACK::getTriangular** (const Field &F, const **FFLAS::FFLAS\_UPLO** Uplo, const **FFLAS::FFLAS\_DIAG** diag, const size\_t M, const size\_t N, const size\_t R, typename **Field::ConstElement\_ptr** A, const size\_t lda, typename **Field::Element\_ptr** T, const size\_t ldt, const bool OnlyNonZeroVectors=false)

just one triangular fzero+fassign ?

Global **FFPACK::getTriangular** (const Field &F, const **FFLAS::FFLAS\_UPLO** Uplo, const **FFLAS::FFLAS\_DIAG** diag, const size\_t M, const size\_t N, const size\_t R, typename **Field::Element\_ptr** A, const size\_t lda)

just one triangular fzero+fassign ?

Global **FFPACK::Invert2** (const Field &F, const size\_t M, typename **Field::Element\_ptr** A, const size\_t lda, typename **Field::Element\_ptr** X, const size\_t ldx, int &>nullity)

this init is not all necessary (done after ftrtri)

Global **FFPACK::LUdivine** (const Field &F, const **FFLAS::FFLAS\_DIAG** Diag, const **FFLAS::FFLAS\_TRANSPOSE** trans, const size\_t M, const size\_t N, typename **Field::Element\_ptr** A, const size\_t lda, size\_t \*P, size\_t \*Q, const FFPACK::FFPACK\_LU\_TAG LuTag, const size\_t cutoff)

std::swap ?

Global **FFPACK::Protected::RandomKrylovPrecond** (const PolRing &PR, std::list< typename PolRing::Element > &completedFactors, const size\_t N, typename PolRing::Domain\_t::Element\_ptr A, const size\_t lda, size\_t &Nb, typename PolRing::Domain\_t::Element\_ptr &B, size\_t &ldb, typename PolRing::Domain\_t::RandIter &g, const size\_t degree=\_\_FFLASFFPACK\_ARITHPROG\_THRESHOLD)

swap to save space ??

don't assing K2 c\*noc x N but only mas (c,noc) x N and store each one after the other

## Module **field**

biblio

Global **launch\_fger\_dispatch** (const Field &F, const size\_t nn, const typename **Field::Element** alpha, const size\_t iters, RandIter &G)

does nbw actually do nbw recursive calls and then call blas (check ?) ?

Global **launch\_MM\_dispatch** (const Field &F, const int mm, const int nn, const int kk, const typename **Field::Element** alpha, const typename **Field::Element** beta, const size\_t iters, RandIter &G)

does nbw actually do nbw recursive calls and then call blas (check ?) ?



---

Global `launch_MM_dispatch` (const Field &F, const int mm, const int nn, const int kk, const typename `Field::Element` alpha, const typename `Field::Element` beta, const size\_t iters, const int nbw, const bool par, RandIter &G)

does nbw actually do nbw recursive calls and then call blas (check ?) ?

Module `MMalgos`

biblio

Module `simd`

biblio

Global `test_colechelon` (Field &F, size\_t m, size\_t n, size\_t r, size\_t iters, `FFPACK::FFPACK_LU_TAG` LuTag, RandIter &G, bool par)

check Ida

Global `test_det` (Field &F, size\_t n, int iter, RandIter &G)

test with stride

Global `test_redcochelon` (Field &F, size\_t m, size\_t n, size\_t r, size\_t iters, `FFPACK::FFPACK_LU_TAG` LuTag, RandIter &G, bool par)

check Ida

Global `test_redrowechelon` (Field &F, size\_t m, size\_t n, size\_t r, size\_t iters, `FFPACK::FFPACK_LU_TAG` LuTag, RandIter &G, bool par)

check Ida

Global `test_rowechelon` (Field &F, size\_t m, size\_t n, size\_t r, size\_t iters, `FFPACK::FFPACK_LU_TAG` LuTag, RandIter &G, bool par)

check Ida



# Chapter 5

## Topic Index

### 5.1 Topics

Here is a list of all topics with brief descriptions:

|  |    |
|--|----|
| CHECKER . . . . .                          | 41 |
| FFLAS-FFPACK . . . . .                     | 41 |
| FFLAS . . . . .                            | 41 |
| Interfaces . . . . .                       | 42 |
| Matrix Multiplication Algorithms . . . . . | 42 |
| SIMD wrapper . . . . .                     | 42 |
| FFPACK . . . . .                           | 42 |
| FFLAS-FFPACK fields . . . . .              | 43 |
| RNS . . . . .                              | 43 |



## Chapter 6

# Namespace Index

### 6.1 Namespace List

Here is a list of all namespaces with brief descriptions:

|   |     |
|---|-----|
| FFLAS   | 45  |
| FFLAS::_ftranspose_impl   | 190 |
| FFLAS::BLAS3  | 191 |
| FFLAS::csr_hyb_details  | 197 |
| FFLAS::CuttingStrategy  | 197 |
| FFLAS::details  | 198 |
| FFLAS::details_spmv   | 206 |
| FFLAS::ElementCategories  | 207 |
| FFLAS::FieldCategories  |     |
| Traits and categories will need to be placed in a proper file later                 | 207 |
| FFLAS::MMHelperAlgo   | 207 |
| FFLAS::ModeCategories   |     |
| Specifies the mode of action for an algorithm w.r.t                                 | 208 |
| FFLAS::ParSeqHelper   |     |
| ParSeqHelper for both fgemm and ftrsm   | 208 |
| FFLAS::Protected  | 209 |
| FFLAS::sell_details   | 223 |
| FFLAS::sparse_details   | 223 |
| FFLAS::sparse_details_impl  | 237 |
| FFLAS::StrategyParameter  | 278 |
| FFLAS::StructureHelper  |     |
| StructureHelper for ftrsm   | 278 |
| FFLAS::vectorised   | 278 |
| FFLAS::vectorised::unswitch   | 284 |
| FFPACK  |     |
| Finite Field <b>PACK</b> Set of elimination based routines for dense linear algebra | 287 |
| FFPACK::Protected   | 391 |
| Givaro  | 398 |
| MKL_CONFIG  | 398 |
| RecInt  | 398 |



## Chapter 7

# Hierarchical Index

### 7.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

|  |     |
|--|-----|
| AlgoChooser< ModeT, ParSeq > . . . . .   | 401 |
| AlgoChooser< ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeq > . . . . . | 401 |
| ALL< v > . . . . .   | 401 |
| ALL< false, v... > . . . . .   | 402 |
| ALL< true, v... > . . . . .  | 402 |
| ALL<> . . . . .  | 402 |
| ArbitraryPrecIntTag . . . . .  | 402 |
| AreEqual< X, Y > . . . . .   | 403 |
| AreEqual< X, X > . . . . .   | 403 |
| Argument . . . . .   | 403 |
| associatedDelayedField< Field > . . . . .  | 404 |
| associatedDelayedField< const FFPACK::RNSIntegerMod< RNS > > . . . . .                         | 404 |
| associatedDelayedField< const Givaro::Modular< T, X > > . . . . .                              | 405 |
| associatedDelayedField< const Givaro::ModularBalanced< T > > . . . . .                         | 405 |
| associatedDelayedField< const Givaro::ZRing< T > > . . . . .                                   | 406 |
| Auto . . . . .   | 406 |
| Bench< Elt > . . . . .   | 406 |
| Bini . . . . .   | 409 |
| Block . . . . .  | 409 |
| BlockTransposeSIMD< Field, Simd, > . . . . .   | 409 |
| callLUdivine_small< Element > . . . . .  | 411 |
| callLUdivine_small< double > . . . . .   | 411 |
| callLUdivine_small< float > . . . . .  | 412 |
| CharpolyFailed . . . . .   | 412 |
| Checker_Empty< Field > . . . . .   | 412 |
| CheckerImplem_charpoly< Field, Polynomial > . . . . .  | 413 |
| CheckerImplem_charpoly< Givaro::ZRing< Givaro::Integer >, Polynomial > . . . . .               | 414 |
| CheckerImplem_Det< Field > . . . . .   | 415 |
| CheckerImplem_fgemm< Field > . . . . .   | 417 |
| CheckerImplem_ftrsm< Field > . . . . .   | 418 |
| CheckerImplem_invert< Field > . . . . .  | 419 |
| CheckerImplem_PLUQ< Field > . . . . .  | 420 |
| Classic . . . . .  | 421 |
| Column . . . . .   | 421 |
| CompactElement< Element > . . . . .  | 421 |

|  |     |
|--|-----|
| CompactElement< double > . . . . .                           | 421 |
| CompactElement< float > . . . . .                            | 422 |
| CompactElement< int16_t > . . . . .                          | 422 |
| CompactElement< int32_t > . . . . .                          | 422 |
| CompactElement< int64_t > . . . . .                          | 422 |
| compatible_data_type< Field > . . . . .                      | 423 |
| compatible_data_type< Givaro::ZRing< double > > . . . . .    | 423 |
| compatible_data_type< Givaro::ZRing< float > > . . . . .     | 423 |
| Compose< H1, H2 > . . . . .                                  | 424 |
| Simd128_impl< true, true, false, 2 >::Converter . . . . .    | 425 |
| Simd128_impl< true, true, false, 4 >::Converter . . . . .    | 425 |
| Simd128_impl< true, true, false, 8 >::Converter . . . . .    | 425 |
| Simd128_impl< true, true, true, 2 >::Converter . . . . .     | 426 |
| Simd128_impl< true, true, true, 4 >::Converter . . . . .     | 426 |
| Simd128_impl< true, true, true, 8 >::Converter . . . . .     | 426 |
| Simd256_impl< true, false, true, 8 >::Converter . . . . .    | 427 |
| Simd256_impl< true, true, false, 2 >::Converter . . . . .    | 427 |
| Simd256_impl< true, true, false, 4 >::Converter . . . . .    | 427 |
| Simd256_impl< true, true, false, 8 >::Converter . . . . .    | 428 |
| Simd256_impl< true, true, true, 2 >::Converter . . . . .     | 428 |
| Simd256_impl< true, true, true, 4 >::Converter . . . . .     | 428 |
| Simd256_impl< true, true, true, 8 >::Converter . . . . .     | 429 |
| Simd512_impl< true, true, false, 8 >::Converter . . . . .    | 429 |
| Simd512_impl< true, true, true, 8 >::Converter . . . . .     | 429 |
| ConvertTo< T > . . . . .                                     | 430 |
| Coo< ValT, IdxT > . . . . .                                  | 430 |
| Coo< Field > . . . . .                                       | 432 |
| Coo< ValT, IdxT > . . . . .                                  | 433 |
| CooMat< Field > . . . . .                                    | 435 |
| CooMat< FFPACK::RNSInteger > . . . . .                       | 435 |
| count_nonconst_lvalue_reference< T > . . . . .               | 436 |
| count_nonconst_lvalue_reference< const T &, O... > . . . . . | 436 |
| count_nonconst_lvalue_reference< T &, O... > . . . . .       | 436 |
| count_nonconst_lvalue_reference< T, O... > . . . . .         | 436 |
| count_nonconst_lvalue_reference<> . . . . .                  | 437 |
| CsrMat< Field > . . . . .                                    | 437 |
| CsrMat< FFPACK::RNSInteger > . . . . .                       | 437 |
| DefaultBoundedTag . . . . .                                  | 438 |
| DefaultTag . . . . .   | 438 |
| DelayedTag . . . . .   | 438 |
| DivideAndConquer . . . . .                                   | 438 |
| ElementTraits< Element > . . . . .                           | 438 |
| ElementTraits< double > . . . . .                            | 439 |
| ElementTraits< FFPACK::rns_double_elt > . . . . .            | 439 |
| ElementTraits< float > . . . . .                             | 439 |
| ElementTraits< Givaro::Integer > . . . . .                   | 440 |
| ElementTraits< int16_t > . . . . .                           | 440 |
| ElementTraits< int32_t > . . . . .                           | 440 |
| ElementTraits< int64_t > . . . . .                           | 440 |
| ElementTraits< int8_t > . . . . .                            | 441 |
| ElementTraits< Reclnt::rint< K > > . . . . .                 | 441 |
| ElementTraits< Reclnt::rmint< K, MG > > . . . . .            | 441 |
| ElementTraits< Reclnt::ruint< K > > . . . . .                | 442 |
| ElementTraits< uint16_t > . . . . .                          | 442 |
| ElementTraits< uint32_t > . . . . .                          | 442 |
| ElementTraits< uint64_t > . . . . .                          | 442 |
| ElementTraits< uint8_t > . . . . .                           | 443 |
| EllMat< Field > . . . . .                                    | 443 |



|   |     |
|---|-----|
| EllMat< FFPACK::RNSInteger > . . . . .  | 443 |
| Failure . . . . .   | 444 |
| FailureCharpolyCheck . . . . .  | 445 |
| FailureDetCheck . . . . .   | 446 |
| FailureFgemmCheck . . . . .   | 446 |
| FailureInvertCheck . . . . .  | 446 |
| FailurePLUQCheck . . . . .  | 446 |
| FailureTrsmCheck . . . . .  | 446 |
| false_type  |     |
| isSparseMatrix< Field, M > . . . . .  | 481 |
| isSparseMatrixMKLFormat< F, M > . . . . .   | 485 |
| isSparseMatrixSimdFormat< F, M > . . . . .  | 485 |
| isZOSparseMatrix< F, M > . . . . .  | 486 |
| support_fast_mod< T > . . . . .   | 759 |
| support_simd< T > . . . . .   | 760 |
| support_simd_add< T > . . . . .   | 761 |
| support_simd_mod< T > . . . . .   | 761 |
| FieldSimd< _Field > . . . . .   | 446 |
| FieldTraits< Field > . . . . .  | 452 |
| FieldTraits< FFPACK::RNSInteger< T > > . . . . .  | 453 |
| FieldTraits< FFPACK::RNSIntegerMod< T > > . . . . .   | 453 |
| FieldTraits< Givaro::Modular< Element > > . . . . .   | 454 |
| FieldTraits< Givaro::ModularBalanced< Element > > . . . . .   | 454 |
| FieldTraits< Givaro::ZRing< double > > . . . . .  | 455 |
| FieldTraits< Givaro::ZRing< float > > . . . . .   | 455 |
| FieldTraits< Givaro::ZRing< Givaro::Integer > > . . . . .   | 456 |
| FieldTraits< Givaro::ZRing< int16_t > > . . . . .   | 456 |
| FieldTraits< Givaro::ZRing< int32_t > > . . . . .   | 457 |
| FieldTraits< Givaro::ZRing< int64_t > > . . . . .   | 457 |
| FieldTraits< Givaro::ZRing< Reclnt::ruint< K > > > . . . . .  | 458 |
| FieldTraits< Givaro::ZRing< uint16_t > > . . . . .  | 458 |
| FieldTraits< Givaro::ZRing< uint32_t > > . . . . .  | 459 |
| FieldTraits< Givaro::ZRing< uint64_t > > . . . . .  | 459 |
| Fixed . . . . .   | 460 |
| FixedPreclntTag . . . . .   | 460 |
| ScalFunctionsBase< Element, typename enable_if< is_floating_point< Element >::value >::type >←<br>::FloatingPointTestDistribution . . . . . | 460 |
| ForStrategy1D< blocksize_t, Cut, Param > . . . . .  | 461 |
| ForStrategy2D< blocksize_t, Cut, Param > . . . . .  | 463 |
| ftmmLeftLowerNoTransNonUnit< Element > . . . . .  | 467 |
| ftmmLeftLowerNoTransUnit< Element > . . . . .   | 467 |
| ftmmLeftLowerTransNonUnit< Element > . . . . .  | 467 |
| ftmmLeftLowerTransUnit< Element > . . . . .   | 467 |
| ftmmLeftUpperNoTransNonUnit< Element > . . . . .  | 467 |
| ftmmLeftUpperNoTransUnit< Element > . . . . .   | 467 |
| ftmmLeftUpperTransNonUnit< Element > . . . . .  | 467 |
| ftmmLeftUpperTransUnit< Element > . . . . .   | 468 |
| ftmmRightLowerNoTransNonUnit< Element > . . . . .   | 468 |
| ftmmRightLowerNoTransUnit< Element > . . . . .  | 468 |
| ftmmRightLowerTransNonUnit< Element > . . . . .   | 468 |
| ftmmRightLowerTransUnit< Element > . . . . .  | 468 |
| ftmmRightUpperNoTransNonUnit< Element > . . . . .   | 468 |
| ftmmRightUpperNoTransUnit< Element > . . . . .  | 468 |
| ftmmRightUpperTransNonUnit< Element > . . . . .   | 468 |
| ftmmRightUpperTransUnit< Element > . . . . .  | 469 |
| ftsmLeftLowerNoTransNonUnit< Element > . . . . .  | 469 |
| ftsmLeftLowerNoTransUnit< Element > . . . . .   | 469 |
| ftsmLeftLowerTransNonUnit< Element > . . . . .  | 469 |

|   |     |
|---|-----|
| ftsmLeftLowerTransUnit< Element > . . . . .                                 | 469 |
| ftsmLeftUpperNoTransNonUnit< Element > . . . . .                            | 469 |
| ftsmLeftUpperNoTransUnit< Element > . . . . .                               | 470 |
| ftsmLeftUpperTransNonUnit< Element > . . . . .                              | 470 |
| ftsmLeftUpperTransUnit< Element > . . . . .                                 | 470 |
| ftsmRightLowerNoTransNonUnit< Element > . . . . .                           | 470 |
| ftsmRightLowerNoTransUnit< Element > . . . . .                              | 470 |
| ftsmRightLowerTransNonUnit< Element > . . . . .                             | 470 |
| ftsmRightLowerTransUnit< Element > . . . . .                                | 470 |
| ftsmRightUpperNoTransNonUnit< Element > . . . . .                           | 470 |
| ftsmRightUpperNoTransUnit< Element > . . . . .                              | 471 |
| ftsmRightUpperTransNonUnit< Element > . . . . .                             | 471 |
| ftsmRightUpperTransUnit< Element > . . . . .                                | 471 |
| GenericTag . . . . .  | 471 |
| GenericTag . . . . .  | 471 |
| Grain . . . . .   | 471 |
| has_minus_eq_impl< C > . . . . .  | 471 |
| has_minus_impl< C > . . . . .   | 472 |
| has_mul_eq_impl< C > . . . . .  | 472 |
| has_mul_impl< C > . . . . .   | 472 |
| has_operation< T > . . . . .  | 473 |
| has_plus_eq_impl< C > . . . . .   | 473 |
| has_plus_impl< C > . . . . .  | 473 |
| HelperFlag . . . . .  | 474 |
| HelperMod< Field, ElementTraits > . . . . .                                 | 474 |
| HelperMod< Field, ElementCategories::MachineIntTag > . . . . .              | 475 |
| HelperMod< Field, FFLAS::ElementCategories::ArbitraryPrecIntTag > . . . . . | 476 |
| HelperMod< Field, FFLAS::ElementCategories::FixedPrecIntTag > . . . . .     | 476 |
| HelperMod< Field, FFLAS::ElementCategories::MachineFloatTag > . . . . .     | 477 |
| Hybrid . . . . .  | 478 |
| Info . . . . .  | 478 |
| Info . . . . .  | 479 |
| is_all_same< Args > . . . . .   | 480 |
| is_all_same< T, Args... > . . . . .   | 480 |
| is_all_same<> . . . . .   | 480 |
| is_simd< T > . . . . .  | 481 |
| Iterative . . . . .   | 487 |
| LazyTag . . . . .   | 487 |
| limits< T > . . . . .   | 488 |
| limits< char > . . . . .  | 488 |
| limits< double > . . . . .  | 488 |
| limits< float > . . . . .   | 489 |
| limits< Givaro::Integer > . . . . .   | 490 |
| limits< int > . . . . .   | 490 |
| limits< long > . . . . .  | 491 |
| limits< long long > . . . . .   | 491 |
| limits< Reclnt::rint< K > > . . . . .                                       | 492 |
| limits< Reclnt::ruint< K > > . . . . .                                      | 493 |
| limits< short int > . . . . .   | 493 |
| limits< signed char > . . . . .   | 494 |
| limits< unsigned char > . . . . .   | 495 |
| limits< unsigned int > . . . . .  | 495 |
| limits< unsigned long > . . . . .   | 496 |
| limits< unsigned long long > . . . . .                                      | 496 |
| limits< unsigned short int > . . . . .                                      | 497 |
| MachineFloatTag . . . . .   | 498 |
| MachineIntTag . . . . .   | 498 |
| MMHelper< Field, AlgoTrait, ModeTrait, ParSeqTrait > . . . . .              | 498 |

|  |     |
|--|-----|
| MMHelper< FFPACK::RNSInteger< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait > . . . . .                  | 503 |
| MMHelper< FFPACK::RNSIntegerMod< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait > . . . . .               | 505 |
| MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo< Dest >, ParSeqTrait > . . . . .                             | 507 |
| MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeqTrait > . . . . . | 509 |
| MMHelper< Field, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait > . . . . .                                    | 511 |
| ModeTraits< Field > . . . . .  | 512 |
| ModeTraits< Givaro::Modular< Element, Compute > > . . . . .  | 513 |
| ModeTraits< Givaro::Modular< Givaro::Integer, Compute > > . . . . .  | 513 |
| ModeTraits< Givaro::Modular< int16_t, Compute > > . . . . .  | 513 |
| ModeTraits< Givaro::Modular< int32_t, Compute > > . . . . .  | 514 |
| ModeTraits< Givaro::Modular< int64_t, uint64_t > > . . . . .   | 514 |
| ModeTraits< Givaro::Modular< int8_t, Compute > > . . . . .   | 514 |
| ModeTraits< Givaro::Modular< Reclnt::ruint< K >, Compute > > . . . . .   | 515 |
| ModeTraits< Givaro::Modular< uint16_t, Compute > > . . . . .   | 515 |
| ModeTraits< Givaro::Modular< uint32_t, Compute > > . . . . .   | 515 |
| ModeTraits< Givaro::Modular< uint8_t, Compute > > . . . . .  | 516 |
| ModeTraits< Givaro::ModularBalanced< Element > > . . . . .   | 516 |
| ModeTraits< Givaro::ModularBalanced< Givaro::Integer > > . . . . .   | 516 |
| ModeTraits< Givaro::ModularBalanced< int16_t > > . . . . .   | 517 |
| ModeTraits< Givaro::ModularBalanced< int32_t > > . . . . .   | 517 |
| ModeTraits< Givaro::ModularBalanced< int8_t > > . . . . .  | 517 |
| ModeTraits< Givaro::Montgomery< T > > . . . . .  | 517 |
| ModeTraits< Givaro::ZRing< double > > . . . . .  | 518 |
| ModeTraits< Givaro::ZRing< float > > . . . . .   | 518 |
| ModeTraits< Givaro::ZRing< Givaro::Integer > > . . . . .   | 518 |
| ModularBalanced< T > . . . . .   | 519 |
| ModularTag . . . . .   | 519 |
| Montgomery< T > . . . . .  | 519 |
| need_field_characteristic< Field > . . . . .   | 519 |
| need_field_characteristic< Givaro::Modular< Field > > . . . . .  | 519 |
| need_field_characteristic< Givaro::ModularBalanced< Field > > . . . . .  | 520 |
| NoSimd< T > . . . . .  | 520 |
| Parallel< C, P > . . . . .   | 522 |
| readMyMachineType< Field, T > . . . . .  | 525 |
| readMyMachineType< Field, mpz_t > . . . . .  | 525 |
| Recursive . . . . .  | 526 |
| Recursive . . . . .  | 526 |
| rint< K > . . . . .  | 526 |
| rns_double . . . . .   | 526 |
| rns_double_elt . . . . .   | 531 |
| rns_double_elt_cstptr . . . . .  | 533 |
| rns_double_elt_ptr . . . . .   | 535 |
| rns_double_extended . . . . .  | 538 |
| RNSElementTag . . . . .  | 542 |
| RNSInteger< RNS > . . . . .  | 542 |
| RNSInteger< FFPACK::rns_double > . . . . .   | 542 |
| RNSIntegerMod< RNS > . . . . .   | 545 |
| RNSIntegerMod< FFPACK::rns_double > . . . . .  | 545 |
| rnsRandIter< RNS > . . . . .   | 552 |
| RNSInteger< RNS >::RandIter . . . . .  | 523 |
| RNSIntegerMod< RNS >::RandIter . . . . .   | 524 |
| Row . . . . .  | 553 |
| ruint< K > . . . . .   | 553 |
| ScalFunctionsBase< Element, Enable > . . . . .   | 558 |
| ScalFunctions< Element > . . . . .   | 553 |
| ScalFunctionsBase< Element, typename enable_if< is_floating_point< Element >::value >::type > . . . . .            | 559 |

|   |     |
|---|-----|
| ScalFunctionsBase< Element, typename enable_if< is_integral< Element >::value >::type > . . . . . | 560 |
| Sequential . . . . .  | 563 |
| Simd128_impl< ArithType, Int, Signed, Size > . . . . .  | 564 |
| Simd128_impl< true, false, true, 4 > . . . . .  | 564 |
| Simd128_impl< true, false, true, 8 > . . . . .  | 564 |
| Simd128i_base . . . . .   | 622 |
| Simd128_impl< true, true, true, 2 > . . . . .   | 594 |
| Simd128_impl< true, true, false, 2 > . . . . .  | 564 |
| Simd128_impl< true, true, true, 4 > . . . . .   | 604 |
| Simd128_impl< true, true, false, 4 > . . . . .  | 574 |
| Simd128_impl< true, true, true, 8 > . . . . .   | 612 |
| Simd128_impl< true, true, false, 8 > . . . . .  | 584 |
| Simd256_impl< ArithType, Int, Signed, Size > . . . . .  | 623 |
| Simd256fp_base . . . . .  | 704 |
| Simd256_impl< true, false, true, 4 > . . . . .  | 623 |
| Simd256_impl< true, false, true, 8 > . . . . .  | 624 |
| Simd256i_base . . . . .   | 705 |
| Simd256_impl< true, true, true, 2 > . . . . .   | 669 |
| Simd256_impl< true, true, false, 2 > . . . . .  | 631 |
| Simd256_impl< true, true, true, 4 > . . . . .   | 678 |
| Simd256_impl< true, true, false, 4 > . . . . .  | 641 |
| Simd256_impl< true, true, false, 4 > . . . . .  | 641 |
| Simd256_impl< true, true, true, 8 > . . . . .   | 695 |
| Simd256_impl< true, true, false, 8 > . . . . .  | 660 |
| Simd512_impl< ArithType, Int, Signed, Size > . . . . .  | 705 |
| Simd512_impl< true, false, true, 4 > . . . . .  | 705 |
| Simd512_impl< true, false, true, 8 > . . . . .  | 705 |
| Simd512i_base . . . . .   | 733 |
| Simd256_impl< true, true, true, 4 > . . . . .   | 678 |
| Simd512_impl< true, true, true, 8 > . . . . .   | 723 |
| Simd512_impl< true, true, false, 8 > . . . . .  | 712 |
| SimdChooser< T, bool, bool > . . . . .  | 734 |
| SimdChooser< T, false, b > . . . . .  | 734 |
| SimdChooser< T, true, false > . . . . .   | 734 |
| SimdChooser< T, true, true > . . . . .  | 735 |
| simdToType< T > . . . . .   | 735 |
| Single . . . . .  | 735 |
| Sparse< Field, SparseMatrix_t, IdxT, PtrT > . . . . .   | 735 |
| Sparse< _Field, SparseMatrix_t::COO > . . . . .   | 735 |
| Sparse< _Field, SparseMatrix_t::COO_ZO > . . . . .  | 737 |
| Sparse< _Field, SparseMatrix_t::CSR > . . . . .   | 739 |
| Sparse< _Field, SparseMatrix_t::CSR_ZO > . . . . .  | 742 |
| Sparse< _Field, SparseMatrix_t::CSR_HYB > . . . . .   | 740 |
| Sparse< _Field, SparseMatrix_t::ELL > . . . . .   | 744 |
| Sparse< _Field, SparseMatrix_t::ELL_ZO > . . . . .  | 749 |
| Sparse< _Field, SparseMatrix_t::ELL_simd > . . . . .  | 745 |
| Sparse< _Field, SparseMatrix_t::ELL_simd_ZO > . . . . .   | 747 |
| Sparse< _Field, SparseMatrix_t::HYB_ZO > . . . . .  | 750 |
| Sparse< _Field, SparseMatrix_t::SELL > . . . . .  | 752 |
| Sparse< _Field, SparseMatrix_t::SELL_ZO > . . . . .   | 754 |
| Sparse< FFPACK::RNSInteger, SparseMatrix_t::COO, int16_t > . . . . .                              | 735 |
| Sparse< FFPACK::RNSInteger, SparseMatrix_t::COO, int32_t > . . . . .                              | 735 |
| Sparse< FFPACK::RNSInteger, SparseMatrix_t::COO, int64_t > . . . . .                              | 735 |
| Sparse< FFPACK::RNSInteger, SparseMatrix_t::COO_ZO, int16_t > . . . . .                           | 735 |
| Sparse< FFPACK::RNSInteger, SparseMatrix_t::COO_ZO, int32_t > . . . . .                           | 735 |

|   |     |
|---|-----|
| Sparse< FFPACK::RNSInteger, SparseMatrix_t::COO_ZO, int64_t > . . . . .           | 735 |
| Sparse< FFPACK::RNSInteger, SparseMatrix_t::CSR, int16_t > . . . . .              | 735 |
| Sparse< FFPACK::RNSInteger, SparseMatrix_t::CSR, int32_t > . . . . .              | 735 |
| Sparse< FFPACK::RNSInteger, SparseMatrix_t::CSR, int64_t > . . . . .              | 735 |
| Sparse< FFPACK::RNSInteger, SparseMatrix_t::CSR_ZO, int16_t > . . . . .           | 735 |
| Sparse< FFPACK::RNSInteger, SparseMatrix_t::CSR_ZO, int32_t > . . . . .           | 735 |
| Sparse< FFPACK::RNSInteger, SparseMatrix_t::CSR_ZO, int64_t > . . . . .           | 735 |
| Sparse< FFPACK::RNSInteger, SparseMatrix_t::ELL, int16_t > . . . . .              | 735 |
| Sparse< FFPACK::RNSInteger, SparseMatrix_t::ELL, int32_t > . . . . .              | 735 |
| Sparse< FFPACK::RNSInteger, SparseMatrix_t::ELL, int64_t > . . . . .              | 735 |
| Sparse< FFPACK::RNSInteger, SparseMatrix_t::ELL_ZO, int16_t > . . . . .           | 735 |
| Sparse< FFPACK::RNSInteger, SparseMatrix_t::ELL_ZO, int32_t > . . . . .           | 735 |
| Sparse< FFPACK::RNSInteger, SparseMatrix_t::ELL_ZO, int64_t > . . . . .           | 735 |
| SpMat< Field, flag > . . . . .  | 756 |
| StatsMatrix . . . . .   | 756 |
| Test< Elt > . . . . .   | 761 |
| TestOneMethod< Simd > . . . . .   | 764 |
| tfn_minus . . . . .   | 767 |
| tfn_minus_eq . . . . .  | 767 |
| tfn_mul . . . . .   | 768 |
| tfn_mul_eq . . . . .  | 768 |
| tfn_plus . . . . .  | 768 |
| tfn_plus_eq . . . . .   | 769 |
| Threads . . . . .   | 769 |
| ThreeD . . . . .  | 769 |
| ThreeDAdaptive . . . . .  | 769 |
| ThreeDInPlace . . . . .   | 770 |
| TRSMHelper< ReclterTrait, ParSeqTrait > . . . . .                                 | 770 |
| true_type   |     |
| isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::COO > > . . . . .           | 481 |
| isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::COO_ZO > > . . . . .        | 482 |
| isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::CSR > > . . . . .           | 482 |
| isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::CSR_HYB > > . . . . .       | 482 |
| isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::CSR_ZO > > . . . . .        | 483 |
| isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::ELL > > . . . . .           | 483 |
| isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::ELL_ZO > > . . . . .        | 484 |
| isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::ELL_simd > > . . . . .      | 483 |
| isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::ELL_simd_ZO > > . . . . .   | 484 |
| isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::HYB_ZO > > . . . . .        | 484 |
| isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::SELL > > . . . . .          | 484 |
| isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::SELL_ZO > > . . . . .       | 485 |
| isZOSparseMatrix< Field, Sparse< Field, SparseMatrix_t::COO_ZO > > . . . . .      | 486 |
| isZOSparseMatrix< Field, Sparse< Field, SparseMatrix_t::CSR_ZO > > . . . . .      | 486 |
| isZOSparseMatrix< Field, Sparse< Field, SparseMatrix_t::ELL_ZO > > . . . . .      | 487 |
| isZOSparseMatrix< Field, Sparse< Field, SparseMatrix_t::ELL_simd_ZO > > . . . . . | 486 |
| isZOSparseMatrix< Field, Sparse< Field, SparseMatrix_t::SELL_ZO > > . . . . .     | 487 |
| support_fast_mod< double > . . . . .  | 759 |
| support_fast_mod< float > . . . . .   | 760 |
| support_fast_mod< int64_t > . . . . .   | 760 |
| TwoD . . . . .  | 771 |
| TwoDAdaptive . . . . .  | 771 |
| UnparametricTag . . . . .   | 771 |
| width< T > . . . . .  | 772 |
| width< double > . . . . .   | 772 |
| width< float > . . . . .  | 772 |
| Winograd . . . . .  | 772 |
| WinogradPar . . . . .   | 772 |



## Chapter 8

# Data Structure Index

### 8.1 Data Structures

Here are the data structures with brief descriptions:

|  |     |
|--|-----|
| AlgoChooser< ModeT, ParSeq > . . . . .   | 401 |
| AlgoChooser< ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeq > . . . . . | 401 |
| ALL< v > . . . . .   | 401 |
| ALL< false, v... > . . . . .   | 402 |
| ALL< true, v... > . . . . .  | 402 |
| ALL<> . . . . .  | 402 |
| ArbitraryPrecIntTag  |     |
| Arbitrary precision integers: GMP . . . . .  | 402 |
| AreEqual< X, Y > . . . . .   | 403 |
| AreEqual< X, X > . . . . .   | 403 |
| Argument . . . . .   | 403 |
| associatedDelayedField< Field > . . . . .  | 404 |
| associatedDelayedField< const FFPACK::RNSIntegerMod< RNS > > . . . . .                         | 404 |
| associatedDelayedField< const Givaro::Modular< T, X > > . . . . .                              | 405 |
| associatedDelayedField< const Givaro::ModularBalanced< T > > . . . . .                         | 405 |
| associatedDelayedField< const Givaro::ZRing< T > > . . . . .                                   | 406 |
| Auto . . . . .   | 406 |
| Bench< Elt > . . . . .   | 406 |
| Bini . . . . .   | 409 |
| Block . . . . .  | 409 |
| BlockTransposeSIMD< Field, Simd, > . . . . .   | 409 |
| callLUdivine_small< Element > . . . . .  | 411 |
| callLUdivine_small< double > . . . . .   | 411 |
| callLUdivine_small< float > . . . . .  | 412 |
| CharpolyFailed . . . . .   | 412 |
| Checker_Empty< Field > . . . . .   | 412 |
| CheckerImplem_charpoly< Field, Polynomial > . . . . .  | 413 |
| CheckerImplem_charpoly< Givaro::ZRing< Givaro::Integer >, Polynomial > . . . . .               | 414 |
| CheckerImplem_Det< Field > . . . . .   | 415 |
| CheckerImplem_fgemm< Field > . . . . .   | 417 |
| CheckerImplem_ftdsm< Field > . . . . .   | 418 |
| CheckerImplem_invert< Field > . . . . .  | 419 |
| CheckerImplem_PLUQ< Field > . . . . .  | 420 |
| Classic . . . . .  | 421 |
| Column . . . . .   | 421 |

|  |                     |
|--|---------------------|
| <a href="#">CompactElement&lt; Element &gt;</a>                                  | <a href="#">421</a> |
| <a href="#">CompactElement&lt; double &gt;</a>                                   | <a href="#">421</a> |
| <a href="#">CompactElement&lt; float &gt;</a>                                    | <a href="#">422</a> |
| <a href="#">CompactElement&lt; int16_t &gt;</a>                                  | <a href="#">422</a> |
| <a href="#">CompactElement&lt; int32_t &gt;</a>                                  | <a href="#">422</a> |
| <a href="#">CompactElement&lt; int64_t &gt;</a>                                  | <a href="#">422</a> |
| <a href="#">compatible_data_type&lt; Field &gt;</a>                              | <a href="#">423</a> |
| <a href="#">compatible_data_type&lt; Givaro::ZRing&lt; double &gt; &gt;</a>      | <a href="#">423</a> |
| <a href="#">compatible_data_type&lt; Givaro::ZRing&lt; float &gt; &gt;</a>       | <a href="#">423</a> |
| <a href="#">Compose&lt; H1, H2 &gt;</a>  | <a href="#">424</a> |
| <a href="#">Simd128_impl&lt; true, true, false, 2 &gt;::Converter</a>            | <a href="#">425</a> |
| <a href="#">Simd128_impl&lt; true, true, false, 4 &gt;::Converter</a>            | <a href="#">425</a> |
| <a href="#">Simd128_impl&lt; true, true, false, 8 &gt;::Converter</a>            | <a href="#">425</a> |
| <a href="#">Simd128_impl&lt; true, true, true, 2 &gt;::Converter</a>             | <a href="#">426</a> |
| <a href="#">Simd128_impl&lt; true, true, true, 4 &gt;::Converter</a>             | <a href="#">426</a> |
| <a href="#">Simd128_impl&lt; true, true, true, 8 &gt;::Converter</a>             | <a href="#">426</a> |
| <a href="#">Simd256_impl&lt; true, false, true, 8 &gt;::Converter</a>            | <a href="#">427</a> |
| <a href="#">Simd256_impl&lt; true, true, false, 2 &gt;::Converter</a>            | <a href="#">427</a> |
| <a href="#">Simd256_impl&lt; true, true, false, 4 &gt;::Converter</a>            | <a href="#">427</a> |
| <a href="#">Simd256_impl&lt; true, true, false, 8 &gt;::Converter</a>            | <a href="#">428</a> |
| <a href="#">Simd256_impl&lt; true, true, true, 2 &gt;::Converter</a>             | <a href="#">428</a> |
| <a href="#">Simd256_impl&lt; true, true, true, 4 &gt;::Converter</a>             | <a href="#">428</a> |
| <a href="#">Simd256_impl&lt; true, true, true, 8 &gt;::Converter</a>             | <a href="#">429</a> |
| <a href="#">Simd512_impl&lt; true, true, false, 8 &gt;::Converter</a>            | <a href="#">429</a> |
| <a href="#">Simd512_impl&lt; true, true, true, 8 &gt;::Converter</a>             | <a href="#">429</a> |
| <a href="#">ConvertTo&lt; T &gt;</a>   |                     |
| Force conversion to appropriate element type of ElementCategory T                | <a href="#">430</a> |
| <a href="#">Coo&lt; ValT, IdxT &gt;</a>  | <a href="#">430</a> |
| <a href="#">Coo&lt; Field &gt;</a>   | <a href="#">432</a> |
| <a href="#">Coo&lt; ValT, IdxT &gt;</a>  | <a href="#">433</a> |
| <a href="#">CooMat&lt; Field &gt;</a>  | <a href="#">435</a> |
| <a href="#">count_nonconst_lvalue_reference&lt; T &gt;</a>                       | <a href="#">436</a> |
| <a href="#">count_nonconst_lvalue_reference&lt; const T &amp;, O... &gt;</a>     | <a href="#">436</a> |
| <a href="#">count_nonconst_lvalue_reference&lt; T &amp;, O... &gt;</a>           | <a href="#">436</a> |
| <a href="#">count_nonconst_lvalue_reference&lt; T, O... &gt;</a>                 | <a href="#">436</a> |
| <a href="#">count_nonconst_lvalue_reference&lt;&gt;</a>                          | <a href="#">437</a> |
| <a href="#">CsrMat&lt; Field &gt;</a>  | <a href="#">437</a> |
| <a href="#">DefaultBoundedTag</a>  |                     |
| Use standard field operations, but keeps track of bounds on input and output     | <a href="#">438</a> |
| <a href="#">DefaultTag</a>   |                     |
| No specific mode of action: use standard field operations                        | <a href="#">438</a> |
| <a href="#">DelayedTag</a>   |                     |
| Performs field operations with delayed mod reductions. Ensures result is reduced | <a href="#">438</a> |
| <a href="#">DivideAndConquer</a>   | <a href="#">438</a> |
| <a href="#">ElementTraits&lt; Element &gt;</a>                                   |                     |
| ElementTraits  | <a href="#">438</a> |
| <a href="#">ElementTraits&lt; double &gt;</a>                                    | <a href="#">439</a> |
| <a href="#">ElementTraits&lt; FFPACK::rns_double_elt &gt;</a>                    | <a href="#">439</a> |
| <a href="#">ElementTraits&lt; float &gt;</a>                                     | <a href="#">439</a> |
| <a href="#">ElementTraits&lt; Givaro::Integer &gt;</a>                           | <a href="#">440</a> |
| <a href="#">ElementTraits&lt; int16_t &gt;</a>                                   | <a href="#">440</a> |
| <a href="#">ElementTraits&lt; int32_t &gt;</a>                                   | <a href="#">440</a> |
| <a href="#">ElementTraits&lt; int64_t &gt;</a>                                   | <a href="#">440</a> |
| <a href="#">ElementTraits&lt; int8_t &gt;</a>                                    | <a href="#">441</a> |
| <a href="#">ElementTraits&lt; Reclnt::rint&lt; K &gt; &gt;</a>                   | <a href="#">441</a> |
| <a href="#">ElementTraits&lt; Reclnt::rmint&lt; K, MG &gt; &gt;</a>              | <a href="#">441</a> |
| <a href="#">ElementTraits&lt; Reclnt::ruint&lt; K &gt; &gt;</a>                  | <a href="#">442</a> |
| <a href="#">ElementTraits&lt; uint16_t &gt;</a>                                  | <a href="#">442</a> |



|  |     |
|--|-----|
| ElementTraits< uint32_t > . . . . .  | 442 |
| ElementTraits< uint64_t > . . . . .  | 442 |
| ElementTraits< uint8_t > . . . . .   | 443 |
| ElMat< Field > . . . . .   | 443 |
| Failure  |     |
| A precondition failed . . . . .  | 444 |
| FailureCharpolyCheck . . . . .   | 445 |
| FailureDetCheck . . . . .  | 446 |
| FailureFgemmCheck . . . . .  | 446 |
| FailureInvertCheck . . . . .   | 446 |
| FailurePLUQCheck . . . . .   | 446 |
| FailureTrsmCheck . . . . .   | 446 |
| FieldSimd< _Field > . . . . .  | 446 |
| FieldTraits< Field >   |     |
| FieldTrait . . . . .   | 452 |
| FieldTraits< FFPACK::RNSInteger< T > > . . . . .   | 453 |
| FieldTraits< FFPACK::RNSIntegerMod< T > > . . . . .  | 453 |
| FieldTraits< Givaro::Modular< Element > > . . . . .  | 454 |
| FieldTraits< Givaro::ModularBalanced< Element > > . . . . .  | 454 |
| FieldTraits< Givaro::ZRing< double > > . . . . .   | 455 |
| FieldTraits< Givaro::ZRing< float > > . . . . .  | 455 |
| FieldTraits< Givaro::ZRing< Givaro::Integer > > . . . . .  | 456 |
| FieldTraits< Givaro::ZRing< int16_t > > . . . . .  | 456 |
| FieldTraits< Givaro::ZRing< int32_t > > . . . . .  | 457 |
| FieldTraits< Givaro::ZRing< int64_t > > . . . . .  | 457 |
| FieldTraits< Givaro::ZRing< Reclnt::ruint< K > > > . . . . .   | 458 |
| FieldTraits< Givaro::ZRing< uint16_t > > . . . . .   | 458 |
| FieldTraits< Givaro::ZRing< uint32_t > > . . . . .   | 459 |
| FieldTraits< Givaro::ZRing< uint64_t > > . . . . .   | 459 |
| Fixed . . . . .  | 460 |
| FixedPrecIntTag  |     |
| Fixed precision integers above machine precision: Givaro::reclnt . . . . .   | 460 |
| ScalFunctionsBase< Element, typename enable_if< is_floating_point< Element >::value >::type >::FloatingPointTestDistribution |     |
| 460  |     |
| ForStrategy1D< blocksize_t, Cut, Param > . . . . .   | 461 |
| ForStrategy2D< blocksize_t, Cut, Param > . . . . .   | 463 |
| ftmmLeftLowerNoTransNonUnit< Element > . . . . .   | 467 |
| ftmmLeftLowerNoTransUnit< Element > . . . . .  | 467 |
| ftmmLeftLowerTransNonUnit< Element > . . . . .   | 467 |
| ftmmLeftLowerTransUnit< Element > . . . . .  | 467 |
| ftmmLeftUpperNoTransNonUnit< Element > . . . . .   | 467 |
| ftmmLeftUpperNoTransUnit< Element > . . . . .  | 467 |
| ftmmLeftUpperTransNonUnit< Element > . . . . .   | 467 |
| ftmmLeftUpperTransUnit< Element > . . . . .  | 468 |
| ftmmRightLowerNoTransNonUnit< Element > . . . . .  | 468 |
| ftmmRightLowerNoTransUnit< Element > . . . . .   | 468 |
| ftmmRightLowerTransNonUnit< Element > . . . . .  | 468 |
| ftmmRightLowerTransUnit< Element > . . . . .   | 468 |
| ftmmRightUpperNoTransNonUnit< Element > . . . . .  | 468 |
| ftmmRightUpperNoTransUnit< Element > . . . . .   | 468 |
| ftmmRightUpperTransNonUnit< Element > . . . . .  | 468 |
| ftmmRightUpperTransUnit< Element > . . . . .   | 469 |
| ftsmLeftLowerNoTransNonUnit< Element > . . . . .   | 469 |
| ftsmLeftLowerNoTransUnit< Element > . . . . .  | 469 |
| ftsmLeftLowerTransNonUnit< Element > . . . . .   | 469 |
| ftsmLeftLowerTransUnit< Element > . . . . .  | 469 |
| ftsmLeftUpperNoTransNonUnit< Element > . . . . .   | 469 |
| Computes the maximal size for delaying the modular reduction in a triangular system resolution                               | 469 |

|  |     |
|--|-----|
| <a href="#">ftrsmLeftUpperNoTransUnit&lt; Element &gt;</a>   | 470 |
| <a href="#">ftrsmLeftUpperTransNonUnit&lt; Element &gt;</a>  | 470 |
| <a href="#">ftrsmLeftUpperTransUnit&lt; Element &gt;</a>   | 470 |
| <a href="#">ftrsmRightLowerNoTransNonUnit&lt; Element &gt;</a>                                     | 470 |
| <a href="#">ftrsmRightLowerNoTransUnit&lt; Element &gt;</a>  | 470 |
| <a href="#">ftrsmRightLowerTransNonUnit&lt; Element &gt;</a>                                       | 470 |
| <a href="#">ftrsmRightLowerTransUnit&lt; Element &gt;</a>  | 470 |
| <a href="#">ftrsmRightUpperNoTransNonUnit&lt; Element &gt;</a>                                     | 470 |
| <a href="#">ftrsmRightUpperNoTransUnit&lt; Element &gt;</a>  | 471 |
| <a href="#">ftrsmRightUpperTransNonUnit&lt; Element &gt;</a>                                       | 471 |
| <a href="#">ftrsmRightUpperTransUnit&lt; Element &gt;</a>  | 471 |
| <a href="#">GenericTag</a>   |     |
| Default is generic   | 471 |
| <a href="#">GenericTag</a>   |     |
| Generic ring   | 471 |
| <a href="#">Grain</a>  | 471 |
| <a href="#">has_minus_eq_impl&lt; C &gt;</a>   | 471 |
| <a href="#">has_minus_impl&lt; C &gt;</a>  | 472 |
| <a href="#">has_mul_eq_impl&lt; C &gt;</a>   | 472 |
| <a href="#">has_mul_impl&lt; C &gt;</a>  | 472 |
| <a href="#">has_operation&lt; T &gt;</a>   | 473 |
| <a href="#">has_plus_eq_impl&lt; C &gt;</a>  | 473 |
| <a href="#">has_plus_impl&lt; C &gt;</a>   | 473 |
| <a href="#">HelperFlag</a>   | 474 |
| <a href="#">HelperMod&lt; Field, ElementTraits &gt;</a>  | 474 |
| <a href="#">HelperMod&lt; Field, ElementCategories::MachineIntTag &gt;</a>                         | 475 |
| <a href="#">HelperMod&lt; Field, FFLAS::ElementCategories::ArbitraryPrecIntTag &gt;</a>            | 476 |
| <a href="#">HelperMod&lt; Field, FFLAS::ElementCategories::FixedPrecIntTag &gt;</a>                | 476 |
| <a href="#">HelperMod&lt; Field, FFLAS::ElementCategories::MachineFloatTag &gt;</a>                | 477 |
| <a href="#">Hybrid</a>   | 478 |
| <a href="#">Info</a>   | 478 |
| <a href="#">Info</a>   | 479 |
| <a href="#">is_all_same&lt; Args &gt;</a>  | 480 |
| <a href="#">is_all_same&lt; T, Args... &gt;</a>  | 480 |
| <a href="#">is_all_same&lt;&gt;</a>  | 480 |
| <a href="#">is_simd&lt; T &gt;</a>   | 481 |
| <a href="#">isSparseMatrix&lt; Field, M &gt;</a>   | 481 |
| <a href="#">isSparseMatrix&lt; Field, Sparse&lt; Field, SparseMatrix_t::COO &gt;&gt;</a>           | 481 |
| <a href="#">isSparseMatrix&lt; Field, Sparse&lt; Field, SparseMatrix_t::COO_ZO &gt;&gt;</a>        | 482 |
| <a href="#">isSparseMatrix&lt; Field, Sparse&lt; Field, SparseMatrix_t::CSR &gt;&gt;</a>           | 482 |
| <a href="#">isSparseMatrix&lt; Field, Sparse&lt; Field, SparseMatrix_t::CSR_HYB &gt;&gt;</a>       | 482 |
| <a href="#">isSparseMatrix&lt; Field, Sparse&lt; Field, SparseMatrix_t::CSR_ZO &gt;&gt;</a>        | 483 |
| <a href="#">isSparseMatrix&lt; Field, Sparse&lt; Field, SparseMatrix_t::ELL &gt;&gt;</a>           | 483 |
| <a href="#">isSparseMatrix&lt; Field, Sparse&lt; Field, SparseMatrix_t::ELL_simd &gt;&gt;</a>      | 483 |
| <a href="#">isSparseMatrix&lt; Field, Sparse&lt; Field, SparseMatrix_t::ELL_simd_ZO &gt;&gt;</a>   | 484 |
| <a href="#">isSparseMatrix&lt; Field, Sparse&lt; Field, SparseMatrix_t::ELL_ZO &gt;&gt;</a>        | 484 |
| <a href="#">isSparseMatrix&lt; Field, Sparse&lt; Field, SparseMatrix_t::HYB_ZO &gt;&gt;</a>        | 484 |
| <a href="#">isSparseMatrix&lt; Field, Sparse&lt; Field, SparseMatrix_t::SELL &gt;&gt;</a>          | 484 |
| <a href="#">isSparseMatrix&lt; Field, Sparse&lt; Field, SparseMatrix_t::SELL_ZO &gt;&gt;</a>       | 485 |
| <a href="#">isSparseMatrixMKLFormat&lt; F, M &gt;</a>  | 485 |
| <a href="#">isSparseMatrixSimdFormat&lt; F, M &gt;</a>   | 485 |
| <a href="#">isZOSparseMatrix&lt; F, M &gt;</a>   | 486 |
| <a href="#">isZOSparseMatrix&lt; Field, Sparse&lt; Field, SparseMatrix_t::COO_ZO &gt;&gt;</a>      | 486 |
| <a href="#">isZOSparseMatrix&lt; Field, Sparse&lt; Field, SparseMatrix_t::CSR_ZO &gt;&gt;</a>      | 486 |
| <a href="#">isZOSparseMatrix&lt; Field, Sparse&lt; Field, SparseMatrix_t::ELL_simd_ZO &gt;&gt;</a> | 486 |
| <a href="#">isZOSparseMatrix&lt; Field, Sparse&lt; Field, SparseMatrix_t::ELL_ZO &gt;&gt;</a>      | 487 |
| <a href="#">isZOSparseMatrix&lt; Field, Sparse&lt; Field, SparseMatrix_t::SELL_ZO &gt;&gt;</a>     | 487 |
| <a href="#">Iterative</a>  | 487 |

|  |     |
|--|-----|
| LazyTag  |     |
| Performs field operations with delayed mod only when necessary. Result may not be reduced                | 487 |
| limits< T >  | 488 |
| limits< char >   | 488 |
| limits< double >   | 488 |
| limits< float >  | 489 |
| limits< Givaro::Integer >  | 490 |
| limits< int >  | 490 |
| limits< long >   | 491 |
| limits< long long >  | 491 |
| limits< RecInt::rint< K > >  | 492 |
| limits< RecInt::ruint< K > >   | 493 |
| limits< short int >  | 493 |
| limits< signed char >  | 494 |
| limits< unsigned char >  | 495 |
| limits< unsigned int >   | 495 |
| limits< unsigned long >  | 496 |
| limits< unsigned long long >   | 496 |
| limits< unsigned short int >   | 497 |
| MachineFloatTag  |     |
| Float or double  | 498 |
| MachineIntTag  |     |
| Short, int, long, long long, and unsigned variants   | 498 |
| MMHelper< Field, AlgoTrait, ModeTrait, ParSeqTrait >   | 498 |
| MMHelper< FFPACK::RNSInteger< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >                  | 503 |
| MMHelper< FFPACK::RNSIntegerMod< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >               | 505 |
| MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo< Dest >, ParSeqTrait >                             | 507 |
| MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeqTrait > | 509 |
| MMHelper< Field, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >                                    |     |
| FGEMM Helper for Default and ConvertTo modes of operation  | 511 |
| ModeTraits< Field >  |     |
| ModeTraits   | 512 |
| ModeTraits< Givaro::Modular< Element, Compute > >  | 513 |
| ModeTraits< Givaro::Modular< Givaro::Integer, Compute > >  | 513 |
| ModeTraits< Givaro::Modular< int16_t, Compute > >  | 513 |
| ModeTraits< Givaro::Modular< int32_t, Compute > >  | 514 |
| ModeTraits< Givaro::Modular< int64_t, uint64_t > >   | 514 |
| ModeTraits< Givaro::Modular< int8_t, Compute > >   | 514 |
| ModeTraits< Givaro::Modular< RecInt::ruint< K >, Compute > >   | 515 |
| ModeTraits< Givaro::Modular< uint16_t, Compute > >   | 515 |
| ModeTraits< Givaro::Modular< uint32_t, Compute > >   | 515 |
| ModeTraits< Givaro::Modular< uint8_t, Compute > >  | 516 |
| ModeTraits< Givaro::ModularBalanced< Element > >   | 516 |
| ModeTraits< Givaro::ModularBalanced< Givaro::Integer > >   | 516 |
| ModeTraits< Givaro::ModularBalanced< int16_t > >   | 517 |
| ModeTraits< Givaro::ModularBalanced< int32_t > >   | 517 |
| ModeTraits< Givaro::ModularBalanced< int8_t > >  | 517 |
| ModeTraits< Givaro::Montgomery< T > >  | 517 |
| ModeTraits< Givaro::ZRing< double > >  | 518 |
| ModeTraits< Givaro::ZRing< float > >   | 518 |
| ModeTraits< Givaro::ZRing< Givaro::Integer > >   | 518 |
| ModularBalanced< T >   | 519 |
| ModularTag   |     |
| This is a modular field like e.g. Modular<T> or ModularBalanced<T>                                       | 519 |
| Montgomery< T >  | 519 |
| need_field_characteristic< Field >   | 519 |
| need_field_characteristic< Givaro::Modular< Field > >  | 519 |

|   |     |
|---|-----|
| <a href="#">need_field_characteristic&lt; Givaro::ModularBalanced&lt; Field &gt; &gt;</a>                                       | 520 |
| <a href="#">NoSimd&lt; T &gt;</a>   | 520 |
| <a href="#">Parallel&lt; C, P &gt;</a>  | 522 |
| <a href="#">RNSInteger&lt; RNS &gt;::RandIter</a>   | 523 |
| <a href="#">RNSIntegerMod&lt; RNS &gt;::RandIter</a>  | 524 |
| <a href="#">readMyMachineType&lt; Field, T &gt;</a>   | 525 |
| <a href="#">readMyMachineType&lt; Field, mpz_t &gt;</a>   | 525 |
| <a href="#">Recursive</a>   | 526 |
| <a href="#">Recursive</a>   | 526 |
| <a href="#">rint&lt; K &gt;</a>   | 526 |
| <a href="#">rns_double</a>  | 526 |
| <a href="#">rns_double_elt</a>  | 531 |
| <a href="#">rns_double_elt_cstptr</a>   | 533 |
| <a href="#">rns_double_elt_ptr</a>  | 535 |
| <a href="#">rns_double_extended</a>   | 538 |
| <a href="#">RNSElementTag</a>   |     |
| Representation in a Residue Number System   | 542 |
| <a href="#">RNSInteger&lt; RNS &gt;</a>   | 542 |
| <a href="#">RNSIntegerMod&lt; RNS &gt;</a>  | 545 |
| <a href="#">rnsRandIter&lt; RNS &gt;</a>  | 552 |
| <a href="#">Row</a>   | 553 |
| <a href="#">ruint&lt; K &gt;</a>  | 553 |
| <a href="#">ScalFunctions&lt; Element &gt;</a>  | 553 |
| <a href="#">ScalFunctionsBase&lt; Element, Enable &gt;</a>  | 558 |
| <a href="#">ScalFunctionsBase&lt; Element, typename enable_if&lt; is_floating_point&lt; Element &gt;::value &gt;::type &gt;</a> | 559 |
| <a href="#">ScalFunctionsBase&lt; Element, typename enable_if&lt; is_integral&lt; Element &gt;::value &gt;::type &gt;</a>       | 560 |
| <a href="#">Sequential</a>  | 563 |
| <a href="#">Simd128_impl&lt; ArithType, Int, Signed, Size &gt;</a>  | 564 |
| <a href="#">Simd128_impl&lt; true, false, true, 4 &gt;</a>  | 564 |
| <a href="#">Simd128_impl&lt; true, false, true, 8 &gt;</a>  | 564 |
| <a href="#">Simd128_impl&lt; true, true, false, 2 &gt;</a>  | 564 |
| <a href="#">Simd128_impl&lt; true, true, false, 4 &gt;</a>  | 574 |
| <a href="#">Simd128_impl&lt; true, true, false, 8 &gt;</a>  | 584 |
| <a href="#">Simd128_impl&lt; true, true, true, 2 &gt;</a>   | 594 |
| <a href="#">Simd128_impl&lt; true, true, true, 4 &gt;</a>   | 604 |
| <a href="#">Simd128_impl&lt; true, true, true, 8 &gt;</a>   | 612 |
| <a href="#">Simd128i_base</a>   | 622 |
| <a href="#">Simd256_impl&lt; ArithType, Int, Signed, Size &gt;</a>  | 623 |
| <a href="#">Simd256_impl&lt; true, false, true, 4 &gt;</a>  | 623 |
| <a href="#">Simd256_impl&lt; true, false, true, 8 &gt;</a>  | 624 |
| <a href="#">Simd256_impl&lt; true, true, false, 2 &gt;</a>  | 631 |
| <a href="#">Simd256_impl&lt; true, true, false, 4 &gt;</a>  | 641 |
| <a href="#">Simd256_impl&lt; true, true, false, 8 &gt;</a>  | 660 |
| <a href="#">Simd256_impl&lt; true, true, true, 2 &gt;</a>   | 669 |
| <a href="#">Simd256_impl&lt; true, true, true, 4 &gt;</a>   | 678 |
| <a href="#">Simd256_impl&lt; true, true, true, 8 &gt;</a>   | 695 |
| <a href="#">Simd256fp_base</a>  | 704 |
| <a href="#">Simd256i_base</a>   | 705 |
| <a href="#">Simd512_impl&lt; ArithType, Int, Signed, Size &gt;</a>  | 705 |
| <a href="#">Simd512_impl&lt; true, false, true, 4 &gt;</a>  | 705 |
| <a href="#">Simd512_impl&lt; true, false, true, 8 &gt;</a>  | 705 |
| <a href="#">Simd512_impl&lt; true, true, false, 8 &gt;</a>  | 712 |
| <a href="#">Simd512_impl&lt; true, true, true, 8 &gt;</a>   | 723 |
| <a href="#">Simd512i_base</a>   | 733 |
| <a href="#">SimdChooser&lt; T, bool, bool &gt;</a>  | 734 |
| <a href="#">SimdChooser&lt; T, false, b &gt;</a>  | 734 |
| <a href="#">SimdChooser&lt; T, true, false &gt;</a>   | 734 |
| <a href="#">SimdChooser&lt; T, true, true &gt;</a>  | 735 |

|   |     |
|---|-----|
| simdToType< T > . . . . .   | 735 |
| Single . . . . .  | 735 |
| Sparse< Field, SparseMatrix_t, IdxT, PtrT > . . . . .             | 735 |
| Sparse< _Field, SparseMatrix_t::COO > . . . . .                   | 735 |
| Sparse< _Field, SparseMatrix_t::COO_ZO > . . . . .                | 737 |
| Sparse< _Field, SparseMatrix_t::CSR > . . . . .                   | 739 |
| Sparse< _Field, SparseMatrix_t::CSR_HYB > . . . . .               | 740 |
| Sparse< _Field, SparseMatrix_t::CSR_ZO > . . . . .                | 742 |
| Sparse< _Field, SparseMatrix_t::ELL > . . . . .                   | 744 |
| Sparse< _Field, SparseMatrix_t::ELL_simd > . . . . .              | 745 |
| Sparse< _Field, SparseMatrix_t::ELL_simd_ZO > . . . . .           | 747 |
| Sparse< _Field, SparseMatrix_t::ELL_ZO > . . . . .                | 749 |
| Sparse< _Field, SparseMatrix_t::HYB_ZO > . . . . .                | 750 |
| Sparse< _Field, SparseMatrix_t::SELL > . . . . .                  | 752 |
| Sparse< _Field, SparseMatrix_t::SELL_ZO > . . . . .               | 754 |
| SpMat< Field, flag > . . . . .                                    | 756 |
| StatsMatrix . . . . .   | 756 |
| support_fast_mod< T > . . . . .                                   | 759 |
| support_fast_mod< double > . . . . .                              | 759 |
| support_fast_mod< float > . . . . .                               | 760 |
| support_fast_mod< int64_t > . . . . .                             | 760 |
| support_simd< T > . . . . .                                       | 760 |
| support_simd_add< T > . . . . .                                   | 761 |
| support_simd_mod< T > . . . . .                                   | 761 |
| Test< Elt > . . . . .   | 761 |
| TestOneMethod< Simd > . . . . .                                   | 764 |
| tfn_minus . . . . .   | 767 |
| tfn_minus_eq . . . . .  | 767 |
| tfn_mul . . . . .   | 768 |
| tfn_mul_eq . . . . .  | 768 |
| tfn_plus . . . . .  | 768 |
| tfn_plus_eq . . . . .   | 769 |
| Threads . . . . .   | 769 |
| ThreeD . . . . .  | 769 |
| ThreeDAdaptive . . . . .  | 769 |
| ThreeDInPlace . . . . .   | 770 |
| TRSMHelper< ReclterTrait, ParSeqTrait > . . . . .                 |     |
| TRSM Helper . . . . .   | 770 |
| TwoD . . . . .  | 771 |
| TwoDAdaptive . . . . .  | 771 |
| UnparametricTag . . . . .   |     |
| If the field uses a representation with infix operators . . . . . | 771 |
| width< T > . . . . .  | 772 |
| width< double > . . . . .   | 772 |
| width< float > . . . . .  | 772 |
| Winograd . . . . .  | 772 |
| WinogradPar . . . . .   | 772 |



# Chapter 9

## File Index

### 9.1 File List

Here is a list of all files with brief descriptions:

|   |     |
|---|-----|
| <a href="#">arithprog.C</a>             | 773 |
| <a href="#">autotune/charpoly.C</a>     | 773 |
| <a href="#">examples/charpoly.C</a>     | 774 |
| <a href="#">fsyrk.C</a>                 | 775 |
| <a href="#">fsytrf.C</a>                | 775 |
| <a href="#">ftrtri.C</a>                | 776 |
| <a href="#">autotune/pluq.C</a>         | 777 |
| <a href="#">examples/pluq.C</a>         | 778 |
| <a href="#">winograd.C</a>              | 778 |
| <a href="#">benchmark-charpoly-mp.C</a> | 779 |
| <a href="#">benchmark-charpoly.C</a>    | 779 |
| <a href="#">benchmark-checkers.C</a>    | 780 |
| <a href="#">benchmark-dgemm.C</a>       | 781 |
| <a href="#">benchmark-dgetrf.C</a>      | 782 |
| <a href="#">benchmark-dgetri.C</a>      | 783 |
| <a href="#">benchmark-dsytrf.C</a>      | 783 |
| <a href="#">benchmark-dtrsm.C</a>       | 784 |
| <a href="#">benchmark-dtrtri.C</a>      | 784 |
| <a href="#">benchmark-fadd-lvl2.C</a>   | 785 |
| <a href="#">benchmark-fdot.C</a>        | 785 |
| <a href="#">benchmark-fgemm-mp.C</a>    | 786 |
| <a href="#">benchmark-fgemm-rns.C</a>   | 787 |
| <a href="#">benchmark-fgemm.C</a>       | 789 |
| <a href="#">benchmark-fgemv-mp.C</a>    | 789 |
| <a href="#">benchmark-fgemv.C</a>       | 791 |
| <a href="#">benchmark-fgesv.C</a>       | 794 |
| <a href="#">benchmark-fsyr2k.C</a>      | 794 |
| <a href="#">benchmark-fsyrk.C</a>       | 795 |
| <a href="#">benchmark-fsytrf.C</a>      | 795 |
| <a href="#">benchmark-ftrsm-mp.C</a>    | 796 |
| <a href="#">benchmark-ftrsm.C</a>       | 797 |
| <a href="#">benchmark-ftrsv.C</a>       | 797 |
| <a href="#">benchmark-ftrtri.C</a>      | 798 |
| <a href="#">benchmark-inverse.C</a>     | 798 |
| <a href="#">benchmark-lqup-mp.C</a>     | 799 |

|  |     |
|--|-----|
| benchmark-lqup.C   | 800 |
| benchmark-pluq.C   | 800 |
| benchmark-quasisep.C   | 801 |
| benchmark-storage-transpose.C  | 802 |
| benchmark-wino.C   | 803 |
| mainpage.doxy  | 804 |
| det.C  | 804 |
| matmul.C   | 804 |
| rank.C   | 805 |
| solve.C  | 805 |
| checker_charpoly.inl   | 805 |
| checker_det.inl  | 806 |
| checker_empty.h  | 806 |
| checker_fgemm.inl  | 806 |
| checker_ftrsm.inl  | 807 |
| checker_invert.inl   | 807 |
| checker_pluq.inl   | 807 |
| checkers.doxy  | 808 |
| checkers_fflas.h   | 808 |
| checkers_fflas.inl   | 808 |
| checkers_ffpack.h  | 809 |
| checkers_ffpack.inl  | 809 |
| config-blas.h  | 810 |
| config.h   | 817 |
| fflas-ffpack/config.h  | 820 |
| fflas-ffpack-config.h  |     |
| Defaults for optimised values  | 823 |
| fflas-ffpack-default-thresholds.h  | 824 |
| fflas-ffpack-thresholds.h  | 825 |
| fflas-ffpack.doxy  | 825 |
| fflas-ffpack.h   |     |
| Includes FFLAS and FFPACK  | 825 |
| fflas.doxy   | 825 |
| fflas.h  |     |
| Finite Field Linear Algebra Subroutines  | 825 |
| fflas_bounds.inl   | 826 |
| fflas_enum.h   | 827 |
| fflas_fadd.h   | 828 |
| fflas_fadd.inl   | 829 |
| fflas_fassign.h  | 830 |
| fflas_fassign.inl  | 831 |
| fflas_faxpy.inl  | 831 |
| fflas_fdot.inl   | 832 |
| fflas_fgemm.inl  | 833 |
| fgemm_classical.inl  | 835 |
| fgemm_classical_mp.inl   |     |
| Matrix multiplication with multiprecision input (either over $\mathbb{Z}$ or over $\mathbb{Z}/p\mathbb{Z}$ ) | 835 |
| fgemm_winograd.inl   | 837 |
| matmul.doxy  | 839 |
| schedule_bini.inl  |     |
| Bini implementation  | 839 |
| schedule_winograd.inl  | 839 |
| schedule_winograd_acc.inl  | 840 |
| schedule_winograd_acc_ip.inl   | 841 |
| schedule_winograd_ip.inl   | 841 |
| fflas_fgmv.inl   | 842 |
| fflas_fgmv_mp.inl  | 844 |
| fflas_fger.inl   | 844 |



|   |     |
|---|-----|
| fflas_fger_mp.inl   | 845 |
| fflas_freduce.h   | 846 |
| fflas_freduce.inl   | 847 |
| fflas_freduce_mp.inl  | 849 |
| fflas_freivalds.inl   | 849 |
| fflas_fscal.h   | 850 |
| fflas_fscal.inl   | 850 |
| fflas_fscal_mp.inl  | 851 |
| fflas_fsyr2k.inl  | 852 |
| fflas_fsyrk.inl   | 853 |
| fflas_fsyrk_strassen.inl  | 854 |
| fflas_ftrmm.inl   | 855 |
| fflas_ftrsm.inl   | 856 |
| fflas_ftrsm_mp.inl  |     |
| Triangular system with matrix right hand side over multiprecision domain (either over $\mathbb{Z}$ or over $\mathbb{Z}/p\mathbb{Z}$ ) | 857 |
| fflas_ftrsv.inl   | 857 |
| fflas_helpers.inl   | 858 |
| igemm.doxy  | 859 |
| igemm.h   | 859 |
| igemm.inl   | 859 |
| igemm_kernels.h   | 860 |
| igemm_kernels.inl   | 861 |
| igemm_tools.h   | 861 |
| igemm_tools.inl   | 862 |
| fflas_level1.inl  | 862 |
| fflas_level2.inl  | 865 |
| fflas_level3.inl  | 867 |
| fflas_pfgemm.inl  | 870 |
| fflas_pftrsm.inl  | 871 |
| fflas_simd.h  | 871 |
| simd.doxy   | 873 |
| simd128.inl   | 873 |
| simd128_double.inl  | 874 |
| simd128_float.inl   | 874 |
| simd128_int16.inl   | 874 |
| simd128_int32.inl   | 875 |
| simd128_int64.inl   | 875 |
| simd256.inl   | 876 |
| simd256_double.inl  | 876 |
| simd256_float.inl   | 877 |
| simd256_int16.inl   | 877 |
| simd256_int32.inl   | 878 |
| simd256_int64.inl   | 878 |
| simd512.inl   | 879 |
| simd512_double.inl  | 879 |
| simd512_float.inl   | 880 |
| simd512_int32.inl   | 880 |
| simd512_int64.inl   | 881 |
| simd_modular.inl  | 881 |
| fflas_sparse.h  | 881 |
| fflas_sparse.inl  | 886 |
| coo.h   | 888 |
| coo_spmv.inl  | 888 |
| coo_spmv.inl  | 889 |
| coo_utils.inl   | 890 |
| csr.h   | 890 |
| csr_pspmm.inl   | 891 |

|   |     |
|---|-----|
| csr_pspmv.inl   | 892 |
| csr_spmm.inl  | 892 |
| csr_spmv.inl  | 894 |
| csr_utils.inl   | 894 |
| csr_hyb.h   | 895 |
| csr_hyb_pspmm.inl   | 895 |
| csr_hyb_pspmv.inl   | 896 |
| csr_hyb_spmm.inl  | 897 |
| csr_hyb_spmv.inl  | 897 |
| csr_hyb_utils.inl   | 898 |
| ell.h   | 898 |
| ell_pspmm.inl   | 899 |
| ell_pspmv.inl   | 899 |
| ell_spmm.inl  | 900 |
| ell_spmv.inl  | 901 |
| ell_utils.inl   | 902 |
| ell_simd.h  | 902 |
| ell_simd_pspmv.inl  | 903 |
| ell_simd_spmv.inl   | 904 |
| ell_simd_utils.inl  | 905 |
| hyb_zo.h  | 905 |
| hyb_zo_pspmm.inl  | 905 |
| hyb_zo_pspmv.inl  | 906 |
| hyb_zo_spmm.inl   | 906 |
| hyb_zo_spmv.inl   | 907 |
| hyb_zo_utils.inl  | 907 |
| read_sparse.h   | 908 |
| sell.h  | 909 |
| sell_pspmv.inl  | 909 |
| sell_spmv.inl   | 910 |
| sell_utils.inl  | 911 |
| sparse_matrix_traits.h  | 912 |
| utils.h   | 913 |
| fflas_transpose.h   |     |
| Transpose the storage of the matrix (switch between row and col major mode) | 913 |
| ffpack.dox  | 914 |
| ffpack.h  |     |
| Set of elimination based routines for dense linear algebra                  | 914 |
| ffpack.inl  | 924 |
| ffpack_bruhatgen.inl  | 925 |
| ffpack_charpoly.inl   | 926 |
| ffpack_charpoly_danilevski.inl  | 927 |
| ffpack_charpoly_kgfast.inl  | 927 |
| ffpack_charpoly_kgfastgeneralized.inl                                       | 928 |
| ffpack_charpoly_kglu.inl  | 928 |
| ffpack_charpoly_mp.inl  | 929 |
| ffpack_det_mp.inl   | 929 |
| ffpack_echelonforms.inl   | 930 |
| ffpack_fgesv.inl  | 931 |
| ffpack_fgetrs.inl   | 932 |
| ffpack_frobenius.inl  | 932 |
| ffpack_fsytrf.inl   | 933 |
| ffpack_ftrssyr2k.inl  | 934 |
| ffpack_ftrstr.inl   | 935 |
| ffpack_ftrtr.inl  | 935 |
| ffpack_invert.inl   | 936 |
| ffpack_krylovelim.inl   | 937 |
| ffpack_ludivine.inl   | 937 |

|   |      |
|---|------|
| ffpack_ludivine_mp.inl  | 938  |
| ffpack_minpoly.inl  | 938  |
| ffpack_permutation.inl  | 939  |
| ffpack_pluq.inl   | 941  |
| ffpack_pluq_mp.inl  | 942  |
| ffpack_ppluq.inl  | 942  |
| ffpack_rankprofiles.inl   | 943  |
| field-traits.h  |      |
| Field Traits  | 944  |
| field.doxy  | 947  |
| rns-double-elt.h  |      |
| Rns elt structure with double support   | 947  |
| rns-double-recint.inl   | 947  |
| rns-double.h  |      |
| Rns structure with double support   | 948  |
| rns-double.inl  | 949  |
| rns-integer-mod.h   |      |
| Representation of $\mathbb{Z}/p\mathbb{Z}$ using RNS representation (note: fixed precision) | 949  |
| rns-integer.h   |      |
| Representation of $\mathbb{Z}$ using RNS representation (note: fixed precision)             | 950  |
| rns.h   | 950  |
| rns.inl   | 951  |
| interfaces.doxy   | 951  |
| fflas_c.h   | 951  |
| fflas_L1_inst.C   | 963  |
| fflas_L1_inst.h   | 964  |
| fflas_L1_inst_implem.inl  | 965  |
| fflas_L2_inst.C   | 966  |
| fflas_L2_inst.h   | 967  |
| fflas_L2_inst_implem.inl  | 968  |
| fflas_L3_inst.C   | 970  |
| fflas_L3_inst.h   | 971  |
| fflas_L3_inst_implem.inl  | 972  |
| fflas_lv1.C   |      |
| C functions calls for level 1 <b>FFLAS</b> in flas-c.h                                      | 973  |
| fflas_lv2.C   |      |
| C functions calls for level 2 <b>FFLAS</b> in flas-c.h                                      | 977  |
| fflas_lv3.C   |      |
| C functions calls for level 3 <b>FFLAS</b> in flas-c.h                                      | 982  |
| fflas_sparse.C  |      |
| C functions calls for level 1.5 and 2.5 <b>FFLAS</b> in flas-c.h                            | 984  |
| ffpack.C  |      |
| C functions calls for <b>FFPACK</b> in ffpack-c.h   | 984  |
| ffpack_c.h  | 1005 |
| ffpack_inst.C   | 1024 |
| ffpack_inst.h   | 1025 |
| ffpack_inst_implem.inl  | 1027 |
| blockcuts.inl   | 1030 |
| fflas_plevel1.h   | 1031 |
| kaapi_routines.inl  | 1032 |
| parallel.h  | 1032 |
| pfgemm_variants.inl   | 1039 |
| pfgemv.inl  | 1040 |
| align-allocator.h   | 1040 |
| args-parser.h   | 1040 |
| bit_manipulation.h  | 1042 |
| cast.h  | 1043 |

|                                 |      |
|---------------------------------|------|
| debug.h                         |      |
| Various utilities for debugging | 1043 |
| fflas_intrinsic.h               | 1044 |
| fflas_io.h                      | 1044 |
| fflas_memory.h                  | 1045 |
| fflas_randommatrix.h            | 1046 |
| flimits.h                       | 1048 |
| Matio.h                         | 1049 |
| test-utils.h                    | 1049 |
| timer.h                         | 1050 |
| cblas.C                         | 1050 |
| clapack.C                       | 1051 |
| cuda.C                          | 1052 |
| fblas.C                         | 1052 |
| lapack.C                        | 1053 |
| regression-check.C              | 1053 |
| test-charpoly-check.C           | 1054 |
| test-charpoly.C                 | 1055 |
| test-compressQ.C                | 1056 |
| test-det-check.C                | 1057 |
| test-det.C                      | 1057 |
| test-echelon.C                  | 1058 |
| test-fadd.C                     | 1060 |
| test-fdot.C                     | 1061 |
| test-fgemm-check.C              | 1063 |
| test-fgemm.C                    | 1064 |
| test-fgemv.C                    | 1066 |
| test-fger.C                     | 1068 |
| test-fgesv.C                    | 1070 |
| test-finit.C                    | 1071 |
| test-fscal.C                    | 1072 |
| test-fsyr2k.C                   | 1073 |
| test-fsyk.C                     | 1074 |
| test-fsytrf.C                   | 1076 |
| test-ftrmm.C                    | 1078 |
| test-ftrmv.C                    | 1079 |
| test-ftrsm-check.C              | 1080 |
| test-ftrsm.C                    | 1081 |
| test-ftrssyr2k.C                | 1082 |
| test-ftrstr.C                   | 1083 |
| test-ftrsv.C                    | 1084 |
| test-ftrtri.C                   | 1085 |
| test-interfaces-c.c             | 1086 |
| test-invert-check.C             | 1087 |
| test-io.C                       | 1087 |
| test-lu.C                       | 1088 |
| test-maxdelayeddim.C            | 1092 |
| test-minpoly.C                  | 1093 |
| test-multifile1.C               | 1093 |
| test-multifile2.C               | 1094 |
| test-nullspace.C                | 1094 |
| test-permutations.C             | 1095 |
| test-pluq-check.C               | 1096 |
| test-quasisep.C                 | 1097 |
| test-rankprofiles.C             | 1098 |
| test-rpm.C                      | 1099 |
| test-simd.C                     | 1100 |
| test-solve.C                    | 1103 |

|                          |      |
|--------------------------|------|
| test-storage-transpose.C | 1104 |
| 101-fgemm.C              | 1104 |
| 2x2-fgemm.C              | 1105 |
| 2x2-ftrsv.C              | 1105 |
| 2x2-pluq.C               | 1106 |
| fflas-101_1.C            | 1106 |
| fflas-101_3.C            | 1106 |
| fflas_101.C              | 1107 |
| fflas_101_lvl1.C         | 1107 |
| ffpack-fgesv.C           | 1107 |
| ffpack-solve.C           | 1108 |



# Chapter 10

## Topic Documentation

### 10.1 CHECKER

Class CHECKER provides functions to verify computations in [FFLAS](#) and [FFPACK](#).

### 10.2 FFLAS-FFPACK

the [FFLAS FFPACK](#) library

#### Topics

- [FFLAS](#)
- [Interfaces](#)

#### 10.2.1 Detailed Description

the [FFLAS FFPACK](#) library

C++ header library for fast exact dense linear algebra

See also

[FFLAS](#)  
[FFPACK](#)

#### 10.2.2 FFLAS

The C-style wrapper of BLAS for finite field linear algebra.

[FFLAS](#), Finite Field Linear Algebra Subroutines, provide basic linear algebra subroutines based on the BLAS interface. Therefore, the specifications are in C style; only the field given as a template parameter requires C++.

As much as possible, these routines use [ATLAS/BLAS](#) computations and achieve therefore high efficiency.

### 10.2.3 Interfaces

Intefaces for FFLAS-FFPACK

C interface in folder

See also

libs

## 10.3 Matrix Multiplication Algorithms

### Files

- file [schedule\\_bini.inl](#)  
*Bini implementation.*

### 10.3.1 Detailed Description

Matrix Multiplication (level 3) algorithms

**Todo** biblio

## 10.4 SIMD wrapper

wraps SIMD functions Support SSE4.1, AVX, AVX2.

**Todo** biblio

## 10.5 FFPACK

### Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

### 10.5.1 Detailed Description

Class [FFPACK](#) provides functions using fflas much as Lapack uses BLAS.



## 10.6 FFLAS-FFPACK fields

### Files

- file [rns-double-elt.h](#)  
*rns elt structure with double support*
- file [rns-double.h](#)  
*rns structure with double support*
- file [rns-integer-mod.h](#)  
*representation of  $\mathbb{Z}/p\mathbb{Z}$  using RNS representation (note: fixed precision)*
- file [rns-integer.h](#)  
*representation of  $\mathbb{Z}$  using RNS representation (note: fixed precision)*
- file [rns.h](#)

### 10.6.1 Detailed Description

fields in the FFLAS-FFPACK library

Unparametric/Random elements

[Todo](#) biblio

## 10.7 RNS

just include them all

just include them all



# Chapter 11

## Namespace Documentation

### 11.1 FFLAS Namespace Reference

#### Namespaces

- namespace [\\_frtranspose\\_impl](#)
- namespace [BLAS3](#)
- namespace [csr\\_hyb\\_details](#)
- namespace [CuttingStrategy](#)
- namespace [details](#)
- namespace [details\\_spmv](#)
- namespace [ElementCategories](#)
- namespace [FieldCategories](#)

*Traits and categories will need to be placed in a proper file later.*

- namespace [MMHelperAlgo](#)
- namespace [ModeCategories](#)

*Specifies the mode of action for an algorithm w.r.t.*

- namespace [ParSeqHelper](#)

*ParSeqHelper for both fgemm and ftrsm.*

- namespace [Protected](#)
- namespace [sell\\_details](#)
- namespace [sparse\\_details](#)
- namespace [sparse\\_details\\_impl](#)
- namespace [StrategyParameter](#)
- namespace [StructureHelper](#)

*StructureHelper for ftrsm.*

- namespace [vectorised](#)

#### Data Structures

- struct [AlgoChooser](#)
- struct [AlgoChooser< ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeq >](#)
- struct [associatedDelayedField](#)
- struct [associatedDelayedField< const FFPACK::RNSIntegerMod< RNS > >](#)
- struct [associatedDelayedField< const Givaro::Modular< T, X > >](#)
- struct [associatedDelayedField< const Givaro::ModularBalanced< T > >](#)
- struct [associatedDelayedField< const Givaro::ZRing< T > >](#)

- struct [BlockTransposeSIMD](#)
- struct [Checker\\_Empty](#)
- class [CheckerImplem\\_fgemm](#)
- class [CheckerImplem\\_ftsrn](#)
- struct [CooMat](#)
- struct [CsrMat](#)
- struct [ElementTraits](#)
  - ElementTraits.*
- struct [ElementTraits< double >](#)
- struct [ElementTraits< FFPACK::rns\\_double\\_elt >](#)
- struct [ElementTraits< float >](#)
- struct [ElementTraits< Givaro::Integer >](#)
- struct [ElementTraits< int16\\_t >](#)
- struct [ElementTraits< int32\\_t >](#)
- struct [ElementTraits< int64\\_t >](#)
- struct [ElementTraits< int8\\_t >](#)
- struct [ElementTraits< Reclnt::rint< K > >](#)
- struct [ElementTraits< Reclnt::rmint< K, MG > >](#)
- struct [ElementTraits< Reclnt::ruint< K > >](#)
- struct [ElementTraits< uint16\\_t >](#)
- struct [ElementTraits< uint32\\_t >](#)
- struct [ElementTraits< uint64\\_t >](#)
- struct [ElementTraits< uint8\\_t >](#)
- struct [ElIMat](#)
- struct [FieldTraits](#)
  - FieldTrait.*
- struct [FieldTraits< FFPACK::RNSInteger< T > >](#)
- struct [FieldTraits< FFPACK::RNSIntegerMod< T > >](#)
- struct [FieldTraits< Givaro::Modular< Element > >](#)
- struct [FieldTraits< Givaro::ModularBalanced< Element > >](#)
- struct [FieldTraits< Givaro::ZRing< double > >](#)
- struct [FieldTraits< Givaro::ZRing< float > >](#)
- struct [FieldTraits< Givaro::ZRing< Givaro::Integer > >](#)
- struct [FieldTraits< Givaro::ZRing< int16\\_t > >](#)
- struct [FieldTraits< Givaro::ZRing< int32\\_t > >](#)
- struct [FieldTraits< Givaro::ZRing< int64\\_t > >](#)
- struct [FieldTraits< Givaro::ZRing< Reclnt::ruint< K > > >](#)
- struct [FieldTraits< Givaro::ZRing< uint16\\_t > >](#)
- struct [FieldTraits< Givaro::ZRing< uint32\\_t > >](#)
- struct [FieldTraits< Givaro::ZRing< uint64\\_t > >](#)
- struct [ForStrategy1D](#)
- struct [ForStrategy2D](#)
- struct [has\\_minus\\_eq\\_impl](#)
- struct [has\\_minus\\_impl](#)
- struct [has\\_mul\\_eq\\_impl](#)
- struct [has\\_mul\\_impl](#)
- struct [has\\_operation](#)
- struct [has\\_plus\\_eq\\_impl](#)
- struct [has\\_plus\\_impl](#)
- struct [HelperFlag](#)
- struct [isSparseMatrix](#)
- struct [isSparseMatrix< Field, Sparse< Field, SparseMatrix\\_t::COO > >](#)
- struct [isSparseMatrix< Field, Sparse< Field, SparseMatrix\\_t::COO\\_ZO > >](#)
- struct [isSparseMatrix< Field, Sparse< Field, SparseMatrix\\_t::CSR > >](#)

- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::CSR\_HYB > >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::CSR\_ZO > >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::ELL > >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::ELL\_simd > >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::ELL\_simd\_ZO > >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::ELL\_ZO > >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::HYB\_ZO > >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::SELL > >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::SELL\_ZO > >
- struct [isSparseMatrixMKLFormat](#)
- struct [isSparseMatrixSimdFormat](#)
- struct [isZOSparseMatrix](#)
- struct [isZOSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::COO\_ZO > >
- struct [isZOSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::CSR\_ZO > >
- struct [isZOSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::ELL\_simd\_ZO > >
- struct [isZOSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::ELL\_ZO > >
- struct [isZOSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::SELL\_ZO > >
- struct [MMHelper](#)
- struct [MMHelper](#)< FFPACK::RNSInteger< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >
- struct [MMHelper](#)< FFPACK::RNSIntegerMod< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >
- struct [MMHelper](#)< Field, AlgoTrait, ModeCategories::ConvertTo< Dest >, ParSeqTrait >
- struct [MMHelper](#)< Field, AlgoTrait, ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeqTrait >
- struct [MMHelper](#)< Field, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >
- *FGEMM Helper for Default and ConvertTo modes of operation.*
- struct [ModeTraits](#)
- *ModeTraits.*
- struct [ModeTraits](#)< Givaro::Modular< Element, Compute > >
- struct [ModeTraits](#)< Givaro::Modular< Givaro::Integer, Compute > >
- struct [ModeTraits](#)< Givaro::Modular< int16\_t, Compute > >
- struct [ModeTraits](#)< Givaro::Modular< int32\_t, Compute > >
- struct [ModeTraits](#)< Givaro::Modular< int64\_t, uint64\_t > >
- struct [ModeTraits](#)< Givaro::Modular< int8\_t, Compute > >
- struct [ModeTraits](#)< Givaro::Modular< RecInt::ruint< K >, Compute > >
- struct [ModeTraits](#)< Givaro::Modular< uint16\_t, Compute > >
- struct [ModeTraits](#)< Givaro::Modular< uint32\_t, Compute > >
- struct [ModeTraits](#)< Givaro::Modular< uint8\_t, Compute > >
- struct [ModeTraits](#)< Givaro::ModularBalanced< Element > >
- struct [ModeTraits](#)< Givaro::ModularBalanced< Givaro::Integer > >
- struct [ModeTraits](#)< Givaro::ModularBalanced< int16\_t > >
- struct [ModeTraits](#)< Givaro::ModularBalanced< int32\_t > >
- struct [ModeTraits](#)< Givaro::ModularBalanced< int8\_t > >
- struct [ModeTraits](#)< Givaro::Montgomery< T > >
- struct [ModeTraits](#)< Givaro::ZRing< double > >
- struct [ModeTraits](#)< Givaro::ZRing< float > >
- struct [ModeTraits](#)< Givaro::ZRing< Givaro::Integer > >
- struct [readMyMachineType](#)
- struct [readMyMachineType](#)< Field, mpz\_t >
- struct [Sparse](#)
- struct [Sparse](#)< \_Field, SparseMatrix\_t::COO >
- struct [Sparse](#)< \_Field, SparseMatrix\_t::COO\_ZO >
- struct [Sparse](#)< \_Field, SparseMatrix\_t::CSR >
- struct [Sparse](#)< \_Field, SparseMatrix\_t::CSR\_HYB >
- struct [Sparse](#)< \_Field, SparseMatrix\_t::CSR\_ZO >
- struct [Sparse](#)< \_Field, SparseMatrix\_t::ELL >

- struct [Sparse](#)< [\\_Field](#), [SparseMatrix\\_t::ELL\\_simd](#) >
- struct [Sparse](#)< [\\_Field](#), [SparseMatrix\\_t::ELL\\_simd\\_ZO](#) >
- struct [Sparse](#)< [\\_Field](#), [SparseMatrix\\_t::ELL\\_ZO](#) >
- struct [Sparse](#)< [\\_Field](#), [SparseMatrix\\_t::HYB\\_ZO](#) >
- struct [Sparse](#)< [\\_Field](#), [SparseMatrix\\_t::SELL](#) >
- struct [Sparse](#)< [\\_Field](#), [SparseMatrix\\_t::SELL\\_ZO](#) >
- struct [SpMat](#)
- struct [StatsMatrix](#)
- struct [support\\_fast\\_mod](#)
- struct [support\\_fast\\_mod](#)< double >
- struct [support\\_fast\\_mod](#)< float >
- struct [support\\_fast\\_mod](#)< int64\_t >
- struct [support\\_simd](#)
- struct [support\\_simd\\_add](#)
- struct [support\\_simd\\_mod](#)
- struct [tfn\\_minus](#)
- struct [tfn\\_minus\\_eq](#)
- struct [tfn\\_mul](#)
- struct [tfn\\_mul\\_eq](#)
- struct [tfn\\_plus](#)
- struct [tfn\\_plus\\_eq](#)
- struct [TRSMHelper](#)

*TRSM Helper.*

## Typedefs

- template<class [Field](#) >  
using [Checker\\_fgemm](#) = [FFLAS::Checker\\_Empty](#)<[Field](#)>
- template<class [Field](#) >  
using [Checker\\_ftrsm](#) = [FFLAS::Checker\\_Empty](#)<[Field](#)>
- template<class [Field](#) >  
using [ForceCheck\\_fgemm](#) = [CheckerImplem\\_fgemm](#)<[Field](#)>
- template<class [Field](#) >  
using [ForceCheck\\_ftrsm](#) = [CheckerImplem\\_ftrsm](#)<[Field](#)>
- using [ZOSparseMatrix](#) = std::true\_type
- using [NotZOSparseMatrix](#) = std::false\_type
- using [SimdSparseMatrix](#) = std::true\_type
- using [NoSimdSparseMatrix](#) = std::false\_type
- using [MKLSparseMatrixFormat](#) = std::true\_type
- using [NotMKLSparseMatrixFormat](#) = std::false\_type
- template<class T >  
using [has\\_plus](#) = typename std::conditional<std::is\_arithmetic<T>::value, std::true\_type, [has\\_plus\\_impl](#)<T>>::type
- template<class T >  
using [has\\_minus](#) = typename std::conditional<std::is\_arithmetic<T>::value, std::true\_type, [has\\_minus\\_impl](#)<T>>::type
- template<class T >  
using [has\\_equal](#) = typename std::conditional<std::is\_arithmetic<T>::value, std::true\_type, std::is\_copy\_assignable<T>>::type
- template<class T >  
using [has\\_plus\\_eq](#) = typename std::conditional<std::is\_arithmetic<T>::value, std::true\_type, [has\\_plus\\_eq\\_impl](#)<T>>::type
- template<class T >  
using [has\\_minus\\_eq](#) = typename std::conditional<std::is\_arithmetic<T>::value, std::true\_type, [has\\_minus\\_eq\\_impl](#)<T>>::type

- `template<class T >`  
using `has_mul` = `typename std::conditional<std::is_arithmetic<T>::value, std::true_type, has_mul_impl<T>>::type`
- `template<class T >`  
using `has_mul_eq` = `typename std::conditional<std::is_arithmetic<T>::value, std::true_type, has_mul_eq_impl<T>>::type`
- `typedef Givaro::Timer` `Timer`
- `typedef Givaro::BaseTimer` `BaseTimer`
- `typedef Givaro::UserTimer` `UserTimer`
- `typedef Givaro::SysTimer` `SysTimer`

## Enumerations

- enum `FFLAS_ORDER` { `FflasRowMajor` = 101 , `FflasColMajor` = 102 }  
*Storage by row or col ?*
- enum `FFLAS_TRANSPOSE` { `FflasNoTrans` = 111 , `FflasTrans` = 112 }  
*Is matrix transposed ?*
- enum `FFLAS_UPLO` { `FflasUpper` = 121 , `FflasLower` = 122 , `FflasLeftTri` = 123 , `FflasRightTri` = 124 }  
*Is triangular matrix's shape upper ?*
- enum `FFLAS_DIAG` { `FflasNonUnit` = 131 , `FflasUnit` = 132 }  
*Is the triangular matrix implicitly unit diagonal ?*
- enum `FFLAS_SIDE` { `FflasLeft` = 141 , `FflasRight` = 142 }  
*On what side ?*
- enum `FFLAS_BASE` { `FflasDouble` = 151 , `FflasFloat` = 152 , `FflasGeneric` = 153 }  
*FFLAS\_BASE determines the type of the element representation for Matrix Mult kernel.*
- enum `number_kind` { `zero` = 0 , `one` = 1 , `mone` = -1 , `other` = 2 }
- enum class `SparseMatrix_t` {  
    `CSR` , `CSR_ZO` , `CSC` , `CSC_ZO` ,  
    `COO` , `COO_ZO` , `ELL` , `ELL_ZO` ,  
    `SELL` , `SELL_ZO` , `ELL_simd` , `ELL_simd_ZO` ,  
    `CSR_HYB` , `HYB_ZO` }
- enum `FFLAS_FORMAT` {  
    `FflasAuto` = 0 , `FflasDense` = 1 , `FflasSMS` = 2 , `FflasBinary` = 3 ,  
    `FflasMath` = 4 , `FflasMaple` = 5 , `FflasSageMath` = 6 }

## Functions

- `Givaro::Integer` `InfNorm` (const size\_t M, const size\_t N, const Givaro::Integer \*A, const size\_t Ida)
- `template<class T >`  
const T & `min3` (const T &m, const T &n, const T &k)
- `template<class T >`  
const T & `max3` (const T &m, const T &n, const T &k)
- `template<class T >`  
const T & `min4` (const T &m, const T &n, const T &k, const T &l)
- `template<class T >`  
const T & `max4` (const T &m, const T &n, const T &k, const T &l)
- `template<class Field >`  
void `fadd` (const Field &F, const size\_t N, typename Field::ConstElement\_ptr A, const size\_t inca, typename Field::ConstElement\_ptr B, const size\_t incb, typename Field::Element\_ptr C, const size\_t incc)
- `template<class Field >`  
void `faddin` (const Field &F, const size\_t N, typename Field::ConstElement\_ptr B, const size\_t incb, typename Field::Element\_ptr C, const size\_t incc)

- `template<class Field >`  
`void fsub (const Field &F, const size_t N, typename Field::ConstElement_ptr A, const size_t inca, typename Field::ConstElement_ptr B, const size_t incb, typename Field::Element_ptr C, const size_t incc)`
- `template<class Field >`  
`void fsubin (const Field &F, const size_t N, typename Field::ConstElement_ptr B, const size_t incb, typename Field::Element_ptr C, const size_t incc)`
- `template<class Field >`  
`void fadd (const Field &F, const size_t N, typename Field::ConstElement_ptr A, const size_t inca, const typename Field::Element alpha, typename Field::ConstElement_ptr B, const size_t incb, typename Field::Element_ptr C, const size_t incc)`
- `template<class Field >`  
`void pfadd (const Field &F, const size_t M, const size_t N, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, typename Field::Element_ptr C, const size_t ldc, const size_t numths)`
- `template<class Field >`  
`void pfsub (const Field &F, const size_t M, const size_t N, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, typename Field::Element_ptr C, const size_t ldc, const size_t numths)`
- `template<class Field >`  
`void pfaddin (const Field &F, const size_t M, const size_t N, typename Field::ConstElement_ptr B, const size_t ldb, typename Field::Element_ptr C, const size_t ldc, size_t numths)`
- `template<class Field >`  
`void pfsubin (const Field &F, const size_t M, const size_t N, typename Field::ConstElement_ptr B, const size_t ldb, typename Field::Element_ptr C, const size_t ldc, size_t numths)`
- `template<class Field >`  
`void fadd (const Field &F, const size_t M, const size_t N, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, typename Field::Element_ptr C, const size_t ldc)`  
*fadd : matrix addition.*
- `template<class Field >`  
`void fsub (const Field &F, const size_t M, const size_t N, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, typename Field::Element_ptr C, const size_t ldc)`  
*fsub : matrix subtraction.*
- `template<class Field >`  
`void faddin (const Field &F, const size_t M, const size_t N, typename Field::ConstElement_ptr B, const size_t ldb, typename Field::Element_ptr C, const size_t ldc)`  
*faddin*
- `template<class Field >`  
`void faddin (const Field &F, const FFLAS_UPLO uplo, const size_t N, typename Field::ConstElement_ptr B, const size_t ldb, typename Field::Element_ptr C, const size_t ldc)`  
*fadding for symmetric matrices*
- `template<class Field >`  
`void fsubin (const Field &F, const size_t M, const size_t N, typename Field::ConstElement_ptr B, const size_t ldb, typename Field::Element_ptr C, const size_t ldc)`  
*fsubin  $C = C - B$*
- `template<class Field >`  
`void fadd (const Field &F, const size_t M, const size_t N, typename Field::ConstElement_ptr A, const size_t lda, const typename Field::Element alpha, typename Field::ConstElement_ptr B, const size_t ldb, typename Field::Element_ptr C, const size_t ldc)`  
*fadd : matrix addition with scaling.*
- `template<class Field >`  
`void fassign (const Field &F, const size_t N, typename Field::ConstElement_ptr Y, const size_t incY, typename Field::Element_ptr X, const size_t incX)`  
*fassign :  $x \leftarrow y$ .*
- `template<> void fassign (const Givaro::Modular< float > &F, const size_t N, const float *Y, const size_t incY, float *X, const size_t incX)`



- `template<> void fassign (const Givaro::ModularBalanced< float > &F, const size_t N, const float *Y, const size_t incY, float *X, const size_t incX)`
- `template<> void fassign (const Givaro::ZRing< float > &F, const size_t N, const float *Y, const size_t incY, float *X, const size_t incX)`
- `template<> void fassign (const Givaro::Modular< double > &F, const size_t N, const double *Y, const size_t incY, double *X, const size_t incX)`
- `template<> void fassign (const Givaro::ModularBalanced< double > &F, const size_t N, const double *Y, const size_t incY, double *X, const size_t incX)`
- `template<> void fassign (const Givaro::ZRing< double > &F, const size_t N, const double *Y, const size_t incY, double *X, const size_t incX)`
- `template<class Field >`  
`void fassign (const Field &F, const size_t m, const size_t n, typename Field::ConstElement_ptr B, const size_t ldb, typename Field::Element_ptr A, const size_t lda)`  

$$fassign : A \leftarrow B.$$
- `template<class Field >`  
`void faxpy (const Field &F, const size_t N, const typename Field::Element alpha, typename Field::ConstElement_ptr X, const size_t incX, typename Field::Element_ptr Y, const size_t incY)`  

$$faxpy : y \leftarrow \alpha \cdot x + y.$$
- `template<> void faxpy (const Givaro::DoubleDomain &, const size_t N, const Givaro::DoubleDomain::Element a, Givaro::DoubleDomain::ConstElement_ptr x, const size_t incx, Givaro::DoubleDomain::Element_ptr y, const size_t incy)`
- `template<> void faxpy (const Givaro::FloatDomain &, const size_t N, const Givaro::FloatDomain::Element a, Givaro::FloatDomain::ConstElement_ptr x, const size_t incx, Givaro::FloatDomain::Element_ptr y, const size_t incy)`
- `template<class Field >`  
`void faxpy (const Field &F, const size_t m, const size_t n, const typename Field::Element alpha, typename Field::ConstElement_ptr X, const size_t ldx, typename Field::Element_ptr Y, const size_t ldy)`  

$$faxpy : y \leftarrow \alpha \cdot x + y.$$
- `template<class Field >`  
`Field::Element fdot (const Field &F, const size_t N, typename Field::ConstElement_ptr x, const size_t incx, typename Field::ConstElement_ptr y, const size_t incy, ModeCategories::DefaultTag &MT)`
- `template<class Field >`  
`Field::Element fdot (const Field &F, const size_t N, typename Field::ConstElement_ptr x, const size_t incx, typename Field::ConstElement_ptr y, const size_t incy, ModeCategories::DelayedTag &MT)`
- `template<> Givaro::DoubleDomain::Element fdot (const Givaro::DoubleDomain &, const size_t N, Givaro::DoubleDomain::ConstElement_ptr x, const size_t incx, Givaro::DoubleDomain::ConstElement_ptr y, const size_t incy, ModeCategories::DefaultTag &MT)`
- `template<> Givaro::FloatDomain::Element fdot (const Givaro::FloatDomain &, const size_t N, Givaro::FloatDomain::ConstElement_ptr x, const size_t incx, Givaro::FloatDomain::ConstElement_ptr y, const size_t incy, ModeCategories::DefaultTag &MT)`
- `template<class Field, class T >`  
`Field::Element fdot (const Field &F, const size_t N, typename Field::ConstElement_ptr x, const size_t incx, typename Field::ConstElement_ptr y, const size_t incy, ModeCategories::ConvertTo< T > &MT)`
- `template<class Field >`  
`Field::Element fdot (const Field &F, const size_t N, typename Field::ConstElement_ptr x, const size_t incx, typename Field::ConstElement_ptr y, const size_t incy, ModeCategories::DefaultBoundedTag &dbt)`
- `template<class Field >`  
`Field::Element fdot (const Field &F, const size_t N, typename Field::ConstElement_ptr x, const size_t incx, typename Field::ConstElement_ptr y, const size_t incy, const ParSeqHelper::Sequential seq)`
- `template<class Field >`  
`Field::Element fdot (const Field &F, const size_t N, typename Field::ConstElement_ptr X, const size_t incX, typename Field::ConstElement_ptr Y, const size_t incY)`  

$$fdot: dot\ product\ x^T y.$$
- `template<class Field >`  
`Field::Element_ptr fgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, typename`

- `Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field, MMHelperAlgo::Winograd, ModeCategories::ConvertTo< ElementCategories::MachineFloatTag >, ParSeqHelper::Sequential > &H)`
- `template<typename Field >`  
`Field::Element_ptr fgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, const ParSeqHelper::Sequential seq)`
  - `template<typename Field, class Cut, class Param >`  
`Field::Element_ptr fgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, const ParSeqHelper::Parallel< Cut, Param > par)`
  - `template<typename Field >`  
`Field::Element_ptr fgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc)`  
*fgemm: Field GENERAL Matrix Multiply.*
  - `template<typename Field, class ModeT, class ParSeq >`  
`Field::Element_ptr fgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field, MMHelperAlgo::Auto, ModeT, ParSeq > &H)`
  - `template<class Field >`  
`Field::Element_ptr fgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field, MMHelperAlgo::Winograd, ModeCategories::DelayedTag, ParSeqHelper::Sequential > &H)`
  - `template<class Field >`  
`Field::Element_ptr fsquare (const Field &F, const FFLAS_TRANSPOSE ta, const size_t n, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc)`  
*fsquare: Squares a matrix.*
  - `template<> double * fsquare (const Givaro::ModularBalanced< double > &F, const FFLAS_TRANSPOSE ta, const size_t n, const double alpha, const double *A, const size_t lda, const double beta, double *C, const size_t ldc)`
  - `template<> float * fsquare (const Givaro::ModularBalanced< float > &F, const FFLAS_TRANSPOSE ta, const size_t n, const float alpha, const float *A, const size_t lda, const float beta, float *C, const size_t ldc)`
  - `template<> double * fsquare (const Givaro::Modular< double > &F, const FFLAS_TRANSPOSE ta, const size_t n, const double alpha, const double *A, const size_t lda, const double beta, double *C, const size_t ldc)`
  - `template<> float * fsquare (const Givaro::Modular< float > &F, const FFLAS_TRANSPOSE ta, const size_t n, const float alpha, const float *A, const size_t lda, const float beta, float *C, const size_t ldc)`
  - `template<typename RNS, typename ParSeqTrait >`  
`FFPACK::RNSInteger< RNS >::Element_ptr fgemm (const FFPACK::RNSInteger< RNS > &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename FFPACK::RNSInteger< RNS >::Element alpha, typename FFPACK::RNSInteger< RNS >::ConstElement_ptr Ad, const size_t lda, typename FFPACK::RNSInteger< RNS >::ConstElement_ptr Bd, const size_t ldb, const typename FFPACK::RNSInteger< RNS >::Element beta, typename FFPACK::RNSInteger< RNS >::Element_ptr Cd, const size_t ldc, MMHelper< FFPACK::RNSInteger< RNS >, MMHelperAlgo::Classic, ModeCategories::DefaultTag, ParSeqHelper::Compose< ParSeqHelper::Sequential, ParSeqTrait > > &H)`

- `template<typename RNS >`  
`FFPACK::RNSInteger< RNS >::Element_ptr fgemm (const FFPACK::RNSInteger< RNS > &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename FFPACK::RNSInteger< RNS >::Element alpha, typename FFPACK::RNSInteger< RNS >::ConstElement_ptr Ad, const size_t lda, typename FFPACK::RNSInteger< RNS >::ConstElement_ptr Bd, const size_t ldb, const typename FFPACK::RNSInteger< RNS >::Element beta, typename FFPACK::RNSInteger< RNS >::Element_ptr Cd, const size_t ldc, MMHelper< FFPACK::RNSInteger< RNS >, MMHelperAlgo::Classic, ModeCategories::DefaultTag, ParSeqHelper::Sequential > &H)`
- `template<typename RNS, typename ParSeqTrait >`  
`FFPACK::RNSInteger< RNS >::Element_ptr fgemm (const FFPACK::RNSInteger< RNS > &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename FFPACK::RNSInteger< RNS >::Element alpha, typename FFPACK::RNSInteger< RNS >::ConstElement_ptr Ad, const size_t lda, typename FFPACK::RNSInteger< RNS >::ConstElement_ptr Bd, const size_t ldb, const typename FFPACK::RNSInteger< RNS >::Element beta, typename FFPACK::RNSInteger< RNS >::Element_ptr Cd, const size_t ldc, MMHelper< FFPACK::RNSInteger< RNS >, MMHelperAlgo::Classic, ModeCategories::DefaultTag, ParSeqHelper::Compose< ParSeqHelper::Parallel< CuttingStrategy::RNSModulus, StrategyParameter::Threads >, ParSeqTrait > > &H)`
- `template<typename RNS, typename Cut, typename Param >`  
`FFPACK::RNSInteger< RNS >::Element_ptr fgemm (const FFPACK::RNSInteger< RNS > &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename FFPACK::RNSInteger< RNS >::Element alpha, typename FFPACK::RNSInteger< RNS >::ConstElement_ptr Ad, const size_t lda, typename FFPACK::RNSInteger< RNS >::ConstElement_ptr Bd, const size_t ldb, const typename FFPACK::RNSInteger< RNS >::Element beta, typename FFPACK::RNSInteger< RNS >::Element_ptr Cd, const size_t ldc, MMHelper< FFPACK::RNSInteger< RNS >, MMHelperAlgo::Classic, ModeCategories::DefaultTag, ParSeqHelper::Parallel< Cut, Param > > &H)`
- `template<class ParSeq >`  
`Givaro::Integer * fgemm (const Givaro::ZRing< Givaro::Integer > &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const Givaro::Integer alpha, const Givaro::Integer *A, const size_t lda, const Givaro::Integer *B, const size_t ldb, Givaro::Integer beta, Givaro::Integer *C, const size_t ldc, MMHelper< Givaro::ZRing< Givaro::Integer >, MMHelperAlgo::Classic, ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeq > &H)`
- `template<typename RNS, class ModeT >`  
`RNS::Element_ptr fgemm (const FFPACK::RNSInteger< RNS > &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename RNS::Element alpha, typename RNS::ConstElement_ptr Ad, const size_t lda, typename RNS::ConstElement_ptr Bd, const size_t ldb, const typename RNS::Element beta, typename RNS::Element_ptr Cd, const size_t ldc, MMHelper< FFPACK::RNSInteger< RNS >, MMHelperAlgo::Winograd, ModeT, ParSeqHelper::Sequential > &H)`
- `template<typename RNS >`  
`RNS::Element_ptr fgemm (const FFPACK::RNSIntegerMod< RNS > &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename RNS::Element alpha, typename RNS::ConstElement_ptr Ad, const size_t lda, typename RNS::ConstElement_ptr Bd, const size_t ldb, const typename RNS::Element beta, typename RNS::Element_ptr Cd, const size_t ldc, MMHelper< FFPACK::RNSIntegerMod< RNS >, MMHelperAlgo::Winograd > &H)`
- `Givaro::Integer * fgemm (const Givaro::Modular< Givaro::Integer > &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const Givaro::Integer alpha, const Givaro::Integer *A, const size_t lda, const Givaro::Integer *B, const size_t ldb, const Givaro::Integer beta, Givaro::Integer *C, const size_t ldc, MMHelper< Givaro::Modular< Givaro::Integer >, MMHelperAlgo::Classic, ModeCategories::ConvertTo< ElementCategories::RNSElementTag > > &H)`
- `template<class ParSeq >`  
`Givaro::Integer * fgemm (const Givaro::Modular< Givaro::Integer > &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const Givaro::Integer alpha, const Givaro::Integer *A, const size_t lda, const Givaro::Integer *B, const size_t ldb, const Givaro::Integer beta, Givaro::Integer *C, const size_t ldc, MMHelper< Givaro::Modular< Givaro::Integer >, MMHelperAlgo::Auto, ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeq > &H)`
- `template<size_t K1, size_t K2, class ParSeq >`  
`Reclnt::ruint< K1 > * fgemm (const Givaro::Modular< Reclnt::ruint< K1 >, Reclnt::ruint< K2 > > &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n,`

- const size\_t k, const [RecInt::ruint](#)< K1 > alpha, const [RecInt::ruint](#)< K1 > \*A, const size\_t lda, const [RecInt::ruint](#)< K1 > \*B, const size\_t ldb, [RecInt::ruint](#)< K1 > beta, [RecInt::ruint](#)< K1 > \*C, const size\_t ldc, [MMHelper](#)< [Givaro::Modular](#)< [RecInt::ruint](#)< K1 >, [RecInt::ruint](#)< K2 > >, [MMHelperAlgo::Classic](#), [ModeCategories::ConvertTo](#)< [ElementCategories::RNSElementTag](#) >, [ParSeq](#) > &H)
- `template<class Field , class ModeT >`  
[Field::Element\\_ptr](#) [fgemm](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, [MMHelper](#)< [Field](#), [MMHelperAlgo::Winograd](#), ModeT > &H)
  - `template<class Field , class ModeT , class Cut , class Param >`  
[Field::Element\\_ptr](#) [fgemm](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, [MMHelper](#)< [Field](#), [MMHelperAlgo::WinogradPar](#), ModeT, [ParSeqHelper::Parallel](#)< Cut, Param > > &H)
  - `template<class Field >`  
[Field::Element\\_ptr](#) [fgemv](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) Y, const size\_t incY, [MMHelper](#)< [Field](#), [MMHelperAlgo::Classic](#), [ModeCategories::ConvertTo](#)< [ElementCategories::MachineFloatTag](#) > > &H)
  - `template<class Field >`  
[Field::Element\\_ptr](#) [fgemv](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) Y, const size\_t incY, [MMHelper](#)< [Field](#), [MMHelperAlgo::Classic](#), [ModeCategories::DelayedTag](#) > &H)
  - `template<class Field >`  
[Field::Element\\_ptr](#) [fgemv](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) Y, const size\_t incY, [MMHelper](#)< [Field](#), [MMHelperAlgo::Classic](#), [ModeCategories::DefaultTag](#) > &H)
  - `template<class Field >`  
[Field::Element\\_ptr](#) [fgemv](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) Y, const size\_t incY, [MMHelper](#)< [Field](#), [MMHelperAlgo::Classic](#), [ModeCategories::LazyTag](#) > &H)
  - `template<class Field >`  
[Field::Element\\_ptr](#) [fgemv](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) TransA, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) Y, const size\_t incY)  
*finite prime Field GEneral Matrix Vector multiplication.*
  - `Givaro::ZRing< int64_t >::Element_ptr` [fgemv](#) (const [Givaro::ZRing](#)< int64\_t > &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t M, const size\_t N, const int64\_t alpha, const int64\_t \*A, const size\_t lda, const int64\_t \*X, const size\_t incX, const int64\_t beta, const int64\_t \*Y, const size\_t incY, [MMHelper](#)< [Givaro::ZRing](#)< int64\_t >, [MMHelperAlgo::Classic](#), [ModeCategories::DefaultTag](#) > &H)
  - `Givaro::DoubleDomain::Element_ptr` [fgemv](#) (const [Givaro::DoubleDomain](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t M, const size\_t N, const [Givaro::DoubleDomain::Element](#) alpha, const [Givaro::DoubleDomain::ConstElement\\_ptr](#) A, const size\_t lda, const [Givaro::DoubleDomain::ConstElement\\_ptr](#) X, const size\_t incX, const [Givaro::DoubleDomain::Element](#) beta, [Givaro::DoubleDomain::Element\\_ptr](#) Y, const size\_t incY, [MMHelper](#)< [Givaro::DoubleDomain](#), [MMHelperAlgo::Classic](#), [ModeCategories::DefaultTag](#) > &H)
  - `template<class Field >`  
[Field::Element\\_ptr](#) [fgemv](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, const [Field::ConstElement\\_ptr](#) A, const size\_t lda, const [Field::ConstElement\\_ptr](#) X, const size\_t incX, const typename [Field::Element](#) beta, const [Field::Element\\_ptr](#) Y, const size\_t incY)

- `_t N, const typename Field::Element alpha, const typename Field::ConstElement\_ptr A, const size_t`  
`_t lda, const typename Field::ConstElement\_ptr X, const size_t incX, const typename Field::Element`  
`beta, typename Field::Element\_ptr Y, const size_t incY, MMHelper< Field, MMHelperAlgo::Classic,`  
`ModeCategories::DefaultBoundedTag > &H)`
- `Givaro::FloatDomain::Element_ptr fgemv (const Givaro::FloatDomain &F, const FFLAS\_TRANSPOSE ta,`  
`const size_t M, const size_t N, const Givaro::FloatDomain::Element alpha, const Givaro::FloatDomain::`  
`ConstElement_ptr A, const size_t lda, const Givaro::FloatDomain::ConstElement_ptr X, const size_t`  
`incX, const Givaro::FloatDomain::Element beta, Givaro::FloatDomain::Element_ptr Y, const size_t incY,`  
`MMHelper< Givaro::FloatDomain, MMHelperAlgo::Classic, ModeCategories::DefaultTag > &H)`
- `template<class Field , class Cut , class Param >`  
`Field::Element\_ptr fgemv (const Field &F, const FFLAS\_TRANSPOSE ta, const size_t m, const size_t n,`  
`const typename Field::Element alpha, const typename Field::ConstElement\_ptr A, const size_t lda, const`  
`typename Field::ConstElement\_ptr X, const size_t incX, const typename Field::Element beta, typename`  
`Field::Element\_ptr Y, const size_t incY, ParSeqHelper::Parallel< Cut, Param > &parH)`
- `template<class Field >`  
`Field::Element\_ptr fgemv (const Field &F, const FFLAS\_TRANSPOSE ta, const size_t m, const size_t n,`  
`const typename Field::Element alpha, const typename Field::ConstElement\_ptr A, const size_t lda, const`  
`typename Field::ConstElement\_ptr X, const size_t incX, const typename Field::Element beta, typename`  
`Field::Element\_ptr Y, const size_t incY, ParSeqHelper::Sequential &seqH)`
- `FFPACK::rns\_double::Element\_ptr fgemv (const FFPACK::RNSInteger< FFPACK::rns\_double > &F, const`  
`FFLAS\_TRANSPOSE ta, const size_t M, const size_t N, const FFPACK::rns\_double::Element alpha,`  
`FFPACK::rns\_double::ConstElement\_ptr A, const size_t lda, FFPACK::rns\_double::ConstElement\_ptr`  
`X, const size_t incX, const FFPACK::rns\_double::Element beta, FFPACK::rns\_double::Element\_ptr Y,`  
`const size_t incY, MMHelper< FFPACK::RNSInteger< FFPACK::rns\_double >, MMHelperAlgo::Classic,`  
`ModeCategories::DefaultTag > &H)`
- `FFPACK::rns\_double::Element\_ptr fgemv (const FFPACK::RNSIntegerMod< FFPACK::rns\_double > &F,`  
`const FFLAS\_TRANSPOSE ta, const size_t M, const size_t N, const FFPACK::rns\_double::Element alpha,`  
`FFPACK::rns\_double::ConstElement\_ptr A, const size_t lda, FFPACK::rns\_double::ConstElement\_ptr X,`  
`const size_t incX, const FFPACK::rns\_double::Element beta, FFPACK::rns\_double::Element\_ptr Y, const`  
`size_t incY, MMHelper< FFPACK::RNSIntegerMod< FFPACK::rns\_double >, MMHelperAlgo::Classic,`  
`ModeCategories::DefaultTag > &H)`
- `Givaro::Integer * fgemv (const Givaro::ZRing< Givaro::Integer > &F, const FFLAS\_TRANSPOSE`  
`ta, const size_t m, const size_t n, const Givaro::Integer alpha, Givaro::Integer *A, const size_t`  
`lda, Givaro::Integer *X, const size_t ldx, Givaro::Integer beta, Givaro::Integer *Y, const size_t ldy,`  
`MMHelper< Givaro::ZRing< Givaro::Integer >, MMHelperAlgo::Classic, ModeCategories::ConvertTo<`  
`ElementCategories::RNSElementTag > > &H)`
- `Givaro::Integer * fgemv (const Givaro::Modular< Givaro::Integer > &F, const FFLAS\_TRANSPOSE`  
`ta, const size_t m, const size_t n, const Givaro::Integer alpha, Givaro::Integer *A, const size_t`  
`lda, Givaro::Integer *X, const size_t ldx, Givaro::Integer beta, Givaro::Integer *Y, const size_t ldy,`  
`MMHelper< Givaro::Modular< Givaro::Integer >, MMHelperAlgo::Classic, ModeCategories::ConvertTo<`  
`ElementCategories::RNSElementTag > > &H)`
- `template<size_t K1, size_t K2, class ParSeq >`  
`RecInt::ruint< K1 > * fgemv (const Givaro::Modular< RecInt::ruint< K1 >, RecInt::ruint< K2 > >`  
`&F, const FFLAS\_TRANSPOSE ta, const size_t m, const size_t n, const RecInt::ruint< K1 > al-`  
`pha, const RecInt::ruint< K1 > *A, const size_t lda, const RecInt::ruint< K1 > *X, const size_t incx,`  
`RecInt::ruint< K1 > beta, RecInt::ruint< K1 > *Y, const size_t incy, MMHelper< Givaro::Modular<`  
`RecInt::ruint< K1 >, RecInt::ruint< K2 > >, MMHelperAlgo::Classic, ModeCategories::ConvertTo<`  
`ElementCategories::RNSElementTag >, ParSeq > &H)`
- `template<class Field >`  
`void fger (const Field &F, const size_t M, const size_t N, const typename Field::Element alpha, typename`  
`Field::ConstElement\_ptr x, const size_t incx, typename Field::ConstElement\_ptr y, const size_t incy, type-`  
`name Field::Element\_ptr A, const size_t lda)`  

*fger: rank one update of a general matrix*
- `template<class Field >`  
`void fger (const Field &F, const size_t M, const size_t N, const typename Field::Element alpha, type-`  
`name Field::ConstElement\_ptr x, const size_t incx, typename Field::ConstElement\_ptr y, const size_t`  
`incy, typename Field::Element\_ptr A, const size_t lda, MMHelper< Field, MMHelperAlgo::Classic,`  
`ModeCategories::ConvertTo< ElementCategories::MachineFloatTag > > &H)`



- `template<class Field, class AnyTag >`  
`void fger (const Field &F, const size_t M, const size_t N, const typename Field::Element alpha, typename Field::ConstElement_ptr x, const size_t incx, typename Field::ConstElement_ptr y, const size_t incy, typename Field::Element_ptr A, const size_t lda, MMHelper< Field, MMHelperAlgo::Classic, AnyTag > &H)`
- `void fger (const Givaro::DoubleDomain &F, const size_t M, const size_t N, const Givaro::DoubleDomain::Element alpha, const Givaro::DoubleDomain::ConstElement_ptr x, const size_t incx, const Givaro::DoubleDomain::ConstElement_ptr y, const size_t incy, Givaro::DoubleDomain::Element_ptr A, const size_t lda, MMHelper< Givaro::DoubleDomain, MMHelperAlgo::Classic, ModeCategories::DefaultTag > &H)`
- `template<class Field >`  
`void fger (const Field &F, const size_t M, const size_t N, const typename Field::Element alpha, const typename Field::ConstElement_ptr x, const size_t incx, const typename Field::ConstElement_ptr y, const size_t incy, typename Field::Element_ptr A, const size_t lda, MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::DefaultBoundedTag > &H)`
- `void fger (const Givaro::FloatDomain &F, const size_t M, const size_t N, const Givaro::FloatDomain::Element alpha, const Givaro::FloatDomain::ConstElement_ptr x, const size_t incx, const Givaro::FloatDomain::ConstElement_ptr y, const size_t incy, Givaro::FloatDomain::Element_ptr A, const size_t lda, MMHelper< Givaro::FloatDomain, MMHelperAlgo::Classic, ModeCategories::DefaultTag > &H)`
- `template<class Field >`  
`void fger (const Field &F, const size_t M, const size_t N, const typename Field::Element alpha, typename Field::ConstElement_ptr x, const size_t incx, typename Field::ConstElement_ptr y, const size_t incy, typename Field::Element_ptr A, const size_t lda, MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::LazyTag > &H)`
- `template<class Field >`  
`void fger (const Field &F, const size_t M, const size_t N, const typename Field::Element alpha, typename Field::ConstElement_ptr x, const size_t incx, typename Field::ConstElement_ptr y, const size_t incy, typename Field::Element_ptr A, const size_t lda, MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::DelayedTag > &H)`
- `void fger (const Givaro::Modular< Givaro::Integer > &F, const size_t M, const size_t N, const typename Givaro::Integer alpha, typename Givaro::Integer *x, const size_t incx, typename Givaro::Integer *y, const size_t incy, typename Givaro::Integer *A, const size_t lda, MMHelper< Givaro::Modular< Givaro::Integer >, MMHelperAlgo::Classic, ModeCategories::ConvertTo< ElementCategories::RNSElementTag > > &H)`
- `template<typename RNS >`  
`void fger (const FFPACK::RNSInteger< RNS > &F, const size_t M, const size_t N, const typename FFPACK::RNSInteger< RNS >::Element alpha, typename FFPACK::RNSInteger< RNS >::Element_ptr x, const size_t incx, typename FFPACK::RNSInteger< RNS >::Element_ptr y, const size_t incy, typename FFPACK::RNSInteger< RNS >::Element_ptr A, const size_t lda, MMHelper< FFPACK::RNSInteger< RNS >, MMHelperAlgo::Classic, ModeCategories::DefaultTag > &H)`
- `template<typename RNS >`  
`void fger (const FFPACK::RNSIntegerMod< RNS > &F, const size_t M, const size_t N, const typename FFPACK::RNSIntegerMod< RNS >::Element alpha, typename FFPACK::RNSIntegerMod< RNS >::Element_ptr x, const size_t incx, typename FFPACK::RNSIntegerMod< RNS >::Element_ptr y, const size_t incy, typename FFPACK::RNSIntegerMod< RNS >::Element_ptr A, const size_t lda, MMHelper< FFPACK::RNSIntegerMod< RNS >, MMHelperAlgo::Classic > &H)`
- `template<class Field >`  
`void freduce (const Field &F, const size_t n, typename Field::ConstElement_ptr Y, const size_t incY, typename Field::Element_ptr X, const size_t incX)`  

$$\text{freduce } x \leftarrow y \bmod F.$$
- `template<class Field >`  
`void freduce (const Field &F, const size_t n, typename Field::Element_ptr X, const size_t incX)`  

$$\text{freduce } x \leftarrow x \bmod F.$$
- `template<class Field >`  
`void freduce_constoverride (const Field &F, const size_t m, typename Field::ConstElement_ptr A, const size_t incX)`
- `template<class Field, class ConstOtherElement_ptr >`  
`void finit (const Field &F, const size_t n, ConstOtherElement_ptr Y, const size_t incY, typename Field::Element_ptr X, const size_t incX)`

- template<class [Field](#) >  
void [finit](#) (const [Field](#) &F, const size\_t n, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*finit Initializes  $X$  in  $F^{\$}$ .*
- template<class [Field](#) >  
void [freduce](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
*freduce  $A \leftarrow A \bmod F$ .*
- template<class [Field](#) >  
void [freduce](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) uplo, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
*freduce for square symmetric matrices*
- template<class [Field](#) >  
void [pfreduce](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t numths)
- template<class [Field](#) >  
void [freduce](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
*freduce  $A \leftarrow B \bmod F$ .*
- template<class [Field](#) >  
void [freduce\\_constoverride](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda)
- template<class [Field](#) , class OtherElement\_ptr >  
void [finit](#) (const [Field](#) &F, const size\_t m, const size\_t n, const OtherElement\_ptr B, const size\_t ldb, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
*finit  $A \leftarrow B \bmod F$ .*
- template<class [Field](#) >  
void [finit](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda)
- template<> void [freduce](#) (const [FFPACK::RNSIntegerMod](#)< [FFPACK::rns\\_double](#) > &F, const size\_t n, [FFPACK::RNSIntegerMod](#)< [FFPACK::rns\\_double](#) >::Element\_ptr A, size\_t inc)
- template<> void [freduce](#) (const [FFPACK::RNSIntegerMod](#)< [FFPACK::rns\\_double](#) > &F, const size\_t m, const size\_t n, [FFPACK::rns\\_double::Element\\_ptr](#) A, size\_t lda)
- template<class [Field](#) >  
bool [freivalds](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, typename [Field::ConstElement\\_ptr](#) C, const size\_t ldc)  
*freivalds: **Freivalds G**eneral **M**atrix **M**ultiply **R**andom **C**heck.*
- template<class [Field](#) >  
void [fscal](#) (const [Field](#) &F, const size\_t n, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*fscal  $x \leftarrow \alpha \cdot x$ .*
- template<class [Field](#) >  
void [fscal](#) (const [Field](#) &F, const size\_t n, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, typename [Field::Element\\_ptr](#) Y, const size\_t incY)  
*fscal  $y \leftarrow \alpha \cdot x$ .*
- template<> void [fscal](#) (const Givaro::DoubleDomain &, const size\_t N, const Givaro::DoubleDomain::Element a, Givaro::DoubleDomain::ConstElement\_ptr x, const size\_t incx, Givaro::DoubleDomain::Element\_ptr y, const size\_t incy)
- template<> void [fscal](#) (const Givaro::FloatDomain &, const size\_t N, const Givaro::FloatDomain::Element a, Givaro::FloatDomain::ConstElement\_ptr x, const size\_t incx, Givaro::FloatDomain::Element\_ptr y, const size\_t incy)
- template<> void [fscal](#) (const Givaro::DoubleDomain &, const size\_t N, const Givaro::DoubleDomain::Element a, Givaro::DoubleDomain::Element\_ptr y, const size\_t incy)
- template<> void [fscal](#) (const Givaro::FloatDomain &, const size\_t N, const Givaro::FloatDomain::Element a, Givaro::FloatDomain::Element\_ptr y, const size\_t incy)

- `template<class Field >`  
`void fscaln (const Field &F, const size_t m, const size_t n, const typename Field::Element alpha, typename Field::Element_ptr A, const size_t lda)`  

$$fscaln\ A \leftarrow a \cdot A.$$
- `template<class Field >`  
`void fscal (const Field &F, const size_t m, const size_t n, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb)`  

$$fscal\ B \leftarrow a \cdot A.$$
- `template<> void fscaln (const FFPACK::RNSInteger< FFPACK::rns_double > &F, const size_t n, const FFPACK::rns_double::Element alpha, FFPACK::rns_double::Element_ptr A, const size_t inc)`
- `template<> void fscal (const FFPACK::RNSInteger< FFPACK::rns_double > &F, const size_t n, const FFPACK::rns_double::Element alpha, FFPACK::rns_double::ConstElement_ptr A, const size_t Ainc, FFPACK::rns_double::Element_ptr B, const size_t Binc)`
- `template<> void fscaln (const FFPACK::RNSInteger< FFPACK::rns_double > &F, const size_t m, const size_t n, const FFPACK::rns_double::Element alpha, FFPACK::rns_double::Element_ptr A, const size_t lda)`
- `template<> void fscal (const FFPACK::RNSInteger< FFPACK::rns_double > &F, const size_t m, const size_t n, const FFPACK::rns_double::Element alpha, FFPACK::rns_double::ConstElement_ptr A, const size_t Ainc, FFPACK::rns_double::Element_ptr B, const size_t Binc)`
- `template<> void fscaln (const FFPACK::RNSIntegerMod< FFPACK::rns_double > &F, const size_t n, const typename FFPACK::RNSIntegerMod< FFPACK::rns_double >::Element alpha, typename FFPACK::RNSIntegerMod< FFPACK::rns_double >::Element_ptr A, const size_t inc)`
- `template<> void fscal (const FFPACK::RNSIntegerMod< FFPACK::rns_double > &F, const size_t n, const FFPACK::rns_double::Element alpha, FFPACK::rns_double::ConstElement_ptr A, const size_t Ainc, FFPACK::rns_double::Element_ptr B, const size_t Binc)`
- `template<> void fscaln (const FFPACK::RNSIntegerMod< FFPACK::rns_double > &F, const size_t m, const size_t n, const FFPACK::rns_double::Element alpha, FFPACK::rns_double::Element_ptr A, const size_t lda)`
- `template<> void fscal (const FFPACK::RNSIntegerMod< FFPACK::rns_double > &F, const size_t m, const size_t n, const FFPACK::rns_double::Element alpha, FFPACK::rns_double::ConstElement_ptr A, const size_t Ainc, FFPACK::rns_double::Element_ptr B, const size_t Binc)`
- `template<class Field >`  
`Field::Element_ptr fsyr2k (const Field &F, const FFLAS_UPLO UpLo, const FFLAS_TRANSPOSE trans, const size_t n, const size_t k, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc)`  

$$fsyr2k: \text{Symmetric Rank } 2K \text{ update}$$
- `template<class Field >`  
`Field::Element_ptr fsyrk (const Field &F, const FFLAS_UPLO UpLo, const FFLAS_TRANSPOSE trans, const size_t n, const size_t k, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc)`  

$$fsyrk: \text{Symmetric Rank } K \text{ update}$$
- `template<class Field >`  
`Field::Element_ptr fsyrk (const Field &F, const FFLAS_UPLO UpLo, const FFLAS_TRANSPOSE trans, const size_t N, const size_t K, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, const ParSeqHelper::Sequential seq)`
- `template<class Field >`  
`Field::Element_ptr fsyrk (const Field &F, const FFLAS_UPLO UpLo, const FFLAS_TRANSPOSE trans, const size_t N, const size_t K, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::DefaultTag > &H)`
- `template<class Field >`  
`Field::Element_ptr fsyrk (const Field &F, const FFLAS_UPLO UpLo, const FFLAS_TRANSPOSE trans, const size_t N, const size_t K, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::ConvertTo< ElementCategories::MachineFloatTag >, ParSeqHelper::Sequential > &H)`



- `template<class Field >`  
`Field::Element_ptr fsyrk` (const `Field` &F, const `FFLAS_UPLO` UpLo, const `FFLAS_TRANSPOSE` trans, const `size_t` N, const `size_t` K, const typename `Field::Element` alpha, typename `Field::ConstElement_ptr` A, const `size_t` lda, const typename `Field::Element` beta, typename `Field::Element_ptr` C, const `size_t` ldc, `MMHelper`< `Field`, `MMHelperAlgo::Classic`, `ModeCategories::DelayedTag` > &H)
- `template<class Field >`  
`Field::Element_ptr fsyrk` (const `Field` &F, const `FFLAS_UPLO` UpLo, const `FFLAS_TRANSPOSE` trans, const `size_t` N, const `size_t` K, const typename `Field::Element` alpha, typename `Field::ConstElement_ptr` A, const `size_t` lda, const typename `Field::Element` beta, typename `Field::Element_ptr` C, const `size_t` ldc, `MMHelper`< `Field`, `MMHelperAlgo::Classic`, `ModeCategories::LazyTag` > &H)
- `template<class Field , typename Mode >`  
`Field::Element_ptr fsyrk` (const `Field` &F, const `FFLAS_UPLO` UpLo, const `FFLAS_TRANSPOSE` trans, const `size_t` N, const `size_t` K, const typename `Field::Element` alpha, typename `Field::ConstElement_ptr` A, const `size_t` lda, const typename `Field::Element` beta, typename `Field::Element_ptr` C, const `size_t` ldc, `MMHelper`< `Field`, `MMHelperAlgo::DivideAndConquer`, `Mode` > &H)
- `template<class Field >`  
`Field::Element_ptr fsyrk` (const `Field` &F, const `FFLAS_UPLO` UpLo, const `FFLAS_TRANSPOSE` trans, const `size_t` N, const `size_t` K, const typename `Field::Element` alpha, typename `Field::ConstElement_ptr` A, const `size_t` lda, const typename `Field::Element` beta, typename `Field::Element_ptr` C, const `size_t` ldc, `MMHelper`< `Field`, `MMHelperAlgo::Classic`, `ModeCategories::DefaultBoundedTag` > &H)
- `Givaro::FloatDomain::Element_ptr fsyrk` (const `Givaro::FloatDomain` &F, const `FFLAS_UPLO` UpLo, const `FFLAS_TRANSPOSE` trans, const `size_t` N, const `size_t` K, const `Givaro::FloatDomain::Element` alpha, `Givaro::FloatDomain::ConstElement_ptr` A, const `size_t` lda, const `Givaro::FloatDomain::Element` beta, `Givaro::FloatDomain::Element_ptr` C, const `size_t` ldc, `MMHelper`< `Givaro::FloatDomain`, `MMHelperAlgo::Classic`, `ModeCategories::DefaultTag` > &H)
- `Givaro::DoubleDomain::Element_ptr fsyrk` (const `Givaro::DoubleDomain` &F, const `FFLAS_UPLO` UpLo, const `FFLAS_TRANSPOSE` trans, const `size_t` N, const `size_t` K, const `Givaro::DoubleDomain::Element` alpha, `Givaro::DoubleDomain::ConstElement_ptr` A, const `size_t` lda, const `Givaro::DoubleDomain::Element` beta, `Givaro::DoubleDomain::Element_ptr` C, const `size_t` ldc, `MMHelper`< `Givaro::DoubleDomain`, `MMHelperAlgo::Classic`, `ModeCategories::DefaultTag` > &H)
- `template<class Field >`  
`Field::Element_ptr fsyrk` (const `Field` &F, const `FFLAS_UPLO` UpLo, const `FFLAS_TRANSPOSE` trans, const `size_t` n, const `size_t` k, const typename `Field::Element` alpha, typename `Field::Element_ptr` A, const `size_t` lda, typename `Field::ConstElement_ptr` D, const `size_t` incD, const typename `Field::Element` beta, typename `Field::Element_ptr` C, const `size_t` ldc, const `size_t` threshold=`__FFLASFFPACK_FSYRK_THRESHOLD`)  
*fsyrk: Symmetric Rank K update with diagonal scaling*
- `template<class Field >`  
`Field::Element_ptr fsyrk` (const `Field` &F, const `FFLAS_UPLO` UpLo, const `FFLAS_TRANSPOSE` trans, const `size_t` N, const `size_t` K, const typename `Field::Element` alpha, typename `Field::Element_ptr` A, const `size_t` lda, typename `Field::ConstElement_ptr` D, const `size_t` incD, const typename `Field::Element` beta, typename `Field::Element_ptr` C, const `size_t` ldc, const `ParSeqHelper::Sequential` seq, const `size_t` threshold)
- `template<class Field , class Cut , class Param >`  
`Field::Element_ptr fsyrk` (const `Field` &F, const `FFLAS_UPLO` UpLo, const `FFLAS_TRANSPOSE` trans, const `size_t` N, const `size_t` K, const typename `Field::Element` alpha, typename `Field::Element_ptr` A, const `size_t` lda, typename `Field::ConstElement_ptr` D, const `size_t` incD, const typename `Field::Element` beta, typename `Field::Element_ptr` C, const `size_t` ldc, const `ParSeqHelper::Parallel`< `Cut`, `Param` > par, const `size_t` threshold)
- `template<class Field >`  
`Field::Element_ptr fsyrk` (const `Field` &F, const `FFLAS_UPLO` UpLo, const `FFLAS_TRANSPOSE` trans, const `size_t` n, const `size_t` k, const typename `Field::Element` alpha, typename `Field::Element_ptr` A, const `size_t` lda, typename `Field::ConstElement_ptr` D, const `size_t` incD, const `std::vector< bool >` &twoBlock, const typename `Field::Element` beta, typename `Field::Element_ptr` C, const `size_t` ldc, const `size_t` threshold=`__FFLASFFPACK_FSYRK_THRESHOLD`)  
*fsyrk: Symmetric Rank K update with diagonal scaling*
- `template<class Field , class FieldTrait >`  
void `computeS1S2` (const `Field` &F, const `FFLAS_TRANSPOSE` trans, const `size_t` N, const `size_t` K, const

- typename [Field::Element](#) x, const typename [Field::Element](#) y, typename [Field::Element\\_ptr](#) A, const size\_t Ida, typename [Field::Element\\_ptr](#) S, const size\_t Ids, typename [Field::Element\\_ptr](#) T, const size\_t Idt, [MMHelper](#)< [Field](#), [MMHelperAlgo::Winograd](#), [FieldTrait](#) > &WH)
- template<class [Field](#) >  
[Field::Element\\_ptr](#) fsyrk (const [Field](#) &F, const [FFLAS\\_UPLO](#) UpLo, const [FFLAS\\_TRANSPOSE](#) trans, const size\_t N, const size\_t K, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t Ida, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t Idc, [MMHelper](#)< [Field](#), [MMHelperAlgo::Winograd](#), [ModeCategories::DelayedTag](#), [ParSeqHelper::Sequential](#) > &H)
  - template<class [Field](#) , class Mode >  
[Field::Element\\_ptr](#) fsyrk (const [Field](#) &F, const [FFLAS\\_UPLO](#) UpLo, const [FFLAS\\_TRANSPOSE](#) trans, const size\_t N, const size\_t K, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t Ida, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t Idc, [MMHelper](#)< [Field](#), [MMHelperAlgo::Winograd](#), Mode > &H)
  - template<class [Field](#) , class FieldTrait >  
[Field::Element\\_ptr](#) fsyrk\_strassen (const [Field](#) &F, const [FFLAS\\_UPLO](#) uplo, const [FFLAS\\_TRANSPOSE](#) trans, const size\_t N, const size\_t K, const typename [Field::Element](#) y1, const typename [Field::Element](#) y2, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) A, const size\_t Ida, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t Idc, [MMHelper](#)< [Field](#), [MMHelperAlgo::Winograd](#), FieldTrait > &WH)
  - template<class [Field](#) >  
void ftrmm (const [Field](#) &F, const [FFLAS\\_SIDE](#) Side, const [FFLAS\\_UPLO](#) Uplo, const [FFLAS\\_TRANSPOSE](#) TransA, const [FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t Ida, typename [Field::Element\\_ptr](#) B, const size\_t ldb)  
*ftrmm: **TRI**angular **M**atrix **M**ultiply.*
  - template<class [Field](#) >  
void ftrmm (const [Field](#) &F, const [FFLAS\\_SIDE](#) Side, const [FFLAS\\_UPLO](#) Uplo, const [FFLAS\\_TRANSPOSE](#) TransA, const [FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t Ida, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc)  
*ftrmm: **TRI**angular **M**atrix **M**ultiply with 3 operands Computes  $C \leftarrow \alpha \text{op}(A)B + \text{beta}C$  or  $C \leftarrow \alpha \text{Bop}(A) + \text{beta}C$ .*
  - template<class [Field](#) >  
void ftrsm (const [Field](#) &F, const [FFLAS\\_SIDE](#) Side, const [FFLAS\\_UPLO](#) Uplo, const [FFLAS\\_TRANSPOSE](#) TransA, const [FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) A, const size\_t Ida, typename [Field::Element\\_ptr](#) B, const size\_t ldb)
  - template<class [Field](#) >  
void ftrsm (const [Field](#) &F, const [FFLAS\\_SIDE](#) Side, const [FFLAS\\_UPLO](#) Uplo, const [FFLAS\\_TRANSPOSE](#) TransA, const [FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) A, const size\_t Ida, typename [Field::Element\\_ptr](#) B, const size\_t ldb, const [ParSeqHelper::Sequential](#) &PSH)
  - template<class [Field](#) , class Cut , class Param >  
void ftrsm (const [Field](#) &F, const [FFLAS\\_SIDE](#) Side, const [FFLAS\\_UPLO](#) Uplo, const [FFLAS\\_TRANSPOSE](#) TransA, const [FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) A, const size\_t Ida, typename [Field::Element\\_ptr](#) B, const size\_t ldb, const [ParSeqHelper::Parallel](#)< Cut, Param > &PSH)
  - template<class [Field](#) , class ParSeqTrait = [ParSeqHelper::Sequential](#)>  
void ftrsm (const [Field](#) &F, const [FFLAS\\_SIDE](#) Side, const [FFLAS\\_UPLO](#) Uplo, const [FFLAS\\_TRANSPOSE](#) TransA, const [FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) A, const size\_t Ida, typename [Field::Element\\_ptr](#) B, const size\_t ldb, [TRSMHelper](#)< [StructureHelper::Recursive](#), ParSeqTrait > &H)
  - void ftrsm (const Givaro::Modular< Givaro::Integer > &F, const [FFLAS\\_SIDE](#) Side, const [FFLAS\\_UPLO](#) Uplo, const [FFLAS\\_TRANSPOSE](#) TransA, const [FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, const Givaro::Integer alpha, const Givaro::Integer \*A, const size\_t Ida, Givaro::Integer \*B, const size\_t ldb)
  - void cblas\_imptrsm (const enum [FFLAS\\_ORDER](#) Order, const enum [FFLAS\\_SIDE](#) Side, const enum [FFLAS\\_UPLO](#) Uplo, const enum [FFLAS\\_TRANSPOSE](#) TransA, const enum [FFLAS\\_DIAG](#) Diag, const int M, const int N, const [FFPACK::rns\\_double\\_elt](#) alpha, [FFPACK::rns\\_double\\_elt\\_cstptr](#) A, const int Ida, [FFPACK::rns\\_double\\_elt\\_ptr](#) B, const int ldb)

- template<class [Field](#) >  
void [ftrsv](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) Uplo, const [FFLAS\\_TRANSPOSE](#) TransA, const [FFLAS\\_DIAG](#) Diag, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) X, int incX)  
*ftrsv: TRIangular System solve with Vector Computes  $X \leftarrow \text{op}(A^{-1})X$*
- void [igemm](#) (const enum [FFLAS\\_ORDER](#) Order, const enum [FFLAS\\_TRANSPOSE](#) TransA, const enum [FFLAS\\_TRANSPOSE](#) TransB, const size\_t M, const size\_t N, const size\_t K, const int64\_t alpha, const int64\_t \*A, const size\_t lda, const int64\_t \*B, const size\_t ldb, const int64\_t beta, int64\_t \*C, const size\_t ldc)
- template<class [Field](#) , class OtherElement\_ptr >  
void [finit](#) (const [Field](#) &F, const size\_t n, const OtherElement\_ptr Y, const size\_t incY, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*finit  $x \leftarrow y \bmod F$ .*
- template<class [Field](#) , class OtherElement\_ptr >  
void [fconvert](#) (const [Field](#) &F, const size\_t n, OtherElement\_ptr X, const size\_t incX, typename [Field::ConstElement\\_ptr](#) Y, const size\_t incY)  
*fconvert  $x \leftarrow y \bmod F$ .*
- template<class [Field](#) >  
void [fnegin](#) (const [Field](#) &F, const size\_t n, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*fnegin  $x \leftarrow -x$ .*
- template<class [Field](#) >  
void [fneg](#) (const [Field](#) &F, const size\_t n, typename [Field::ConstElement\\_ptr](#) Y, const size\_t incY, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*fneg  $x \leftarrow -y$ .*
- template<class [Field](#) >  
void [fzero](#) (const [Field](#) &F, const size\_t n, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*fzero :  $A \leftarrow 0$ .*
- template<class [Field](#) , class Randlter >  
void [frand](#) (const [Field](#) &F, Randlter &G, const size\_t n, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*frand :  $A \leftarrow \text{random}$ .*
- template<class [Field](#) >  
bool [fiszero](#) (const [Field](#) &F, const size\_t n, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX)  
*fiszero : test  $X = 0$ .*
- template<class [Field](#) >  
bool [fequal](#) (const [Field](#) &F, const size\_t n, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, typename [Field::ConstElement\\_ptr](#) Y, const size\_t incY)  
*fequal : test  $X = Y$ .*
- template<class [Field](#) >  
void [faxpby](#) (const [Field](#) &F, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) Y, const size\_t incY)  
*faxpby :  $y \leftarrow \alpha \cdot x + \beta \cdot y$ .*
- template<typename [Field](#) , class Cut , class Param >  
[Field::Element](#) [fdot](#) (const [Field](#) &F, const size\_t N, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, typename [Field::ConstElement\\_ptr](#) Y, const size\_t incY, const [ParSeqHelper::Parallel](#)< Cut, Param > par)
- template<class [Field](#) >  
void [fswap](#) (const [Field](#) &F, const size\_t N, typename [Field::Element\\_ptr](#) X, const size\_t incX, typename [Field::Element\\_ptr](#) Y, const size\_t incY)  
*fswap:  $X \leftrightarrow Y$ .*
- template<class [Field](#) >  
void [fzero](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
*fzero :  $A \leftarrow 0$ .*
- template<class [Field](#) >  
void [fzero](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) shape, const [FFLAS\\_DIAG](#) diag, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda)

- $fzero : A \leftarrow 0$  for a triangular matrix.
- template<class [Field](#) , class Randlter >  
 void [frand](#) (const [Field](#) &F, Randlter &G, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
 $frand : A \leftarrow random.$
- template<class [Field](#) >  
 bool [fequal](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb)  
 $fequal : test A = B.$
- template<class [Field](#) >  
 bool [fiszero](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda)  
 $fiszero : test A = 0.$
- template<class [Field](#) >  
 void [fidentity](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda, const typename [Field::Element](#) &d)  
 $creates a diagonal matrix$
- template<class [Field](#) >  
 void [fidentity](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
 $creates a diagonal matrix$
- template<class [Field](#) , class OtherElement\_ptr >  
 void [finit](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
 $finit$  Initializes  $A$  in  $F\mathbb{F}$ .
- template<class [Field](#) , class OtherElement\_ptr >  
 void [fconvert](#) (const [Field](#) &F, const size\_t m, const size\_t n, OtherElement\_ptr A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb)  
 $fconvert A \leftarrow BmodF.$
- template<class [Field](#) >  
 void [fnegin](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
 $fnegin A \leftarrow -A.$
- template<class [Field](#) >  
 void [fneg](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
 $fneg A \leftarrow -B.$
- template<class [Field](#) >  
 void [faxpby](#) (const [Field](#) &F, const size\_t m, const size\_t n, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) X, const size\_t ldx, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) Y, const size\_t ldy)  
 $faxpby : y \leftarrow \alpha \cdot x + \beta \cdot y.$
- template<class [Field](#) >  
 void [fmove](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) B, const size\_t ldb)  
 $fmove : A \leftarrow B \text{ and } B \leftarrow 0.$
- template<class [Field](#) >  
 size\_t [bitsize](#) (const [Field](#) &F, size\_t M, size\_t N, const typename [Field::ConstElement\\_ptr](#) A, size\_t lda)  
 $bitsize$ : Computes the largest bitsize of the matrix' coefficients.
- template<> size\_t [bitsize](#)< [Givaro::ZRing](#)< [Givaro::Integer](#) > > (const [Givaro::ZRing](#)< [Givaro::Integer](#) > &F, size\_t M, size\_t N, const [Givaro::Integer](#) \*A, size\_t lda)
- template<class [Field](#) >  
 void [ftsmv](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) Uplo, const [FFLAS\\_TRANSPOSE](#) TransA, const [FFLAS\\_DIAG](#) Diag, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) X, int incX)  
 $ftsm$ : *TRiangular Matrix Vector prodcut* Computes  $X \leftarrow op(A)X$

- template<class [Field](#) >  
void [ftrsm](#) (const [Field](#) &F, const [FFLAS\\_SIDE](#) Side, const [FFLAS\\_UPLO](#) Uplo, const [FFLAS\\_TRANSPOSE](#) TransA, const [FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) B, const size\_t ldb)  
*ftrsm: **TRI**angular **S**ystem solve with **M**atrix.*
- template<class [Field](#) , typename [FieldTrait](#) >  
[Field::Element\\_ptr](#) [fsyrk\\_strassen](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) UpLo, const [FFLAS\\_TRANSPOSE](#) trans, const size\_t N, const size\_t K, const typename [Field::Element](#) y1, const typename [Field::Element](#) y2, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, [MMHelper](#)< [Field](#), [MMHelperAlgo::Winograd](#), [FieldTrait](#) > &H)
- template<typename [Field](#) >  
[Field::Element\\_ptr](#) [pfgemm](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, size\_t numthreads=0)
- template<class [Field](#) >  
[Field::Element](#) \* [pfgemm\\_1D\\_rec](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [Field::Element](#) alpha, const typename [Field::Element\\_ptr](#) A, const size\_t lda, const typename [Field::Element\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element](#) \*C, const size\_t ldc, size\_t seuil)
- template<class [Field](#) >  
[Field::Element](#) \* [pfgemm\\_2D\\_rec](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [Field::Element](#) alpha, const typename [Field::Element\\_ptr](#) A, const size\_t lda, const typename [Field::Element\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element](#) \*C, const size\_t ldc, size\_t seuil)
- template<class [Field](#) >  
[Field::Element](#) \* [pfgemm\\_3D\\_rec](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [Field::Element](#) alpha, const typename [Field::Element\\_ptr](#) A, const size\_t lda, const typename [Field::Element\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, size\_t seuil, size\_t \*x)
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [pfgemm\\_3D\\_rec2](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [Field::Element](#) alpha, const typename [Field::Element\\_ptr](#) A, const size\_t lda, const typename [Field::Element\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, size\_t seuil, size\_t \*x)
- template<class [Field](#) , class [ModeTrait](#) , class [Strat](#) , class [Param](#) >  
std::enable\_if<!std::is\_same< [ModeTrait](#), [ModeCategories::ConvertTo](#)< [ElementCategories::RNSElementTag](#) >::value, typename [Field::Element\\_ptr](#) >::type [fgemm](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_TRANSPOSE](#) ta, const [FFLAS::FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, [MMHelper](#)< [Field](#), [MMHelperAlgo::Winograd](#), [ModeTrait](#), [ParSeqHelper::Parallel](#)< [Strat](#), [Param](#) > > &H)
- template<class [Field](#) , class [Cut](#) , class [Param](#) >  
[Field::Element\\_ptr](#) [ftrsm](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const [FFLAS::FFLAS\\_UPLO](#) UpLo, const [FFLAS::FFLAS\\_TRANSPOSE](#) TA, const [FFLAS::FFLAS\\_DIAG](#) Diag, const size\_t m, const size\_t n, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) B, const size\_t ldb, [TRSMHelper](#)< [StructureHelper::Iterative](#), [ParSeqHelper::Parallel](#)< [Cut](#), [Param](#) > > &H)
- template<class [Field](#) , class [Cut](#) , class [Param](#) >  
[Field::Element\\_ptr](#) [ftrsm](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const [FFLAS::FFLAS\\_UPLO](#) UpLo, const [FFLAS::FFLAS\\_TRANSPOSE](#) TA, const [FFLAS::FFLAS\\_DIAG](#) Diag, const size\_t m, const size\_t n, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) B, const size\_t ldb, [TRSMHelper](#)< [StructureHelper::Hybrid](#), [ParSeqHelper::Parallel](#)< [Cut](#), [Param](#) > > &H)

- `template<class Field , class SM >`  
`void fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, const typename Field::Element &beta, typename Field::Element_ptr y)`
- `template<class Field , class SM >`  
`void fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, const typename Field::Element &beta, typename Field::Element_ptr y, int ldy)`
- `template<class Field , class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::COO > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class Field , class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::COO_ZO > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class Field >`  
`void sparse_delete (const Sparse< Field, SparseMatrix_t::COO > &A)`
- `template<class Field >`  
`void sparse_delete (const Sparse< Field, SparseMatrix_t::COO_ZO > &A)`
- `template<class Field , class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::CSR > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class Field , class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::CSR_ZO > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class Field >`  
`void sparse_delete (const Sparse< Field, SparseMatrix_t::CSR > &A)`
- `template<class Field >`  
`void sparse_delete (const Sparse< Field, SparseMatrix_t::CSR_ZO > &A)`
- `template<class Field >`  
`std::ostream & sparse_print (std::ostream &os, const Sparse< Field, SparseMatrix_t::CSR > &A)`
- `template<class IndexT >`  
`void sparse_init (const Givaro::Modular< Givaro::Integer > &F, Sparse< Givaro::Modular< Givaro::Integer >, SparseMatrix_t::CSR > &A, const IndexT *row, const IndexT *col, Givaro::Integer *dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class IndexT >`  
`void sparse_init (const Givaro::ZRing< Givaro::Integer > &F, Sparse< Givaro::ZRing< Givaro::Integer >, SparseMatrix_t::CSR_ZO > &A, const IndexT *row, const IndexT *col, Givaro::Integer *dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class IndexT , size_t RECINT_SIZE>`  
`void sparse_init (const Givaro::ZRing< RecInt::rmint< RECINT_SIZE > > &F, Sparse< Givaro::ZRing< RecInt::rmint< RECINT_SIZE > >, SparseMatrix_t::CSR_ZO > &A, const IndexT *row, const IndexT *col, typename Givaro::ZRing< RecInt::rmint< RECINT_SIZE > >::Element_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class IndexT , size_t RECINT_SIZE>`  
`void sparse_init (const Givaro::ZRing< RecInt::rmint< RECINT_SIZE > > &F, Sparse< Givaro::ZRing< RecInt::rmint< RECINT_SIZE > >, SparseMatrix_t::CSR > &A, const IndexT *row, const IndexT *col, typename Givaro::ZRing< RecInt::rmint< RECINT_SIZE > >::Element_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class Field >`  
`void sparse_delete (const Sparse< Field, SparseMatrix_t::CSR_HYB > &A)`
- `template<class Field , class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::CSR_HYB > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class Field , class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::ELL > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class Field , class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::ELL_ZO > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`



- `template<class Field >`  
`void sparse_delete (const Sparse< Field, SparseMatrix_t::ELL > &A)`
- `template<class Field >`  
`void sparse_delete (const Sparse< Field, SparseMatrix_t::ELL_ZO > &A)`
- `template<class Field , class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::ELL_simd > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class Field , class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::ELL_simd_ZO > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class Field >`  
`void sparse_delete (const Sparse< Field, SparseMatrix_t::ELL_simd > &A)`
- `template<class Field >`  
`void sparse_delete (const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > &A)`
- `template<class Field >`  
`void sparse_print (const Sparse< Field, SparseMatrix_t::ELL_simd > &A)`
- `template<class Field >`  
`void sparse_delete (const Sparse< Field, SparseMatrix_t::HYB_ZO > &A)`
- `template<class Field , class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::HYB_ZO > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<typename _Field >`  
`std::ostream & operator<< (std::ostream &os, const Sparse< _Field, SparseMatrix_t::HYB_ZO > &A)`
- `template<class Field , bool sorted = true, bool read_integer = false>`  
`void readSmsFormat (const std::string &path, const Field &f, index_t *&row, index_t *&col, typename Field::Element_ptr &val, index_t &rowdim, index_t &coldim, uint64_t &nnz)`
- `template<class Field >`  
`void readSprFormat (const std::string &path, const Field &f, index_t *&row, index_t *&col, typename Field::Element_ptr &val, index_t &rowdim, index_t &coldim, uint64_t &nnz)`
- `template<class T >`  
`std::enable_if< std::is_integral< T >::value, int > getDataType ()`
- `template<class T >`  
`std::enable_if< std::is_floating_point< T >::value, int > getDataType ()`
- `template<class T >`  
`std::enable_if< std::is_same< T, mpz_t >::value, int > getDataType ()`
- `template<class T >`  
`int getDataType ()`
- `template<class Field >`  
`void readMachineType (const Field &F, typename Field::Element &modulo, typename Field::Element_ptr val, std::ifstream &file, const uint64_t dims, const mask_t data_type, const mask_t field_desc)`
- `template<class Field >`  
`void readDnsFormat (const std::string &path, const Field &F, index_t &rowdim, index_t &coldim, typename Field::Element_ptr &val)`
- `template<class Field >`  
`void writeDnsFormat (const std::string &path, const Field &F, const index_t &rowdim, const index_t &coldim, typename Field::Element_ptr A, index_t ldA)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::SELL_ZO > &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::ModularTag)`
- `template<class Field >`  
`void sparse_delete (const Sparse< Field, SparseMatrix_t::SELL > &A)`
- `template<class Field >`  
`void sparse_delete (const Sparse< Field, SparseMatrix_t::SELL_ZO > &A)`
- `template<class Field >`  
`void sparse_print (const Sparse< Field, SparseMatrix_t::SELL > &A)`

- `template<class Field , class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::SELL > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz, uint64_t sigma=0)`
- `template<class Field , class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::SELL_ZO > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class It >`  
`double computeDeviation (It begin, It end)`
- `template<class Field >`  
`StatsMatrix getStat (const Field &F, const index_t *row, const index_t *col, typename Field::ConstElement_ptr val, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class Field , class enable = void>`  
`Field::Residu_t maxCardinality ()`
- `template<> uint64_t maxCardinality< Givaro::Modular< int64_t > > ()`
- `template<> uint32_t maxCardinality< Givaro::Modular< int32_t > > ()`
- `template<class Field >`  
`Field::Residu_t minCardinality ()`
- `template<> void fflas_delete (FFPACK::rns_double_elt_ptr A)`
- `template<> void fflas_delete (FFPACK::rns_double_elt_cstptr A)`
- `template<> FFPACK::rns_double_elt_ptr fflas_new (const FFPACK::RNSIntegerMod< FFPACK::rns_double > &F, const size_t m, const Alignment align)`
- `template<> FFPACK::rns_double_elt_ptr fflas_new (const FFPACK::RNSIntegerMod< FFPACK::rns_double > &F, const size_t m, const size_t n, const Alignment align)`
- `template<typename RNS >`  
`void finit_rns (const FFPACK::RNSIntegerMod< RNS > &F, const size_t m, const size_t n, size_t k, const Givaro::Integer *B, const size_t ldb, typename RNS::Element_ptr A)`
- `template<typename RNS >`  
`void finit_trans_rns (const FFPACK::RNSIntegerMod< RNS > &F, const size_t m, const size_t n, size_t k, const Givaro::Integer *B, const size_t ldb, typename RNS::Element_ptr A)`
- `template<typename RNS >`  
`void fconvert_rns (const FFPACK::RNSIntegerMod< RNS > &F, const size_t m, const size_t n, Givaro::Integer alpha, Givaro::Integer *B, const size_t ldb, typename RNS::ConstElement_ptr A)`
- `template<typename RNS >`  
`void fconvert_trans_rns (const FFPACK::RNSIntegerMod< RNS > &F, const size_t m, const size_t n, Givaro::Integer alpha, Givaro::Integer *B, const size_t ldb, typename RNS::ConstElement_ptr A)`
- `template<> FFPACK::rns_double_elt_ptr fflas_new (const FFPACK::RNSInteger< FFPACK::rns_double > &F, const size_t m, const Alignment align)`
- `template<> FFPACK::rns_double_elt_ptr fflas_new (const FFPACK::RNSInteger< FFPACK::rns_double > &F, const size_t m, const size_t n, const Alignment align)`
- `template<typename RNS >`  
`void finit_rns (const FFPACK::RNSInteger< RNS > &F, const size_t m, const size_t n, size_t k, const Givaro::Integer *B, const size_t ldb, typename FFPACK::RNSInteger< RNS >::Element_ptr A)`
- `template<typename RNS >`  
`void fconvert_rns (const FFPACK::RNSInteger< RNS > &F, const size_t m, const size_t n, Givaro::Integer alpha, Givaro::Integer *B, const size_t ldb, typename FFPACK::RNSInteger< RNS >::ConstElement_ptr A)`
- `template INST_OR_DECL void freduce (const FFLAS_FIELD< FFLAS_ELT > &F, const size_t n, const FFLAS_ELT *Y, const size_t incY, FFLAS_ELT *X, const size_t incX)`  

$$\text{freduce } x \leftarrow x \bmod F.$$
- `template INST_OR_DECL void freduce (const FFLAS_FIELD< FFLAS_ELT > &F, const size_t n, const FFLAS_ELT *Y, const size_t incY, FFLAS_ELT *X, const size_t incX)`  

$$\text{freduce } x \leftarrow y \bmod F.$$
- `template INST_OR_DECL void finit (const FFLAS_FIELD< FFLAS_ELT > &F, const size_t n, const FFLAS_ELT *Y, const size_t incY, FFLAS_ELT *X, const size_t incX)`  

$$\text{finit } x \leftarrow y \bmod F.$$



- template `INST_OR_DECL` void `fconvert` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` n, `FFLAS_ELT` \*X, const `size_t` incX, const `FFLAS_ELT` \*Y, const `size_t` incY)  
 $fconvert\ x \leftarrow y \bmod F.$
- template `INST_OR_DECL` void `fnegin` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` n, `FFLAS_ELT` \*X, const `size_t` incX)  
 $fnegin\ x \leftarrow -x.$
- template `INST_OR_DECL` void `fneg` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` n, const `FFLAS_ELT` \*Y, const `size_t` incY, `FFLAS_ELT` \*X, const `size_t` incX)  
 $fneg\ x \leftarrow -y.$
- template `INST_OR_DECL` void `fzero` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` n, `FFLAS_ELT` \*X, const `size_t` incX)  
 $fzero : A \leftarrow 0.$
- template `INST_OR_DECL` bool `fiszero` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` n, const `FFLAS_ELT` \*X, const `size_t` incX)  
 $fiszero : test\ X = 0.$
- template `INST_OR_DECL` bool `fequal` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` n, const `FFLAS_ELT` \*X, const `size_t` incX, const `FFLAS_ELT` \*Y, const `size_t` incY)  
 $fequal : test\ X = Y.$
- template `INST_OR_DECL` void `fassign` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` N, const `FFLAS_ELT` \*Y, const `size_t` incY, `FFLAS_ELT` \*X, const `size_t` incX)  
 $fassign : x \leftarrow y.$
- template `INST_OR_DECL` void `fscaln` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` n, const `FFLAS_ELT` alpha, `FFLAS_ELT` \*X, const `size_t` incX)  
 $fscaln\ x \leftarrow \alpha \cdot x.$
- template `INST_OR_DECL` void `fscal` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` n, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*X, const `size_t` incX, `FFLAS_ELT` \*Y, const `size_t` incY)  
 $fscal\ y \leftarrow \alpha \cdot x.$
- template `INST_OR_DECL` void `faxpy` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` N, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*X, const `size_t` incX, `FFLAS_ELT` \*Y, const `size_t` incY)  
 $faxpy : y \leftarrow \alpha \cdot x + y.$
- template `INST_OR_DECL` `FFLAS_ELT` `fdot` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` N, const `FFLAS_ELT` \*X, const `size_t` incX, const `FFLAS_ELT` \*Y, const `size_t` incY)  
 $faxpby : y \leftarrow \alpha \cdot x + \beta \cdot y.$
- template `INST_OR_DECL` void `fswap` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` N, `FFLAS_ELT` \*X, const `size_t` incX, `FFLAS_ELT` \*Y, const `size_t` incY)  
 $fswap : X \leftrightarrow Y.$
- template `INST_OR_DECL` void `fadd` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` N, const `FFLAS_ELT` \*A, const `size_t` inca, const `FFLAS_ELT` \*B, const `size_t` incb, `FFLAS_ELT` \*C, const `size_t` incc)
- template `INST_OR_DECL` void `fsub` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` N, const `FFLAS_ELT` \*A, const `size_t` inca, const `FFLAS_ELT` \*B, const `size_t` incb, `FFLAS_ELT` \*C, const `size_t` incc)
- template `INST_OR_DECL` void `faddn` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` N, const `FFLAS_ELT` \*B, const `size_t` incb, `FFLAS_ELT` \*C, const `size_t` incc)
- template `INST_OR_DECL` void `fadd` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` N, const `FFLAS_ELT` \*A, const `size_t` inca, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*B, const `size_t` incb, `FFLAS_ELT` \*C, const `size_t` incc)
- template `INST_OR_DECL` void `fassign` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` m, const `size_t` n, const `FFLAS_ELT` \*B, const `size_t` ldb, `FFLAS_ELT` \*A, const `size_t` lda)  
 $fassign : A \leftarrow B.$
- template `INST_OR_DECL` void `fzero` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` m, const `size_t` n, `FFLAS_ELT` \*A, const `size_t` lda)  
 $fzero : A \leftarrow 0.$

- template `INST_OR_DECL` bool `fequal` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, const `FFLAS_ELT` \*A, const size\_t lda, const `FFLAS_ELT` \*B, const size\_t ldb)  

$$fequal : test A = B.$$
- template `INST_OR_DECL` bool `fiszero` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, const `FFLAS_ELT` \*A, const size\_t lda)  

$$fiszero : test A = 0.$$
- template `INST_OR_DECL` void `fidentity` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, `FFLAS_ELT` \*A, const size\_t lda, const `FFLAS_ELT` &d)  

$$creates a diagonal matrix$$
- template `INST_OR_DECL` void `fidentity` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, `FFLAS_ELT` \*A, const size\_t lda)  

$$creates a diagonal matrix$$
- template `INST_OR_DECL` void `freduce` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, `FFLAS_ELT` \*A, const size\_t lda)  

$$freduce A \leftarrow A mod F.$$
- template `INST_OR_DECL` void `freduce` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, const `FFLAS_ELT` \*B, const size\_t ldb, `FFLAS_ELT` \*A, const size\_t lda)  

$$freduce A \leftarrow B mod F.$$
- template `INST_OR_DECL` void `finit` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, const `FFLAS_ELT` \*B, const size\_t ldb, `FFLAS_ELT` \*A, const size\_t lda)  

$$finit A \leftarrow B mod F.$$
- template `INST_OR_DECL` void `fnegin` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, `FFLAS_ELT` \*A, const size\_t lda)  

$$fnegin A \leftarrow -A.$$
- template `INST_OR_DECL` void `fneg` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, const `FFLAS_ELT` \*B, const size\_t ldb, `FFLAS_ELT` \*A, const size\_t lda)  

$$fneg A \leftarrow -B.$$
- template `INST_OR_DECL` void `fscal` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, const `FFLAS_ELT` alpha, `FFLAS_ELT` \*A, const size\_t lda)  

$$fscal A \leftarrow a \cdot A.$$
- template `INST_OR_DECL` void `fscal` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*A, const size\_t lda, `FFLAS_ELT` \*B, const size\_t ldb)  

$$fscal B \leftarrow a \cdot A.$$
- template `INST_OR_DECL` void `faxpy` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*X, const size\_t idx, `FFLAS_ELT` \*Y, const size\_t ldy)  

$$faxpy : y \leftarrow \alpha \cdot x + y.$$
- template `INST_OR_DECL` void `fmove` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, `FFLAS_ELT` \*A, const size\_t lda, `FFLAS_ELT` \*B, const size\_t ldb)  

$$faxpy : y \leftarrow \alpha \cdot x + \beta \cdot y.$$
- template `INST_OR_DECL` void `fadd` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t M, const size\_t N, const `FFLAS_ELT` \*A, const size\_t lda, const `FFLAS_ELT` \*B, const size\_t ldb, `FFLAS_ELT` \*C, const size\_t ldc)  

$$fadd : matrix addition.$$
- template `INST_OR_DECL` void `fsub` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t M, const size\_t N, const `FFLAS_ELT` \*A, const size\_t lda, const `FFLAS_ELT` \*B, const size\_t ldb, `FFLAS_ELT` \*C, const size\_t ldc)  

$$fsub : matrix subtraction.$$
- template `INST_OR_DECL` void `fsubin` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t M, const size\_t N, const `FFLAS_ELT` \*B, const size\_t ldb, `FFLAS_ELT` \*C, const size\_t ldc)  

$$fsubin C = C - B$$
- template `INST_OR_DECL` void `fadd` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t M, const size\_t N, const `FFLAS_ELT` \*A, const size\_t lda, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*B, const size\_t ldb, `FFLAS_ELT` \*C, const size\_t ldc)

*fadd* : matrix addition with scaling.

- template `INST_OR_DECL` void `faddin` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t M, const size\_t N, const `FFLAS_ELT` \*B, const size\_t ldb, `FFLAS_ELT` \*C, const size\_t ldc)

*faddin*

- template `INST_OR_DECL` `FFLAS_ELT` \* `fgemv` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const `FFLAS_TRANSPOSE` TransA, const size\_t M, const size\_t N, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*A, const size\_t lda, const `FFLAS_ELT` \*X, const size\_t incX, const `FFLAS_ELT` beta, `FFLAS_ELT` \*Y, const size\_t incY)

*finite prime FFLAS\_FIELD*<*FFLAS\_ELT*> *GEneral Matrix Vector multiplication.*

- template `INST_OR_DECL` void `fger` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t M, const size\_t N, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*x, const size\_t incx, const `FFLAS_ELT` \*y, const size\_t incy, `FFLAS_ELT` \*A, const size\_t lda)

*fger*: rank one update of a general matrix

- template `INST_OR_DECL` void `ftsv` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const `FFLAS_UPLO` Uplo, const `FFLAS_TRANSPOSE` TransA, const `FFLAS_DIAG` Diag, const size\_t N, const `FFLAS_ELT` \*A, const size\_t lda, `FFLAS_ELT` \*X, int incX)

*ftsv*: *TRI*angular System solve with Vector Computes  $X \leftarrow \text{op}(A^{-1})X$

- template `INST_OR_DECL` void `ftsm` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const `FFLAS_SIDE` Side, const `FFLAS_UPLO` Uplo, const `FFLAS_TRANSPOSE` TransA, const `FFLAS_DIAG` Diag, const size\_t M, const size\_t N, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*A, const size\_t lda, `FFLAS_ELT` \*B, const size\_t ldb)

*ftsm*: *TRI*angular System solve with *Matrix*.

- template `INST_OR_DECL` void `ftmm` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const `FFLAS_SIDE` Side, const `FFLAS_UPLO` Uplo, const `FFLAS_TRANSPOSE` TransA, const `FFLAS_DIAG` Diag, const size\_t M, const size\_t N, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*A, const size\_t lda, `FFLAS_ELT` \*B, const size\_t ldb)

*ftmm*: *TRI*angular *Matrix Multiply*.

- template `INST_OR_DECL` `FFLAS_ELT` \* `fgemm` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const `FFLAS_TRANSPOSE` ta, const `FFLAS_TRANSPOSE` tb, const size\_t m, const size\_t n, const size\_t k, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*A, const size\_t lda, const `FFLAS_ELT` \*B, const size\_t ldb, const `FFLAS_ELT` beta, `FFLAS_ELT` \*C, const size\_t ldc)

*fgemm*: *Field GEneral Matrix Multiply*.

- template `INST_OR_DECL` `FFLAS_ELT` \* `fgemm` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const `FFLAS_TRANSPOSE` ta, const `FFLAS_TRANSPOSE` tb, const size\_t m, const size\_t n, const size\_t k, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*A, const size\_t lda, const `FFLAS_ELT` \*B, const size\_t ldb, const `FFLAS_ELT` beta, `FFLAS_ELT` \*C, const size\_t ldc, const `ParSeqHelper::Sequential` seq)
- template `INST_OR_DECL` `FFLAS_ELT` \* `fgemm` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const `FFLAS_TRANSPOSE` ta, const `FFLAS_TRANSPOSE` tb, const size\_t m, const size\_t n, const size\_t k, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*A, const size\_t lda, const `FFLAS_ELT` \*B, const size\_t ldb, const `FFLAS_ELT` beta, `FFLAS_ELT` \*C, const size\_t ldc, const `ParSeqHelper::Parallel`< `CuttingStrategy::Recursive`, `StrategyParameter::TwoDAdaptive` > par)
- template `INST_OR_DECL` `FFLAS_ELT` \* `fgemm` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const `FFLAS_TRANSPOSE` ta, const `FFLAS_TRANSPOSE` tb, const size\_t m, const size\_t n, const size\_t k, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*A, const size\_t lda, const `FFLAS_ELT` \*B, const size\_t ldb, const `FFLAS_ELT` beta, `FFLAS_ELT` \*C, const size\_t ldc, const `ParSeqHelper::Parallel`< `CuttingStrategy::Block`, `StrategyParameter::Threads` > par)
- template `INST_OR_DECL` `FFLAS_ELT` \* `fsquare` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const `FFLAS_TRANSPOSE` ta, const size\_t n, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*A, const size\_t lda, const `FFLAS_ELT` beta, `FFLAS_ELT` \*C, const size\_t ldc)

*fsquare*: Squares a matrix.

- template<class Cut = `CuttingStrategy::Block`, class Strat = `StrategyParameter::Threads`>  
void `BlockCuts` (size\_t &RBLOCKSIZE, size\_t &CBLOCKSIZE, const size\_t m, const size\_t n, const size\_t numthreads)
- template<> void `BlockCuts`< `CuttingStrategy::Single`, `StrategyParameter::Threads` > (size\_t &RBLOCKSIZE, size\_t &CBLOCKSIZE, const size\_t m, const size\_t n, const size\_t numthreads)

- `template<> void BlockCuts< CuttingStrategy::Row, StrategyParameter::Fixed > (size_t &RBLOCKSIZE, size_t &CBLOCKSIZE, const size_t m, const size_t n, const size_t numthreads)`
- `template<> void BlockCuts< CuttingStrategy::Row, StrategyParameter::Grain > (size_t &RBLOCKSIZE, size_t &CBLOCKSIZE, const size_t m, const size_t n, const size_t grainsize)`
- `template<> void BlockCuts< CuttingStrategy::Block, StrategyParameter::Grain > (size_t &RBLOCKSIZE, size_t &CBLOCKSIZE, const size_t m, const size_t n, const size_t grainsize)`
- `template<> void BlockCuts< CuttingStrategy::Column, StrategyParameter::Fixed > (size_t &RBLOCKSIZE, size_t &CBLOCKSIZE, const size_t m, const size_t n, const size_t numthreads)`
- `template<> void BlockCuts< CuttingStrategy::Column, StrategyParameter::Grain > (size_t &RBLOCKSIZE, size_t &CBLOCKSIZE, const size_t m, const size_t n, const size_t grainsize)`
- `template<> void BlockCuts< CuttingStrategy::Block, StrategyParameter::Fixed > (size_t &RBLOCKSIZE, size_t &CBLOCKSIZE, const size_t m, const size_t n, const size_t numthreads)`
- `template<> void BlockCuts< CuttingStrategy::Row, StrategyParameter::Threads > (size_t &RBLOCKSIZE, size_t &CBLOCKSIZE, const size_t m, const size_t n, const size_t numthreads)`
- `template<> void BlockCuts< CuttingStrategy::Column, StrategyParameter::Threads > (size_t &RBLOCKSIZE, size_t &CBLOCKSIZE, const size_t m, const size_t n, const size_t numthreads)`
- `template<> void BlockCuts< CuttingStrategy::Block, StrategyParameter::Threads > (size_t &RBLOCKSIZE, size_t &CBLOCKSIZE, const size_t m, const size_t n, const size_t numthreads)`
- `template<class Cut = CuttingStrategy::Block, class Param = StrategyParameter::Threads>  
void BlockCuts (size_t &rowBlockSize, size_t &colBlockSize, size_t &lastRBS, size_t &lastCBS, size_t &changeRBS, size_t &changeCBS, size_t &numRowBlock, size_t &numColBlock, size_t m, size_t n, const size_t numthreads)`
- `template<class Field >  
void pfzero (const Field &F, size_t m, size_t n, typename Field::Element_ptr C, size_t BS=0)`
- `template<class Field, class RandIter >  
void pfrand (const Field &F, RandIter &G, size_t m, size_t n, typename Field::Element_ptr C, size_t BS=0)`
- `template<class Field, class Cut, class Param >  
Field::Element & fdot (const Field &F, const size_t N, typename Field::ConstElement_ptr x, const size_t incx, typename Field::ConstElement_ptr y, const size_t incy, typename Field::Element &d, const ParSeqHelper::Parallel< Cut, Param > par)`
- `template<class Field, class AlgoT, class FieldTrait >  
Field::Element * pfgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, const typename Field::ConstElement_ptr A, const size_t lda, const typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element *C, const size_t ldc, MMHelper< Field, AlgoT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Block, StrategyParameter::Threads > > &H)`
- `template<class Field, class AlgoT, class FieldTrait >  
Field::Element * pfgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, const typename Field::ConstElement_ptr AA, const size_t lda, const typename Field::ConstElement_ptr BB, const size_t ldb, const typename Field::Element beta, typename Field::Element *C, const size_t ldc, MMHelper< Field, AlgoT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Recursive, StrategyParameter::ThreeDAdaptive > > &H)`
- `template<class Field, class AlgoT, class FieldTrait >  
Field::Element * pfgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, const typename Field::ConstElement_ptr AA, const size_t lda, const typename Field::ConstElement_ptr BB, const size_t ldb, const typename Field::Element beta, typename Field::Element *C, const size_t ldc, MMHelper< Field, AlgoT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Recursive, StrategyParameter::TwoDAdaptive > > &H)`
- `template<class Field, class AlgoT, class FieldTrait >  
Field::Element * pfgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, const typename Field::ConstElement_ptr AA, const size_t lda, const typename Field::ConstElement_ptr BB, const size_t ldb, const typename Field::Element beta, typename Field::Element *C, const size_t ldc, MMHelper< Field, AlgoT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Recursive, StrategyParameter::TwoD > > &H)`

- `template<class Field, class AlgoT, class FieldTrait >`  
`Field::Element_ptr pfgemm` (const `Field` &F, const `FFLAS_TRANSPOSE` ta, const `FFLAS_TRANSPOSE` tb, const `size_t` m, const `size_t` n, const `size_t` k, const typename `Field::Element` alpha, const typename `Field::ConstElement_ptr` A, const `size_t` lda, const typename `Field::ConstElement_ptr` B, const `size_t` ldb, const typename `Field::Element` beta, typename `Field::Element_ptr` C, const `size_t` ldc, `MMHelper`< `Field`, `AlgoT`, `FieldTrait`, `ParSeqHelper::Parallel`< `CuttingStrategy::Recursive`, `StrategyParameter::ThreeD` > > &H)
- `template<class Field, class AlgoT, class FieldTrait >`  
`Field::Element * pfgemm` (const `Field` &F, const `FFLAS_TRANSPOSE` ta, const `FFLAS_TRANSPOSE` tb, const `size_t` m, const `size_t` n, const `size_t` k, const typename `Field::Element` alpha, const typename `Field::ConstElement_ptr` A, const `size_t` lda, const typename `Field::ConstElement_ptr` B, const `size_t` ldb, const typename `Field::Element` beta, typename `Field::Element_ptr` C, const `size_t` ldc, `MMHelper`< `Field`, `AlgoT`, `FieldTrait`, `ParSeqHelper::Parallel`< `CuttingStrategy::Recursive`, `StrategyParameter::ThreeDInPlace` > > &H)
- `template<class Field, class AlgoT, class FieldTrait >`  
`Field::Element_ptr fgemv` (const `Field` &F, const `FFLAS_TRANSPOSE` ta, const `size_t` m, const `size_t` n, const typename `Field::Element` alpha, const typename `Field::ConstElement_ptr` A, const `size_t` lda, const typename `Field::ConstElement_ptr` X, const `size_t` incX, const typename `Field::Element` beta, typename `Field::Element_ptr` Y, const `size_t` incY, `MMHelper`< `Field`, `AlgoT`, `FieldTrait`, `ParSeqHelper::Parallel`< `CuttingStrategy::Recursive`, `StrategyParameter::Threads` > > &H)
- `template<class Field, class AlgoT, class FieldTrait, class Cut >`  
`Field::Element_ptr fgemv` (const `Field` &F, const `FFLAS_TRANSPOSE` ta, const `size_t` m, const `size_t` n, const typename `Field::Element` alpha, const typename `Field::ConstElement_ptr` A, const `size_t` lda, const typename `Field::ConstElement_ptr` X, const `size_t` incX, const typename `Field::Element` beta, typename `Field::Element_ptr` Y, const `size_t` incY, `MMHelper`< `Field`, `AlgoT`, `FieldTrait`, `ParSeqHelper::Parallel`< `CuttingStrategy::Row`, `Cut` > > &H)
- `void parseArguments` (int argc, char \*\*argv, `Argument` \*args, bool printDefaults=true)
- `char * getArgumentsValue` (int argc, char \*\*argv, int i)  
*Get the value of an argument and avoid core dump when no value was given after an argument.*
- `std::ostream & writeCommandString` (std::ostream &os, `Argument` \*args, const char \*programName=nullptr)  
*writes the values of all arguments, preceded by the programName*
- `template<class Field >`  
`std::ostream & WriteMatrix` (std::ostream &c, const `Field` &F, `size_t` m, `size_t` n, typename `Field::ConstElement_ptr` A, `size_t` lda, `FFLAS_FORMAT` format, bool column\_major)  
*WriteMatrix: write a matrix to an output stream.*
- `void preamble` (std::ifstream &ifs, `FFLAS_FORMAT` &format)
- `template<class Field >`  
`Field::Element_ptr ReadMatrix` (std::ifstream &ifs, `Field` &F, `size_t` &m, `size_t` &n, typename `Field::Element_ptr` &A, `FFLAS_FORMAT` format=`FflasAuto`)  
*ReadMatrix: read a matrix from an input stream.*
- `template<class Field >`  
`Field::Element_ptr ReadMatrix` (const std::string &matrix\_file, `Field` &F, `size_t` &m, `size_t` &n, typename `Field::Element_ptr` &A, `FFLAS_FORMAT` format=`FflasAuto`)  
*ReadMatrix: read a matrix from a file.*
- `template<class Field >`  
`void WriteMatrix` (std::string &matrix\_file, const `Field` &F, int m, int n, typename `Field::ConstElement_ptr` A, `size_t` lda, `FFLAS_FORMAT` format=`FflasDense`, bool column\_major=false)  
*WriteMatrix: write a matrix to a file.*
- `std::ostream & WritePermutation` (std::ostream &c, const `size_t` \*P, `size_t` N)  
*WritePermutation: write a permutation matrix to an output stream.*
- `template<class Element >`  
`bool alignable` ()
- `template<> bool alignable`< `Givaro::Integer` \* > ()
- `template<class Field >`  
`Field::Element_ptr fflas_new` (const `Field` &F, const `size_t` m, const `Alignment` align=`Alignment::DEFAULT`)

- `template<class Field >`  
`Field::Element_ptr fflas_new` (const Field &F, const size\_t m, const size\_t n, const Alignment align=Alignment::DEFAULT)
- `template<class Element >`  
`Element * fflas_new` (const size\_t m, const Alignment align=Alignment::DEFAULT)
- `template<class Element_ptr >`  
`void fflas_delete` (Element\_ptr A)
- `template<class Ptr, class ... Args>`  
`void fflas_delete` (Ptr p, Args ... args)
- `void prefetch` (const int64\_t \*)
- `void getTLBSize` (int &tlb)
- `void queryCacheSizes` (int &l1, int &l2, int &l3)
- `int queryL1CacheSize` ()
- `int queryTopLevelCacheSize` ()
- `uint64_t getSeed` ()

### 11.1.1 Typedef Documentation

#### 11.1.1.1 Checker\_fgemm

```
template<class Field >
using Checker_fgemm = FFLAS::Checker_Empty<Field>
```

#### 11.1.1.2 Checker\_ftrsm

```
template<class Field >
using Checker_ftrsm = FFLAS::Checker_Empty<Field>
```

#### 11.1.1.3 ForceCheck\_fgemm

```
template<class Field >
using ForceCheck_fgemm = CheckerImplem_fgemm<Field>
```

#### 11.1.1.4 ForceCheck\_ftrsm

```
template<class Field >
using ForceCheck_ftrsm = CheckerImplem_ftrsm<Field>
```

#### 11.1.1.5 ZOSparseMatrix

```
using ZOSparseMatrix = std::true_type
```

#### 11.1.1.6 NotZOSparseMatrix

```
using NotZOSparseMatrix = std::false_type
```

#### 11.1.1.7 SimdSparseMatrix

```
using SimdSparseMatrix = std::true_type
```

#### 11.1.1.8 NoSimdSparseMatrix

```
using NoSimdSparseMatrix = std::false_type
```

#### 11.1.1.9 MKLSparseMatrixFormat

```
using MKLSparseMatrixFormat = std::true_type
```

#### 11.1.1.10 NotMKLSparseMatrixFormat

```
using NotMKLSparseMatrixFormat = std::false_type
```

#### 11.1.1.11 has\_plus

```
template<class T >
using has_plus = typename std::conditional<std::is_arithmetic<T>::value, std::true_type,
has_plus_impl<T>>::type
```

#### 11.1.1.12 has\_minus

```
template<class T >
using has_minus = typename std::conditional<std::is_arithmetic<T>::value, std::true_type,
has_minus_impl<T>>::type
```

#### 11.1.1.13 has\_equal

```
template<class T >
using has_equal = typename std::conditional<std::is_arithmetic<T>::value, std::true_type,
std::is_copy_assignable<T>>::type
```

#### 11.1.1.14 has\_plus\_eq

```
template<class T >
using has_plus_eq = typename std::conditional<std::is_arithmetic<T>::value, std::true_type,
has_plus_eq_impl<T>>::type
```

#### 11.1.1.15 has\_minus\_eq

```
template<class T >
using has_minus_eq = typename std::conditional<std::is_arithmetic<T>::value, std::true_type,
has_minus_eq_impl<T>>::type
```

**11.1.1.16 has\_mul**

```
template<class T >
using has_mul = typename std::conditional<std::is_arithmetic<T>::value, std::true_type, has_mul_impl<T>>::type
```

**11.1.1.17 has\_mul\_eq**

```
template<class T >
using has_mul_eq = typename std::conditional<std::is_arithmetic<T>::value, std::true_type, has_mul_eq_impl<T>>::type
```

**11.1.1.18 Timer**

```
typedef Givaro::Timer Timer
```

**11.1.1.19 BaseTimer**

```
typedef Givaro::BaseTimer BaseTimer
```

**11.1.1.20 UserTimer**

```
typedef Givaro::UserTimer UserTimer
```

**11.1.1.21 SysTimer**

```
typedef Givaro::SysTimer SysTimer
```

**11.1.2 Enumeration Type Documentation****11.1.2.1 FFLAS\_ORDER**

```
enum FFLAS_ORDER
```

Storage by row or col ?

Enumerator

|               |           |
|---------------|-----------|
| FflasRowMajor | row major |
| FflasColMajor | col major |

**11.1.2.2 FFLAS\_TRANSPOSE**

```
enum FFLAS_TRANSPOSE
```

Is matrix transposed ?



**Enumerator**

|              |                           |
|--------------|---------------------------|
| FflasNoTrans | Matrix is not transposed. |
| FflasTrans   | Matrix is transposed.     |

**11.1.2.3 FFLAS\_UPLO**enum [FFLAS\\_UPLO](#)

Is triangular matrix's shape upper ?

**Enumerator**

|               |  |
|---------------|--|
| FflasUpper    | Triangular matrix is Upper triangular (if $i > j$ then $T_{i,j} = 0$ )         |
| FflasLower    | Triangular matrix is Lower triangular (if $i < j$ then $T_{i,j} = 0$ )         |
| FflasLeftTri  | Triangular matrix is Left triangular (if $j > n - i - 1$ then $T_{i,j} = 0$ )  |
| FflasRightTri | Triangular matrix is Right triangular (if $j < n - i - 1$ then $T_{i,j} = 0$ ) |

**11.1.2.4 FFLAS\_DIAG**enum [FFLAS\\_DIAG](#)

Is the triangular matrix implicitly unit diagonal ?

**Enumerator**

|              |   |
|--------------|---|
| FflasNonUnit | Triangular matrix has an explicit arbitrary diagonal.             |
| FflasUnit    | Triangular matrix has an implicit unit diagonal ( $T_{i,i} = 1$ ) |

**11.1.2.5 FFLAS\_SIDE**enum [FFLAS\\_SIDE](#)

On what side ?

**Enumerator**

|            |                                 |
|------------|---------------------------------|
| FflasLeft  | Operator applied on the left.   |
| FflasRight | Operator applied on the righth. |

**11.1.2.6 FFLAS\_BASE**enum [FFLAS\\_BASE](#)

FFLAS\_BASE determines the type of the element representation for Matrix Mult kernel.

(deprecated, should not be used)

## Enumerator

|              |  |
|--------------|--|
| FflasDouble  | to use the double precision BLAS   |
| FflasFloat   | to use the single precision BLAS   |
| FflasGeneric | for any other domain, that can not be converted to floating point integers |

## 11.1.2.7 number\_kind

```
enum number_kind
```

## Enumerator

|       |  |
|-------|--|
| zero  |  |
| one   |  |
| mone  |  |
| other |  |

## 11.1.2.8 SparseMatrix\_t

```
enum class SparseMatrix_t [strong]
```

## Enumerator

|             |  |
|-------------|--|
| CSR         |  |
| CSR_ZO      |  |
| CSC         |  |
| CSC_ZO      |  |
| COO         |  |
| COO_ZO      |  |
| ELL         |  |
| ELL_ZO      |  |
| SELL        |  |
| SELL_ZO     |  |
| ELL_simd    |  |
| ELL_simd_ZO |  |
| CSR_HYB     |  |
| HYB_ZO      |  |

## 11.1.2.9 FFLAS\_FORMAT

```
enum FFLAS_FORMAT
```

## Enumerator

|               |  |
|---------------|--|
| FflasAuto     |  |
| FflasDense    |  |
| FflasSMS      |  |
| FflasBinary   |  |
| FflasMath     |  |
| FflasMaple    |  |
| FflasSageMath |  |

### 11.1.3 Function Documentation

#### 11.1.3.1 InfNorm()

```
Givaro::Integer InfNorm (  
    const size_t M,  
    const size_t N,  
    const Givaro::Integer * A,  
    const size_t lda) [inline]
```

#### 11.1.3.2 min3()

```
template<class T >  
const T & min3 (  
    const T & m,  
    const T & n,  
    const T & k)
```

#### 11.1.3.3 max3()

```
template<class T >  
const T & max3 (  
    const T & m,  
    const T & n,  
    const T & k)
```

#### 11.1.3.4 min4()

```
template<class T >  
const T & min4 (  
    const T & m,  
    const T & n,  
    const T & k,  
    const T & l)
```

#### 11.1.3.5 max4()

```
template<class T >  
const T & max4 (  
    const T & m,  
    const T & n,  
    const T & k,  
    const T & l)
```

#### 11.1.3.6 fadd() [1/8]

```
template<class Field >
void fadd (
    const Field & F,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t inca,
    typename Field::ConstElement_ptr B,
    const size_t incb,
    typename Field::Element_ptr C,
    const size_t incc)
```

#### 11.1.3.7 faddin() [1/5]

```
template<class Field >
void faddin (
    const Field & F,
    const size_t N,
    typename Field::ConstElement_ptr B,
    const size_t incb,
    typename Field::Element_ptr C,
    const size_t incc)
```

#### 11.1.3.8 fsub() [1/4]

```
template<class Field >
void fsub (
    const Field & F,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t inca,
    typename Field::ConstElement_ptr B,
    const size_t incb,
    typename Field::Element_ptr C,
    const size_t incc)
```

#### 11.1.3.9 fsubin() [1/3]

```
template<class Field >
void fsubin (
    const Field & F,
    const size_t N,
    typename Field::ConstElement_ptr B,
    const size_t incb,
    typename Field::Element_ptr C,
    const size_t incc)
```

### 11.1.3.10 fadd() [2/8]

```
template<class Field >
void fadd (
    const Field & F,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t inca,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr B,
    const size_t incb,
    typename Field::Element_ptr C,
    const size_t incc)
```

**Todo** optimise here

### 11.1.3.11 pfadd()

```
template<class Field >
void pfadd (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    typename Field::Element_ptr C,
    const size_t ldc,
    const size_t numths)
```

### 11.1.3.12 pfsub()

```
template<class Field >
void pfsub (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    typename Field::Element_ptr C,
    const size_t ldc,
    const size_t numths)
```

**11.1.3.13 pfaddin()**

```
template<class Field >
void pfaddin (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    typename Field::Element_ptr C,
    const size_t ldc,
    size_t numths)
```

**11.1.3.14 pfsubin()**

```
template<class Field >
void pfsubin (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    typename Field::Element_ptr C,
    const size_t ldc,
    size_t numths)
```

**11.1.3.15 fadd() [3/8]**

```
template<class Field >
void fadd (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    typename Field::Element_ptr C,
    const size_t ldc)
```

fadd : matrix addition.

Computes  $C = A + B$ .

**Parameters**

|            |                          |
|------------|--------------------------|
| <i>F</i>   | field                    |
| <i>M</i>   | rows                     |
| <i>N</i>   | cols                     |
| <i>A</i>   | dense matrix of size MxN |
| <i>lda</i> | leading dimension of A   |
| <i>B</i>   | dense matrix of size MxN |
| <i>ldb</i> | leading dimension of B   |
| <i>C</i>   | dense matrix of size MxN |
| <i>ldc</i> | leading dimension of C   |

**11.1.3.16 fsub()** [2/4]

```
template<class Field >
void fsub (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    typename Field::Element_ptr C,
    const size_t ldc)
```

fsub : matrix subtraction.

Computes  $C = A - B$ .

**Parameters**

|            |                          |
|------------|--------------------------|
| <i>F</i>   | field                    |
| <i>M</i>   | rows                     |
| <i>N</i>   | cols                     |
| <i>A</i>   | dense matrix of size MxN |
| <i>lda</i> | leading dimension of A   |
| <i>B</i>   | dense matrix of size MxN |
| <i>ldb</i> | leading dimension of B   |
| <i>C</i>   | dense matrix of size MxN |
| <i>ldc</i> | leading dimension of C   |

**11.1.3.17 faddin()** [2/5]

```
template<class Field >
void faddin (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    typename Field::Element_ptr C,
    const size_t ldc)
```

faddin

**11.1.3.18 faddin()** [3/5]

```
template<class Field >
void faddin (
    const Field & F,
    const FFLAS_UPLO uplo,
    const size_t N,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    typename Field::Element_ptr C,
    const size_t ldc)
```

fadding for symmetric matrices

**11.1.3.19 fsubin()** [2/3]

```
template<class Field >
void fsubin (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    typename Field::Element_ptr C,
    const size_t ldc)
```

fsubin C = C - B

**11.1.3.20 fadd()** [4/8]

```
template<class Field >
void fadd (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    typename Field::Element_ptr C,
    const size_t ldc)
```

fadd : matrix addition with scaling.

Computes  $C = A + \text{alpha } B$ .

**Parameters**

|              |                          |
|--------------|--------------------------|
| <i>F</i>     | field                    |
| <i>M</i>     | rows                     |
| <i>N</i>     | cols                     |
| <i>A</i>     | dense matrix of size MxN |
| <i>lda</i>   | leading dimension of A   |
| <i>alpha</i> | some scalar              |
| <i>B</i>     | dense matrix of size MxN |
| <i>ldb</i>   | leading dimension of B   |
| <i>C</i>     | dense matrix of size MxN |
| <i>ldc</i>   | leading dimension of C   |

**11.1.3.21 fassign()** [1/10]

```
template<class Field >
void fassign (
    const Field & F,
    const size_t N,
```



```

typename Field::ConstElement_ptr Y,
const size_t incY,
typename Field::Element_ptr X,
const size_t incX) [inline]

```

fassign :  $x \leftarrow y$ .

X is preallocated

**Todo** variant for triangular matrix

#### Parameters

|     |        |                     |
|-----|--------|---------------------|
|     | $F$    | field               |
|     | $N$    | size of the vectors |
| out | $X$    | vector in $F$       |
|     | $incX$ | stride of X         |
| in  | $Y$    | vector in $F$       |
|     | $incY$ | stride of Y         |

#### 11.1.3.22 fassign() [2/10]

```

template<>
void fassign (
    const Givaro::Modular< float > & F,
    const size_t N,
    const float * Y,
    const size_t incY,
    float * X,
    const size_t incX) [inline]

```

#### 11.1.3.23 fassign() [3/10]

```

template<>
void fassign (
    const Givaro::ModularBalanced< float > & F,
    const size_t N,
    const float * Y,
    const size_t incY,
    float * X,
    const size_t incX) [inline]

```

#### 11.1.3.24 fassign() [4/10]

```

template<>
void fassign (
    const Givaro::ZRing< float > & F,
    const size_t N,
    const float * Y,
    const size_t incY,
    float * X,
    const size_t incX) [inline]

```

**11.1.3.25 fassign()** [5/10]

```
template<>
void fassign (
    const Givaro::Modular< double > & F,
    const size_t N,
    const double * Y,
    const size_t incY,
    double * X,
    const size_t incX) [inline]
```

**11.1.3.26 fassign()** [6/10]

```
template<>
void fassign (
    const Givaro::ModularBalanced< double > & F,
    const size_t N,
    const double * Y,
    const size_t incY,
    double * X,
    const size_t incX) [inline]
```

**11.1.3.27 fassign()** [7/10]

```
template<>
void fassign (
    const Givaro::ZRing< double > & F,
    const size_t N,
    const double * Y,
    const size_t incY,
    double * X,
    const size_t incX) [inline]
```

**11.1.3.28 fassign()** [8/10]

```
template<class Field >
void fassign (
    const Field & F,
    const size_t m,
    const size_t n,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    typename Field::Element_ptr A,
    const size_t lda)
```

$\text{fassign} : A \leftarrow B.$

**Parameters**

|       |                        |
|-------|------------------------|
| $F$   | field                  |
| $m$   | number of rows to copy |
| $n$   | number of cols to copy |
| $A$   | matrix in $F$          |
| $lda$ | stride of $A$          |
| $B$   | vector in $F$          |
| $ldb$ | stride of $B$          |

**11.1.3.29 faxpy()** [1/6]

```
template<class Field >
void faxpy (
    const Field & F,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr X,
    const size_t incX,
    typename Field::Element_ptr Y,
    const size_t incY) [inline]
```

$\text{faxpy} : y \leftarrow \alpha \cdot x + y.$

**Parameters**

|         |               |                     |
|---------|---------------|---------------------|
|         | $F$           | field               |
|         | $N$           | size of the vectors |
|         | $\alpha$      | scalar              |
| in      | $X$           | vector in F         |
|         | $\text{incX}$ | stride of X         |
| in, out | $Y$           | vector in F         |
|         | $\text{incY}$ | stride of Y         |

**11.1.3.30 faxpy()** [2/6]

```
template<>
void faxpy (
    const Givaro::DoubleDomain & ,
    const size_t N,
    const Givaro::DoubleDomain::Element a,
    Givaro::DoubleDomain::ConstElement_ptr x,
    const size_t incx,
    Givaro::DoubleDomain::Element_ptr y,
    const size_t incy) [inline]
```

**11.1.3.31 faxpy()** [3/6]

```
template<>
void faxpy (
    const Givaro::FloatDomain & ,
    const size_t N,
    const Givaro::FloatDomain::Element a,
    Givaro::FloatDomain::ConstElement_ptr x,
    const size_t incx,
    Givaro::FloatDomain::Element_ptr y,
    const size_t incy) [inline]
```

**11.1.3.32 faxpy()** [4/6]

```
template<class Field >
void faxpy (
    const Field & F,
    const size_t m,
    const size_t n,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr X,
    const size_t ldx,
    typename Field::Element_ptr Y,
    const size_t ldy) [inline]
```

$\text{faxpy} : y \leftarrow \alpha \cdot x + y.$

**Parameters**

|         |          |                          |
|---------|----------|--------------------------|
|         | $F$      | field                    |
|         | $m$      | row dimension            |
|         | $n$      | column dimension         |
|         | $\alpha$ | scalar                   |
| in      | $X$      | vector in $F$            |
|         | $ldx$    | leading dimension of $X$ |
| in, out | $Y$      | vector in $F$            |
|         | $ldy$    | leading dimension of $Y$ |

**11.1.3.33 fdot()** [1/11]

```
template<class Field >
Field::Element fdot (
    const Field & F,
    const size_t N,
    typename Field::ConstElement_ptr x,
    const size_t incx,
    typename Field::ConstElement_ptr y,
    const size_t incy,
    ModeCategories::DefaultTag & MT) [inline]
```

**11.1.3.34 fdot()** [2/11]

```
template<class Field >
Field::Element fdot (
    const Field & F,
    const size_t N,
    typename Field::ConstElement_ptr x,
    const size_t incx,
    typename Field::ConstElement_ptr y,
    const size_t incy,
    ModeCategories::DelayedTag & MT) [inline]
```

**11.1.3.35 fdot()** [3/11]

```
template<>
Givaro::DoubleDomain::Element fdot (
    const Givaro::DoubleDomain & ,
    const size_t N,
    Givaro::DoubleDomain::ConstElement_ptr x,
    const size_t incx,
    Givaro::DoubleDomain::ConstElement_ptr y,
    const size_t incy,
    ModeCategories::DefaultTag & MT) [inline]
```

**11.1.3.36 fdot()** [4/11]

```
template<>
Givaro::FloatDomain::Element fdot (
    const Givaro::FloatDomain & ,
    const size_t N,
    Givaro::FloatDomain::ConstElement_ptr x,
    const size_t incx,
    Givaro::FloatDomain::ConstElement_ptr y,
    const size_t incy,
    ModeCategories::DefaultTag & MT) [inline]
```

**11.1.3.37 fdot()** [5/11]

```
template<class Field , class T >
Field::Element fdot (
    const Field & F,
    const size_t N,
    typename Field::ConstElement_ptr x,
    const size_t incx,
    typename Field::ConstElement_ptr y,
    const size_t incy,
    ModeCategories::ConvertTo< T > & MT) [inline]
```

**11.1.3.38 fdot()** [6/11]

```
template<class Field >
Field::Element fdot (
    const Field & F,
    const size_t N,
    typename Field::ConstElement_ptr x,
    const size_t incx,
    typename Field::ConstElement_ptr y,
    const size_t incy,
    ModeCategories::DefaultBoundedTag & dbt) [inline]
```

**11.1.3.39 fdot()** [7/11]

```
template<class Field >
Field::Element fdot (
    const Field & F,
    const size_t N,
    typename Field::ConstElement_ptr x,
    const size_t incx,
    typename Field::ConstElement_ptr y,
    const size_t incy,
    const ParSeqHelper::Sequential seq) [inline]
```

**11.1.3.40 fdot()** [8/11]

```
template<class Field >
Field::Element fdot (
    const Field & F,
    const size_t N,
    typename Field::ConstElement_ptr X,
    const size_t incX,
    typename Field::ConstElement_ptr Y,
    const size_t incY) [inline]
```

fdot: dot product  $x^T y$ .

**Parameters**

|        |                     |
|--------|---------------------|
| $F$    | field               |
| $N$    | size of the vectors |
| $X$    | vector in F         |
| $incX$ | stride of X         |
| $Y$    | vector in F         |
| $incY$ | stride of Y         |

**11.1.3.41 fgemm()** [1/23]

```
template<class Field >
Field::Element_ptr fgemm (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Winograd, ModeCategories::ConvertTo< ElementCategories::MachineFl
>, ParSeqHelper::Sequential > & H) [inline]
```

**11.1.3.42 fgemm()** [2/23]

```

template<typename Field >
Field::Element_ptr fgemm (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    const ParSeqHelper::Sequential seq) [inline]

```

**11.1.3.43 fgemm()** [3/23]

```

template<typename Field , class Cut , class Param >
Field::Element_ptr fgemm (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    const ParSeqHelper::Parallel< Cut, Param > par) [inline]

```

**11.1.3.44 fgemm()** [4/23]

```

template<typename Field >
Field::Element_ptr fgemm (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,

```

```

    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc) [inline]

```

**fgemm**: Field **GE**neral **M**atrix **M**ultiply.

Computes  $C = \alpha \text{op}(A) \times \text{op}(B) + \beta C$  Automatically set Winograd recursion level

#### Parameters

|              |   |
|--------------|---|
| <i>F</i>     | field.  |
| <i>ta</i>    | if $ta == \text{FflasTrans}$ then $\text{op}(A) = A^t$ , else $\text{op}(A) = A$ ,                    |
| <i>tb</i>    | same for matrix B   |
| <i>m</i>     | see A   |
| <i>n</i>     | see B   |
| <i>k</i>     | see A   |
| <i>alpha</i> | scalar  |
| <i>beta</i>  | scalar  |
| <i>A</i>     | $\text{op}(A)$ is $m \times k$  |
| <i>B</i>     | $\text{op}(B)$ is $k \times n$  |
| <i>C</i>     | $C$ is $m \times n$   |
| <i>lda</i>   | leading dimension of A  |
| <i>ldb</i>   | leading dimension of B  |
| <i>ldc</i>   | leading dimension of C  |
| <i>w</i>     | recursive levels of Winograd's algorithm are used. No argument (or -1) does auto computation of $w$ . |

#### Warning

$\alpha$  must be invertible

#### 11.1.3.45 fgemm() [5/23]

```

template<typename Field , class ModeT , class ParSeq >
Field::Element_ptr fgemm (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Auto, ModeT, ParSeq > & H) [inline]

```



**11.1.3.46 fgemm()** [6/23]

```

template<class Field >
Field::Element_ptr fgemm (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Winograd, ModeCategories::DelayedTag, ParSeqHelper::Sequential
> & H) [inline]

```

**11.1.3.47 fsquare()** [1/6]

```

template<class Field >
Field::Element_ptr fsquare (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const size_t n,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc) [inline]

```

fsquare: Squares a matrix.

compute  $C \leftarrow \alpha \text{op}(A) \text{op}(A) + \beta C$  over a Field  $F$  Avoid the conversion of B

**Parameters**

|              |   |
|--------------|---|
| <i>ta</i>    | if $ta == \text{FflasTrans}$ , $\text{op}(A) = A^T$ . |
| <i>F</i>     | field   |
| <i>n</i>     | size of A   |
| <i>alpha</i> | scalar  |
| <i>beta</i>  | scalar  |
| <i>A</i>     | dense matrix of size $n \times n$                     |
| <i>lda</i>   | leading dimension of A                                |
| <i>C</i>     | dense matrix of size $n \times n$                     |
| <i>ldc</i>   | leading dimension of C                                |

**Bug** why double ?

**11.1.3.48 fsquare()** [2/6]

```

template<>
double * fsquare (
    const Givaro::ModularBalanced< double > & F,
    const FFLAS_TRANSPOSE ta,
    const size_t n,
    const double alpha,
    const double * A,
    const size_t lda,
    const double beta,
    double * C,
    const size_t ldc) [inline]

```

**11.1.3.49 fsquare()** [3/6]

```

template<>
float * fsquare (
    const Givaro::ModularBalanced< float > & F,
    const FFLAS_TRANSPOSE ta,
    const size_t n,
    const float alpha,
    const float * A,
    const size_t lda,
    const float beta,
    float * C,
    const size_t ldc) [inline]

```

**11.1.3.50 fsquare()** [4/6]

```

template<>
double * fsquare (
    const Givaro::Modular< double > & F,
    const FFLAS_TRANSPOSE ta,
    const size_t n,
    const double alpha,
    const double * A,
    const size_t lda,
    const double beta,
    double * C,
    const size_t ldc) [inline]

```

**11.1.3.51 fsquare()** [5/6]

```

template<>
float * fsquare (
    const Givaro::Modular< float > & F,
    const FFLAS_TRANSPOSE ta,
    const size_t n,
    const float alpha,
    const float * A,
    const size_t lda,
    const float beta,
    float * C,
    const size_t ldc) [inline]

```

**11.1.3.52 fgemm()** [7/23]

```

template<typename RNS , typename ParSeqTrait >
FFPACK::RNSInteger< RNS >::Element_ptr fgemm (
    const FFPACK::RNSInteger< RNS > & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename FFPACK::RNSInteger< RNS >::Element alpha,
    typename FFPACK::RNSInteger< RNS >::ConstElement_ptr Ad,
    const size_t lda,
    typename FFPACK::RNSInteger< RNS >::ConstElement_ptr Bd,
    const size_t ldb,
    const typename FFPACK::RNSInteger< RNS >::Element beta,
    typename FFPACK::RNSInteger< RNS >::Element_ptr Cd,
    const size_t ldc,
    MMHelper< FFPACK::RNSInteger< RNS >, MMHelperAlgo::Classic, ModeCategories::DefaultTag,
    ParSeqHelper::Compose< ParSeqHelper::Sequential, ParSeqTrait > > & H) [inline]

```

**11.1.3.53 fgemm()** [8/23]

```

template<typename RNS >
FFPACK::RNSInteger< RNS >::Element_ptr fgemm (
    const FFPACK::RNSInteger< RNS > & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename FFPACK::RNSInteger< RNS >::Element alpha,
    typename FFPACK::RNSInteger< RNS >::ConstElement_ptr Ad,
    const size_t lda,
    typename FFPACK::RNSInteger< RNS >::ConstElement_ptr Bd,
    const size_t ldb,
    const typename FFPACK::RNSInteger< RNS >::Element beta,
    typename FFPACK::RNSInteger< RNS >::Element_ptr Cd,
    const size_t ldc,
    MMHelper< FFPACK::RNSInteger< RNS >, MMHelperAlgo::Classic, ModeCategories::DefaultTag,
    ParSeqHelper::Sequential > & H) [inline]

```

**11.1.3.54 fgemm()** [9/23]

```

template<typename RNS , typename ParSeqTrait >
FFPACK::RNSInteger< RNS >::Element_ptr fgemm (
    const FFPACK::RNSInteger< RNS > & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename FFPACK::RNSInteger< RNS >::Element alpha,
    typename FFPACK::RNSInteger< RNS >::ConstElement_ptr Ad,

```

```

    const size_t lda,
    typename FFPACK::RNSInteger< RNS >::ConstElement_ptr Bd,
    const size_t ldb,
    const typename FFPACK::RNSInteger< RNS >::Element beta,
    typename FFPACK::RNSInteger< RNS >::Element_ptr Cd,
    const size_t ldc,
    MMHelper< FFPACK::RNSInteger< RNS >, MMHelperAlgo::Classic, ModeCategories::DefaultTag,
    ParSeqHelper::Compose< ParSeqHelper::Parallel< CuttingStrategy::RNSModulus, StrategyParameter::Threads
    >, ParSeqTrait > > & H) [inline]

```

#### 11.1.3.55 fgemm() [10/23]

```

template<typename RNS , typename Cut , typename Param >
FFPACK::RNSInteger< RNS >::Element_ptr fgemm (
    const FFPACK::RNSInteger< RNS > & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename FFPACK::RNSInteger< RNS >::Element alpha,
    typename FFPACK::RNSInteger< RNS >::ConstElement_ptr Ad,
    const size_t lda,
    typename FFPACK::RNSInteger< RNS >::ConstElement_ptr Bd,
    const size_t ldb,
    const typename FFPACK::RNSInteger< RNS >::Element beta,
    typename FFPACK::RNSInteger< RNS >::Element_ptr Cd,
    const size_t ldc,
    MMHelper< FFPACK::RNSInteger< RNS >, MMHelperAlgo::Classic, ModeCategories::DefaultTag,
    ParSeqHelper::Parallel< Cut, Param > > & H) [inline]

```

#### 11.1.3.56 fgemm() [11/23]

```

template<class ParSeq >
Givaro::Integer * fgemm (
    const Givaro::ZRing< Givaro::Integer > & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const Givaro::Integer alpha,
    const Givaro::Integer * A,
    const size_t lda,
    const Givaro::Integer * B,
    const size_t ldb,
    Givaro::Integer beta,
    Givaro::Integer * C,
    const size_t ldc,
    MMHelper< Givaro::ZRing< Givaro::Integer >, MMHelperAlgo::Classic, ModeCategories::ConvertTo<
    ElementCategories::RNSElementTag >, ParSeq > & H) [inline]

```

**11.1.3.57 fgemm()** [12/23]

```

template<typename RNS , class ModeT >
RNS::Element_ptr fgemm (
    const FFPACK::RNSInteger< RNS > & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename RNS::Element alpha,
    typename RNS::ConstElement_ptr Ad,
    const size_t lda,
    typename RNS::ConstElement_ptr Bd,
    const size_t ldb,
    const typename RNS::Element beta,
    typename RNS::Element_ptr Cd,
    const size_t ldc,
    MMHelper< FFPACK::RNSInteger< RNS >, MMHelperAlgo::Winograd, ModeT, ParSeqHelper::Sequential
> & H) [inline]

```

**11.1.3.58 fgemm()** [13/23]

```

template<typename RNS >
RNS::Element_ptr fgemm (
    const FFPACK::RNSIntegerMod< RNS > & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename RNS::Element alpha,
    typename RNS::ConstElement_ptr Ad,
    const size_t lda,
    typename RNS::ConstElement_ptr Bd,
    const size_t ldb,
    const typename RNS::Element beta,
    typename RNS::Element_ptr Cd,
    const size_t ldc,
    MMHelper< FFPACK::RNSIntegerMod< RNS >, MMHelperAlgo::Winograd > & H) [inline]

```

**11.1.3.59 fgemm()** [14/23]

```

Givaro::Integer * fgemm (
    const Givaro::Modular< Givaro::Integer > & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const Givaro::Integer alpha,
    const Givaro::Integer * A,
    const size_t lda,
    const Givaro::Integer * B,

```

```

    const size_t ldb,
    const Givaro::Integer beta,
    Givaro::Integer * C,
    const size_t ldc,
    MMHelper< Givaro::Modular< Givaro::Integer >, MMHelperAlgo::Classic, ModeCategories::ConvertTo<
ElementCategories::RNSElementTag > > & H) [inline]

```

#### 11.1.3.60 fgemm() [15/23]

```

template<class ParSeq >
Givaro::Integer * fgemm (
    const Givaro::Modular< Givaro::Integer > & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const Givaro::Integer alpha,
    const Givaro::Integer * A,
    const size_t lda,
    const Givaro::Integer * B,
    const size_t ldb,
    const Givaro::Integer beta,
    Givaro::Integer * C,
    const size_t ldc,
    MMHelper< Givaro::Modular< Givaro::Integer >, MMHelperAlgo::Auto, ModeCategories::ConvertTo<
ElementCategories::RNSElementTag >, ParSeq > & H) [inline]

```

#### 11.1.3.61 fgemm() [16/23]

```

template<size_t K1, size_t K2, class ParSeq >
RecInt::ruint< K1 > * fgemm (
    const Givaro::Modular< RecInt::ruint< K1 >, RecInt::ruint< K2 > > & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const RecInt::ruint< K1 > alpha,
    const RecInt::ruint< K1 > * A,
    const size_t lda,
    const RecInt::ruint< K1 > * B,
    const size_t ldb,
    RecInt::ruint< K1 > beta,
    RecInt::ruint< K1 > * C,
    const size_t ldc,
    MMHelper< Givaro::Modular< RecInt::ruint< K1 >, RecInt::ruint< K2 > >, MMHelperAlgo::Classic,
ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeq > & H) [inline]

```

#### 11.1.3.62 fgemm() [17/23]

```

template<class Field , class ModeT >
Field::Element_ptr fgemm (

```

```

    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Winograd, ModeT > & H) [inline]

```

### 11.1.3.63 fgemm() [18/23]

```

template<class Field , class ModeT , class Cut , class Param >
Field::Element_ptr fgemm (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::WinogradPar, ModeT, ParSeqHelper::Parallel< Cut,
Param > > & H) [inline]

```

### 11.1.3.64 fgemv() [1/19]

```

template<class Field >
Field::Element_ptr fgemv (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr X,
    const size_t incX,
    const typename Field::Element beta,
    typename Field::Element_ptr Y,
    const size_t incY,
    MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::ConvertTo< ElementCategories::MachineFlo
> > & H) [inline]

```

**11.1.3.65 fgemv()** [2/19]

```

template<class Field >
Field::Element_ptr fgemv (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr X,
    const size_t incX,
    const typename Field::Element beta,
    typename Field::Element_ptr Y,
    const size_t incY,
    MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::DelayedTag > & H) [inline]

```

**11.1.3.66 fgemv()** [3/19]

```

template<class Field >
Field::Element_ptr fgemv (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr X,
    const size_t incX,
    const typename Field::Element beta,
    typename Field::Element_ptr Y,
    const size_t incY,
    MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::DefaultTag > & H) [inline]

```

**11.1.3.67 fgemv()** [4/19]

```

template<class Field >
Field::Element_ptr fgemv (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr X,
    const size_t incX,
    const typename Field::Element beta,
    typename Field::Element_ptr Y,
    const size_t incY,
    MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::LazyTag > & H) [inline]

```



**11.1.3.68 fgemv()** [5/19]

```
template<class Field >
Field::Element_ptr fgemv (
    const Field & F,
    const FFLAS_TRANSPOSE TransA,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr X,
    const size_t incX,
    const typename Field::Element beta,
    typename Field::Element_ptr Y,
    const size_t incY) [inline]
```

finite prime Field GEneral Matrix Vector multiplication.

Computes  $Y \leftarrow \alpha \text{op}(A)X + \beta Y$ .

**Parameters**

|     |          |   |
|-----|----------|---|
|     | $F$      | field   |
|     | $TransA$ | if $TransA == FflasTrans$ then $\text{op}(A) = A^t$ . |
|     | $M$      | rows  |
|     | $N$      | cols  |
|     | $alpha$  | scalar  |
|     | $A$      | dense matrix of size $M \times N$                     |
|     | $lda$    | leading dimension of $A$                              |
|     | $X$      | dense vector of size $N$                              |
|     | $incX$   | stride of $X$   |
|     | $beta$   | scalar  |
| out | $Y$      | dense vector of size $M$                              |
|     | $incY$   | stride of $Y$   |

**11.1.3.69 fgemv()** [6/19]

```
Givaro::ZRing< int64_t >::Element_ptr fgemv (
    const Givaro::ZRing< int64_t > & F,
    const FFLAS_TRANSPOSE ta,
    const size_t M,
    const size_t N,
    const int64_t alpha,
    const int64_t * A,
    const size_t lda,
    const int64_t * X,
    const size_t incX,
    const int64_t beta,
    int64_t * Y,
    const size_t incY,
    MMHelper< Givaro::ZRing< int64_t >, MMHelperAlgo::Classic, ModeCategories::DefaultTag
> & H) [inline]
```

**11.1.3.70 fgemv()** [7/19]

```
Givaro::DoubleDomain::Element_ptr fgemv (
    const Givaro::DoubleDomain & F,
    const FFLAS_TRANSPOSE ta,
    const size_t M,
    const size_t N,
    const Givaro::DoubleDomain::Element alpha,
    const Givaro::DoubleDomain::ConstElement_ptr A,
    const size_t lda,
    const Givaro::DoubleDomain::ConstElement_ptr X,
    const size_t incX,
    const Givaro::DoubleDomain::Element beta,
    Givaro::DoubleDomain::Element_ptr Y,
    const size_t incY,
    MMHelper< Givaro::DoubleDomain, MMHelperAlgo::Classic, ModeCategories::DefaultTag
> & H) [inline]
```

**11.1.3.71 fgemv()** [8/19]

```
template<class Field >
Field::Element_ptr fgemv (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    const typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::ConstElement_ptr X,
    const size_t incX,
    const typename Field::Element beta,
    typename Field::Element_ptr Y,
    const size_t incY,
    MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::DefaultBoundedTag > & H)
[inline]
```

**11.1.3.72 fgemv()** [9/19]

```
Givaro::FloatDomain::Element_ptr fgemv (
    const Givaro::FloatDomain & F,
    const FFLAS_TRANSPOSE ta,
    const size_t M,
    const size_t N,
    const Givaro::FloatDomain::Element alpha,
    const Givaro::FloatDomain::ConstElement_ptr A,
    const size_t lda,
    const Givaro::FloatDomain::ConstElement_ptr X,
    const size_t incX,
    const Givaro::FloatDomain::Element beta,
    Givaro::FloatDomain::Element_ptr Y,
    const size_t incY,
    MMHelper< Givaro::FloatDomain, MMHelperAlgo::Classic, ModeCategories::DefaultTag
> & H) [inline]
```

**11.1.3.73 fgemv()** [10/19]

```

template<class Field , class Cut , class Param >
Field::Element_ptr fgemv (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const size_t m,
    const size_t n,
    const typename Field::Element alpha,
    const typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::ConstElement_ptr X,
    const size_t incX,
    const typename Field::Element beta,
    typename Field::Element_ptr Y,
    const size_t incY,
    ParSeqHelper::Parallel< Cut, Param > & parH)

```

**11.1.3.74 fgemv()** [11/19]

```

template<class Field >
Field::Element_ptr fgemv (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const size_t m,
    const size_t n,
    const typename Field::Element alpha,
    const typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::ConstElement_ptr X,
    const size_t incX,
    const typename Field::Element beta,
    typename Field::Element_ptr Y,
    const size_t incY,
    ParSeqHelper::Sequential & seqH)

```

**11.1.3.75 fgemv()** [12/19]

```

FFPACK::rns_double::Element_ptr fgemv (
    const FFPACK::RNSInteger< FFPACK::rns_double > & F,
    const FFLAS_TRANSPOSE ta,
    const size_t M,
    const size_t N,
    const FFPACK::rns_double::Element alpha,
    FFPACK::rns_double::ConstElement_ptr A,
    const size_t lda,
    FFPACK::rns_double::ConstElement_ptr X,
    const size_t incX,
    const FFPACK::rns_double::Element beta,
    FFPACK::rns_double::Element_ptr Y,
    const size_t incY,
    MMHelper< FFPACK::RNSInteger< FFPACK::rns_double >, MMHelperAlgo::Classic, ModeCategories::Default > & H) [inline]

```

**11.1.3.76 fgemv()** [13/19]

```
FFPACK::rns_double::Element_ptr fgemv (
    const FFPACK::RNSIntegerMod< FFPACK::rns_double > & F,
    const FFLAS_TRANSPOSE ta,
    const size_t M,
    const size_t N,
    const FFPACK::rns_double::Element alpha,
    FFPACK::rns_double::ConstElement_ptr A,
    const size_t lda,
    FFPACK::rns_double::ConstElement_ptr X,
    const size_t incX,
    const FFPACK::rns_double::Element beta,
    FFPACK::rns_double::Element_ptr Y,
    const size_t incY,
    MMHelper< FFPACK::RNSIntegerMod< FFPACK::rns_double >, MMHelperAlgo::Classic,
    ModeCategories::DefaultTag > & H) [inline]
```

**11.1.3.77 fgemv()** [14/19]

```
Givaro::Integer * fgemv (
    const Givaro::ZRing< Givaro::Integer > & F,
    const FFLAS_TRANSPOSE ta,
    const size_t m,
    const size_t n,
    const Givaro::Integer alpha,
    Givaro::Integer * A,
    const size_t lda,
    Givaro::Integer * X,
    const size_t ldx,
    Givaro::Integer beta,
    Givaro::Integer * Y,
    const size_t ldy,
    MMHelper< Givaro::ZRing< Givaro::Integer >, MMHelperAlgo::Classic, ModeCategories::ConvertTo<
    ElementCategories::RNSElementTag > > & H) [inline]
```

**11.1.3.78 fgemv()** [15/19]

```
Givaro::Integer * fgemv (
    const Givaro::Modular< Givaro::Integer > & F,
    const FFLAS_TRANSPOSE ta,
    const size_t m,
    const size_t n,
    const Givaro::Integer alpha,
    Givaro::Integer * A,
    const size_t lda,
    Givaro::Integer * X,
    const size_t ldx,
    Givaro::Integer beta,
    Givaro::Integer * Y,
    const size_t ldy,
    MMHelper< Givaro::Modular< Givaro::Integer >, MMHelperAlgo::Classic, ModeCategories::ConvertTo<
    ElementCategories::RNSElementTag > > & H) [inline]
```

**11.1.3.79 fgemv()** [16/19]

```

template<size_t K1, size_t K2, class ParSeq >
RecInt::ruint< K1 > * fgemv (
    const Givaro::Modular< RecInt::ruint< K1 >, RecInt::ruint< K2 > > & F,
    const FFLAS_TRANSPOSE ta,
    const size_t m,
    const size_t n,
    const RecInt::ruint< K1 > alpha,
    const RecInt::ruint< K1 > * A,
    const size_t lda,
    const RecInt::ruint< K1 > * X,
    const size_t incx,
    RecInt::ruint< K1 > beta,
    RecInt::ruint< K1 > * Y,
    const size_t incy,
    MMHelper< Givaro::Modular< RecInt::ruint< K1 >, RecInt::ruint< K2 > >, MMHelperAlgo::Classic,
    ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeq > & H) [inline]

```

**11.1.3.80 fger()** [1/12]

```

template<class Field >
void fger (
    const Field & F,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr x,
    const size_t incx,
    typename Field::ConstElement_ptr y,
    const size_t incy,
    typename Field::Element_ptr A,
    const size_t lda) [inline]

```

fger: rank one update of a general matrix

Computes  $A \leftarrow \alpha x y^T + A$

**Parameters**

|         |          |  |
|---------|----------|--|
|         | $F$      | field  |
|         | $M$      | rows   |
|         | $N$      | cols   |
|         | $\alpha$ | scalar   |
| in, out | $A$      | dense matrix of size MxN and leading dimension lda |
|         | $lda$    | leading dimension of A                             |
|         | $x$      | dense vector of size M                             |
|         | $incx$   | stride of X  |
|         | $y$      | dense vector of size N                             |
|         | $incy$   | stride of Y  |

**11.1.3.81 fger() [2/12]**

```

template<class Field >
void fger (
    const Field & F,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr x,
    const size_t incx,
    typename Field::ConstElement_ptr y,
    const size_t incy,
    typename Field::Element_ptr A,
    const size_t lda,
    MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::ConvertTo< ElementCategories::MachineFlo
> > & H) [inline]

```

**11.1.3.82 fger() [3/12]**

```

template<class Field , class AnyTag >
void fger (
    const Field & F,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr x,
    const size_t incx,
    typename Field::ConstElement_ptr y,
    const size_t incy,
    typename Field::Element_ptr A,
    const size_t lda,
    MMHelper< Field, MMHelperAlgo::Classic, AnyTag > & H) [inline]

```

**11.1.3.83 fger() [4/12]**

```

void fger (
    const Givaro::DoubleDomain & F,
    const size_t M,
    const size_t N,
    const Givaro::DoubleDomain::Element alpha,
    const Givaro::DoubleDomain::ConstElement_ptr x,
    const size_t incx,
    const Givaro::DoubleDomain::ConstElement_ptr y,
    const size_t incy,
    Givaro::DoubleDomain::Element_ptr A,
    const size_t lda,
    MMHelper< Givaro::DoubleDomain, MMHelperAlgo::Classic, ModeCategories::DefaultTag
> & H) [inline]

```

**11.1.3.84 fger()** [5/12]

```

template<class Field >
void fger (
    const Field & F,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    const typename Field::ConstElement_ptr x,
    const size_t incx,
    const typename Field::ConstElement_ptr y,
    const size_t incy,
    typename Field::Element_ptr A,
    const size_t lda,
    MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::DefaultBoundedTag > & H)
[inline]

```

**11.1.3.85 fger()** [6/12]

```

void fger (
    const Givaro::FloatDomain & F,
    const size_t M,
    const size_t N,
    const Givaro::FloatDomain::Element alpha,
    const Givaro::FloatDomain::ConstElement_ptr x,
    const size_t incx,
    const Givaro::FloatDomain::ConstElement_ptr y,
    const size_t incy,
    Givaro::FloatDomain::Element_ptr A,
    const size_t lda,
    MMHelper< Givaro::FloatDomain, MMHelperAlgo::Classic, ModeCategories::DefaultTag
> & H) [inline]

```

**11.1.3.86 fger()** [7/12]

```

template<class Field >
void fger (
    const Field & F,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr x,
    const size_t incx,
    typename Field::ConstElement_ptr y,
    const size_t incy,
    typename Field::Element_ptr A,
    const size_t lda,
    MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::LazyTag > & H) [inline]

```

**11.1.3.87 fger()** [8/12]

```

template<class Field >
void fger (
    const Field & F,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr x,
    const size_t incx,
    typename Field::ConstElement_ptr y,
    const size_t incy,
    typename Field::Element_ptr A,
    const size_t lda,
    MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::DelayedTag > & H) [inline]

```

**11.1.3.88 fger()** [9/12]

```

void fger (
    const Givaro::Modular< Givaro::Integer > & F,
    const size_t M,
    const size_t N,
    const typename Givaro::Integer alpha,
    typename Givaro::Integer * x,
    const size_t incx,
    typename Givaro::Integer * y,
    const size_t incy,
    typename Givaro::Integer * A,
    const size_t lda,
    MMHelper< Givaro::Modular< Givaro::Integer >, MMHelperAlgo::Classic, ModeCategories::ConvertTo<
ElementCategories::RNSElementTag > > & H) [inline]

```

**11.1.3.89 fger()** [10/12]

```

template<typename RNS >
void fger (
    const FFPACK::RNSInteger< RNS > & F,
    const size_t M,
    const size_t N,
    const typename FFPACK::RNSInteger< RNS >::Element alpha,
    typename FFPACK::RNSInteger< RNS >::Element_ptr x,
    const size_t incx,
    typename FFPACK::RNSInteger< RNS >::Element_ptr y,
    const size_t incy,
    typename FFPACK::RNSInteger< RNS >::Element_ptr A,
    const size_t lda,
    MMHelper< FFPACK::RNSInteger< RNS >, MMHelperAlgo::Classic, ModeCategories::DefaultTag
> & H) [inline]

```



**11.1.3.90 fger()** [11/12]

```

template<typename RNS >
void fger (
    const FFPACK::RNSIntegerMod< RNS > & F,
    const size_t M,
    const size_t N,
    const typename FFPACK::RNSIntegerMod< RNS >::Element alpha,
    typename FFPACK::RNSIntegerMod< RNS >::Element_ptr x,
    const size_t incx,
    typename FFPACK::RNSIntegerMod< RNS >::Element_ptr y,
    const size_t incy,
    typename FFPACK::RNSIntegerMod< RNS >::Element_ptr A,
    const size_t lda,
    MMHelper< FFPACK::RNSIntegerMod< RNS >, MMHelperAlgo::Classic > & H) [inline]

```

**11.1.3.91 freduce()** [1/11]

```

template<class Field >
void freduce (
    const Field & F,
    const size_t n,
    typename Field::ConstElement_ptr Y,
    const size_t incY,
    typename Field::Element_ptr X,
    const size_t incX)

```

freduce  $x \leftarrow y \bmod F$ .

**Parameters**

|        |                     |
|--------|---------------------|
| $F$    | field               |
| $n$    | size of the vectors |
| $Y$    | vector of Element   |
| $incY$ | stride of Y         |
| $X$    | vector in F         |
| $incX$ | stride of X         |

**Bug** use cblas\_(d)scal when possible

**11.1.3.92 freduce()** [2/11]

```

template<class Field >
void freduce (
    const Field & F,
    const size_t n,
    typename Field::Element_ptr X,
    const size_t incX)

```

freduce  $x \leftarrow x \bmod F$ .

## Parameters

|        |                     |
|--------|---------------------|
| $F$    | field               |
| $n$    | size of the vectors |
| $X$    | vector in $F$       |
| $incX$ | stride of $X$       |

**Bug** use `cblas_(d)scal` when possible

### 11.1.3.93 `freduce_constoverride()` [1/2]

```
template<class Field >
void freduce_constoverride (
    const Field & F,
    const size_t m,
    typename Field::ConstElement_ptr A,
    const size_t incX)
```

### 11.1.3.94 `finit()` [1/8]

```
template<class Field , class ConstOtherElement_ptr >
void finit (
    const Field & F,
    const size_t n,
    ConstOtherElement_ptr Y,
    const size_t incY,
    typename Field::Element_ptr X,
    const size_t incX)
```

### 11.1.3.95 `finit()` [2/8]

```
template<class Field >
void finit (
    const Field & F,
    const size_t n,
    typename Field::Element_ptr X,
    const size_t incX)
```

`finit` Initializes  $X$  in  $F$ .

## Parameters

|        |                     |
|--------|---------------------|
| $F$    | field               |
| $n$    | size of the vectors |
| $X$    | vector in $F$       |
| $incX$ | stride of $X$       |

**11.1.3.96 freduce()** [3/11]

```
template<class Field >
void freduce (
    const Field & F,
    const size_t m,
    const size_t n,
    typename Field::Element_ptr A,
    const size_t lda)
```

freduce  $A \leftarrow A \bmod F$ .

**Parameters**

|       |                |
|-------|----------------|
| $F$   | field          |
| $m$   | number of rows |
| $n$   | number of cols |
| $A$   | matrix in F    |
| $lda$ | stride of A    |

**11.1.3.97 freduce()** [4/11]

```
template<class Field >
void freduce (
    const Field & F,
    const FFLAS_UPLO UpLo,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda)
```

freduce for square symmetric matrices

**11.1.3.98 pfreduce()**

```
template<class Field >
void pfreduce (
    const Field & F,
    const size_t m,
    const size_t n,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t numths)
```

**11.1.3.99 freduce()** [5/11]

```
template<class Field >
void freduce (
    const Field & F,
    const size_t m,
    const size_t n,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    typename Field::Element_ptr A,
    const size_t lda)
```

freduce  $A \leftarrow B \bmod F$ .

## Parameters

|       |                                |
|-------|--------------------------------|
| $F$   | field                          |
| $m$   | number of rows                 |
| $n$   | number of cols                 |
| $A$   | matrix in $F$                  |
| $lda$ | stride of $A$                  |
| $B$   | matrix in <code>Element</code> |
| $ldb$ | stride of $B$                  |

**11.1.3.100 `freduce_constoverride()` [2/2]**

```
template<class Field >
void freduce_constoverride (
    const Field & F,
    const size_t m,
    const size_t n,
    typename Field::ConstElement_ptr A,
    const size_t lda)
```

**11.1.3.101 `finit()` [3/8]**

```
template<class Field , class OtherElement_ptr >
void finit (
    const Field & F,
    const size_t m,
    const size_t n,
    const OtherElement_ptr B,
    const size_t ldb,
    typename Field::Element_ptr A,
    const size_t lda)
```

$\text{finit } A \leftarrow B \bmod F.$

## Parameters

|       |                                     |
|-------|-------------------------------------|
| $F$   | field                               |
| $m$   | number of rows                      |
| $n$   | number of cols                      |
| $A$   | matrix in $F$                       |
| $lda$ | stride of $A$                       |
| $B$   | matrix in <code>OtherElement</code> |
| $ldb$ | stride of $B$                       |

**11.1.3.102 `finit()` [4/8]**

```
template<class Field >
void finit (
    const Field & F,
    const size_t m,
    const size_t n,
    typename Field::Element_ptr A,
    const size_t lda)
```

**11.1.3.103 freduce()** [6/11]

```
template<>
void freduce (
    const FFPACK::RNSIntegerMod< FFPACK::rns_double > & F,
    const size_t n,
    FFPACK::RNSIntegerMod< FFPACK::rns_double >::Element_ptr A,
    size_t inc) [inline]
```

**11.1.3.104 freduce()** [7/11]

```
template<>
void freduce (
    const FFPACK::RNSIntegerMod< FFPACK::rns_double > & F,
    const size_t m,
    const size_t n,
    FFPACK::rns_double::Element_ptr A,
    size_t lda) [inline]
```

**11.1.3.105 freivalds()**

```
template<class Field >
bool freivalds (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    typename Field::ConstElement_ptr C,
    const size_t ldc) [inline]
```

freivalds: **F**reivalds **G**eneral **M**atrix **M**ultiply **R**andom **C**heck.

Randomly Checks  $C = \alpha \text{op}(A) \times \text{op}(B)$

**Parameters**

|              |  |
|--------------|--|
| <i>F</i>     | field.   |
| <i>ta</i>    | if <code>ta==FflasTrans</code> then $\text{op}(A) = A^t$ , else $\text{op}(A) = A$ , |
| <i>tb</i>    | same for matrix B  |
| <i>m</i>     | see A  |
| <i>n</i>     | see B  |
| <i>k</i>     | see A  |
| <i>alpha</i> | scalar   |
| <i>A</i>     | $\text{op}(A)$ is $m \times k$   |
| <i>B</i>     | $\text{op}(B)$ is $k \times n$   |
| <i>C</i>     | $C$ is $m \times n$  |
| <i>lda</i>   | leading dimension of A   |
| <i>ldb</i>   | leading dimension of B   |
| <i>ldc</i>   | leading dimension of C   |

**11.1.3.106 fscaln()** [1/10]

```
template<class Field >
void fscaln (
    const Field & F,
    const size_t n,
    const typename Field::Element alpha,
    typename Field::Element_ptr X,
    const size_t incX) [inline]
```

$\text{fscaln } x \leftarrow \alpha \cdot x.$

**Parameters**

|               |                        |
|---------------|------------------------|
| $F$           | field                  |
| $n$           | size of the vectors    |
| $\alpha$      | scalar                 |
| $X$           | vector in $\mathbb{F}$ |
| $\text{incX}$ | stride of $X$          |

**Bug** use `cblas_(d)scal` when possible

**Todo** check if comparison with  $\pm 1, 0$  is necessary.

**11.1.3.107 fscal()** [1/10]

```
template<class Field >
void fscal (
    const Field & F,
    const size_t n,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr X,
    const size_t incX,
    typename Field::Element_ptr Y,
    const size_t incY) [inline]
```

$\text{fscal } y \leftarrow \alpha \cdot x.$

**Parameters**

|     |               |                        |
|-----|---------------|------------------------|
|     | $F$           | field                  |
|     | $n$           | size of the vectors    |
|     | $\alpha$      | scalar                 |
| in  | $X$           | vector in $\mathbb{F}$ |
|     | $\text{incX}$ | stride of $X$          |
| out | $Y$           | vector in $\mathbb{F}$ |
|     | $\text{incY}$ | stride of $Y$          |

**Bug** use `cblas_(d)scal` when possible

**Todo** check if comparison with  $\pm 1, 0$  is necessary.

**11.1.3.108 fscal()** [2/10]

```
template<>
void fscal (
    const Givaro::DoubleDomain & ,
    const size_t N,
    const Givaro::DoubleDomain::Element a,
    Givaro::DoubleDomain::ConstElement_ptr x,
    const size_t incx,
    Givaro::DoubleDomain::Element_ptr y,
    const size_t incy) [inline]
```

**11.1.3.109 fscal()** [3/10]

```
template<>
void fscal (
    const Givaro::FloatDomain & ,
    const size_t N,
    const Givaro::FloatDomain::Element a,
    Givaro::FloatDomain::ConstElement_ptr x,
    const size_t incx,
    Givaro::FloatDomain::Element_ptr y,
    const size_t incy) [inline]
```

**11.1.3.110 fscaln()** [2/10]

```
template<>
void fscaln (
    const Givaro::DoubleDomain & ,
    const size_t N,
    const Givaro::DoubleDomain::Element a,
    Givaro::DoubleDomain::Element_ptr y,
    const size_t incy) [inline]
```

**11.1.3.111 fscaln()** [3/10]

```
template<>
void fscaln (
    const Givaro::FloatDomain & ,
    const size_t N,
    const Givaro::FloatDomain::Element a,
    Givaro::FloatDomain::Element_ptr y,
    const size_t incy) [inline]
```

**11.1.3.112 fscaln()** [4/10]

```
template<class Field >
void fscaln (
    const Field & F,
    const size_t m,
    const size_t n,
    const typename Field::Element alpha,
    typename Field::Element_ptr A,
    const size_t lda) [inline]
```

$\text{fscaln } A \leftarrow a \cdot A.$

## Parameters

|          |                  |
|----------|------------------|
| $F$      | field            |
| $m$      | number of rows   |
| $n$      | number of cols   |
| $\alpha$ | homotecie scalar |
| $A$      | matrix in $F$    |
| $lda$    | stride of $A$    |

**11.1.3.113 fscal()** [4/10]

```
template<class Field >
void fscal (
    const Field & F,
    const size_t m,
    const size_t n,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::Element_ptr B,
    const size_t ldb) [inline]
```

$\text{fscal } B \leftarrow a \cdot A.$

## Parameters

|     |          |                  |
|-----|----------|------------------|
|     | $F$      | field            |
|     | $m$      | number of rows   |
|     | $n$      | number of cols   |
|     | $\alpha$ | homotecie scalar |
| in  | $A$      | matrix in $F$    |
|     | $lda$    | stride of $A$    |
| out | $B$      | matrix in $F$    |
|     | $ldb$    | stride of $B$    |

**11.1.3.114 fscaln()** [5/10]

```
template<>
void fscaln (
    const FFPACK::RNSInteger< FFPACK::rns_double > & F,
    const size_t n,
    const FFPACK::rns_double::Element alpha,
    FFPACK::rns_double::Element_ptr A,
    const size_t inc) [inline]
```



**11.1.3.115 fscal()** [5/10]

```

template<>
void fscal (
    const FFPACK::RNSInteger< FFPACK::rns_double > & F,
    const size_t n,
    const FFPACK::rns_double::Element alpha,
    FFPACK::rns_double::ConstElement_ptr A,
    const size_t Ainc,
    FFPACK::rns_double::Element_ptr B,
    const size_t Binc) [inline]

```

**11.1.3.116 fscaln()** [6/10]

```

template<>
void fscaln (
    const FFPACK::RNSInteger< FFPACK::rns_double > & F,
    const size_t m,
    const size_t n,
    const FFPACK::rns_double::Element alpha,
    FFPACK::rns_double::Element_ptr A,
    const size_t lda) [inline]

```

**11.1.3.117 fscal()** [6/10]

```

template<>
void fscal (
    const FFPACK::RNSInteger< FFPACK::rns_double > & F,
    const size_t m,
    const size_t n,
    const FFPACK::rns_double::Element alpha,
    FFPACK::rns_double::ConstElement_ptr A,
    const size_t lda,
    FFPACK::rns_double::Element_ptr B,
    const size_t ldb) [inline]

```

**11.1.3.118 fscaln()** [7/10]

```

template<>
void fscaln (
    const FFPACK::RNSIntegerMod< FFPACK::rns_double > & F,
    const size_t n,
    const typename FFPACK::RNSIntegerMod< FFPACK::rns_double >::Element alpha,
    typename FFPACK::RNSIntegerMod< FFPACK::rns_double >::Element_ptr A,
    const size_t inc) [inline]

```

**11.1.3.119 fscal()** [7/10]

```
template<>
void fscal (
    const FFPACK::RNSIntegerMod< FFPACK::rns_double > & F,
    const size_t n,
    const FFPACK::rns_double::Element alpha,
    FFPACK::rns_double::ConstElement_ptr A,
    const size_t Ainc,
    FFPACK::rns_double::Element_ptr B,
    const size_t Binc) [inline]
```

**11.1.3.120 fscaln()** [8/10]

```
template<>
void fscaln (
    const FFPACK::RNSIntegerMod< FFPACK::rns_double > & F,
    const size_t m,
    const size_t n,
    const FFPACK::rns_double::Element alpha,
    FFPACK::rns_double::Element_ptr A,
    const size_t lda) [inline]
```

**11.1.3.121 fscal()** [8/10]

```
template<>
void fscal (
    const FFPACK::RNSIntegerMod< FFPACK::rns_double > & F,
    const size_t m,
    const size_t n,
    const FFPACK::rns_double::Element alpha,
    FFPACK::rns_double::ConstElement_ptr A,
    const size_t lda,
    FFPACK::rns_double::Element_ptr B,
    const size_t ldb) [inline]
```

**11.1.3.122 fsyr2k()**

```
template<class Field >
Field::Element_ptr fsyr2k (
    const Field & F,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE trans,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc) [inline]
```

fsyr2k: Symmetric Rank 2K update

Computes the Lower or Upper triangular part of  $C = \alpha(A \times B^T + B \times A^T) + \beta C$  or  $C = \alpha(A^T \times B + B^T \times A) + \beta C$

## Parameters

|              |  |
|--------------|--|
| <i>F</i>     | field.   |
| <i>UpLo</i>  | whether to compute the upper or the lower triangular part of the symmetric matrix C  |
| <i>trans</i> | if <code>ta==FflasNoTrans</code> then compute $C = \alpha(A \times B^T + B \times A^T) + \beta C$ , else $C = \alpha(A^T \times B + B^T \times A) + \beta C$ |
| <i>n</i>     | order of matrix C  |
| <i>k</i>     | see A  |
| <i>alpha</i> | scalar   |
| <i>A</i>     | <i>A</i> is $n \times k$ (FflasNoTrans) or <i>A</i> is $k \times n$ (FflasTrans)   |
| <i>lda</i>   | leading dimension of A   |
| <i>beta</i>  | scalar   |
| <i>C</i>     | <i>C</i> is $n \times n$   |
| <i>ldc</i>   | leading dimension of C   |

## Warning

$\alpha$  must be invertible

## 11.1.3.123 fsyrk() [1/16]

```
template<class Field >
Field::Element_ptr fsyrk (
    const Field & F,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE trans,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc) [inline]
```

fsyrk: Symmetric Rank K update

Computes the Lower or Upper triangular part of  $C = \alpha A \times A^T + \beta C$  or  $C = \alpha A^T \times A + \beta C$

## Parameters

|              |  |
|--------------|--|
| <i>F</i>     | field.   |
| <i>UpLo</i>  | whether to compute the upper or the lower triangular part of the symmetric matrix C  |
| <i>trans</i> | if <code>ta==FflasNoTrans</code> then compute $C = \alpha A \times A^T + \beta C$ , else $C = \alpha A^T \times A + \beta C$ |
| <i>n</i>     | order of matrix C  |
| <i>k</i>     | see A  |
| <i>alpha</i> | scalar   |
| <i>A</i>     | <i>A</i> is $n \times k$ or <i>A</i> is $k \times n$   |
| <i>lda</i>   | leading dimension of A   |
| <i>beta</i>  | scalar   |
| <i>C</i>     | <i>C</i> is $n \times n$   |
| <i>ldc</i>   | leading dimension of C   |

**Warning**

$\alpha$  *must* be invertible

**11.1.3.124 fsyrk()** [2/16]

```
template<class Field >
Field::Element_ptr fsyrk (
    const Field & F,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE trans,
    const size_t N,
    const size_t K,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    const ParSeqHelper::Sequential seq) [inline]
```

**11.1.3.125 fsyrk()** [3/16]

```
template<class Field >
Field::Element_ptr fsyrk (
    const Field & F,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE trans,
    const size_t N,
    const size_t K,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::DefaultTag > & H) [inline]
```

**11.1.3.126 fsyrk()** [4/16]

```
template<class Field >
Field::Element_ptr fsyrk (
    const Field & F,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE trans,
    const size_t N,
    const size_t K,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::ConvertTo< ElementCategories::MachineFlo
>, ParSeqHelper::Sequential > & H) [inline]
```

**11.1.3.127 fsyrk()** [5/16]

```

template<class Field >
Field::Element_ptr fsyrk (
    const Field & F,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE trans,
    const size_t N,
    const size_t K,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::DelayedTag > & H) [inline]

```

**11.1.3.128 fsyrk()** [6/16]

```

template<class Field >
Field::Element_ptr fsyrk (
    const Field & F,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE trans,
    const size_t N,
    const size_t K,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::LazyTag > & H) [inline]

```

**11.1.3.129 fsyrk()** [7/16]

```

template<class Field , typename Mode >
Field::Element_ptr fsyrk (
    const Field & F,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE trans,
    const size_t N,
    const size_t K,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::DivideAndConquer, Mode > & H) [inline]

```

**11.1.3.130 fsyrk() [8/16]**

```

template<class Field >
Field::Element_ptr fsyrk (
    const Field & F,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE trans,
    const size_t N,
    const size_t K,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::DefaultBoundedTag > & H)
[inline]

```

**11.1.3.131 fsyrk() [9/16]**

```

Givaro::FloatDomain::Element_ptr fsyrk (
    const Givaro::FloatDomain & F,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE trans,
    const size_t N,
    const size_t K,
    const Givaro::FloatDomain::Element alpha,
    Givaro::FloatDomain::ConstElement_ptr A,
    const size_t lda,
    const Givaro::FloatDomain::Element beta,
    Givaro::FloatDomain::Element_ptr C,
    const size_t ldc,
    MMHelper< Givaro::FloatDomain, MMHelperAlgo::Classic, ModeCategories::DefaultTag
> & H) [inline]

```

**11.1.3.132 fsyrk() [10/16]**

```

Givaro::DoubleDomain::Element_ptr fsyrk (
    const Givaro::DoubleDomain & F,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE trans,
    const size_t N,
    const size_t K,
    const Givaro::DoubleDomain::Element alpha,
    Givaro::DoubleDomain::ConstElement_ptr A,
    const size_t lda,
    const Givaro::DoubleDomain::Element beta,
    Givaro::DoubleDomain::Element_ptr C,
    const size_t ldc,
    MMHelper< Givaro::DoubleDomain, MMHelperAlgo::Classic, ModeCategories::DefaultTag
> & H) [inline]

```

**11.1.3.133 fsyrk()** [11/16]

```

template<class Field >
Field::Element_ptr fsyrk (
    const Field & F,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE trans,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr D,
    const size_t incD,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    const size_t threshold = __FFLASFFPACK_FSYRK_THRESHOLD) [inline]

```

fsyrk: Symmetric Rank K update with diagonal scaling

Computes the Lower or Upper triangular part of  $C = \alpha A \times D \times A^T + \beta C$  or  $C = \alpha A^T \times D \times A + \beta C$  where D is a diagonal matrix. Matrix A is updated into  $D \times A$  (if trans = FflasTrans) or  $A \times D$  (if trans = FflasNoTrans).

**Parameters**

|              |   |
|--------------|---|
| <i>F</i>     | field.  |
| <i>UpLo</i>  | whether to compute the upper or the lower triangular part of the symmetric matrix C                             |
| <i>trans</i> | if ta==FflasNoTrans then compute $C = \alpha A \times A^T + \beta C$ , else $C = \alpha A^T \times A + \beta C$ |
| <i>n</i>     | order of matrix C   |
| <i>k</i>     | see A   |
| <i>alpha</i> | scalar  |
| <i>A</i>     | A is $n \times k$ or A is $k \times n$  |
| <i>lda</i>   | leading dimension of A  |
| <i>D</i>     | D is $k \times k$ diagonal matrix, stored as a vector of k coefficients   |
| <i>lda</i>   | leading dimension of A  |
| <i>beta</i>  | scalar  |
| <i>C</i>     | C is $n \times n$   |
| <i>ldc</i>   | leading dimension of C  |

**Warning**

$\alpha$  must be invertible

**11.1.3.134 fsyrk()** [12/16]

```

template<class Field >
Field::Element_ptr fsyrk (
    const Field & F,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE trans,
    const size_t N,

```

```

const size_t K,
const typename Field::Element alpha,
typename Field::Element_ptr A,
const size_t lda,
typename Field::ConstElement_ptr D,
const size_t incD,
const typename Field::Element beta,
typename Field::Element_ptr C,
const size_t ldc,
const ParSeqHelper::Sequential seq,
const size_t threshold) [inline]

```

#### 11.1.3.135 fsyrk() [13/16]

```

template<class Field , class Cut , class Param >
Field::Element_ptr fsyrk (
    const Field & F,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE trans,
    const size_t N,
    const size_t K,
    const typename Field::Element alpha,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr D,
    const size_t incD,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    const ParSeqHelper::Parallel< Cut, Param > par,
    const size_t threshold) [inline]

```

#### 11.1.3.136 fsyrk() [14/16]

```

template<class Field >
Field::Element_ptr fsyrk (
    const Field & F,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE trans,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr D,
    const size_t incD,
    const std::vector< bool > & twoBlock,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    const size_t threshold = __FFLASFFPACK_FSYRK_THRESHOLD) [inline]

```

fsyrk: Symmetric Rank K update with diagonal scaling

Computes the Lower or Upper triangular part of  $C = \alpha A \times \text{Delta} D \times A^T + \beta C$  or  $C = \alpha A^T \times \text{Delta} D \times A + \beta C$  where D is a diagonal matrix and Delta is a block diagonal with either 1 on the diagonal or 2x2 swap blocks Matrix A is updated into  $D \times A$  (if trans = FflaTrans) or  $A \times D$  (if trans = FflaNoTrans).



## Parameters

|                  |  |
|------------------|--|
| <i>F</i>         | field.   |
| <i>UpLo</i>      | whether to compute the upper or the lower triangular part of the symmetric matrix C  |
| <i>trans</i>     | if <code>ta==FflasNoTrans</code> then compute $C = \alpha A \Delta D \times A^T + \beta C$ , else $C = \alpha A^T \Delta D \times A + \beta C$ |
| <i>n</i>         | see B  |
| <i>k</i>         | see A  |
| <i>alpha</i>     | scalar   |
| <i>A</i>         | <i>A</i> is $n \times k$ or <i>A</i> is $k \times n$   |
| <i>lda</i>       | leading dimension of A   |
| <i>D</i>         | <i>D</i> is $k \times k$ diagonal matrix, stored as a vector of k coefficients   |
| <i>twoBlocks</i> | a vector boolean indicating the beginning of each 2x2 blocs in Delta   |
| <i>lda</i>       | leading dimension of A   |
| <i>beta</i>      | scalar   |
| <i>C</i>         | <i>C</i> is $n \times n$   |
| <i>ldc</i>       | leading dimension of C   |

## Warning

$\alpha$  must be invertible

## 11.1.3.137 computeS1S2()

```
template<class Field , class FieldTrait >
void computeS1S2 (
    const Field & F,
    const FFLAS_TRANSPOSE trans,
    const size_t N,
    const size_t K,
    const typename Field::Element x,
    const typename Field::Element y,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr S,
    const size_t lds,
    typename Field::Element_ptr T,
    const size_t ldt,
    MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > & WH) [inline]
```

## 11.1.3.138 fsyrk() [15/16]

```
template<class Field >
Field::Element_ptr fsyrk (
    const Field & F,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE trans,
    const size_t N,
    const size_t K,
    const typename Field::Element alpha,
```

```

        typename Field::ConstElement_ptr A,
        const size_t lda,
        const typename Field::Element beta,
        typename Field::Element_ptr C,
        const size_t ldc,
        MMHelper< Field, MMHelperAlgo::Winograd, ModeCategories::DelayedTag, ParSeqHelper::Sequential
> & H) [inline]

```

#### 11.1.3.139 fsyrk() [16/16]

```

template<class Field , class Mode >
Field::Element_ptr fsyrk (
    const Field & F,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE trans,
    const size_t N,
    const size_t K,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Winograd, Mode > & H) [inline]

```

#### 11.1.3.140 fsyrk\_strassen() [1/2]

```

template<class Field , class FieldTrait >
Field::Element_ptr fsyrk_strassen (
    const Field & F,
    const FFLAS_UPLO uplo,
    const FFLAS_TRANSPOSE trans,
    const size_t N,
    const size_t K,
    const typename Field::Element y1,
    const typename Field::Element y2,
    const typename Field::Element alpha,
    typename Field::Element_ptr A,
    const size_t lda,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > & WH) [inline]

```

#### 11.1.3.141 ftrmm() [1/3]

```

template<class Field >
void ftrmm (
    const Field & F,
    const FFLAS_SIDE Side,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE TransA,
    const FFLAS_DIAG Diag,

```

```

const size_t M,
const size_t N,
const typename Field::Element alpha,
typename Field::ConstElement_ptr A,
const size_t lda,
typename Field::Element_ptr B,
const size_t ldb) [inline]

```

ftmmm: **TR**angular **M**atrix **M**ultiply.

Computes  $B \leftarrow \alpha \text{op}(A)B$  or  $B \leftarrow \alpha B \text{op}(A)$ .

#### Parameters

|               |  |
|---------------|--|
| <i>F</i>      | field  |
| <i>Side</i>   | if Side==FflasLeft then $B \leftarrow \alpha \text{op}(A)B$ is computed.                   |
| <i>Uplo</i>   | if Uplo==FflasUpper then A is upper triangular   |
| <i>TransA</i> | if TransA==FflasTrans then $\text{op}(A) = A^t$ .  |
| <i>Diag</i>   | if Diag==FflasUnit then A is implicitly unit.  |
| <i>M</i>      | rows of B  |
| <i>N</i>      | cols of B  |
| <i>alpha</i>  | scalar   |
| <i>A</i>      | triangular matrix. If Side==FflasLeft then A is $N \times N$ , otherwise A is $M \times M$ |
| <i>lda</i>    | leading dim of A   |
| <i>B</i>      | matrix of size MxN   |
| <i>ldb</i>    | leading dim of B   |

#### 11.1.3.142 ftmmm() [2/3]

```

template<class Field >
void ftmmm (
    const Field & F,
    const FFLAS_SIDE Side,
    const FFLAS_UPLO Uplo,
    const FFLAS_TRANSPOSE TransA,
    const FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc) [inline]

```

ftmmm: **TR**angular **M**atrix **M**ultiply with 3 operands Computes  $C \leftarrow \alpha \text{op}(A)B + \beta C$  or  $C \leftarrow \alpha B \text{op}(A) + \beta C$ .

#### Parameters

|             |  |
|-------------|--|
| <i>F</i>    | field  |
| <i>Side</i> | if Side==FflasLeft then $B \leftarrow \alpha \text{op}(A)B$ is computed. |

## Parameters

|               |   |
|---------------|---|
| <i>Uplo</i>   | if <code>Uplo==FflasUpper</code> then A is upper triangular   |
| <i>TransA</i> | if <code>TransA==FflasTrans</code> then $\text{op}(A) = A^t$ .  |
| <i>Diag</i>   | if <code>Diag==FflasUnit</code> then A is implicitly unit.  |
| <i>M</i>      | rows of B   |
| <i>N</i>      | cols of B   |
| <i>alpha</i>  | scalar  |
| <i>A</i>      | triangular matrix. If <code>Side==FflasLeft</code> then A is $N \times N$ , otherwise A is $M \times M$ |
| <i>lda</i>    | leading dim of A  |
| <i>B</i>      | matrix of size MxN  |
| <i>ldb</i>    | leading dim of B  |
| <i>beta</i>   | scalar  |
| <i>C</i>      | matrix of size MxN  |
| <i>ldc</i>    | leading dim of C  |

11.1.3.143 `ftrsm()` [1/9]

```
template<class Field >
void ftrsm (
    const Field & F,
    const FFLAS_SIDE Side,
    const FFLAS_UPLO Uplo,
    const FFLAS_TRANSPOSE TransA,
    const FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr B,
    const size_t ldb) [inline]
```

11.1.3.144 `ftrsm()` [2/9]

```
template<class Field >
void ftrsm (
    const Field & F,
    const FFLAS_SIDE Side,
    const FFLAS_UPLO Uplo,
    const FFLAS_TRANSPOSE TransA,
    const FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr B,
    const size_t ldb,
    const ParSeqHelper::Sequential & PSH) [inline]
```

**11.1.3.145 ftrsm()** [3/9]

```
template<class Field , class Cut , class Param >
void ftrsm (
    const Field & F,
    const FFLAS_SIDE Side,
    const FFLAS_UPLO Uplo,
    const FFLAS_TRANSPOSE TransA,
    const FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr B,
    const size_t ldb,
    const ParSeqHelper::Parallel< Cut, Param > & PSH) [inline]
```

**11.1.3.146 ftrsm()** [4/9]

```
template<class Field , class ParSeqTrait = ParSeqHelper::Sequential>
void ftrsm (
    const Field & F,
    const FFLAS_SIDE Side,
    const FFLAS_UPLO Uplo,
    const FFLAS_TRANSPOSE TransA,
    const FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr B,
    const size_t ldb,
    TRSMHelper< StructureHelper::Recursive, ParSeqTrait > & H) [inline]
```

**11.1.3.147 ftrsm()** [5/9]

```
void ftrsm (
    const Givaro::Modular< Givaro::Integer > & F,
    const FFLAS_SIDE Side,
    const FFLAS_UPLO Uplo,
    const FFLAS_TRANSPOSE TransA,
    const FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    const Givaro::Integer alpha,
    const Givaro::Integer * A,
    const size_t lda,
    Givaro::Integer * B,
    const size_t ldb) [inline]
```

### 11.1.3.148 cblas\_impstrsm()

```
void cblas_impstrsm (
    const enum FFLAS_ORDER Order,
    const enum FFLAS_SIDE Side,
    const enum FFLAS_UPLO Uplo,
    const enum FFLAS_TRANSPOSE TransA,
    const enum FFLAS_DIAG Diag,
    const int M,
    const int N,
    const FFPACK::rns_double_elt alpha,
    FFPACK::rns_double_elt_cstptr A,
    const int lda,
    FFPACK::rns_double_elt_ptr B,
    const int ldb) [inline]
```

### 11.1.3.149 ftrsv() [1/2]

```
template<class Field >
void ftrsv (
    const Field & F,
    const FFLAS_UPLO Uplo,
    const FFLAS_TRANSPOSE TransA,
    const FFLAS_DIAG Diag,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::Element_ptr X,
    int incX) [inline]
```

ftrsv: TRIangular System solve with Vector Computes  $X \leftarrow \text{op}(A^{-1})X$

#### Parameters

|               |  |
|---------------|--|
| <i>F</i>      | field  |
| <i>X</i>      | vector of size N on a field F                      |
| <i>incX</i>   | stride of X  |
| <i>A</i>      | a matrix of leading dimension lda and size N       |
| <i>lda</i>    | leading dimension of A                             |
| <i>N</i>      | number of rows or columns of A according to TransA |
| <i>TransA</i> | if TransA==FflasTrans then $\text{op}(A) = A^t$ .  |
| <i>Diag</i>   | if Diag==FflasUnit then A is unit.                 |
| <i>Uplo</i>   | if Uplo==FflasUpper then A is upper triangular     |

### 11.1.3.150 igemm\_()

```
void igemm_ (
    const enum FFLAS_ORDER Order,
    const enum FFLAS_TRANSPOSE TransA,
    const enum FFLAS_TRANSPOSE TransB,
    const size_t M,
```

```

    const size_t N,
    const size_t K,
    const int64_t alpha,
    const int64_t * A,
    const size_t lda,
    const int64_t * B,
    const size_t ldb,
    const int64_t beta,
    int64_t * C,
    const size_t ldc) [inline]

```

### 11.1.3.151 finit() [5/8]

```

template<class Field , class OtherElement_ptr >
void finit (
    const Field & F,
    const size_t n,
    const OtherElement_ptr Y,
    const size_t incY,
    typename Field::Element_ptr X,
    const size_t incX)

```

$\text{finit } x \leftarrow y \bmod F.$

#### Parameters

|        |                        |
|--------|------------------------|
| $F$    | field                  |
| $n$    | size of the vectors    |
| $Y$    | vector of OtherElement |
| $incY$ | stride of Y            |
| $X$    | vector in F            |
| $incX$ | stride of X            |

**Bug** use cblas\_(d)scal when possible

### 11.1.3.152 fconvert() [1/3]

```

template<class Field , class OtherElement_ptr >
void fconvert (
    const Field & F,
    const size_t n,
    OtherElement_ptr X,
    const size_t incX,
    typename Field::ConstElement_ptr Y,
    const size_t incY)

```

$\text{fconvert } x \leftarrow y \bmod F.$

#### Parameters

|     |                     |
|-----|---------------------|
| $F$ | field               |
| $n$ | size of the vectors |

|        |                                     |
|--------|-------------------------------------|
| $Y$    | vector of $F$                       |
| $incY$ | stride of $Y$                       |
| $X$    | vector in <code>OtherElement</code> |
| $incX$ | stride of $X$                       |

**Bug** use `cblas_(d)scal` when possible

#### 11.1.3.153 `fnegin()` [1/4]

```
template<class Field >
void fnegin (
    const Field & F,
    const size_t n,
    typename Field::Element_ptr X,
    const size_t incX)
```

`fnegin`  $x \leftarrow -x$ .

##### Parameters

|        |                     |
|--------|---------------------|
| $F$    | field               |
| $n$    | size of the vectors |
| $X$    | vector in $F$       |
| $incX$ | stride of $X$       |

**Bug** use `cblas_(d)scal` when possible

#### 11.1.3.154 `fneg()` [1/4]

```
template<class Field >
void fneg (
    const Field & F,
    const size_t n,
    typename Field::ConstElement_ptr Y,
    const size_t incY,
    typename Field::Element_ptr X,
    const size_t incX)
```

`fneg`  $x \leftarrow -y$ .

##### Parameters

|        |                     |
|--------|---------------------|
| $F$    | field               |
| $n$    | size of the vectors |
| $X$    | vector in $F$       |
| $incX$ | stride of $X$       |
| $Y$    | vector in $F$       |
| $incY$ | stride of $Y$       |

**Bug** use `cblas_(d)scal` when possible



**11.1.3.155 fzero()** [1/5]

```
template<class Field >
void fzero (
    const Field & F,
    const size_t n,
    typename Field::Element_ptr X,
    const size_t incX)
```

$\text{fzero} : A \leftarrow 0.$

**Parameters**

|               |                            |
|---------------|----------------------------|
| $F$           | field                      |
| $n$           | number of elements to zero |
| $X$           | vector in $F$              |
| $\text{incX}$ | stride of $X$              |

**11.1.3.156 frand()** [1/2]

```
template<class Field , class RandIter >
void frand (
    const Field & F,
    RandIter & G,
    const size_t n,
    typename Field::Element_ptr X,
    const size_t incX)
```

$\text{frand} : A \leftarrow \text{random}.$

**Parameters**

|               |                                 |
|---------------|---------------------------------|
| $F$           | field                           |
| $G$           | randomiterator                  |
| $n$           | number of elements to randomize |
| $X$           | vector in $F$                   |
| $\text{incX}$ | stride of $X$                   |

**11.1.3.157 fiszero()** [1/4]

```
template<class Field >
bool fiszero (
    const Field & F,
    const size_t n,
    typename Field::ConstElement_ptr X,
    const size_t incX)
```

$\text{fiszero} : \text{test } X = 0.$

## Parameters

|        |                  |
|--------|------------------|
| $F$    | field            |
| $n$    | vector dimension |
| $X$    | vector in $F$    |
| $incX$ | increment of $X$ |

**11.1.3.158 fequal()** [1/4]

```
template<class Field >
bool fequal (
    const Field & F,
    const size_t n,
    typename Field::ConstElement_ptr X,
    const size_t incX,
    typename Field::ConstElement_ptr Y,
    const size_t incY)
```

fequal : test  $X = Y$ .

## Parameters

|        |                  |
|--------|------------------|
| $F$    | field            |
| $n$    | vector dimension |
| $X$    | vector in $F$    |
| $incX$ | increment of $X$ |
| $Y$    | vector in $F$    |
| $incY$ | increment of $Y$ |

**11.1.3.159 faxpby()** [1/2]

```
template<class Field >
void faxpby (
    const Field & F,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr X,
    const size_t incX,
    const typename Field::Element beta,
    typename Field::Element_ptr Y,
    const size_t incY)
```

faxpby :  $y \leftarrow \alpha \cdot x + \beta \cdot y$ .

## Parameters

|    |          |                     |
|----|----------|---------------------|
|    | $F$      | field               |
|    | $N$      | size of the vectors |
|    | $\alpha$ | scalar              |
| in | $X$      | vector in $F$       |
|    | $incX$   | stride of $X$       |

|                |             |             |
|----------------|-------------|-------------|
|                | <i>beta</i> | scalar      |
| <i>in, out</i> | <i>Y</i>    | vector in F |
|                | <i>incY</i> | stride of Y |

**Note**

this is a catlas function

**11.1.3.160 fdot()** [9/11]

```
template<typename Field , class Cut , class Param >
Field::Element fdot (
    const Field & F,
    const size_t N,
    typename Field::ConstElement_ptr X,
    const size_t incX,
    typename Field::ConstElement_ptr Y,
    const size_t incY,
    const ParSeqHelper::Parallel< Cut, Param > par) [inline]
```

**11.1.3.161 fswap()** [1/2]

```
template<class Field >
void fswap (
    const Field & F,
    const size_t N,
    typename Field::Element_ptr X,
    const size_t incX,
    typename Field::Element_ptr Y,
    const size_t incY)
```

fswap:  $X \leftrightarrow Y$ .

**Bug** use `cblas_dswap` when double

**Parameters**

|             |                     |
|-------------|---------------------|
| <i>F</i>    | field               |
| <i>N</i>    | size of the vectors |
| <i>X</i>    | vector in F         |
| <i>incX</i> | stride of X         |
| <i>Y</i>    | vector in F         |
| <i>incY</i> | stride of Y         |

**11.1.3.162 fzero()** [2/5]

```
template<class Field >
void fzero (
    const Field & F,
    const size_t m,
    const size_t n,
    typename Field::Element_ptr A,
    const size_t lda)
```

fzero :  $A \leftarrow 0$ .

## Parameters

|       |                        |
|-------|------------------------|
| $F$   | field                  |
| $m$   | number of rows to zero |
| $n$   | number of cols to zero |
| $A$   | matrix in $F$          |
| $lda$ | stride of $A$          |

## Warning

may be buggy if Element is larger than int

**11.1.3.163 fzero()** [3/5]

```
template<class Field >
void fzero (
    const Field & F,
    const FFLAS_UPLO shape,
    const FFLAS_DIAG diag,
    const size_t n,
    typename Field::Element_ptr A,
    const size_t lda)
```

$fzero : A \leftarrow 0$  for a triangular matrix.

## Parameters

|         |                                |
|---------|--------------------------------|
| $F$     | field                          |
| $shape$ | shape of the triangular matrix |
| $m$     | number of rows to zero         |
| $n$     | number of cols to zero         |
| $A$     | matrix in $F$                  |
| $lda$   | stride of $A$                  |

## Warning

may be buggy if Element is larger than int

**11.1.3.164 frand()** [2/2]

```
template<class Field , class RandIter >
void frand (
    const Field & F,
    RandIter & G,
    const size_t m,
    const size_t n,
    typename Field::Element_ptr A,
    const size_t lda)
```

$frand : A \leftarrow random.$

## Parameters

|       |                             |
|-------|-----------------------------|
| $F$   | field                       |
| $G$   | randomiterator              |
| $m$   | number of rows to randomize |
| $n$   | number of cols to randomize |
| $A$   | matrix in $F$               |
| $lda$ | stride of $A$               |

**11.1.3.165 fequal()** [2/4]

```
template<class Field >
bool fequal (
    const Field & F,
    const size_t m,
    const size_t n,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb)
```

fequal : test  $A = B$ .

## Parameters

|       |                            |
|-------|----------------------------|
| $F$   | field                      |
| $m$   | row dimension              |
| $n$   | column dimension           |
| $A$   | $m \times n$ matrix in $F$ |
| $lda$ | leading dimension of $A$   |
| $B$   | $m \times n$ matrix in $F$ |
| $ldb$ | leading dimension of $B$   |

**11.1.3.166 fiszero()** [2/4]

```
template<class Field >
bool fiszero (
    const Field & F,
    const size_t m,
    const size_t n,
    typename Field::ConstElement_ptr A,
    const size_t lda)
```

fiszero : test  $A = 0$ .

## Parameters

|       |                            |
|-------|----------------------------|
| $F$   | field                      |
| $m$   | row dimension              |
| $n$   | column dimension           |
| $A$   | $m \times n$ matrix in $F$ |
| $lda$ | leading dimension of $A$   |

**11.1.3.167 fidentity()** [1/4]

```
template<class Field >
void fidentity (
    const Field & F,
    const size_t m,
    const size_t n,
    typename Field::Element_ptr A,
    const size_t lda,
    const typename Field::Element & d)
```

creates a diagonal matrix

**11.1.3.168 fidentity()** [2/4]

```
template<class Field >
void fidentity (
    const Field & F,
    const size_t m,
    const size_t n,
    typename Field::Element_ptr A,
    const size_t lda)
```

creates a diagonal matrix

**11.1.3.169 finit()** [6/8]

```
template<class Field , class OtherElement_ptr >
void finit (
    const Field & F,
    const size_t m,
    const size_t n,
    typename Field::Element_ptr A,
    const size_t lda)
```

finit Initializes A in F\$.

**Parameters**

|       |                |
|-------|----------------|
| $F$   | field          |
| $m$   | number of rows |
| $n$   | number of cols |
| $A$   | matrix in F    |
| $lda$ | stride of A    |

**11.1.3.170 fconvert()** [2/3]

```
template<class Field , class OtherElement_ptr >
void fconvert (
    const Field & F,
    const size_t m,
    const size_t n,
    OtherElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb)
```

fconvert  $A \leftarrow B \bmod F$ .

## Parameters

|       |                        |
|-------|------------------------|
| $F$   | field                  |
| $m$   | number of rows         |
| $n$   | number of cols         |
| $A$   | matrix in OtherElement |
| $lda$ | stride of A            |
| $B$   | matrix in F            |
| $ldb$ | stride of B            |

**Todo** check if  $n == lda$

## 11.1.3.171 fnegin() [2/4]

```
template<class Field >
void fnegin (
    const Field & F,
    const size_t m,
    const size_t n,
    typename Field::Element_ptr A,
    const size_t lda)
```

$\text{fnegin } A \leftarrow -A.$

## Parameters

|       |                |
|-------|----------------|
| $F$   | field          |
| $m$   | number of rows |
| $n$   | number of cols |
| $A$   | matrix in F    |
| $lda$ | stride of A    |

**Todo** check if  $n == lda$

## 11.1.3.172 fneg() [2/4]

```
template<class Field >
void fneg (
    const Field & F,
    const size_t m,
    const size_t n,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    typename Field::Element_ptr A,
    const size_t lda)
```

$\text{fneg } A \leftarrow -B.$



## Parameters

|       |                |
|-------|----------------|
| $F$   | field          |
| $m$   | number of rows |
| $n$   | number of cols |
| $A$   | matrix in $F$  |
| $lda$ | stride of $A$  |

**Todo** check if  $n == lda$

**11.1.3.173 faxpby()** [2/2]

```
template<class Field >
void faxpby (
    const Field & F,
    const size_t m,
    const size_t n,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr X,
    const size_t ldx,
    const typename Field::Element beta,
    typename Field::Element_ptr Y,
    const size_t ldy)
```

$\text{faxpby} : y \leftarrow \alpha \cdot x + \beta \cdot y.$

## Parameters

|         |          |                          |
|---------|----------|--------------------------|
|         | $F$      | field                    |
|         | $m$      | row dimension            |
|         | $n$      | column dimension         |
|         | $\alpha$ | scalar                   |
| in      | $X$      | vector in $F$            |
|         | $ldx$    | leading dimension of $X$ |
|         | $\beta$  | scalar                   |
| in, out | $Y$      | vector in $F$            |
|         | $ldy$    | leading dimension of $Y$ |

## Note

this is a catlas function

**11.1.3.174 fmove()** [1/2]

```
template<class Field >
void fmove (
    const Field & F,
    const size_t m,
    const size_t n,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr B,
    const size_t ldb)
```

$\text{fmove} : A \leftarrow B \text{ and } B \leftarrow 0.$

## Parameters

|       |                        |
|-------|------------------------|
| $F$   | field                  |
| $m$   | number of rows to copy |
| $n$   | number of cols to copy |
| $A$   | matrix in $F$          |
| $lda$ | stride of $A$          |
| $B$   | matrix in $F$          |
| $ldb$ | stride of $B$          |

**11.1.3.175 bitsize()**

```
template<class Field >
size_t bitsize (
    const Field & F,
    size_t M,
    size_t N,
    const typename Field::ConstElement_ptr A,
    size_t lda) [inline]
```

bitsize: Computes the largest bitsize of the matrix' coefficients.

If the matrix is over a modular prime field, it returns the bitsize of the largest element (in a bsolute value)

## Parameters

|        |   |
|--------|---|
| $F$    | field   |
| $M$    | rows  |
| $N$    | cols  |
| $incX$ | stride of $X$   |
| $A$    | a matrix of leading dimension $lda$ and size $M \times N$ |
| $lda$  | leading dimension of $A$                                  |

**11.1.3.176 bitsize< Givaro::ZRing< Givaro::Integer > >()**

```
template<>
size_t bitsize< Givaro::ZRing< Givaro::Integer > > (
    const Givaro::ZRing< Givaro::Integer > & F,
    size_t M,
    size_t N,
    const Givaro::Integer * A,
    size_t lda) [inline]
```

**11.1.3.177 ftrmv()**

```
template<class Field >
void ftrmv (
    const Field & F,
    const FFLAS_UPLO Uplo,
    const FFLAS_TRANSPOSE TransA,
    const FFLAS_DIAG Diag,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::Element_ptr X,
    int incX)
```

ftrsm: TRiangular Matrix Vector prodcut Computes  $X \leftarrow \text{op}(A)X$

**Parameters**

|               |   |
|---------------|---|
| <i>F</i>      | field   |
| <i>X</i>      | vector of size N on a field F                     |
| <i>incX</i>   | stride of X                                       |
| <i>A</i>      | a matrix of leading dimension lda and size N      |
| <i>lda</i>    | leading dimension of A                            |
| <i>N</i>      | number of rows and columns of A                   |
| <i>TransA</i> | if TransA==FflasTrans then $\text{op}(A) = A^T$ . |
| <i>Diag</i>   | if Diag==FflasUnit then A is unit diagonal.       |
| <i>Uplo</i>   | if Uplo==FflasUpper then A is upper triangular    |

**11.1.3.178 ftrsm() [6/9]**

```
template<class Field >
void ftrsm (
    const Field & F,
    const FFLAS_SIDE Side,
    const FFLAS_UPLO Uplo,
    const FFLAS_TRANSPOSE TransA,
    const FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::Element_ptr B,
    const size_t ldb)
```

ftrsm: TRiangular System solve with Matrix.

Computes  $B \leftarrow \alpha \text{op}(A^{-1})B$  or  $B \leftarrow \alpha B \text{op}(A^{-1})$ .

**Parameters**

|             |   |
|-------------|---|
| <i>F</i>    | field   |
| <i>Side</i> | if Side==FflasLeft then $B \leftarrow \alpha \text{op}(A^{-1})B$ is computed. |

## Parameters

|               |  |
|---------------|--|
| <i>Uplo</i>   | if <code>Uplo==FflasUpper</code> then A is upper triangular  |
| <i>TransA</i> | if <code>TransA==FflasTrans</code> then $\text{op}(A) = A^t$ .   |
| <i>Diag</i>   | if <code>Diag==FflasUnit</code> then A is unit.  |
| <i>M</i>      | rows of B  |
| <i>N</i>      | cols of B  |
| <i>alpha</i>  | scalar   |
| <i>A</i>      | triangular invertible matrix. If <code>Side==FflasLeft</code> then A is $N \times N$ , otherwise A is $M \times M$ |
| <i>lda</i>    | leading dim of A   |
| <i>B</i>      | matrix of size MxN   |
| <i>ldb</i>    | leading dim of B   |

**Bug**  $\alpha$  must be non zero.

## 11.1.3.179 fsyrk\_strassen() [2/2]

```
template<class Field , typename FieldTrait >
Field::Element_ptr fsyrk_strassen (
    const Field & F,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE trans,
    const size_t N,
    const size_t K,
    const typename Field::Element y1,
    const typename Field::Element y2,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > & H) [inline]
```

## 11.1.3.180 pfgemm() [1/7]

```
template<typename Field >
Field::Element_ptr pfgemm (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    size_t numthreads = 0)
```

**11.1.3.181 pfgemm\_1D\_rec()**

```

template<class Field >
Field::Element * pfgemm_1D_rec (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    const typename Field::Element_ptr A,
    const size_t lda,
    const typename Field::Element_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element * C,
    const size_t ldc,
    size_t seuil)

```

**11.1.3.182 pfgemm\_2D\_rec()**

```

template<class Field >
Field::Element * pfgemm_2D_rec (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    const typename Field::Element_ptr A,
    const size_t lda,
    const typename Field::Element_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element * C,
    const size_t ldc,
    size_t seuil)

```

**11.1.3.183 pfgemm\_3D\_rec()**

```

template<class Field >
Field::Element * pfgemm_3D_rec (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    const typename Field::Element_ptr A,
    const size_t lda,
    const typename Field::Element_ptr B,

```

```

    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    size_t seuil,
    size_t * x)

```

#### 11.1.3.184 pfgemm\_3D\_rec2()

```

template<class Field >
Field::Element_ptr pfgemm_3D_rec2 (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    const typename Field::Element_ptr A,
    const size_t lda,
    const typename Field::Element_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    size_t seuil,
    size_t * x)

```

#### 11.1.3.185 fgemm() [19/23]

```

template<class Field , class ModeTrait , class Strat , class Param >
std::enable_if<!std::is_same< ModeTrait, ModeCategories::ConvertTo< ElementCategories::RNSElementTag
> >::value, typename Field::Element_ptr >::type fgemm (
    const Field & F,
    const FFLAS::FFLAS_TRANSPOSE ta,
    const FFLAS::FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Winograd, ModeTrait, ParSeqHelper::Parallel< Strat,
Param > > & H) [inline]

```

#### 11.1.3.186 ftrsm() [7/9]

```

template<class Field , class Cut , class Param >
Field::Element_ptr ftrsm (

```

```

    const Field & F,
    const FFLAS::FFLAS_SIDE Side,
    const FFLAS::FFLAS_UPLO UpLo,
    const FFLAS::FFLAS_TRANSPOSE TA,
    const FFLAS::FFLAS_DIAG Diag,
    const size_t m,
    const size_t n,
    const typename Field::Element alpha,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr B,
    const size_t ldb,
    TRSMHelper< StructureHelper::Iterative, ParSeqHelper::Parallel< Cut, Param > > &
H) [inline]

```

#### 11.1.3.187 ftrsm() [8/9]

```

template<class Field , class Cut , class Param >
Field::Element_ptr ftrsm (
    const Field & F,
    const FFLAS::FFLAS_SIDE Side,
    const FFLAS::FFLAS_UPLO UpLo,
    const FFLAS::FFLAS_TRANSPOSE TA,
    const FFLAS::FFLAS_DIAG Diag,
    const size_t m,
    const size_t n,
    const typename Field::Element alpha,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr B,
    const size_t ldb,
    TRSMHelper< StructureHelper::Hybrid, ParSeqHelper::Parallel< Cut, Param > > & H)
[inline]

```

#### 11.1.3.188 fspmv() [1/2]

```

template<class Field , class SM >
void fspmv (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    const typename Field::Element & beta,
    typename Field::Element_ptr y) [inline]

```

#### 11.1.3.189 fspmm()

```

template<class Field , class SM >
void fspmm (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    const typename Field::Element & beta,
    typename Field::Element_ptr y,
    int ldy) [inline]

```

**11.1.3.190 sparse\_init()** [1/16]

```
template<class Field , class IndexT >
void sparse_init (
    const Field & F,
    Sparse< Field, SparseMatrix_t::COO > & A,
    const IndexT * row,
    const IndexT * col,
    typename Field::ConstElement_ptr dat,
    uint64_t rowdim,
    uint64_t coldim,
    uint64_t nnz) [inline]
```

**11.1.3.191 sparse\_init()** [2/16]

```
template<class Field , class IndexT >
void sparse_init (
    const Field & F,
    Sparse< Field, SparseMatrix_t::COO_ZO > & A,
    const IndexT * row,
    const IndexT * col,
    typename Field::ConstElement_ptr dat,
    uint64_t rowdim,
    uint64_t coldim,
    uint64_t nnz) [inline]
```

**11.1.3.192 sparse\_delete()** [1/12]

```
template<class Field >
void sparse_delete (
    const Sparse< Field, SparseMatrix_t::COO > & A) [inline]
```

**11.1.3.193 sparse\_delete()** [2/12]

```
template<class Field >
void sparse_delete (
    const Sparse< Field, SparseMatrix_t::COO_ZO > & A) [inline]
```

**11.1.3.194 sparse\_init()** [3/16]

```
template<class Field , class IndexT >
void sparse_init (
    const Field & F,
    Sparse< Field, SparseMatrix_t::CSR > & A,
    const IndexT * row,
    const IndexT * col,
    typename Field::ConstElement_ptr dat,
    uint64_t rowdim,
    uint64_t coldim,
    uint64_t nnz) [inline]
```



**11.1.3.195 sparse\_init()** [4/16]

```
template<class Field , class IndexT >
void sparse_init (
    const Field & F,
    Sparse< Field, SparseMatrix_t::CSR_ZO > & A,
    const IndexT * row,
    const IndexT * col,
    typename Field::ConstElement_ptr dat,
    uint64_t rowdim,
    uint64_t coldim,
    uint64_t nnz) [inline]
```

**11.1.3.196 sparse\_delete()** [3/12]

```
template<class Field >
void sparse_delete (
    const Sparse< Field, SparseMatrix_t::CSR > & A) [inline]
```

**11.1.3.197 sparse\_delete()** [4/12]

```
template<class Field >
void sparse_delete (
    const Sparse< Field, SparseMatrix_t::CSR_ZO > & A) [inline]
```

**11.1.3.198 sparse\_print()** [1/3]

```
template<class Field >
std::ostream & sparse_print (
    std::ostream & os,
    const Sparse< Field, SparseMatrix_t::CSR > & A) [inline]
```

**11.1.3.199 sparse\_init()** [5/16]

```
template<class IndexT >
void sparse_init (
    const Givaro::Modular< Givaro::Integer > & F,
    Sparse< Givaro::Modular< Givaro::Integer >, SparseMatrix_t::CSR > & A,
    const IndexT * row,
    const IndexT * col,
    Givaro::Integer * dat,
    uint64_t rowdim,
    uint64_t coldim,
    uint64_t nnz) [inline]
```

**11.1.3.200 sparse\_init() [6/16]**

```
template<class IndexT >
void sparse_init (
    const Givaro::ZRing< Givaro::Integer > & F,
    Sparse< Givaro::ZRing< Givaro::Integer >, SparseMatrix_t::CSR_ZO > & A,
    const IndexT * row,
    const IndexT * col,
    Givaro::Integer * dat,
    uint64_t rowdim,
    uint64_t coldim,
    uint64_t nnz) [inline]
```

**11.1.3.201 sparse\_init() [7/16]**

```
template<class IndexT , size_t RECINT_SIZE>
void sparse_init (
    const Givaro::ZRing< RecInt::rmint< RECINT_SIZE > > & F,
    Sparse< Givaro::ZRing< RecInt::rmint< RECINT_SIZE > >, SparseMatrix_t::CSR_ZO >
& A,
    const IndexT * row,
    const IndexT * col,
    typename Givaro::ZRing< RecInt::rmint< RECINT_SIZE > >::Element_ptr dat,
    uint64_t rowdim,
    uint64_t coldim,
    uint64_t nnz) [inline]
```

**11.1.3.202 sparse\_init() [8/16]**

```
template<class IndexT , size_t RECINT_SIZE>
void sparse_init (
    const Givaro::ZRing< RecInt::rmint< RECINT_SIZE > > & F,
    Sparse< Givaro::ZRing< RecInt::rmint< RECINT_SIZE > >, SparseMatrix_t::CSR > &
A,
    const IndexT * row,
    const IndexT * col,
    typename Givaro::ZRing< RecInt::rmint< RECINT_SIZE > >::Element_ptr dat,
    uint64_t rowdim,
    uint64_t coldim,
    uint64_t nnz) [inline]
```

**11.1.3.203 sparse\_delete() [5/12]**

```
template<class Field >
void sparse_delete (
    const Sparse< Field, SparseMatrix_t::CSR_HYB > & A) [inline]
```

**11.1.3.204 sparse\_init()** [9/16]

```
template<class Field , class IndexT >
void sparse_init (
    const Field & F,
    Sparse< Field, SparseMatrix_t::CSR_HYB > & A,
    const IndexT * row,
    const IndexT * col,
    typename Field::ConstElement_ptr dat,
    uint64_t rowdim,
    uint64_t coldim,
    uint64_t nnz) [inline]
```

**11.1.3.205 sparse\_init()** [10/16]

```
template<class Field , class IndexT >
void sparse_init (
    const Field & F,
    Sparse< Field, SparseMatrix_t::ELL > & A,
    const IndexT * row,
    const IndexT * col,
    typename Field::ConstElement_ptr dat,
    uint64_t rowdim,
    uint64_t coldim,
    uint64_t nnz) [inline]
```

**11.1.3.206 sparse\_init()** [11/16]

```
template<class Field , class IndexT >
void sparse_init (
    const Field & F,
    Sparse< Field, SparseMatrix_t::ELL_ZO > & A,
    const IndexT * row,
    const IndexT * col,
    typename Field::ConstElement_ptr dat,
    uint64_t rowdim,
    uint64_t coldim,
    uint64_t nnz) [inline]
```

**11.1.3.207 sparse\_delete()** [6/12]

```
template<class Field >
void sparse_delete (
    const Sparse< Field, SparseMatrix_t::ELL > & A) [inline]
```

**11.1.3.208 sparse\_delete()** [7/12]

```
template<class Field >
void sparse_delete (
    const Sparse< Field, SparseMatrix_t::ELL_ZO > & A) [inline]
```

**11.1.3.209 sparse\_init()** [12/16]

```
template<class Field , class IndexT >
void sparse_init (
    const Field & F,
    Sparse< Field, SparseMatrix_t::ELL_simd > & A,
    const IndexT * row,
    const IndexT * col,
    typename Field::ConstElement_ptr dat,
    uint64_t rowdim,
    uint64_t coldim,
    uint64_t nnz) [inline]
```

**11.1.3.210 sparse\_init()** [13/16]

```
template<class Field , class IndexT >
void sparse_init (
    const Field & F,
    Sparse< Field, SparseMatrix_t::ELL_simd_ZO > & A,
    const IndexT * row,
    const IndexT * col,
    typename Field::ConstElement_ptr dat,
    uint64_t rowdim,
    uint64_t coldim,
    uint64_t nnz) [inline]
```

**11.1.3.211 sparse\_delete()** [8/12]

```
template<class Field >
void sparse_delete (
    const Sparse< Field, SparseMatrix_t::ELL_simd > & A) [inline]
```

**11.1.3.212 sparse\_delete()** [9/12]

```
template<class Field >
void sparse_delete (
    const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > & A) [inline]
```

**11.1.3.213 sparse\_print()** [2/3]

```
template<class Field >
void sparse_print (
    const Sparse< Field, SparseMatrix_t::ELL_simd > & A) [inline]
```

**11.1.3.214 sparse\_delete()** [10/12]

```
template<class Field >
void sparse_delete (
    const Sparse< Field, SparseMatrix_t::HYB_ZO > & A) [inline]
```

**11.1.3.215 sparse\_init()** [14/16]

```
template<class Field , class IndexT >
void sparse_init (
    const Field & F,
    Sparse< Field, SparseMatrix_t::HYB_ZO > & A,
    const IndexT * row,
    const IndexT * col,
    typename Field::ConstElement_ptr dat,
    uint64_t rowdim,
    uint64_t coldim,
    uint64_t nnz) [inline]
```

**11.1.3.216 operator<<()**

```
template<typename _Field >
std::ostream & operator<< (
    std::ostream & os,
    const Sparse< _Field, SparseMatrix_t::HYB_ZO > & A)
```

**11.1.3.217 readSmsFormat()**

```
template<class Field , bool sorted = true, bool read_integer = false>
void readSmsFormat (
    const std::string & path,
    const Field & f,
    index_t *& row,
    index_t *& col,
    typename Field::Element_ptr & val,
    index_t & rowdim,
    index_t & coldim,
    uint64_t & nnz)
```

**11.1.3.218 readSprFormat()**

```
template<class Field >
void readSprFormat (
    const std::string & path,
    const Field & f,
    index_t *& row,
    index_t *& col,
    typename Field::Element_ptr & val,
    index_t & rowdim,
    index_t & coldim,
    uint64_t & nnz)
```

**11.1.3.219 getDataType()** [1/4]

```
template<class T >
std::enable_if< std::is_integral< T >::value, int > getDataType ()
```

**11.1.3.220** `getDataType()` [2/4]

```
template<class T >
std::enable_if< std::is_floating_point< T >::value, int > getDataType ()
```

**11.1.3.221** `getDataType()` [3/4]

```
template<class T >
std::enable_if< std::is_same< T, mpz_t >::value, int > getDataType ()
```

**11.1.3.222** `getDataType()` [4/4]

```
template<class T >
int getDataType ()
```

**11.1.3.223** `readMachineType()`

```
template<class Field >
void readMachineType (
    const Field & F,
    typename Field::Element & modulo,
    typename Field::Element_ptr val,
    std::ifstream & file,
    const uint64_t dims,
    const mask_t data_type,
    const mask_t field_desc)
```

**11.1.3.224** `readDnsFormat()`

```
template<class Field >
void readDnsFormat (
    const std::string & path,
    const Field & F,
    index_t & rowdim,
    index_t & coldim,
    typename Field::Element_ptr & val)
```

**11.1.3.225** `writeDnsFormat()`

```
template<class Field >
void writeDnsFormat (
    const std::string & path,
    const Field & F,
    const index_t & rowdim,
    const index_t & coldim,
    typename Field::Element_ptr A,
    index_t ldA)
```

**11.1.3.226 fspmv()** [2/2]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::SELL_ZO > & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::ModularTag ) [inline]
```

**11.1.3.227 sparse\_delete()** [11/12]

```
template<class Field >
void sparse_delete (
    const Sparse< Field, SparseMatrix_t::SELL > & A) [inline]
```

**11.1.3.228 sparse\_delete()** [12/12]

```
template<class Field >
void sparse_delete (
    const Sparse< Field, SparseMatrix_t::SELL_ZO > & A) [inline]
```

**11.1.3.229 sparse\_print()** [3/3]

```
template<class Field >
void sparse_print (
    const Sparse< Field, SparseMatrix_t::SELL > & A) [inline]
```

**11.1.3.230 sparse\_init()** [15/16]

```
template<class Field , class IndexT >
void sparse_init (
    const Field & F,
    Sparse< Field, SparseMatrix_t::SELL > & A,
    const IndexT * row,
    const IndexT * col,
    typename Field::ConstElement_ptr dat,
    uint64_t rowdim,
    uint64_t coldim,
    uint64_t nnz,
    uint64_t sigma = 0) [inline]
```

**11.1.3.231 sparse\_init()** [16/16]

```
template<class Field , class IndexT >
void sparse_init (
    const Field & F,
    Sparse< Field, SparseMatrix_t::SELL_ZO > & A,
    const IndexT * row,
    const IndexT * col,
    typename Field::ConstElement_ptr dat,
    uint64_t rowdim,
    uint64_t coldim,
    uint64_t nnz) [inline]
```

**11.1.3.232 computeDeviation()**

```
template<class It >
double computeDeviation (
    It begin,
    It end)
```

**11.1.3.233 getStat()**

```
template<class Field >
StatsMatrix getStat (
    const Field & F,
    const index_t * row,
    const index_t * col,
    typename Field::ConstElement_ptr val,
    uint64_t rowdim,
    uint64_t coldim,
    uint64_t nnz)
```

**11.1.3.234 maxCardinality()**

```
template<class Field , class enable = void>
Field::Residu_t maxCardinality () [inline]
```

**11.1.3.235 maxCardinality< Givaro::Modular< int64\_t > >()**

```
template<>
uint64_t maxCardinality< Givaro::Modular< int64_t > > () [inline]
```

**11.1.3.236 maxCardinality< Givaro::Modular< int32\_t > >()**

```
template<>
uint32_t maxCardinality< Givaro::Modular< int32_t > > () [inline]
```

**11.1.3.237 minCardinality()**

```
template<class Field >
Field::Residu_t minCardinality () [inline]
```

**11.1.3.238 fflas\_delete() [1/4]**

```
template<>
void fflas_delete (
    FFPACK::rns_double_elt_ptr A) [inline]
```



**11.1.3.239 fflas\_delete()** [2/4]

```
template<>
void fflas_delete (
    FFPACK::rns_double_elt_cstptr A) [inline]
```

**11.1.3.240 fflas\_new()** [1/7]

```
template<>
FFPACK::rns_double_elt_ptr fflas_new (
    const FFPACK::RNSIntegerMod< FFPACK::rns_double > & F,
    const size_t m,
    const Alignment align) [inline]
```

**11.1.3.241 fflas\_new()** [2/7]

```
template<>
FFPACK::rns_double_elt_ptr fflas_new (
    const FFPACK::RNSIntegerMod< FFPACK::rns_double > & F,
    const size_t m,
    const size_t n,
    const Alignment align) [inline]
```

**11.1.3.242 finit\_rns()** [1/2]

```
template<typename RNS >
void finit_rns (
    const FFPACK::RNSIntegerMod< RNS > & F,
    const size_t m,
    const size_t n,
    size_t k,
    const Givaro::Integer * B,
    const size_t ldb,
    typename RNS::Element_ptr A)
```

**11.1.3.243 finit\_trans\_rns()**

```
template<typename RNS >
void finit_trans_rns (
    const FFPACK::RNSIntegerMod< RNS > & F,
    const size_t m,
    const size_t n,
    size_t k,
    const Givaro::Integer * B,
    const size_t ldb,
    typename RNS::Element_ptr A)
```

**11.1.3.244 fconvert\_rns()** [1/2]

```
template<typename RNS >
void fconvert_rns (
    const FFPACK::RNSIntegerMod< RNS > & F,
    const size_t m,
    const size_t n,
    Givaro::Integer alpha,
    Givaro::Integer * B,
    const size_t ldb,
    typename RNS::ConstElement_ptr A)
```

**11.1.3.245 fconvert\_trans\_rns()**

```
template<typename RNS >
void fconvert_trans_rns (
    const FFPACK::RNSIntegerMod< RNS > & F,
    const size_t m,
    const size_t n,
    Givaro::Integer alpha,
    Givaro::Integer * B,
    const size_t ldb,
    typename RNS::ConstElement_ptr A)
```

**11.1.3.246 fflas\_new()** [3/7]

```
template<>
FFPACK::rns_double_elt_ptr fflas_new (
    const FFPACK::RNSInteger< FFPACK::rns_double > & F,
    const size_t m,
    const Alignment align) [inline]
```

**11.1.3.247 fflas\_new()** [4/7]

```
template<>
FFPACK::rns_double_elt_ptr fflas_new (
    const FFPACK::RNSInteger< FFPACK::rns_double > & F,
    const size_t m,
    const size_t n,
    const Alignment align) [inline]
```

**11.1.3.248 finit\_rns()** [2/2]

```
template<typename RNS >
void finit_rns (
    const FFPACK::RNSInteger< RNS > & F,
    const size_t m,
    const size_t n,
    size_t k,
    const Givaro::Integer * B,
    const size_t ldb,
    typename FFPACK::RNSInteger< RNS >::Element_ptr A)
```

**11.1.3.249 fconvert\_rns()** [2/2]

```
template<typename RNS >
void fconvert_rns (
    const FFPACK::RNSInteger< RNS > & F,
    const size_t m,
    const size_t n,
    Givaro::Integer alpha,
    Givaro::Integer * B,
    const size_t ldb,
    typename FFPACK::RNSInteger< RNS >::ConstElement_ptr A)
```

**11.1.3.250 freduce()** [8/11]

```
template INST_OR_DECL void freduce (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t n,
    FFLAS_ELT * X,
    const size_t incX)
```

freduce  $x \leftarrow x \bmod F$ .

**Parameters**

|        |                     |
|--------|---------------------|
| $F$    | field               |
| $n$    | size of the vectors |
| $X$    | vector in F         |
| $incX$ | stride of X         |

**Bug** use cblas\_(d)scal when possible

**11.1.3.251 freduce()** [9/11]

```
template INST_OR_DECL void freduce (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t n,
    const FFLAS_ELT * Y,
    const size_t incY,
    FFLAS_ELT * X,
    const size_t incX)
```

freduce  $x \leftarrow y \bmod F$ .

**Parameters**

|        |                     |
|--------|---------------------|
| $F$    | field               |
| $n$    | size of the vectors |
| $Y$    | vector of Element   |
| $incY$ | stride of Y         |
| $X$    | vector in F         |
| $incX$ | stride of X         |

**Bug** use cblas\_(d)scal when possible

**11.1.3.252 finit()** [7/8]

```
template INST_OR_DECL void finit (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t n,
    const FFLAS_ELT * Y,
    const size_t incY,
    FFLAS_ELT * X,
    const size_t incX)
```

finit  $x \leftarrow y \bmod F$ .

**Parameters**

|        |                        |
|--------|------------------------|
| $F$    | field                  |
| $n$    | size of the vectors    |
| $Y$    | vector of OtherElement |
| $incY$ | stride of Y            |
| $X$    | vector in F            |
| $incX$ | stride of X            |

**Bug** use cblas\_(d)scal when possible

**11.1.3.253 fconvert()** [3/3]

```
template INST_OR_DECL void fconvert (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t n,
    FFLAS_ELT * X,
    const size_t incX,
    const FFLAS_ELT * Y,
    const size_t incY)
```

fconvert  $x \leftarrow y \bmod F$ .

**Parameters**

|        |                        |
|--------|------------------------|
| $F$    | field                  |
| $n$    | size of the vectors    |
| $Y$    | vector of F            |
| $incY$ | stride of Y            |
| $X$    | vector in OtherElement |
| $incX$ | stride of X            |

**Bug** use cblas\_(d)scal when possible

**11.1.3.254 fnegin()** [3/4]

```
template INST_OR_DECL void fnegin (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t n,
    FFLAS_ELT * X,
    const size_t incX)
```

fnegin  $x \leftarrow -x$ .

## Parameters

|        |                     |
|--------|---------------------|
| $F$    | field               |
| $n$    | size of the vectors |
| $X$    | vector in $F$       |
| $incX$ | stride of $X$       |

**Bug** use `cblas_(d)scal` when possible

11.1.3.255 `fneg()` [3/4]

```
template INST_OR_DECL void fneg (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t n,
    const FFLAS_ELT * Y,
    const size_t incY,
    FFLAS_ELT * X,
    const size_t incX)
```

`fneg`  $x \leftarrow -y$ .

## Parameters

|        |                     |
|--------|---------------------|
| $F$    | field               |
| $n$    | size of the vectors |
| $X$    | vector in $F$       |
| $incX$ | stride of $X$       |
| $Y$    | vector in $F$       |
| $incY$ | stride of $Y$       |

**Bug** use `cblas_(d)scal` when possible

11.1.3.256 `fzero()` [4/5]

```
template INST_OR_DECL void fzero (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t n,
    FFLAS_ELT * X,
    const size_t incX)
```

`fzero` :  $A \leftarrow 0$ .

## Parameters

|        |                            |
|--------|----------------------------|
| $F$    | field                      |
| $n$    | number of elements to zero |
| $X$    | vector in $F$              |
| $incX$ | stride of $X$              |

**11.1.3.257 fiszero()** [3/4]

```
template INST_OR_DECL bool fiszero (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t n,
    const FFLAS_ELT * X,
    const size_t incX)
```

**fiszero** : test  $X = 0$ .

**Parameters**

|        |                  |
|--------|------------------|
| $F$    | field            |
| $n$    | vector dimension |
| $X$    | vector in $F$    |
| $incX$ | increment of $X$ |

**11.1.3.258 fequal()** [3/4]

```
template INST_OR_DECL bool fequal (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t n,
    const FFLAS_ELT * X,
    const size_t incX,
    const FFLAS_ELT * Y,
    const size_t incY)
```

**fequal** : test  $X = Y$ .

**Parameters**

|        |                  |
|--------|------------------|
| $F$    | field            |
| $n$    | vector dimension |
| $X$    | vector in $F$    |
| $incX$ | increment of $X$ |
| $Y$    | vector in $F$    |
| $incY$ | increment of $Y$ |

**11.1.3.259 fassign()** [9/10]

```
template INST_OR_DECL void fassign (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t N,
    const FFLAS_ELT * Y,
    const size_t incY,
    FFLAS_ELT * X,
    const size_t incX)
```

**fassign** :  $x \leftarrow y$ .

$X$  is preallocated

**Todo** variant for triagonal matrix

## Parameters

|     |        |                     |
|-----|--------|---------------------|
|     | $F$    | field               |
|     | $N$    | size of the vectors |
| out | $X$    | vector in $F$       |
|     | $incX$ | stride of $X$       |
| in  | $Y$    | vector in $F$       |
|     | $incY$ | stride of $Y$       |

## 11.1.3.260 fscaln() [9/10]

```
template INST_OR_DECL void fscaln (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t n,
    const FFLAS_ELT alpha,
    FFLAS_ELT * X,
    const size_t incX)
```

fscaln  $x \leftarrow \alpha \cdot x$ .

## Parameters

|         |                     |
|---------|---------------------|
| $F$     | field               |
| $n$     | size of the vectors |
| $alpha$ | scalar              |
| $X$     | vector in $F$       |
| $incX$  | stride of $X$       |

**Bug** use cblas\_(d)scal when possible

**Todo** check if comparison with +/-1,0 is necessary.

## 11.1.3.261 fscal() [9/10]

```
template INST_OR_DECL void fscal (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t n,
    const FFLAS_ELT alpha,
    const FFLAS_ELT * X,
    const size_t incX,
    FFLAS_ELT * Y,
    const size_t incY)
```

fscal  $y \leftarrow \alpha \cdot x$ .

## Parameters

|  |     |                     |
|--|-----|---------------------|
|  | $F$ | field               |
|  | $n$ | size of the vectors |

|     |              |                    |
|-----|--------------|--------------------|
|     | <i>alpha</i> | scalar             |
| in  | <i>X</i>     | vector in $F$      |
|     | <i>incX</i>  | stride of <i>X</i> |
| out | <i>Y</i>     | vector in $F$      |
|     | <i>incY</i>  | stride of <i>Y</i> |

**Bug** use `cblas_(d)scal` when possible

**Todo** check if comparison with  $\pm 1, 0$  is necessary.

### 11.1.3.262 faxpy() [5/6]

```
template INST_OR_DECL void faxpy (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t N,
    const FFLAS_ELT alpha,
    const FFLAS_ELT * X,
    const size_t incX,
    FFLAS_ELT * Y,
    const size_t incY)
```

$\text{faxpy} : y \leftarrow \alpha \cdot x + y.$

#### Parameters

|         |              |                     |
|---------|--------------|---------------------|
|         | <i>F</i>     | field               |
|         | <i>N</i>     | size of the vectors |
|         | <i>alpha</i> | scalar              |
| in      | <i>X</i>     | vector in $F$       |
|         | <i>incX</i>  | stride of <i>X</i>  |
| in, out | <i>Y</i>     | vector in $F$       |
|         | <i>incY</i>  | stride of <i>Y</i>  |

### 11.1.3.263 fdot() [10/11]

```
template INST_OR_DECL FFLAS_ELT fdot (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t N,
    const FFLAS_ELT * X,
    const size_t incX,
    const FFLAS_ELT * Y,
    const size_t incY)
```

$\text{faxpby} : y \leftarrow \alpha \cdot x + \beta \cdot y.$



## Parameters

|         |          |                     |
|---------|----------|---------------------|
|         | $F$      | field               |
|         | $N$      | size of the vectors |
|         | $\alpha$ | scalar              |
| in      | $X$      | vector in $F$       |
|         | $incX$   | stride of $X$       |
|         | $\beta$  | scalar              |
| in, out | $Y$      | vector in $F$       |
|         | $incY$   | stride of $Y$       |

## Note

this is a catlas function

fdot: dot product  $x^T y$ .

## Parameters

|        |                     |
|--------|---------------------|
| $F$    | field               |
| $N$    | size of the vectors |
| $X$    | vector in $F$       |
| $incX$ | stride of $X$       |
| $Y$    | vector in $F$       |
| $incY$ | stride of $Y$       |

## 11.1.3.264 fswap() [2/2]

```
template INST_OR_DECL void fswap (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t N,
    FFLAS_ELT * X,
    const size_t incX,
    FFLAS_ELT * Y,
    const size_t incY)
```

fswap:  $X \leftrightarrow Y$ .

**Bug** use cblas\_dswap when double

## Parameters

|        |                     |
|--------|---------------------|
| $F$    | field               |
| $N$    | size of the vectors |
| $X$    | vector in $F$       |
| $incX$ | stride of $X$       |
| $Y$    | vector in $F$       |
| $incY$ | stride of $Y$       |

**11.1.3.265 fadd()** [5/8]

```
template INST_OR_DECL void fadd (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t N,
    const FFLAS_ELT * A,
    const size_t inca,
    const FFLAS_ELT * B,
    const size_t incb,
    FFLAS_ELT * C,
    const size_t incc)
```

**11.1.3.266 fsub()** [3/4]

```
template INST_OR_DECL void fsub (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t N,
    const FFLAS_ELT * A,
    const size_t inca,
    const FFLAS_ELT * B,
    const size_t incb,
    FFLAS_ELT * C,
    const size_t incc)
```

**11.1.3.267 faddin()** [4/5]

```
template INST_OR_DECL void faddin (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t N,
    const FFLAS_ELT * B,
    const size_t incb,
    FFLAS_ELT * C,
    const size_t incc)
```

**11.1.3.268 fadd()** [6/8]

```
template INST_OR_DECL void fadd (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t N,
    const FFLAS_ELT * A,
    const size_t inca,
    const FFLAS_ELT alpha,
    const FFLAS_ELT * B,
    const size_t incb,
    FFLAS_ELT * C,
    const size_t incc)
```

**11.1.3.269 fassign()** [10/10]

```
template INST_OR_DECL void fassign (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t m,
    const size_t n,
    const FFLAS_ELT * B,
    const size_t ldb,
    FFLAS_ELT * A,
    const size_t lda)
```

fassign :  $A \leftarrow B$ .

**Parameters**

|       |                        |
|-------|------------------------|
| $F$   | field                  |
| $m$   | number of rows to copy |
| $n$   | number of cols to copy |
| $A$   | matrix in F            |
| $lda$ | stride of A            |
| $B$   | vector in F            |
| $ldb$ | stride of B            |

**11.1.3.270 fzero()** [5/5]

```
template INST_OR_DECL void fzero (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t m,
    const size_t n,
    FFLAS_ELT * A,
    const size_t lda)
```

fzero :  $A \leftarrow 0$ .

**Parameters**

|       |                        |
|-------|------------------------|
| $F$   | field                  |
| $m$   | number of rows to zero |
| $n$   | number of cols to zero |
| $A$   | matrix in F            |
| $lda$ | stride of A            |

**Warning**

may be buggy if Element is larger than int

**11.1.3.271 fequal()** [4/4]

```
template INST_OR_DECL bool fequal (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t m,
    const size_t n,
    const FFLAS_ELT * A,
    const size_t lda,
    const FFLAS_ELT * B,
    const size_t ldb)
```

fequal : test  $A = B$ .

**Parameters**

|       |                        |
|-------|------------------------|
| $F$   | field                  |
| $m$   | row dimension          |
| $n$   | column dimension       |
| $A$   | m x n matrix in $F$    |
| $lda$ | leading dimension of A |
| $B$   | m x n matrix in $F$    |
| $ldb$ | leading dimension of B |

**11.1.3.272 fiszero()** [4/4]

```
template INST_OR_DECL bool fiszero (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t m,
    const size_t n,
    const FFLAS_ELT * A,
    const size_t lda)
```

fiszero : test  $A = 0$ .

**Parameters**

|       |                        |
|-------|------------------------|
| $F$   | field                  |
| $m$   | row dimension          |
| $n$   | column dimension       |
| $A$   | m x n matrix in $F$    |
| $lda$ | leading dimension of A |

**11.1.3.273 fidentity()** [3/4]

```
template INST_OR_DECL void fidentity (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t m,
    const size_t n,
    FFLAS_ELT * A,
    const size_t lda,
    const FFLAS_ELT & d)
```

creates a diagonal matrix

**11.1.3.274 fidentity()** [4/4]

```
template INST_OR_DECL void fidentity (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t m,
    const size_t n,
    FFLAS_ELT * A,
    const size_t lda)
```

creates a diagonal matrix

**11.1.3.275 freduce()** [10/11]

```
template INST_OR_DECL void freduce (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t m,
    const size_t n,
    FFLAS_ELT * A,
    const size_t lda)
```

freduce  $A \leftarrow A \bmod F$ .

**Parameters**

|       |                |
|-------|----------------|
| $F$   | field          |
| $m$   | number of rows |
| $n$   | number of cols |
| $A$   | matrix in F    |
| $lda$ | stride of A    |

**11.1.3.276 freduce()** [11/11]

```
template INST_OR_DECL void freduce (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t m,
    const size_t n,
    const FFLAS_ELT * B,
    const size_t ldb,
    FFLAS_ELT * A,
    const size_t lda)
```

freduce  $A \leftarrow B \bmod F$ .

**Parameters**

|       |                   |
|-------|-------------------|
| $F$   | field             |
| $m$   | number of rows    |
| $n$   | number of cols    |
| $A$   | matrix in F       |
| $lda$ | stride of A       |
| $B$   | matrix in Element |
| $ldb$ | stride of B       |

**11.1.3.277 finit()** [8/8]

```
template INST_OR_DECL void finit (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t m,
    const size_t n,
    const FFLAS_ELT * B,
    const size_t ldb,
    FFLAS_ELT * A,
    const size_t lda)
```

$\text{finit } A \leftarrow B \bmod F.$

**Parameters**

|       |                |
|-------|----------------|
| $F$   | field          |
| $m$   | number of rows |
| $n$   | number of cols |
| $A$   | matrix in $F$  |
| $lda$ | stride of $A$  |
| $B$   | matrix in $F$  |
| $ldb$ | stride of $B$  |

**11.1.3.278 fnegin()** [4/4]

```
template INST_OR_DECL void fnegin (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t m,
    const size_t n,
    FFLAS_ELT * A,
    const size_t lda)
```

$\text{fnegin } A \leftarrow -A.$

**Parameters**

|       |                |
|-------|----------------|
| $F$   | field          |
| $m$   | number of rows |
| $n$   | number of cols |
| $A$   | matrix in $F$  |
| $lda$ | stride of $A$  |

**11.1.3.279 fneg()** [4/4]

```
template INST_OR_DECL void fneg (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t m,
    const size_t n,
    const FFLAS_ELT * B,
    const size_t ldb,
    FFLAS_ELT * A,
    const size_t lda)
```

$\text{fneg } A \leftarrow -B.$

## Parameters

|       |                |
|-------|----------------|
| $F$   | field          |
| $m$   | number of rows |
| $n$   | number of cols |
| $A$   | matrix in $F$  |
| $lda$ | stride of $A$  |

**11.1.3.280 fscaln()** [10/10]

```
template INST_OR_DECL void fscaln (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t m,
    const size_t n,
    const FFLAS_ELT alpha,
    FFLAS_ELT * A,
    const size_t lda)
```

$\text{fscaln } A \leftarrow a \cdot A.$

## Parameters

|          |                  |
|----------|------------------|
| $F$      | field            |
| $m$      | number of rows   |
| $n$      | number of cols   |
| $\alpha$ | homotecie scalar |
| $A$      | matrix in $F$    |
| $lda$    | stride of $A$    |

**11.1.3.281 fscl()** [10/10]

```
template INST_OR_DECL void fscl (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t m,
    const size_t n,
    const FFLAS_ELT alpha,
    const FFLAS_ELT * A,
    const size_t lda,
    FFLAS_ELT * B,
    const size_t ldb)
```

$\text{fscl } B \leftarrow a \cdot A.$

## Parameters

|     |          |                  |
|-----|----------|------------------|
|     | $F$      | field            |
|     | $m$      | number of rows   |
|     | $n$      | number of cols   |
|     | $\alpha$ | homotecie scalar |
| in  | $A$      | matrix in $F$    |
|     | $lda$    | stride of $A$    |
| out | $B$      | matrix in $F$    |
|     | $ldb$    | stride of $B$    |

**11.1.3.282 faxpy()** [6/6]

```
template INST_OR_DECL void faxpy (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t m,
    const size_t n,
    const FFLAS_ELT alpha,
    const FFLAS_ELT * X,
    const size_t ldx,
    FFLAS_ELT * Y,
    const size_t ldy)
```

$\text{faxpy} : y \leftarrow \alpha \cdot x + y.$

**Parameters**

|         |          |                        |
|---------|----------|------------------------|
|         | $F$      | field                  |
|         | $m$      | row dimension          |
|         | $n$      | column dimension       |
|         | $\alpha$ | scalar                 |
| in      | $X$      | vector in F            |
|         | $ldx$    | leading dimension of X |
| in, out | $Y$      | vector in F            |
|         | $ldy$    | leading dimension of Y |

**11.1.3.283 fmove()** [2/2]

```
template INST_OR_DECL void fmove (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t m,
    const size_t n,
    FFLAS_ELT * A,
    const size_t lda,
    FFLAS_ELT * B,
    const size_t ldb)
```

$\text{faxpby} : y \leftarrow \alpha \cdot x + \beta \cdot y.$

**Parameters**

|         |          |                        |
|---------|----------|------------------------|
|         | $F$      | field                  |
|         | $m$      | row dimension          |
|         | $n$      | column dimension       |
|         | $\alpha$ | scalar                 |
| in      | $X$      | vector in F            |
|         | $ldx$    | leading dimension of X |
|         | $\beta$  | scalar                 |
| in, out | $Y$      | vector in F            |
|         | $ldy$    | leading dimension of Y |

**Note**

this is a catlas function

$\text{fmove} : A \leftarrow B \text{ and } B \leftarrow 0.$



## Parameters

|            |                        |
|------------|------------------------|
| <i>F</i>   | field                  |
| <i>m</i>   | number of rows to copy |
| <i>n</i>   | number of cols to copy |
| <i>A</i>   | matrix in <i>F</i>     |
| <i>lda</i> | stride of <i>A</i>     |
| <i>B</i>   | vector in <i>F</i>     |
| <i>ldb</i> | stride of <i>B</i>     |

**11.1.3.284 fadd()** [7/8]

```
template INST_OR_DECL void fadd (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    const FFLAS_ELT * A,
    const size_t lda,
    const FFLAS_ELT * B,
    const size_t ldb,
    FFLAS_ELT * C,
    const size_t ldc)
```

fadd : matrix addition.

Computes  $C = A + B$ .

## Parameters

|            |                                   |
|------------|-----------------------------------|
| <i>F</i>   | field                             |
| <i>M</i>   | rows                              |
| <i>N</i>   | cols                              |
| <i>A</i>   | dense matrix of size $M \times N$ |
| <i>lda</i> | leading dimension of <i>A</i>     |
| <i>B</i>   | dense matrix of size $M \times N$ |
| <i>ldb</i> | leading dimension of <i>B</i>     |
| <i>C</i>   | dense matrix of size $M \times N$ |
| <i>ldc</i> | leading dimension of <i>C</i>     |

**11.1.3.285 fsub()** [4/4]

```
template INST_OR_DECL void fsub (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    const FFLAS_ELT * A,
    const size_t lda,
    const FFLAS_ELT * B,
    const size_t ldb,
    FFLAS_ELT * C,
    const size_t ldc)
```

fsub : matrix subtraction.

Computes  $C = A - B$ .

## Parameters

|            |                          |
|------------|--------------------------|
| <i>F</i>   | field                    |
| <i>M</i>   | rows                     |
| <i>N</i>   | cols                     |
| <i>A</i>   | dense matrix of size MxN |
| <i>lda</i> | leading dimension of A   |
| <i>B</i>   | dense matrix of size MxN |
| <i>ldb</i> | leading dimension of B   |
| <i>C</i>   | dense matrix of size MxN |
| <i>ldc</i> | leading dimension of C   |

**11.1.3.286 fsubin()** [3/3]

```
template INST_OR_DECL void fsubin (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    const FFLAS_ELT * B,
    const size_t ldb,
    FFLAS_ELT * C,
    const size_t ldc)
```

fsubin C = C - B

**11.1.3.287 fadd()** [8/8]

```
template INST_OR_DECL void fadd (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    const FFLAS_ELT * A,
    const size_t lda,
    const FFLAS_ELT alpha,
    const FFLAS_ELT * B,
    const size_t ldb,
    FFLAS_ELT * C,
    const size_t ldc)
```

fadd : matrix addition with scaling.

Computes  $C = A + \alpha B$ .

## Parameters

|              |                          |
|--------------|--------------------------|
| <i>F</i>     | field                    |
| <i>M</i>     | rows                     |
| <i>N</i>     | cols                     |
| <i>A</i>     | dense matrix of size MxN |
| <i>lda</i>   | leading dimension of A   |
| <i>alpha</i> | some scalar              |
| <i>B</i>     | dense matrix of size MxN |
| <i>ldb</i>   | leading dimension of B   |
| <i>C</i>     | dense matrix of size MxN |
| <i>ldc</i>   | leading dimension of C   |

**11.1.3.288 faddin()** [5/5]

```
template INST_OR_DECL void faddin (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    const FFLAS_ELT * B,
    const size_t ldb,
    FFLAS_ELT * C,
    const size_t ldc)
```

faddin

**11.1.3.289 fgemv()** [17/19]

```
template INST_OR_DECL FFLAS_ELT * fgemv (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS_TRANSPOSE TransA,
    const size_t M,
    const size_t N,
    const FFLAS_ELT alpha,
    const FFLAS_ELT * A,
    const size_t lda,
    const FFLAS_ELT * X,
    const size_t incX,
    const FFLAS_ELT beta,
    FFLAS_ELT * Y,
    const size_t incY)
```

finite prime FFLAS\_FIELD<FFLAS\_ELT> GEneral Matrix Vector multiplication.

Computes  $Y \leftarrow \alpha \text{op}(A)X + \beta Y$ .

**Parameters**

|     |          |   |
|-----|----------|---|
|     | $F$      | field   |
|     | $TransA$ | if $TransA == FflasTrans$ then $\text{op}(A) = A^t$ . |
|     | $M$      | rows  |
|     | $N$      | cols  |
|     | $alpha$  | scalar  |
|     | $A$      | dense matrix of size $M \times N$                     |
|     | $lda$    | leading dimension of $A$                              |
|     | $X$      | dense vector of size $N$                              |
|     | $incX$   | stride of $X$   |
|     | $beta$   | scalar  |
| out | $Y$      | dense vector of size $M$                              |
|     | $incY$   | stride of $Y$   |

**11.1.3.290 fger() [12/12]**

```
template INST_OR_DECL void fger (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    const FFLAS_ELT alpha,
    const FFLAS_ELT * x,
    const size_t incx,
    const FFLAS_ELT * y,
    const size_t incy,
    FFLAS_ELT * A,
    const size_t lda)
```

fger: rank one update of a general matrix

Computes  $A \leftarrow \alpha x y^T + A$

**Parameters**

|         |          |   |
|---------|----------|---|
|         | $F$      | field   |
|         | $M$      | rows  |
|         | $N$      | cols  |
|         | $\alpha$ | scalar  |
| in, out | $A$      | dense matrix of size $M \times N$ and leading dimension $lda$ |
|         | $lda$    | leading dimension of $A$                                      |
|         | $x$      | dense vector of size $M$                                      |
|         | $incx$   | stride of $X$   |
|         | $y$      | dense vector of size $N$                                      |
|         | $incy$   | stride of $Y$   |

**11.1.3.291 ftrsv() [2/2]**

```
template INST_OR_DECL void ftrsv (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS_UPLO Uplo,
    const FFLAS_TRANSPOSE TransA,
    const FFLAS_DIAG Diag,
    const size_t N,
    const FFLAS_ELT * A,
    const size_t lda,
    FFLAS_ELT * X,
    int incX)
```

ftrsv: TRIangular System solve with Vector Computes  $X \leftarrow \text{op}(A^{-1})X$

**Parameters**

|        |  |
|--------|--|
| $F$    | field  |
| $X$    | vector of size $N$ on a field $F$                |
| $incX$ | stride of $X$                                    |
| $A$    | a matrix of leading dimension $lda$ and size $N$ |
| $lda$  | leading dimension of $A$                         |

## Parameters

|               |  |
|---------------|--|
| <i>N</i>      | number of rows or columns of A according to TransA |
| <i>TransA</i> | if TransA==FflasTrans then $\text{op}(A) = A^t$ .  |
| <i>Diag</i>   | if Diag==FflasUnit then A is unit.                 |
| <i>Uplo</i>   | if Uplo==FflasUpper then A is upper triangular     |

## 11.1.3.292 ftrsm() [9/9]

```
template INST_OR_DECL void ftrsm (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS_SIDE Side,
    const FFLAS_UPLO Uplo,
    const FFLAS_TRANSPOSE TransA,
    const FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    const FFLAS_ELT alpha,
    const FFLAS_ELT * A,
    const size_t lda,
    FFLAS_ELT * B,
    const size_t ldb)
```

ftrsm: **T**Riangular **S**ystem solve with **M**atrix.

Computes  $B \leftarrow \alpha \text{op}(A^{-1})B$  or  $B \leftarrow \alpha B \text{op}(A^{-1})$ .

## Parameters

|               |   |
|---------------|---|
| <i>F</i>      | field   |
| <i>Side</i>   | if Side==FflasLeft then $B \leftarrow \alpha \text{op}(A^{-1})B$ is computed.                         |
| <i>Uplo</i>   | if Uplo==FflasUpper then A is upper triangular  |
| <i>TransA</i> | if TransA==FflasTrans then $\text{op}(A) = A^t$ .   |
| <i>Diag</i>   | if Diag==FflasUnit then A is unit.  |
| <i>M</i>      | rows of B   |
| <i>N</i>      | cols of B   |
| <i>alpha</i>  | scalar  |
| <i>A</i>      | triangular invertible matrix. If Side==FflasLeft then A is $N \times N$ , otherwise A is $M \times M$ |
| <i>lda</i>    | leading dim of A  |
| <i>B</i>      | matrix of size MxN  |
| <i>ldb</i>    | leading dim of B  |

**Bug**  $\alpha$  must be non zero.

**11.1.3.293 ftrmm()** [3/3]

```
template INST_OR_DECL void ftrmm (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS_SIDE Side,
    const FFLAS_UPLO Uplo,
    const FFLAS_TRANSPOSE TransA,
    const FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    const FFLAS_ELT alpha,
    const FFLAS_ELT * A,
    const size_t lda,
    FFLAS_ELT * B,
    const size_t ldb)
```

ftrmm: **TR**iangular **M**atrix **M**ultiply.

Computes  $B \leftarrow \alpha \text{op}(A)B$  or  $B \leftarrow \alpha B \text{op}(A)$ .

**Parameters**

|               |  |
|---------------|--|
| <i>F</i>      | field  |
| <i>Side</i>   | if Side==FflasLeft then $B \leftarrow \alpha \text{op}(A)B$ is computed.                   |
| <i>Uplo</i>   | if Uplo==FflasUpper then A is upper triangular   |
| <i>TransA</i> | if TransA==FflasTrans then $\text{op}(A) = A^t$ .  |
| <i>Diag</i>   | if Diag==FflasUnit then A is implicitly unit.  |
| <i>M</i>      | rows of B  |
| <i>N</i>      | cols of B  |
| <i>alpha</i>  | scalar   |
| <i>A</i>      | triangular matrix. If Side==FflasLeft then A is $N \times N$ , otherwise A is $M \times M$ |
| <i>lda</i>    | leading dim of A   |
| <i>B</i>      | matrix of size MxN   |
| <i>ldb</i>    | leading dim of B   |

**11.1.3.294 fgemm()** [20/23]

```
template INST_OR_DECL FFLAS_ELT * fgemm (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const FFLAS_ELT alpha,
    const FFLAS_ELT * A,
    const size_t lda,
    const FFLAS_ELT * B,
    const size_t ldb,
    const FFLAS_ELT beta,
    FFLAS_ELT * C,
    const size_t ldc)
```

fgemm: **F**ield **G**eneral **M**atrix **M**ultiply.

Computes  $C = \alpha \text{op}(A) \times \text{op}(B) + \beta C$  Automatically set Winograd recursion level

## Parameters

|          |   |
|----------|---|
| $F$      | field.  |
| $ta$     | if $ta == \text{FflasTrans}$ then $\text{op}(A) = A^t$ , else $\text{op}(A) = A$ ,                    |
| $tb$     | same for matrix B   |
| $m$      | see A   |
| $n$      | see B   |
| $k$      | see A   |
| $\alpha$ | scalar  |
| $\beta$  | scalar  |
| $A$      | $\text{op}(A)$ is $m \times k$  |
| $B$      | $\text{op}(B)$ is $k \times n$  |
| $C$      | $C$ is $m \times n$   |
| $lda$    | leading dimension of A  |
| $ldb$    | leading dimension of B  |
| $ldc$    | leading dimension of C  |
| $w$      | recursive levels of Winograd's algorithm are used. No argument (or -1) does auto computation of $w$ . |

## Warning

$\alpha$  must be invertible

## 11.1.3.295 fgemm() [21/23]

```
template INST_OR_DECL FFLAS_ELT * fgemm (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const FFLAS_ELT alpha,
    const FFLAS_ELT * A,
    const size_t lda,
    const FFLAS_ELT * B,
    const size_t ldb,
    const FFLAS_ELT beta,
    FFLAS_ELT * C,
    const size_t ldc,
    const ParSeqHelper::Sequential seq)
```

## 11.1.3.296 fgemm() [22/23]

```
template INST_OR_DECL FFLAS_ELT * fgemm (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
```

```

    const FFLAS_ELT alpha,
    const FFLAS_ELT * A,
    const size_t lda,
    const FFLAS_ELT * B,
    const size_t ldb,
    const FFLAS_ELT beta,
    FFLAS_ELT * C,
    const size_t ldc,
    const ParSeqHelper::Parallel< CuttingStrategy::Recursive, StrategyParameter::TwoDAdaptive
> par)

```

### 11.1.3.297 fgemm() [23/23]

```

template INST_OR_DECL FFLAS_ELT * fgemm (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const FFLAS_ELT alpha,
    const FFLAS_ELT * A,
    const size_t lda,
    const FFLAS_ELT * B,
    const size_t ldb,
    const FFLAS_ELT beta,
    FFLAS_ELT * C,
    const size_t ldc,
    const ParSeqHelper::Parallel< CuttingStrategy::Block, StrategyParameter::Threads
> par)

```

### 11.1.3.298 fsquare() [6/6]

```

template INST_OR_DECL FFLAS_ELT * fsquare (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS_TRANSPOSE ta,
    const size_t n,
    const FFLAS_ELT alpha,
    const FFLAS_ELT * A,
    const size_t lda,
    const FFLAS_ELT beta,
    FFLAS_ELT * C,
    const size_t ldc)

```

fsquare: Squares a matrix.

compute  $C \leftarrow \alpha \text{op}(A) \text{op}(A) + \beta C$  over a FFLAS\_FIELD <FFLAS\_ELT> F Avoid the conversion of B

#### Parameters

|              |   |
|--------------|---|
| <i>ta</i>    | if ta==FflasTrans, $\text{op}(A) = A^T$ . |
| <i>F</i>     | field                                     |
| <i>n</i>     | size of A                                 |
| <i>alpha</i> | scalar                                    |



## Parameters

|             |                                   |
|-------------|-----------------------------------|
| <i>beta</i> | scalar                            |
| <i>A</i>    | dense matrix of size $n \times n$ |
| <i>lda</i>  | leading dimension of <i>A</i>     |
| <i>C</i>    | dense matrix of size $n \times n$ |
| <i>ldc</i>  | leading dimension of <i>C</i>     |

**11.1.3.299 BlockCuts()** [1/2]

```
template<class Cut = CuttingStrategy::Block, class Strat = StrategyParameter::Threads>
void BlockCuts (
    size_t & RBLOCKSIZE,
    size_t & CBLOCKSIZE,
    const size_t m,
    const size_t n,
    const size_t numthreads) [inline]
```

**11.1.3.300 BlockCuts< CuttingStrategy::Single, StrategyParameter::Threads >()**

```
template<>
void BlockCuts< CuttingStrategy::Single, StrategyParameter::Threads > (
    size_t & RBLOCKSIZE,
    size_t & CBLOCKSIZE,
    const size_t m,
    const size_t n,
    const size_t numthreads) [inline]
```

**11.1.3.301 BlockCuts< CuttingStrategy::Row, StrategyParameter::Fixed >()**

```
template<>
void BlockCuts< CuttingStrategy::Row, StrategyParameter::Fixed > (
    size_t & RBLOCKSIZE,
    size_t & CBLOCKSIZE,
    const size_t m,
    const size_t n,
    const size_t numthreads) [inline]
```

**11.1.3.302 BlockCuts< CuttingStrategy::Row, StrategyParameter::Grain >()**

```
template<>
void BlockCuts< CuttingStrategy::Row, StrategyParameter::Grain > (
    size_t & RBLOCKSIZE,
    size_t & CBLOCKSIZE,
    const size_t m,
    const size_t n,
    const size_t grainsize) [inline]
```

**11.1.3.303 BlockCuts< CuttingStrategy::Block, StrategyParameter::Grain >()**

```
template<>
void BlockCuts< CuttingStrategy::Block, StrategyParameter::Grain > (
    size_t & RBLOCKSIZE,
    size_t & CBLOCKSIZE,
    const size_t m,
    const size_t n,
    const size_t grainsize) [inline]
```

**11.1.3.304 BlockCuts< CuttingStrategy::Column, StrategyParameter::Fixed >()**

```
template<>
void BlockCuts< CuttingStrategy::Column, StrategyParameter::Fixed > (
    size_t & RBLOCKSIZE,
    size_t & CBLOCKSIZE,
    const size_t m,
    const size_t n,
    const size_t numthreads) [inline]
```

**11.1.3.305 BlockCuts< CuttingStrategy::Column, StrategyParameter::Grain >()**

```
template<>
void BlockCuts< CuttingStrategy::Column, StrategyParameter::Grain > (
    size_t & RBLOCKSIZE,
    size_t & CBLOCKSIZE,
    const size_t m,
    const size_t n,
    const size_t grainsize) [inline]
```

**11.1.3.306 BlockCuts< CuttingStrategy::Block, StrategyParameter::Fixed >()**

```
template<>
void BlockCuts< CuttingStrategy::Block, StrategyParameter::Fixed > (
    size_t & RBLOCKSIZE,
    size_t & CBLOCKSIZE,
    const size_t m,
    const size_t n,
    const size_t numthreads) [inline]
```

**11.1.3.307 BlockCuts< CuttingStrategy::Row, StrategyParameter::Threads >()**

```
template<>
void BlockCuts< CuttingStrategy::Row, StrategyParameter::Threads > (
    size_t & RBLOCKSIZE,
    size_t & CBLOCKSIZE,
    const size_t m,
    const size_t n,
    const size_t numthreads) [inline]
```

**11.1.3.308 BlockCuts< CuttingStrategy::Column, StrategyParameter::Threads >()**

```
template<>
void BlockCuts< CuttingStrategy::Column, StrategyParameter::Threads > (
    size_t & RBLOCKSIZE,
    size_t & CBLOCKSIZE,
    const size_t m,
    const size_t n,
    const size_t numthreads) [inline]
```

**11.1.3.309 BlockCuts< CuttingStrategy::Block, StrategyParameter::Threads >()**

```
template<>
void BlockCuts< CuttingStrategy::Block, StrategyParameter::Threads > (
    size_t & RBLOCKSIZE,
    size_t & CBLOCKSIZE,
    const size_t m,
    const size_t n,
    const size_t numthreads) [inline]
```

**11.1.3.310 BlockCuts() [2/2]**

```
template<class Cut = CuttingStrategy::Block, class Param = StrategyParameter::Threads>
void BlockCuts (
    size_t & rowBlockSize,
    size_t & colBlockSize,
    size_t & lastRBS,
    size_t & lastCBS,
    size_t & changeRBS,
    size_t & changeCBS,
    size_t & numRowsBlock,
    size_t & numColBlock,
    size_t m,
    size_t n,
    const size_t numthreads) [inline]
```

**11.1.3.311 pfzero()**

```
template<class Field >
void pfzero (
    const Field & F,
    size_t m,
    size_t n,
    typename Field::Element_ptr C,
    size_t BS = 0)
```

**11.1.3.312 pfrand()**

```
template<class Field , class RandIter >
void pfrand (
    const Field & F,
    RandIter & G,
    size_t m,
    size_t n,
    typename Field::Element_ptr C,
    size_t BS = 0)
```

**11.1.3.313 fdot()** [11/11]

```
template<class Field , class Cut , class Param >
Field::Element & fdot (
    const Field & F,
    const size_t N,
    typename Field::ConstElement_ptr x,
    const size_t incx,
    typename Field::ConstElement_ptr y,
    const size_t incy,
    typename Field::Element & d,
    const ParSeqHelper::Parallel< Cut, Param > par) [inline]
```

**11.1.3.314 pfgemm()** [2/7]

```
template<class Field , class AlgoT , class FieldTrait >
Field::Element * pfgemm (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    const typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element * C,
    const size_t ldc,
    MMHelper< Field, AlgoT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Block,
StrategyParameter::Threads > > & H)
```

**11.1.3.315 pfgemm()** [3/7]

```
template<class Field , class AlgoT , class FieldTrait >
Field::Element * pfgemm (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    const typename Field::ConstElement_ptr AA,
    const size_t lda,
    const typename Field::ConstElement_ptr BB,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element * C,
    const size_t ldc,
    MMHelper< Field, AlgoT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Recursive,
StrategyParameter::ThreeDAdaptive > > & H)
```

**11.1.3.316 pfgemm() [4/7]**

```
template<class Field , class AlgoT , class FieldTrait >
Field::Element * pfgemm (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    const typename Field::ConstElement_ptr AA,
    const size_t lda,
    const typename Field::ConstElement_ptr BB,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element * C,
    const size_t ldc,
    MMHelper< Field, AlgoT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Recursive,
StrategyParameter::TwoDAdaptive > > & H)
```

**11.1.3.317 pfgemm() [5/7]**

```
template<class Field , class AlgoT , class FieldTrait >
Field::Element * pfgemm (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    const typename Field::ConstElement_ptr AA,
    const size_t lda,
    const typename Field::ConstElement_ptr BB,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element * C,
    const size_t ldc,
    MMHelper< Field, AlgoT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Recursive,
StrategyParameter::TwoD > > & H)
```

**11.1.3.318 pfgemm() [6/7]**

```
template<class Field , class AlgoT , class FieldTrait >
Field::Element_ptr pfgemm (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    const typename Field::ConstElement_ptr A,
```

```

    const size_t lda,
    const typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, AlgoT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Recursive,
StrategyParameter::ThreeD > > & H)

```

#### 11.1.3.319 pfgemm() [7/7]

```

template<class Field , class AlgoT , class FieldTrait >
Field::Element * pfgemm (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    const typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, AlgoT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Recursive,
StrategyParameter::ThreeDInPlace > > & H)

```

#### 11.1.3.320 fgemv() [18/19]

```

template<class Field , class AlgoT , class FieldTrait >
Field::Element_ptr fgemv (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const size_t m,
    const size_t n,
    const typename Field::Element alpha,
    const typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::ConstElement_ptr X,
    const size_t incX,
    const typename Field::Element beta,
    typename Field::Element_ptr Y,
    const size_t incY,
    MMHelper< Field, AlgoT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Recursive,
StrategyParameter::Threads > > & H)

```

#### 11.1.3.321 fgemv() [19/19]

```

template<class Field , class AlgoT , class FieldTrait , class Cut >
Field::Element_ptr fgemv (

```

```

    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const size_t m,
    const size_t n,
    const typename Field::Element alpha,
    const typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::ConstElement_ptr X,
    const size_t incX,
    const typename Field::Element beta,
    typename Field::Element_ptr Y,
    const size_t incY,
    MMHelper< Field, AlgoT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Row,
Cut > > & H)

```

### 11.1.3.322 parseArguments()

```

void parseArguments (
    int argc,
    char ** argv,
    Argument * args,
    bool printDefaults = true)

```

### 11.1.3.323 getArgumentValue()

```

char * getArgumentValue (
    int argc,
    char ** argv,
    int i)

```

Get the value of an argument and avoid core dump when no value was given after an argument.

#### Parameters

|             |                     |
|-------------|---------------------|
| <i>argv</i> | argument value list |
| <i>i</i>    | argument index      |

#### Returns

char\* argument value

### 11.1.3.324 writeCommandString()

```

std::ostream & writeCommandString (
    std::ostream & os,
    Argument * args,
    const char * programName = nullptr)

```

writes the values of all arguments, preceded by the programName

**11.1.3.325 WriteMatrix()** [1/2]

```
template<class Field >
std::ostream & WriteMatrix (
    std::ostream & c,
    const Field & F,
    size_t m,
    size_t n,
    typename Field::ConstElement_ptr A,
    size_t lda,
    FFLAS_FORMAT format,
    bool column_major) [inline]
```

WriteMatrix: write a matrix to an output stream.

**Parameters**

|                     |  |
|---------------------|--|
| <i>c</i>            | output stream  |
| <i>F</i>            | base field   |
| <i>m</i>            | row dimension  |
| <i>n</i>            | column dimension   |
| <i>A</i>            | matrix   |
| <i>format</i>       | input format (FflasAuto, FflasDense, FflasSMS, FflasBinary)          |
| <i>column_major</i> | whether the matrix is stored in column or row major (row by default) |

**11.1.3.326 preamble()**

```
void preamble (
    std::ifstream & ifs,
    FFLAS_FORMAT & format) [inline]
```

**11.1.3.327 ReadMatrix()** [1/2]

```
template<class Field >
Field::Element_ptr ReadMatrix (
    std::ifstream & ifs,
    Field & F,
    size_t & m,
    size_t & n,
    typename Field::Element_ptr & A,
    FFLAS_FORMAT format = FflasAuto)
```

ReadMatrix: read a matrix from an input stream.

**Parameters**

|     |               |   |
|-----|---------------|---|
|     | <i>ifs</i>    | input stream  |
|     | <i>F</i>      | base field  |
| out | <i>m</i>      | row dimension   |
| out | <i>n</i>      | column dimension  |
| out | <i>A</i>      | output matrix   |
|     | <i>format</i> | input format (FflasAuto, FflasDense, FflasSMS, FflasBinary) |



**11.1.3.328 ReadMatrix()** [2/2]

```
template<class Field >
Field::Element_ptr ReadMatrix (
    const std::string & matrix_file,
    Field & F,
    size_t & m,
    size_t & n,
    typename Field::Element_ptr & A,
    FFLAS_FORMAT format = FflasAuto) [inline]
```

ReadMatrix: read a matrix from a file.

**Parameters**

|     |                    |   |
|-----|--------------------|---|
|     | <i>matrix_file</i> | filename  |
|     | <i>F</i>           | base field  |
| out | <i>m</i>           | row dimension   |
| out | <i>n</i>           | column dimension  |
| out | <i>A</i>           | output matrix   |
|     | <i>format</i>      | input format (FflasAuto, FflasDense, FflasSMS, FflasBinary) |

**11.1.3.329 WriteMatrix()** [2/2]

```
template<class Field >
void WriteMatrix (
    std::string & matrix_file,
    const Field & F,
    int m,
    int n,
    typename Field::ConstElement_ptr A,
    size_t lda,
    FFLAS_FORMAT format = FflasDense,
    bool column_major = false)
```

WriteMatrix: write a matrix to a file.

**Parameters**

|                     |  |
|---------------------|--|
| <i>matrix_file</i>  | file name  |
| <i>F</i>            | base field   |
| <i>m</i>            | row dimension  |
| <i>n</i>            | column dimension   |
| <i>A</i>            | matrix   |
| <i>format</i>       | input format (FflasAuto, FflasDense, FflasSMS, FflasBinary)          |
| <i>column_major</i> | whether the matrix is stored in column or row major (row by default) |

**11.1.3.330 WritePermutation()**

```
std::ostream & WritePermutation (
    std::ostream & c,
    const size_t * P,
    size_t N) [inline]
```

WritePermutation: write a permutation matrix to an output stream.

## Parameters

|          |                         |
|----------|-------------------------|
| <i>c</i> | output stream           |
| <i>P</i> | permutation             |
| <i>N</i> | size of the permutation |

**11.1.3.331 alignable()**

```
template<class Element >
bool alignable () [inline]
```

**11.1.3.332 alignable< Givaro::Integer \* >()**

```
template<>
bool alignable< Givaro::Integer * > () [inline]
```

**11.1.3.333 fflas\_new() [5/7]**

```
template<class Field >
Field::Element_ptr fflas_new (
    const Field & F,
    const size_t m,
    const Alignment align = Alignment::DEFAULT) [inline]
```

**11.1.3.334 fflas\_new() [6/7]**

```
template<class Field >
Field::Element_ptr fflas_new (
    const Field & F,
    const size_t m,
    const size_t n,
    const Alignment align = Alignment::DEFAULT) [inline]
```

**11.1.3.335 fflas\_new() [7/7]**

```
template<class Element >
Element * fflas_new (
    const size_t m,
    const Alignment align = Alignment::DEFAULT) [inline]
```

**11.1.3.336 fflas\_delete() [3/4]**

```
template<class Element_ptr >
void fflas_delete (
    Element_ptr A) [inline]
```

**11.1.3.337 fflas\_delete()** [4/4]

```
template<class Ptr , class ... Args>
void fflas_delete (
    Ptr p,
    Args ... args) [inline]
```

**11.1.3.338 prefetch()**

```
void prefetch (
    const int64_t * ) [inline]
```

**11.1.3.339 getTLBSize()**

```
void getTLBSize (
    int & tlb) [inline]
```

**11.1.3.340 queryCacheSizes()**

```
void queryCacheSizes (
    int & l1,
    int & l2,
    int & l3) [inline]
```

Queries and returns the cache sizes in Bytes of the L1, L2, and L3 data caches respectively

**11.1.3.341 queryL1CacheSize()**

```
int queryL1CacheSize () [inline]
```

**Returns**

the size in Bytes of the L1 data cache

**11.1.3.342 queryTopLevelCacheSize()**

```
int queryTopLevelCacheSize () [inline]
```

**Returns**

the size in Bytes of the L2 or L3 cache if this later is present

**11.1.3.343 getSeed()**

```
uint64_t getSeed ()
```

## 11.2 FFLAS::\_ftranspose\_impl Namespace Reference

### Functions

- `template<size_t bs, typename Field , typename BTSimd >`  
`void not_inplace (const Field &F, const BTSimd &BTS, const size_t m, const size_t n, typename Field::ConstElement_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb)`
- `template<size_t bs, typename Field , typename BTSimd >`  
`void square_inplace (const Field &F, const BTSimd &BTS, const size_t m, typename Field::Element_ptr A, const size_t lda)`
- `template<size_t bs, typename Field , typename BTSimd >`  
`void nonsquare_inplace_v1 (const Field &F, const BTSimd &BTS, const size_t m, const size_t n, typename Field::Element_ptr A)`
- `template<size_t bs, typename Field , typename BTSimd >`  
`void nonsquare_inplace_v2 (const Field &F, const BTSimd &BTS, const size_t m, const size_t n, typename Field::Element_ptr A)`

### 11.2.1 Function Documentation

#### 11.2.1.1 not\_inplace()

```
template<size_t bs, typename Field , typename BTSimd >
void not_inplace (
    const Field & F,
    const BTSimd & BTS,
    const size_t m,
    const size_t n,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::Element_ptr B,
    const size_t ldb)
```

#### 11.2.1.2 square\_inplace()

```
template<size_t bs, typename Field , typename BTSimd >
void square_inplace (
    const Field & F,
    const BTSimd & BTS,
    const size_t m,
    typename Field::Element_ptr A,
    const size_t lda)
```

#### 11.2.1.3 nonsquare\_inplace\_v1()

```
template<size_t bs, typename Field , typename BTSimd >
void nonsquare_inplace_v1 (
    const Field & F,
    const BTSimd & BTS,
    const size_t m,
    const size_t n,
    typename Field::Element_ptr A)
```

#### 11.2.1.4 nonsquare\_inplace\_v2()

```
template<size_t bs, typename Field , typename BTSimd >
void nonsquare_inplace_v2 (
    const Field & F,
    const BTSimd & BTS,
    const size_t m,
    const size_t n,
    typename Field::Element_ptr A)
```

## 11.3 FFLAS::BLAS3 Namespace Reference

### Functions

- template<class Field >  
void [Bini](#) (const Field &F, const FFLAS\_TRANSPOSE ta, const FFLAS\_TRANSPOSE tb, const size\_t mr, const size\_t nr, const size\_t kr, const typename Field::Element alpha, const typename Field::Element\_ptr A, const size\_t lda, const typename Field::Element\_ptr B, const size\_t ldb, const typename Field::Element beta, typename Field::Element\_ptr C, const size\_t ldc, const size\_t kmax, const size\_t w, const FFLAS\_BASE base, const size\_t rec\_level)
- template<class Field , class FieldTrait , class Strat , class Param >  
[Field::Element\\_ptr WinoPar](#) (const Field &F, const FFLAS\_TRANSPOSE ta, const FFLAS\_TRANSPOSE tb, const size\_t mr, const size\_t nr, const size\_t kr, const typename Field::Element alpha, typename Field::ConstElement\_ptr A, const size\_t lda, typename Field::ConstElement\_ptr B, const size\_t ldb, const typename Field::Element beta, typename Field::Element\_ptr C, const size\_t ldc, [MMHelper](#)< Field, [MMHelperAlgo::WinogradPar](#), FieldTrait, [ParSeqHelper::Parallel](#)< Strat, Param > > &WH)
- template<class Field , class FieldTrait >  
void [Winograd](#) (const Field &F, const FFLAS\_TRANSPOSE ta, const FFLAS\_TRANSPOSE tb, const size\_t mr, const size\_t nr, const size\_t kr, const typename Field::Element alpha, typename Field::ConstElement\_ptr A, const size\_t lda, typename Field::ConstElement\_ptr B, const size\_t ldb, const typename Field::Element beta, typename Field::Element\_ptr C, const size\_t ldc, [MMHelper](#)< Field, [MMHelperAlgo::Winograd](#), FieldTrait > &WH)
- template<class Field , class FieldTrait >  
void [WinogradAcc\\_3\\_23](#) (const Field &F, const FFLAS\_TRANSPOSE ta, const FFLAS\_TRANSPOSE tb, const size\_t mr, const size\_t nr, const size\_t kr, const typename Field::Element alpha, typename Field::ConstElement\_ptr A, const size\_t lda, typename Field::ConstElement\_ptr B, const size\_t ldb, const typename Field::Element beta, typename Field::Element\_ptr C, const size\_t ldc, [MMHelper](#)< Field, [MMHelperAlgo::Winograd](#), FieldTrait > &WH)
- template<class Field , class FieldTrait >  
void [WinogradAcc\\_3\\_21](#) (const Field &F, const FFLAS\_TRANSPOSE ta, const FFLAS\_TRANSPOSE tb, const size\_t mr, const size\_t nr, const size\_t kr, const typename Field::Element alpha, typename Field::ConstElement\_ptr A, const size\_t lda, typename Field::ConstElement\_ptr B, const size\_t ldb, const typename Field::Element beta, typename Field::Element\_ptr C, const size\_t ldc, [MMHelper](#)< Field, [MMHelperAlgo::Winograd](#), FieldTrait > &WH)
- template<class Field , class FieldTrait >  
void [WinogradAcc\\_2\\_24](#) (const Field &F, const FFLAS\_TRANSPOSE ta, const FFLAS\_TRANSPOSE tb, const size\_t mr, const size\_t nr, const size\_t kr, const typename Field::Element alpha, const type-name Field::Element\_ptr A, const size\_t lda, const typename Field::Element\_ptr B, const size\_t ldb, const typename Field::Element beta, typename Field::Element\_ptr C, const size\_t ldc, [MMHelper](#)< Field, [MMHelperAlgo::Winograd](#), FieldTrait > &WH)
- template<class Field , class FieldTrait >  
void [WinogradAcc\\_2\\_27](#) (const Field &F, const FFLAS\_TRANSPOSE ta, const FFLAS\_TRANSPOSE tb, const size\_t mr, const size\_t nr, const size\_t kr, const typename Field::Element alpha, const type-name Field::Element\_ptr A, const size\_t lda, const typename Field::Element\_ptr B, const size\_t ldb, const typename Field::Element beta, typename Field::Element\_ptr C, const size\_t ldc, [MMHelper](#)< Field, [MMHelperAlgo::Winograd](#), FieldTrait > &WH)

- `template<class Field , class FieldTrait >`  
`void WinogradAcc_LR (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t mr, const size_t nr, const size_t kr, const typename Field::Element alpha, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, const MMHelper< Field, MMHelperAlgo::Winograd, Field↵Trait > &WH)`
- `template<class Field , class FieldTrait >`  
`void WinogradAcc_R_S (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t mr, const size_t nr, const size_t kr, const typename Field::Element alpha, const typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, const MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > &WH)`
- `template<class Field , class FieldTrait >`  
`void WinogradAcc_L_S (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t mr, const size_t nr, const size_t kr, const typename Field::Element alpha, typename Field::Element_ptr A, const size_t lda, const typename Field::Element_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, const MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > &WH)`
- `template<class Field , class FieldTrait >`  
`void Winograd_LR_S (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t mr, const size_t nr, const size_t kr, const typename Field::Element alpha, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, const MMHelper< Field, MMHelperAlgo::Winograd, Field↵Trait > &WH)`
- `template<class Field , class FieldTrait >`  
`void Winograd_L_S (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t mr, const size_t nr, const size_t kr, const typename Field::Element alpha, typename Field::Element_ptr A, const size_t lda, const typename Field::Element_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, const MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > &WH)`
- `template<class Field , class FieldTrait >`  
`void Winograd_R_S (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t mr, const size_t nr, const size_t kr, const typename Field::Element alpha, const typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, const MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > &WH)`

### 11.3.1 Function Documentation

#### 11.3.1.1 Bini()

```
template<class Field >
void Bini (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t mr,
    const size_t nr,
    const size_t kr,
    const typename Field::Element alpha,
    const typename Field::Element_ptr A,
    const size_t lda,
    const typename Field::Element_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
```

```

typename Field::Element_ptr C,
const size_t ldc,
const size_t kmax,
const size_t w,
const FFLAS_BASE base,
const size_t rec_level) [inline]

```

### 11.3.1.2 WinoPar()

```

template<class Field , class FieldTrait , class Strat , class Param >
Field::Element_ptr WinoPar (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t mr,
    const size_t nr,
    const size_t kr,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::WinogradPar, FieldTrait, ParSeqHelper::Parallel<
Strat, Param > > & WH) [inline]

```

### 11.3.1.3 Winograd()

```

template<class Field , class FieldTrait >
void Winograd (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t mr,
    const size_t nr,
    const size_t kr,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > & WH) [inline]

```

### 11.3.1.4 WinogradAcc\_3\_23()

```

template<class Field , class FieldTrait >
void WinogradAcc_3_23 (
    const Field & F,

```

```

const FFLAS_TRANSPOSE ta,
const FFLAS_TRANSPOSE tb,
const size_t mr,
const size_t nr,
const size_t kr,
const typename Field::Element alpha,
typename Field::ConstElement_ptr A,
const size_t lda,
typename Field::ConstElement_ptr B,
const size_t ldb,
const typename Field::Element beta,
typename Field::Element_ptr C,
const size_t ldc,
MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > & WH) [inline]

```

#### 11.3.1.5 WinogradAcc\_3\_21()

```

template<class Field , class FieldTrait >
void WinogradAcc_3_21 (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t mr,
    const size_t nr,
    const size_t kr,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > & WH) [inline]

```

#### 11.3.1.6 WinogradAcc\_2\_24()

```

template<class Field , class FieldTrait >
void WinogradAcc_2_24 (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t mr,
    const size_t nr,
    const size_t kr,
    const typename Field::Element alpha,
    const typename Field::Element_ptr A,
    const size_t lda,
    const typename Field::Element_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > & WH) [inline]

```



### 11.3.1.7 WinogradAcc\_2\_27()

```
template<class Field , class FieldTrait >
void WinogradAcc_2_27 (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t mr,
    const size_t nr,
    const size_t kr,
    const typename Field::Element alpha,
    const typename Field::Element_ptr A,
    const size_t lda,
    const typename Field::Element_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > & WH) [inline]
```

### 11.3.1.8 WinogradAcc\_LR()

```
template<class Field , class FieldTrait >
void WinogradAcc_LR (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t mr,
    const size_t nr,
    const size_t kr,
    const typename Field::Element alpha,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    const MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > & WH) [inline]
```

### 11.3.1.9 WinogradAcc\_R\_S()

```
template<class Field , class FieldTrait >
void WinogradAcc_R_S (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t mr,
    const size_t nr,
    const size_t kr,
    const typename Field::Element alpha,
    const typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr B,
```

```

const size_t ldb,
const typename Field::Element beta,
typename Field::Element_ptr C,
const size_t ldc,
const MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > & WH) [inline]

```

#### 11.3.1.10 WinogradAcc\_L\_S()

```

template<class Field , class FieldTrait >
void WinogradAcc_L_S (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t mr,
    const size_t nr,
    const size_t kr,
    const typename Field::Element alpha,
    typename Field::Element_ptr A,
    const size_t lda,
    const typename Field::Element_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    const MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > & WH) [inline]

```

#### 11.3.1.11 Winograd\_LR\_S()

```

template<class Field , class FieldTrait >
void Winograd_LR_S (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t mr,
    const size_t nr,
    const size_t kr,
    const typename Field::Element alpha,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    const MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > & WH) [inline]

```

#### 11.3.1.12 Winograd\_L\_S()

```

template<class Field , class FieldTrait >
void Winograd_L_S (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,

```

```

const size_t mr,
const size_t nr,
const size_t kr,
const typename Field::Element alpha,
typename Field::Element_ptr A,
const size_t lda,
const typename Field::Element_ptr B,
const size_t ldb,
const typename Field::Element beta,
typename Field::Element_ptr C,
const size_t ldc,
const MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > & WH) [inline]

```

### 11.3.1.13 Winograd\_R\_S()

```

template<class Field , class FieldTrait >
void Winograd_R_S (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t mr,
    const size_t nr,
    const size_t kr,
    const typename Field::Element alpha,
    const typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    const MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > & WH) [inline]

```

## 11.4 FFLAS::csr\_hyb\_details Namespace Reference

### Data Structures

- struct [Coo](#)
- struct [Info](#)

## 11.5 FFLAS::CuttingStrategy Namespace Reference

### Data Structures

- struct [Block](#)
- struct [Column](#)
- struct [Recursive](#)
- struct [Row](#)
- struct [Single](#)

## Typedefs

- typedef [Row](#) [RNSModulus](#)

## 11.5.1 Typedef Documentation

### 11.5.1.1 RNSModulus

typedef [Row](#) [RNSModulus](#)

## 11.6 FFLAS::details Namespace Reference

### Functions

- template<class [Field](#) , bool ADD>  
std::enable\_if< [FFLAS::support\\_simd\\_add](#)< typename [Field::Element](#) >::value, void >::type [fadd](#)  
(const [Field](#) &F, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t inca, typename [Field::ConstElement\\_ptr](#) B, const size\_t incb, typename [Field::Element\\_ptr](#) C, const size\_t incc, [FieldCategories::ModularTag](#))
- template<class [Field](#) , bool ADD>  
std::enable\_if<![FFLAS::support\\_simd\\_add](#)< typename [Field::Element](#) >::value, void >::type [fadd](#)  
(const [Field](#) &F, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t inca, typename [Field::ConstElement\\_ptr](#) B, const size\_t incb, typename [Field::Element\\_ptr](#) C, const size\_t incc, [FieldCategories::ModularTag](#))
- template<class [Field](#) , bool ADD>  
void [fadd](#) (const [Field](#) &F, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t inca, type-  
name [Field::ConstElement\\_ptr](#) B, const size\_t incb, typename [Field::Element\\_ptr](#) C, const size\_t incc,  
[FieldCategories::GenericTag](#))
- template<class [Field](#) , bool ADD>  
std::enable\_if<![FFLAS::support\\_simd\\_add](#)< typename [Field::Element](#) >::value, void >::type [fadd](#)  
(const [Field](#) &F, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t inca, typename [Field::ConstElement\\_ptr](#) B, const size\_t incb, typename [Field::Element\\_ptr](#) C, const size\_t incc,  
[FieldCategories::UnparametricTag](#))
- template<class [Field](#) , bool ADD>  
std::enable\_if< [FFLAS::support\\_simd\\_add](#)< typename [Field::Element](#) >::value, void >::type [fadd](#)  
(const [Field](#) &F, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t inca, typename [Field::ConstElement\\_ptr](#) B, const size\_t incb, typename [Field::Element\\_ptr](#) C, const size\_t incc,  
[FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
std::enable\_if< [FFLAS::support\\_fast\\_mod](#)< typename [Field::Element](#) >::value, void >::type [faxpy](#) (const  
[Field](#) &F, const size\_t N, const typename [Field::Element](#) a, typename [Field::ConstElement\\_ptr](#) X, const size\_t  
incX, typename [Field::Element\\_ptr](#) Y, const size\_t incY, [FieldCategories::ModularTag](#))
- template<class [Field](#) , class FC >  
void [faxpy](#) (const [Field](#) &F, const size\_t N, const typename [Field::Element](#) a, typename [Field::ConstElement\\_ptr](#)  
X, const size\_t incX, typename [Field::Element\\_ptr](#) Y, const size\_t incY, FC)
- template<class [Field](#) >  
std::enable\_if< [FFLAS::support\\_fast\\_mod](#)< typename [Field::Element](#) >::value, void >::type [freduce](#) (const  
[Field](#) &F, const size\_t m, typename [Field::Element\\_ptr](#) A, const size\_t incX, [FieldCategories::ModularTag](#))
- template<class [Field](#) >  
std::enable\_if< [FFLAS::support\\_fast\\_mod](#)< typename [Field::Element](#) >::value, void >::type [freduce](#)  
(const [Field](#) &F, const size\_t m, typename [Field::ConstElement\\_ptr](#) B, const size\_t incY, typename  
[Field::Element\\_ptr](#) A, const size\_t incX, [FieldCategories::ModularTag](#))

- template<class [Field](#) , class FC >  
void [freduce](#) (const [Field](#) &F, const size\_t m, typename [Field::Element\\_ptr](#) A, const size\_t incX, FC)
- template<class [Field](#) , class FC >  
void [freduce](#) (const [Field](#) &F, const size\_t m, typename [Field::ConstElement\\_ptr](#) B, const size\_t incY, typename [Field::Element\\_ptr](#) A, const size\_t incX, FC)
- template<class [Field](#) >  
std::enable\_if< [FFLAS::support\\_fast\\_mod](#)< typename [Field::Element](#) >::value, void >::type [fscalin](#) (const [Field](#) &F, const size\_t N, const typename [Field::Element](#) a, typename [Field::Element\\_ptr](#) X, const size\_t incX, [FieldCategories::ModularTag](#))
- template<class [Field](#) >  
std::enable\_if< [FFLAS::support\\_fast\\_mod](#)< typename [Field::Element](#) >::value, void >::type [fscal](#) (const [Field](#) &F, const size\_t N, const typename [Field::Element](#) a, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, typename [Field::Element\\_ptr](#) Y, const size\_t incY, [FieldCategories::ModularTag](#))
- template<class [Field](#) , class FC >  
void [fscalin](#) (const [Field](#) &F, const size\_t n, const typename [Field::Element](#) a, typename [Field::Element\\_ptr](#) X, const size\_t incX, FC)
- template<class [Field](#) , class FC >  
void [fscal](#) (const [Field](#) &F, const size\_t N, const typename [Field::Element](#) a, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, typename [Field::Element\\_ptr](#) Y, const size\_t incY, FC)
- template<enum [number\\_kind](#) K>  
void [igebb44](#) (size\_t i, size\_t j, size\_t depth, size\_t pdeth, const int64\_t alpha, const int64\_t \*blA, const int64\_t \*blB, int64\_t \*C, size\_t ldc)
- template<enum [number\\_kind](#) K>  
void [igebb24](#) (size\_t i, size\_t j, size\_t depth, size\_t pdeth, const int64\_t alpha, const int64\_t \*blA, const int64\_t \*blB, int64\_t \*C, size\_t ldc)
- template<enum [number\\_kind](#) K>  
void [igebb14](#) (size\_t i, size\_t j, size\_t depth, size\_t pdeth, const int64\_t alpha, const int64\_t \*blA, const int64\_t \*blB, int64\_t \*C, size\_t ldc)
- template<enum [number\\_kind](#) K>  
void [igebb41](#) (size\_t i, size\_t j, size\_t depth, size\_t pdeth, const int64\_t alpha, const int64\_t \*blA, const int64\_t \*blB, int64\_t \*C, size\_t ldc)
- template<enum [number\\_kind](#) K>  
void [igebb21](#) (size\_t i, size\_t j, size\_t depth, size\_t pdeth, const int64\_t alpha, const int64\_t \*blA, const int64\_t \*blB, int64\_t \*C, size\_t ldc)
- template<enum [number\\_kind](#) K>  
void [igebb11](#) (size\_t i, size\_t j, size\_t depth, size\_t pdeth, const int64\_t alpha, const int64\_t \*blA, const int64\_t \*blB, int64\_t \*C, size\_t ldc)
- template<enum [number\\_kind](#) K>  
void [igebp](#) (size\_t rows, size\_t cols, size\_t depth, const int64\_t alpha, const int64\_t \*blockA, size\_t lda, const int64\_t \*blockB, size\_t ldb, int64\_t \*C, size\_t ldc)
- template<size\_t k, bool transpose>  
void [pack\\_lhs](#) (int64\_t \*XX, const int64\_t \*X, size\_t ldx, size\_t rows, size\_t cols)
- template<size\_t k, bool transpose>  
void [pack\\_rhs](#) (int64\_t \*XX, const int64\_t \*X, size\_t ldx, size\_t rows, size\_t cols)
- void [gebp](#) (size\_t rows, size\_t cols, size\_t depth, int64\_t \*C, size\_t ldc, const int64\_t \*blockA, size\_t lda, const int64\_t \*BlockB, size\_t ldb, int64\_t \*BlockW)
- void [BlockingFactor](#) (size\_t &m, size\_t &n, size\_t &k)

## 11.6.1 Function Documentation

### 11.6.1.1 fadd() [1/5]

```
template<class Field , bool ADD>
std::enable_if< FFLAS::support\_simd\_add< typename Field::Element >::value, void >::type fadd (
    const Field & F,
```

```

    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t inca,
    typename Field::ConstElement_ptr B,
    const size_t incb,
    typename Field::Element_ptr C,
    const size_t incc,
    FieldCategories::ModularTag )

```

#### 11.6.1.2 fadd() [2/5]

```

template<class Field , bool ADD>
std::enable_if<!FFLAS::support_simd_add< typenameField::Element >::value, void >::type fadd (
    const Field & F,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t inca,
    typename Field::ConstElement_ptr B,
    const size_t incb,
    typename Field::Element_ptr C,
    const size_t incc,
    FieldCategories::ModularTag )

```

#### 11.6.1.3 fadd() [3/5]

```

template<class Field , bool ADD>
void fadd (
    const Field & F,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t inca,
    typename Field::ConstElement_ptr B,
    const size_t incb,
    typename Field::Element_ptr C,
    const size_t incc,
    FieldCategories::GenericTag )

```

#### 11.6.1.4 fadd() [4/5]

```

template<class Field , bool ADD>
std::enable_if<!FFLAS::support_simd_add< typenameField::Element >::value, void >::type fadd (
    const Field & F,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t inca,
    typename Field::ConstElement_ptr B,
    const size_t incb,
    typename Field::Element_ptr C,
    const size_t incc,
    FieldCategories::UnparametricTag ) [inline]

```

**11.6.1.5 fadd()** [5/5]

```
template<class Field , bool ADD>
std::enable_if< FFLAS::support_simd_add< typenameField::Element >::value, void >::type fadd (
    const Field & F,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t inca,
    typename Field::ConstElement_ptr B,
    const size_t incb,
    typename Field::Element_ptr C,
    const size_t incc,
    FieldCategories::UnparametricTag ) [inline]
```

**11.6.1.6 faxpy()** [1/2]

```
template<class Field >
std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type faxpy
(
    const Field & F,
    const size_t N,
    const typename Field::Element a,
    typename Field::ConstElement_ptr X,
    const size_t incX,
    typename Field::Element_ptr Y,
    const size_t incY,
    FieldCategories::ModularTag ) [inline]
```

**11.6.1.7 faxpy()** [2/2]

```
template<class Field , class FC >
void faxpy (
    const Field & F,
    const size_t N,
    const typename Field::Element a,
    typename Field::ConstElement_ptr X,
    const size_t incX,
    typename Field::Element_ptr Y,
    const size_t incY,
    FC ) [inline]
```

**11.6.1.8 freduce()** [1/4]

```
template<class Field >
std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type freduce
(
    const Field & F,
    const size_t m,
    typename Field::Element_ptr A,
    const size_t incX,
    FieldCategories::ModularTag ) [inline]
```

**11.6.1.9 freduce()** [2/4]

```
template<class Field >
std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type freduce
(
    const Field & F,
    const size_t m,
    typename Field::ConstElement_ptr B,
    const size_t incY,
    typename Field::Element_ptr A,
    const size_t incX,
    FieldCategories::ModularTag ) [inline]
```

**11.6.1.10 freduce()** [3/4]

```
template<class Field , class FC >
void freduce (
    const Field & F,
    const size_t m,
    typename Field::Element_ptr A,
    const size_t incX,
    FC ) [inline]
```

**11.6.1.11 freduce()** [4/4]

```
template<class Field , class FC >
void freduce (
    const Field & F,
    const size_t m,
    typename Field::ConstElement_ptr B,
    const size_t incY,
    typename Field::Element_ptr A,
    const size_t incX,
    FC ) [inline]
```

**11.6.1.12 fscaln()** [1/2]

```
template<class Field >
std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type fscaln
(
    const Field & F,
    const size_t N,
    const typename Field::Element a,
    typename Field::Element_ptr X,
    const size_t incX,
    FieldCategories::ModularTag ) [inline]
```



**11.6.1.13 fscal()** [1/2]

```
template<class Field >
std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type fscal
(
    const Field & F,
    const size_t N,
    const typename Field::Element a,
    typename Field::ConstElement_ptr X,
    const size_t incX,
    typename Field::Element_ptr Y,
    const size_t incY,
    FieldCategories::ModularTag ) [inline]
```

**11.6.1.14 fscaln()** [2/2]

```
template<class Field , class FC >
void fscaln (
    const Field & F,
    const size_t n,
    const typename Field::Element a,
    typename Field::Element_ptr X,
    const size_t incX,
    FC ) [inline]
```

**11.6.1.15 fscal()** [2/2]

```
template<class Field , class FC >
void fscal (
    const Field & F,
    const size_t N,
    const typename Field::Element a,
    typename Field::ConstElement_ptr X,
    const size_t incX,
    typename Field::Element_ptr Y,
    const size_t incY,
    FC ) [inline]
```

**11.6.1.16 igebb44()**

```
template<enum number_kind K>
void igebb44 (
    size_t i,
    size_t j,
    size_t depth,
    size_t pdeth,
    const int64_t alpha,
    const int64_t * blA,
    const int64_t * blB,
    int64_t * C,
    size_t ldc) [inline]
```

**11.6.1.17 igebb24()**

```
template<enum number_kind K>
void igebb24 (
    size_t i,
    size_t j,
    size_t depth,
    size_t pdeth,
    const int64_t alpha,
    const int64_t * blA,
    const int64_t * blB,
    int64_t * C,
    size_t ldc) [inline]
```

**11.6.1.18 igebb14()**

```
template<enum number_kind K>
void igebb14 (
    size_t i,
    size_t j,
    size_t depth,
    size_t pdeth,
    const int64_t alpha,
    const int64_t * blA,
    const int64_t * blB,
    int64_t * C,
    size_t ldc) [inline]
```

**11.6.1.19 igebb41()**

```
template<enum number_kind K>
void igebb41 (
    size_t i,
    size_t j,
    size_t depth,
    size_t pdeth,
    const int64_t alpha,
    const int64_t * blA,
    const int64_t * blB,
    int64_t * C,
    size_t ldc) [inline]
```

bug ,B\_0 dans VEC\_MADD\_32 ?

bug ,B\_0 dans VEC\_MADD\_32 ?

**11.6.1.20 igebb21()**

```
template<enum number_kind K>
void igebb21 (
    size_t i,
    size_t j,
    size_t depth,
```

```

    size_t pdeth,
    const int64_t alpha,
    const int64_t * blA,
    const int64_t * blB,
    int64_t * C,
    size_t ldc) [inline]

```

#### 11.6.1.21 igebb11()

```

template<enum number_kind K>
void igebb11 (
    size_t i,
    size_t j,
    size_t depth,
    size_t pdeth,
    const int64_t alpha,
    const int64_t * blA,
    const int64_t * blB,
    int64_t * C,
    size_t ldc) [inline]

```

#### 11.6.1.22 igebp()

```

template<enum number_kind K>
void igebp (
    size_t rows,
    size_t cols,
    size_t depth,
    const int64_t alpha,
    const int64_t * blockA,
    size_t lda,
    const int64_t * blockB,
    size_t ldb,
    int64_t * C,
    size_t ldc)

```

#### 11.6.1.23 pack\_lhs()

```

template<size_t k, bool transpose>
void pack_lhs (
    int64_t * XX,
    const int64_t * X,
    size_t ldx,
    size_t rows,
    size_t cols)

```

**Bug** this is fassign

**Bug** this is fassign

**Bug** this is fassign

**Bug** this is fassign

### 11.6.1.24 pack\_rhs()

```
template<size_t k, bool transpose>
void pack_rhs (
    int64_t * XX,
    const int64_t * X,
    size_t ldc,
    size_t rows,
    size_t cols)
```

**Bug** this is fassign

**Bug** this is fassign

**Bug** this is fassign

**Bug** this is fassign

### 11.6.1.25 gebp()

```
void gebp (
    size_t rows,
    size_t cols,
    size_t depth,
    int64_t * C,
    size_t ldc,
    const int64_t * blockA,
    size_t lda,
    const int64_t * BlockB,
    size_t ldb,
    int64_t * BlockW)
```

### 11.6.1.26 BlockingFactor()

```
void BlockingFactor (
    size_t & m,
    size_t & n,
    size_t & k) [inline]
```

## 11.7 FFLAS::details\_spmv Namespace Reference

### Data Structures

- struct [Coo](#)

## 11.8 FFLAS::ElementCategories Namespace Reference

### Data Structures

- struct [ArbitraryPrecIntTag](#)  
*Arbitrary precision integers: GMP.*
- struct [FixedPrecIntTag](#)  
*Fixed precision integers above machine precision: Givaro::reclnt.*
- struct [GenericTag](#)  
*default is generic*
- struct [MachineFloatTag](#)  
*float or double*
- struct [MachineIntTag](#)  
*short, int, long, long long, and unsigned variants*
- struct [RNSElementTag](#)  
*Representation in a Residue Number System.*

## 11.9 FFLAS::FieldCategories Namespace Reference

Traits and categories will need to be placed in a proper file later.

### Data Structures

- struct [GenericTag](#)  
*generic ring.*
- struct [ModularTag](#)  
*This is a modular field like e.g. `Modular<T>` or `ModularBalanced<T>`*
- struct [UnparametricTag](#)  
*If the field uses a representation with infix operators.*

### 11.9.1 Detailed Description

Traits and categories will need to be placed in a proper file later.

## 11.10 FFLAS::MMHelperAlgo Namespace Reference

### Data Structures

- struct [Auto](#)
- struct [Bini](#)
- struct [Classic](#)
- struct [DivideAndConquer](#)
- struct [Winograd](#)
- struct [WinogradPar](#)

## 11.11 FFLAS::ModeCategories Namespace Reference

Specifies the mode of action for an algorithm w.r.t.

### Data Structures

- struct [ConvertTo](#)  
*Force conversion to appropriate element type of ElementCategory T.*
- struct [DefaultBoundedTag](#)  
*Use standard field operations, but keeps track of bounds on input and output.*
- struct [DefaultTag](#)  
*No specific mode of action: use standard field operations.*
- struct [DelayedTag](#)  
*Performs field operations with delayed mod reductions. Ensures result is reduced.*
- struct [LazyTag](#)  
*Performs field operations with delayed mod only when necessary. Result may not be reduced.*

### 11.11.1 Detailed Description

Specifies the mode of action for an algorithm w.r.t.

its field

## 11.12 FFLAS::ParSeqHelper Namespace Reference

[ParSeqHelper](#) for both fgemm and ftrsm.

### Data Structures

- struct [Compose](#)
- struct [Parallel](#)
- struct [Sequential](#)

### 11.12.1 Detailed Description

[ParSeqHelper](#) for both fgemm and ftrsm.

[ParSeqHelper](#) for both fgemm and ftrsm

## 11.13 FFLAS::Protected Namespace Reference

### Data Structures

- class [AreEqual](#)
- class [AreEqual< X, X >](#)
- class [ftrmmLeftLowerNoTransNonUnit](#)
- class [ftrmmLeftLowerNoTransUnit](#)
- class [ftrmmLeftLowerTransNonUnit](#)
- class [ftrmmLeftLowerTransUnit](#)
- class [ftrmmLeftUpperNoTransNonUnit](#)
- class [ftrmmLeftUpperNoTransUnit](#)
- class [ftrmmLeftUpperTransNonUnit](#)
- class [ftrmmLeftUpperTransUnit](#)
- class [ftrmmRightLowerNoTransNonUnit](#)
- class [ftrmmRightLowerNoTransUnit](#)
- class [ftrmmRightLowerTransNonUnit](#)
- class [ftrmmRightLowerTransUnit](#)
- class [ftrmmRightUpperNoTransNonUnit](#)
- class [ftrmmRightUpperNoTransUnit](#)
- class [ftrmmRightUpperTransNonUnit](#)
- class [ftrmmRightUpperTransUnit](#)
- class [ftrsmLeftLowerNoTransNonUnit](#)
- class [ftrsmLeftLowerNoTransUnit](#)
- class [ftrsmLeftLowerTransNonUnit](#)
- class [ftrsmLeftLowerTransUnit](#)
- class [ftrsmLeftUpperNoTransNonUnit](#)

*Computes the maximal size for delaying the modular reduction in a triangular system resolution.*

- class [ftrsmLeftUpperNoTransUnit](#)
- class [ftrsmLeftUpperTransNonUnit](#)
- class [ftrsmLeftUpperTransUnit](#)
- class [ftrsmRightLowerNoTransNonUnit](#)
- class [ftrsmRightLowerNoTransUnit](#)
- class [ftrsmRightLowerTransNonUnit](#)
- class [ftrsmRightLowerTransUnit](#)
- class [ftrsmRightUpperNoTransNonUnit](#)
- class [ftrsmRightUpperNoTransUnit](#)
- class [ftrsmRightUpperTransNonUnit](#)
- class [ftrsmRightUpperTransUnit](#)

### Functions

- template<class [Field](#) >  
double [computeFactorClassic](#) (const [Field](#) &F)
- template<> double [computeFactorClassic](#) (const [Givaro::ModularBalanced](#)< double > &F)
- template<> double [computeFactorClassic](#) (const [Givaro::ModularBalanced](#)< float > &F)
- template<class [Field](#) >  
size\_t [DotProdBoundClassic](#) (const [Field](#) &F, const typename [Field::Element](#) &beta)
- template<class [Field](#) >  
size\_t [TRSMBound](#) (const [Field](#) &)  
  
*TRSMBound.*
- template<class [Element](#) >  
size\_t [TRSMBound](#) (const [Givaro::Modular](#)< [Element](#) > &F)

*Specialization for positive modular representation over double Computes nmax s.t.*

- `template<class Element >`  
`size_t TRSMBound (const Givaro::ModularBalanced< Element > &F)`

*Specialization for balanced modular representation over double.*

- `template<class NewField , class Field , class FieldMode >`  
`Field::Element_ptr fgemm_convert (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field, MMHelperAlgo::Winograd, FieldMode > &H)`
- `template<class Field , class Element , class AlgoT , class ParSeqTrait >`  
`bool NeedPreAddReduction (Element &Outmin, Element &Outmax, Element &Op1min, Element &Op1max, Element &Op2min, Element &Op2max, MMHelper< Field, AlgoT, ModeCategories::LazyTag, ParSeqTrait > &WH)`
- `template<class Field , class Element , class AlgoT , class ModeT , class ParSeqTrait >`  
`bool NeedPreAddReduction (Element &Outmin, Element &Outmax, Element &Op1min, Element &Op1max, Element &Op2min, Element &Op2max, MMHelper< Field, AlgoT, ModeT, ParSeqTrait > &WH)`
- `template<class Field , class Element , class AlgoT , class ParSeqTrait >`  
`bool NeedPreSubReduction (Element &Outmin, Element &Outmax, Element &Op1min, Element &Op1max, Element &Op2min, Element &Op2max, MMHelper< Field, AlgoT, ModeCategories::LazyTag, ParSeqTrait > &WH)`
- `template<class Field , class Element , class AlgoT , class ModeT , class ParSeqTrait >`  
`bool NeedPreSubReduction (Element &Outmin, Element &Outmax, Element &Op1min, Element &Op1max, Element &Op2min, Element &Op2max, MMHelper< Field, AlgoT, ModeT, ParSeqTrait > &WH)`
- `template<class Field , class Element , class AlgoT , class ParSeqTrait >`  
`bool NeedDoublePreAddReduction (Element &Outmin, Element &Outmax, Element &Op1min, Element &Op1max, Element &Op2min, Element &Op2max, Element beta, MMHelper< Field, AlgoT, ModeCategories::LazyTag, ParSeqTrait > &WH)`
- `template<class Field , class Element , class AlgoT , class ModeT , class ParSeqTrait >`  
`bool NeedDoublePreAddReduction (Element &Outmin, Element &Outmax, Element &Op1min, Element &Op1max, Element &Op2min, Element &Op2max, Element beta, MMHelper< Field, AlgoT, ModeT, ParSeqTrait > &WH)`
- `template<class Field , class AlgoT , class ParSeqTrait >`  
`void ScalAndReduce (const Field &F, const size_t N, const typename Field::Element alpha, typename Field::Element_ptr X, const size_t incX, const MMHelper< Field, AlgoT, ModeCategories::LazyTag, ParSeqTrait > &H)`
- `template<class Field , class AlgoT , class ParSeqTrait >`  
`void ScalAndReduce (const Field &F, const size_t M, const size_t N, const typename Field::Element alpha, typename Field::Element_ptr A, const size_t lda, const MMHelper< Field, AlgoT, ModeCategories::LazyTag, ParSeqTrait > &H)`
- `template<class Field >`  
`Field::Element_ptr fsquareCommon (const Field &F, const FFLAS_TRANSPOSE ta, const size_t n, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc)`
- `template<class Field >`  
`int WinogradThreshold (const Field &F)`  
*Computes the number of recursive levels to perform.*
- `template<> int WinogradThreshold (const Givaro::Modular< float > &F)`
- `template<> int WinogradThreshold (const Givaro::ModularBalanced< double > &F)`
- `template<> int WinogradThreshold (const Givaro::ModularBalanced< float > &F)`
- `template<class Field >`  
`int WinogradSteps (const Field &F, const size_t &m)`  
*Computes the number of recursive levels to perform.*
- `template<class Field , class FieldMode >`  
`void DynamicPeeling (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const size_t mr, const size_t nr, const size_t kr, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda,`



- typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, [MMHelper](#)< [Field](#), [MMHelperAlgo::Winograd](#), FieldMode > &H, const typename [MMHelper](#)< [Field](#), [MMHelperAlgo::Winograd](#), FieldMode >::DelayedField::Element Cmin, const typename [MMHelper](#)< [Field](#), [MMHelperAlgo::Winograd](#), FieldMode >::DelayedField::Element Cmax)
- template<class [Field](#) , class FieldMode >  
void [DynamicPeeling2](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const size\_t mr, const size\_t nr, const size\_t kr, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, [MMHelper](#)< [Field](#), [MMHelperAlgo::Winograd](#), FieldMode > &H, const typename [MMHelper](#)< [Field](#), [MMHelperAlgo::Winograd](#), FieldMode >::DelayedField::Element Cmin, const typename [MMHelper](#)< [Field](#), [MMHelperAlgo::Winograd](#), FieldMode >::DelayedField::Element Cmax)
  - template<class [Field](#) , class FieldMode >  
void [WinogradCalc](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t mr, const size\_t nr, const size\_t kr, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, [MMHelper](#)< [Field](#), [MMHelperAlgo::Winograd](#), FieldMode > &H)
  - template<typename FloatElement , class [Field](#) >  
[Field::Element\\_ptr](#) [fgemv\\_convert](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) Y, const size\_t incY)
  - template<class FloatElement , class [Field](#) >  
void [fger\\_convert](#) (const [Field](#) &F, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) x, const size\_t incx, typename [Field::ConstElement\\_ptr](#) y, const size\_t incy, typename [Field::Element\\_ptr](#) A, const size\_t lda)
  - template<class NewField , class [Field](#) , class FieldMode >  
[Field::Element\\_ptr](#) [fsyrk\\_convert](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) UpLo, const [FFLAS\\_TRANSPOSE](#) trans, const size\_t N, const size\_t K, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, [MMHelper](#)< [Field](#), [MMHelperAlgo::Classic](#), FieldMode > &H)
  - template<class [Field](#) , class AlgoT , class ParSeqTrait >  
void [ScaLAndReduce](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) UpLo, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) A, const size\_t lda, const [MMHelper](#)< [Field](#), AlgoT, [ModeCategories::LazyTag](#), ParSeqTrait > &H)
  - template<class [Field](#) , class Element , class AlgoT , class ParSeqTrait >  
bool [NeedPreScaLReduction](#) (Element &Outmin, Element &Outmax, Element &Op1min, Element &Op1max, const Element &x, [MMHelper](#)< [Field](#), AlgoT, [ModeCategories::LazyTag](#), ParSeqTrait > &WH)
  - template<class [Field](#) , class Element , class AlgoT , class ModeT , class ParSeqTrait >  
bool [NeedPreScaLReduction](#) (Element &Outmin, Element &Outmax, Element &Op1min, Element &Op1max, const Element &x, [MMHelper](#)< [Field](#), AlgoT, ModeT, ParSeqTrait > &WH)
  - template<class [Field](#) , class Element , class AlgoT , class ParSeqTrait >  
bool [NeedPreAxyReduction](#) (Element &Outmin, Element &Outmax, Element &Op1min, Element &Op1max, Element &Op2min, Element &Op2max, const Element &x, [MMHelper](#)< [Field](#), AlgoT, [ModeCategories::LazyTag](#), ParSeqTrait > &WH)
  - template<class [Field](#) , class Element , class AlgoT , class ModeT , class ParSeqTrait >  
bool [NeedPreAxyReduction](#) (Element &Outmin, Element &Outmax, Element &Op1min, Element &Op1max, Element &Op2min, Element &Op2max, const Element &x, [MMHelper](#)< [Field](#), AlgoT, ModeT, ParSeqTrait > &WH)
  - template<class DFE >  
size\_t [min\\_types](#) (const DFE &k)
  - template<> size\_t [min\\_types](#) (const [Reclnt::rint](#)< 6 > &k)
  - template<> size\_t [min\\_types](#) (const [Reclnt::rint](#)< 7 > &k)
  - template<> size\_t [min\\_types](#) (const [Reclnt::rint](#)< 8 > &k)
  - template<> size\_t [min\\_types](#) (const [Reclnt::rint](#)< 9 > &k)
  - template<> size\_t [min\\_types](#) (const [Reclnt::rint](#)< 10 > &k)

- `template<> size_t min_types (const Givaro::Integer &k)`
- `template<class T >  
bool unfit (T x)`
- `template<> bool unfit (int64_t x)`
- `template<size_t K>  
bool unfit (Reclnt::rint< K > x)`
- `template<> bool unfit (Reclnt::rint< 6 > x)`
- `template<enum FFLAS_TRANSPOSE tA, enum FFLAS_TRANSPOSE tB>  
void igemm_colmajor (size_t rows, size_t cols, size_t depth, const int64_t alpha, const int64_t *A, size_t lda, const int64_t *B, size_t ldb, int64_t *C, size_t ldc)`
- `template<enum FFLAS_TRANSPOSE tA, enum FFLAS_TRANSPOSE tB, enum number_kind alpha_kind>  
void igemm_colmajor (size_t rows, size_t cols, size_t depth, const int64_t alpha, const int64_t *A, size_t lda, const int64_t *B, size_t ldb, int64_t *C, size_t ldc)`
- `void igemm (const enum FFLAS_TRANSPOSE TransA, const enum FFLAS_TRANSPOSE TransB, size_t rows, size_t cols, size_t depth, const int64_t alpha, const int64_t *A, size_t lda, const int64_t *B, size_t ldb, const int64_t beta, int64_t *C, size_t ldc)`
- `template<class Field >  
void MatF2MatD_Triangular (const Field &F, Givaro::DoubleDomain::Element_ptr S, const size_t lds, typename Field::ConstElement_ptr const E, const size_t lde, const size_t m, const size_t n)`
- `template<class Field >  
void MatF2MatFL_Triangular (const Field &F, Givaro::FloatDomain::Element_ptr S, const size_t lds, typename Field::ConstElement_ptr const E, const size_t lde, const size_t m, const size_t n)`

## 11.13.1 Function Documentation

### 11.13.1.1 computeFactorClassic() [1/3]

```
template<class Field >
double computeFactorClassic (
    const Field & F) [inline]
```

### 11.13.1.2 computeFactorClassic() [2/3]

```
template<>
double computeFactorClassic (
    const Givaro::ModularBalanced< double > & F) [inline]
```

### 11.13.1.3 computeFactorClassic() [3/3]

```
template<>
double computeFactorClassic (
    const Givaro::ModularBalanced< float > & F) [inline]
```

### 11.13.1.4 DotProdBoundClassic()

```
template<class Field >
size_t DotProdBoundClassic (
    const Field & F,
    const typename Field::Element & beta) [inline]
```

**11.13.1.5 TRSMBound()** [1/3]

```
template<class Field >
size_t TRSMBound (
    const Field & ) [inline]
```

TRSMBound.

computes the maximal size for delaying the modular reduction in a triangular system resolution

This is the default version over an arbitrary field. It is currently never used (the recursive algorithm is run until  $n=1$  in this case)

**Parameters**

|     |                                      |
|-----|--------------------------------------|
| $F$ | Finite Field/Ring of the computation |
|-----|--------------------------------------|

**11.13.1.6 TRSMBound()** [2/3]

```
template<class Element >
size_t TRSMBound (
    const Givaro::Modular< Element > & F) [inline]
```

Specialization for positive modular representation over double Computes  $n_{\max}$  s.t.

$(p-1)/2 * (p^{\{n_{\max}-1\}} + (p-2)^{\{n_{\max}-1\}}) < 2^{53}$  See [Dumas Giorgi Pernet 06, arXiv:cs/0601133] Specialization for positive modular representation over float. Computes  $n_{\max}$  s.t.  $(p-1)/2 * (p^{\{n_{\max}-1\}} + (p-2)^{\{n_{\max}-1\}}) < 2^{24}$  @pbi See [Dumas Giorgi Pernet 06, arXiv:cs/0601133]

**11.13.1.7 TRSMBound()** [3/3]

```
template<class Element >
size_t TRSMBound (
    const Givaro::ModularBalanced< Element > & F) [inline]
```

Specialization for balanced modular representation over double.

Computes  $n_{\max}$  s.t.  $(p-1)/2 * (((p+1)/2)^{\{n_{\max}-1\}}) < 2^{53}$

**Bibliography** • Dumas Giorgi Pernet 06, arXiv:cs/0601133

**11.13.1.8 fgemmm\_convert()**

```
template<class NewField , class Field , class FieldMode >
Field::Element_ptr fgemmm_convert (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Winograd, FieldMode > & H) [inline]
```

**11.13.1.9 NeedPreAddReduction() [1/2]**

```
template<class Field , class Element , class AlgoT , class ParSeqTrait >
bool NeedPreAddReduction (
    Element & Outmin,
    Element & Outmax,
    Element & Op1min,
    Element & Op1max,
    Element & Op2min,
    Element & Op2max,
    MMHelper< Field, AlgoT, ModeCategories::LazyTag, ParSeqTrait > & WH) [inline]
```

**11.13.1.10 NeedPreAddReduction() [2/2]**

```
template<class Field , class Element , class AlgoT , class ModeT , class ParSeqTrait >
bool NeedPreAddReduction (
    Element & Outmin,
    Element & Outmax,
    Element & Op1min,
    Element & Op1max,
    Element & Op2min,
    Element & Op2max,
    MMHelper< Field, AlgoT, ModeT, ParSeqTrait > & WH) [inline]
```

**11.13.1.11 NeedPreSubReduction() [1/2]**

```
template<class Field , class Element , class AlgoT , class ParSeqTrait >
bool NeedPreSubReduction (
    Element & Outmin,
    Element & Outmax,
    Element & Op1min,
    Element & Op1max,
    Element & Op2min,
    Element & Op2max,
    MMHelper< Field, AlgoT, ModeCategories::LazyTag, ParSeqTrait > & WH) [inline]
```

**11.13.1.12 NeedPreSubReduction() [2/2]**

```
template<class Field , class Element , class AlgoT , class ModeT , class ParSeqTrait >
bool NeedPreSubReduction (
    Element & Outmin,
    Element & Outmax,
    Element & Op1min,
    Element & Op1max,
    Element & Op2min,
    Element & Op2max,
    MMHelper< Field, AlgoT, ModeT, ParSeqTrait > & WH) [inline]
```

**11.13.1.13 NeedDoublePreAddReduction() [1/2]**

```
template<class Field , class Element , class AlgoT , class ParSeqTrait >
bool NeedDoublePreAddReduction (
    Element & Outmin,
    Element & Outmax,
    Element & Op1min,
    Element & Op1max,
    Element & Op2min,
    Element & Op2max,
    Element beta,
    MMHelper< Field, AlgoT, ModeCategories::LazyTag, ParSeqTrait > & WH) [inline]
```

**11.13.1.14 NeedDoublePreAddReduction() [2/2]**

```
template<class Field , class Element , class AlgoT , class ModeT , class ParSeqTrait >
bool NeedDoublePreAddReduction (
    Element & Outmin,
    Element & Outmax,
    Element & Op1min,
    Element & Op1max,
    Element & Op2min,
    Element & Op2max,
    Element beta,
    MMHelper< Field, AlgoT, ModeT, ParSeqTrait > & WH) [inline]
```

**11.13.1.15 ScalAndReduce() [1/3]**

```
template<class Field , class AlgoT , class ParSeqTrait >
void ScalAndReduce (
    const Field & F,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::Element_ptr X,
    const size_t incX,
    const MMHelper< Field, AlgoT, ModeCategories::LazyTag, ParSeqTrait > & H) [inline]
```

**11.13.1.16 ScalAndReduce() [2/3]**

```
template<class Field , class AlgoT , class ParSeqTrait >
void ScalAndReduce (
    const Field & F,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::Element_ptr A,
    const size_t lda,
    const MMHelper< Field, AlgoT, ModeCategories::LazyTag, ParSeqTrait > & H) [inline]
```

**11.13.1.17 fsquareCommon()**

```
template<class Field >
Field::Element_ptr fsquareCommon (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const size_t n,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc) [inline]
```

**11.13.1.18 WinogradThreshold()** [1/4]

```
template<class Field >
int WinogradThreshold (
    const Field & F) [inline]
```

Computes the number of recursive levels to perform.

**Parameters**

|          |   |
|----------|---|
| <i>m</i> | the common dimension in the product AxB |
|----------|---|

**11.13.1.19 WinogradThreshold()** [2/4]

```
template<>
int WinogradThreshold (
    const Givaro::Modular< float > & F) [inline]
```

**11.13.1.20 WinogradThreshold()** [3/4]

```
template<>
int WinogradThreshold (
    const Givaro::ModularBalanced< double > & F) [inline]
```

**11.13.1.21 WinogradThreshold()** [4/4]

```
template<>
int WinogradThreshold (
    const Givaro::ModularBalanced< float > & F) [inline]
```

**11.13.1.22 WinogradSteps()**

```
template<class Field >
int WinogradSteps (
    const Field & F,
    const size_t & m) [inline]
```

Computes the number of recursive levels to perform.

## Parameters

|     |  |
|-----|--|
| $m$ | the common dimension in the product $A \times B$ |
|-----|--|

## 11.13.1.23 DynamicPeeling()

```

template<class Field , class FieldMode >
void DynamicPeeling (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const size_t mr,
    const size_t nr,
    const size_t kr,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Winograd, FieldMode > & H,
    const typename MMHelper< Field, MMHelperAlgo::Winograd, FieldMode >::Delayed←
Field::Element Cmin,
    const typename MMHelper< Field, MMHelperAlgo::Winograd, FieldMode >::Delayed←
Field::Element Cmax) [inline]

```

## 11.13.1.24 DynamicPeeling2()

```

template<class Field , class FieldMode >
void DynamicPeeling2 (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const size_t mr,
    const size_t nr,
    const size_t kr,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Winograd, FieldMode > & H,

```

```

        const typename MMHelper< Field, MMHelperAlgo::Winograd, FieldMode >::Delayed←
Field::Element Cmin,
        const typename MMHelper< Field, MMHelperAlgo::Winograd, FieldMode >::Delayed←
Field::Element Cmax) [inline]

```

#### 11.13.1.25 WinogradCalc()

```

template<class Field , class FieldMode >
void WinogradCalc (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const FFLAS_TRANSPOSE tb,
    const size_t mr,
    const size_t nr,
    const size_t kr,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Winograd, FieldMode > & H) [inline]

```

#### 11.13.1.26 fgemv\_convert()

```

template<typename FloatElement , class Field >
Field::Element_ptr fgemv_convert (
    const Field & F,
    const FFLAS_TRANSPOSE ta,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr X,
    const size_t incX,
    const typename Field::Element beta,
    typename Field::Element_ptr Y,
    const size_t incY) [inline]

```

#### 11.13.1.27 fger\_convert()

```

template<class FloatElement , class Field >
void fger_convert (
    const Field & F,
    const size_t M,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr x,
    const size_t incx,
    typename Field::ConstElement_ptr y,
    const size_t incy,
    typename Field::Element_ptr A,
    const size_t lda) [inline]

```



**11.13.1.28 fsyrk\_convert()**

```
template<class NewField , class Field , class FieldMode >
Field::Element_ptr fsyrk_convert (
    const Field & F,
    const FFLAS_UPLO UpLo,
    const FFLAS_TRANSPOSE trans,
    const size_t N,
    const size_t K,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc,
    MMHelper< Field, MMHelperAlgo::Classic, FieldMode > & H) [inline]
```

**11.13.1.29 ScalAndReduce() [3/3]**

```
template<class Field , class AlgoT , class ParSeqTrait >
void ScalAndReduce (
    const Field & F,
    const FFLAS_UPLO UpLo,
    const size_t N,
    const typename Field::Element alpha,
    typename Field::Element_ptr A,
    const size_t lda,
    const MMHelper< Field, AlgoT, ModeCategories::LazyTag, ParSeqTrait > & H) [inline]
```

**11.13.1.30 NeedPreScalReduction() [1/2]**

```
template<class Field , class Element , class AlgoT , class ParSeqTrait >
bool NeedPreScalReduction (
    Element & Outmin,
    Element & Outmax,
    Element & Op1min,
    Element & Op1max,
    const Element & x,
    MMHelper< Field, AlgoT, ModeCategories::LazyTag, ParSeqTrait > & WH) [inline]
```

**11.13.1.31 NeedPreScalReduction() [2/2]**

```
template<class Field , class Element , class AlgoT , class ModeT , class ParSeqTrait >
bool NeedPreScalReduction (
    Element & Outmin,
    Element & Outmax,
    Element & Op1min,
    Element & Op1max,
    const Element & x,
    MMHelper< Field, AlgoT, ModeT, ParSeqTrait > & WH) [inline]
```

**11.13.1.32 NeedPreAxyReduction() [1/2]**

```
template<class Field , class Element , class AlgoT , class ParSeqTrait >
bool NeedPreAxyReduction (
    Element & Outmin,
    Element & Outmax,
    Element & Op1min,
    Element & Op1max,
    Element & Op2min,
    Element & Op2max,
    const Element & x,
    MMHelper< Field, AlgoT, ModeCategories::LazyTag, ParSeqTrait > & WH) [inline]
```

**11.13.1.33 NeedPreAxyReduction() [2/2]**

```
template<class Field , class Element , class AlgoT , class ModeT , class ParSeqTrait >
bool NeedPreAxyReduction (
    Element & Outmin,
    Element & Outmax,
    Element & Op1min,
    Element & Op1max,
    Element & Op2min,
    Element & Op2max,
    const Element & x,
    MMHelper< Field, AlgoT, ModeT, ParSeqTrait > & WH) [inline]
```

**11.13.1.34 min\_types() [1/7]**

```
template<class DFE >
size_t min_types (
    const DFE & k) [inline]
```

**11.13.1.35 min\_types() [2/7]**

```
template<>
size_t min_types (
    const RecInt::rint< 6 > & k) [inline]
```

**11.13.1.36 min\_types() [3/7]**

```
template<>
size_t min_types (
    const RecInt::rint< 7 > & k) [inline]
```

**11.13.1.37 min\_types() [4/7]**

```
template<>
size_t min_types (
    const RecInt::rint< 8 > & k) [inline]
```

**11.13.138 min\_types()** [5/7]

```
template<>
size_t min_types (
    const RecInt::rint< 9 > & k) [inline]
```

**11.13.139 min\_types()** [6/7]

```
template<>
size_t min_types (
    const RecInt::rint< 10 > & k) [inline]
```

**11.13.140 min\_types()** [7/7]

```
template<>
size_t min_types (
    const Givaro::Integer & k) [inline]
```

**11.13.141 unfit()** [1/4]

```
template<class T >
bool unfit (
    T x) [inline]
```

**11.13.142 unfit()** [2/4]

```
template<>
bool unfit (
    int64_t x) [inline]
```

**11.13.143 unfit()** [3/4]

```
template<size_t K>
bool unfit (
    RecInt::rint< K > x) [inline]
```

**11.13.144 unfit()** [4/4]

```
template<>
bool unfit (
    RecInt::rint< 6 > x) [inline]
```

**11.13.1.45 igemm\_colmajor() [1/2]**

```
template<enum FFLAS_TRANSPOSE tA, enum FFLAS_TRANSPOSE tB>
void igemm_colmajor (
    size_t rows,
    size_t cols,
    size_t depth,
    const int64_t alpha,
    const int64_t * A,
    size_t lda,
    const int64_t * B,
    size_t ldb,
    int64_t * C,
    size_t ldc)
```

**11.13.1.46 igemm\_colmajor() [2/2]**

```
template<enum FFLAS_TRANSPOSE tA, enum FFLAS_TRANSPOSE tB, enum number_kind alpha_kind>
void igemm_colmajor (
    size_t rows,
    size_t cols,
    size_t depth,
    const int64_t alpha,
    const int64_t * A,
    size_t lda,
    const int64_t * B,
    size_t ldb,
    int64_t * C,
    size_t ldc)
```

**11.13.1.47 igemm()**

```
void igemm (
    const enum FFLAS_TRANSPOSE TransA,
    const enum FFLAS_TRANSPOSE TransB,
    size_t rows,
    size_t cols,
    size_t depth,
    const int64_t alpha,
    const int64_t * A,
    size_t lda,
    const int64_t * B,
    size_t ldb,
    const int64_t beta,
    int64_t * C,
    size_t ldc) [inline]
```

**Todo** use primitive (no `Field()`) and specialise for int64.

**Todo** use primitive (no `Field()`) and specialise for int64.

**11.13.148 MatF2MatD\_Triangular()**

```
template<class Field >
void MatF2MatD_Triangular (
    const Field & F,
    Givaro::DoubleDomain::Element_ptr S,
    const size_t lds,
    typename Field::ConstElement_ptr const E,
    const size_t lde,
    const size_t m,
    const size_t n)
```

**11.13.149 MatF2MatFI\_Triangular()**

```
template<class Field >
void MatF2MatFI_Triangular (
    const Field & F,
    Givaro::FloatDomain::Element_ptr S,
    const size_t lds,
    typename Field::ConstElement_ptr const E,
    const size_t lde,
    const size_t m,
    const size_t n)
```

**Todo** do finit(...,FFLAS\_TRANS,FFLAS\_DIAG)  
do fconvert(...,FFLAS\_TRANS,FFLAS\_DIAG)

**11.14 FFLAS::sell\_details Namespace Reference****Data Structures**

- struct [Coo](#)
- struct [Info](#)

**11.15 FFLAS::sparse\_details Namespace Reference****Functions**

- template<class Field >  
void [init\\_y](#) (const Field &F, const size\_t m, const typename Field::Element b, typename Field::Element\_ptr y)
- template<class Field >  
void [init\\_y](#) (const Field &F, const size\_t m, const size\_t n, const typename Field::Element b, typename Field::Element\_ptr y, const int ldy)
- template<class Field , class SM , class FC , class MZO >  
std::enable\_if<!std::is\_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineFloat >::value||std::is\_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineIntTag >::value)>::type [fspmv\\_dispatch](#) (const Field &F, const SM &A, typename Field::ConstElement\_ptr x, typename Field::Element\_ptr y, FC fc, MZO mzo)

- `template<class Field , class SM , class FC , class MZO >`  
`std::enable_if< std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineFloat >::value || std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineIntTag >::value >::type fspmv_dispatch (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FC fc, MZO mzo)`
- `template<class Field , class SM >`  
`void fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::GenericTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< !isSparseMatrixSimdFormat< Field, SM >::value >::type fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::UnparametricTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< isSparseMatrixSimdFormat< Field, SM >::value >::type fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::UnparametricTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< !isSparseMatrixSimdFormat< Field, SM >::value >::type fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::ModularTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< isSparseMatrixSimdFormat< Field, SM >::value >::type fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::ModularTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`void fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::GenericTag, ZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< !isSparseMatrixSimdFormat< Field, SM >::value >::type fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::UnparametricTag, ZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< isSparseMatrixSimdFormat< Field, SM >::value >::type fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::UnparametricTag, ZOSparseMatrix)`
- `template<class Field , class SM >`  
`void fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::ModularTag, std::true_type)`
- `template<class Field , class SM , class FCat , class MZO >`  
`std::enable_if< !(std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineFloat >::value || std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineIntTag >::value) >::type fspmm_dispatch (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FCat, MZO)`
- `template<class Field , class SM , class FCat , class MZO >`  
`std::enable_if< std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineFloat >::value || std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineIntTag >::value >::type fspmm_dispatch (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FCat, MZO)`
- `template<class Field , class SM >`  
`void fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::GenericTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< support_simd< typenameField::Element >::value >::type fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::UnparametricTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< !support_simd< typenameField::Element >::value >::type fspmm (const Field &F, const SM`

- &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x, int ldx, typename [Field::Element\\_ptr](#) y, int ldy, [FieldCategories::UnparametricTag](#), [NotZOSparseMatrix](#))
- `template<class Field , class SM >`  
`std::enable_if<support\_simd< typenameField::Element >::value >::type fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::ModularTag, NotZOSparseMatrix)`
  - `template<class Field , class SM >`  
`std::enable_if<!support\_simd< typenameField::Element >::value >::type fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::ModularTag, NotZOSparseMatrix)`
  - `template<class Field , class SM >`  
`void fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::GenericTag, ZOSparseMatrix)`
  - `template<class Field , class SM >`  
`std::enable_if<support\_simd< typenameField::Element >::value >::type fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::UnparametricTag, ZOSparseMatrix)`
  - `template<class Field , class SM >`  
`std::enable_if<!support\_simd< typenameField::Element >::value >::type fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::UnparametricTag, ZOSparseMatrix)`
  - `template<class Field , class SM >`  
`void fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::ModularTag, ZOSparseMatrix)`
  - `template<class Field , class SM , class FCat , class MZO >`  
`std::enable_if<!(std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineFloat >::value||std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineIntTag >::value)>::type pfspmm\_dispatch (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FCat, MZO)`
  - `template<class Field , class SM , class FCat , class MZO >`  
`std::enable_if< std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineFloat >::value||std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineIntTag >::value >::type pfspmm\_dispatch (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FCat, MZO)`
  - `template<class Field , class SM >`  
`void pfspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::GenericTag, NotZOSparseMatrix)`
  - `template<class Field , class SM >`  
`std::enable_if<support\_simd< typenameField::Element >::value >::type pfspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::UnparametricTag, NotZOSparseMatrix)`
  - `template<class Field , class SM >`  
`std::enable_if<!support\_simd< typenameField::Element >::value >::type pfspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::UnparametricTag, NotZOSparseMatrix)`
  - `template<class Field , class SM >`  
`std::enable_if<support\_simd< typenameField::Element >::value >::type pfspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::ModularTag, NotZOSparseMatrix)`
  - `template<class Field , class SM >`  
`std::enable_if<!support\_simd< typenameField::Element >::value >::type pfspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::ModularTag, NotZOSparseMatrix)`
  - `template<class Field , class SM >`  
`void pfspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::GenericTag, ZOSparseMatrix)`

- `template<class Field, class SM >`  
`std::enable_if< support_simd< typenameField::Element >::value >::type pfspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::UnparametricTag, ZOSparseMatrix)`
- `template<class Field, class SM >`  
`std::enable_if< !support_simd< typenameField::Element >::value >::type pfspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::UnparametricTag, ZOSparseMatrix)`
- `template<class Field, class SM >`  
`void pfspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::ModularTag, ZOSparseMatrix)`
- `template<class Field, class SM >`  
`void pfspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::GenericTag, std::false_type)`
- `template<class Field, class SM >`  
`void pfspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::UnparametricTag, std::false_type)`
- `template<class Field, class SM >`  
`void pfspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::ModularTag, std::false_type)`
- `template<class Field, class SM >`  
`void pfspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::GenericTag, std::true_type)`
- `template<class Field, class SM >`  
`void pfspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::UnparametricTag, std::true_type)`
- `template<class Field, class SM >`  
`void pfspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::ModularTag, std::true_type)`
- `template<class Field, class SM >`  
`std::enable_if< isSparseMatrixSimdFormat< Field, SM >::value &&support_simd< typenameField::Element >::value >::type fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::UnparametricTag, NotZOSparseMatrix)`
- `template<class Field, class SM >`  
`std::enable_if< isSparseMatrixSimdFormat< Field, SM >::value &&support_simd< typenameField::Element >::value >::type fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::ModularTag, NotZOSparseMatrix)`
- `template<class Field, class SM >`  
`std::enable_if< isSparseMatrixSimdFormat< Field, SM >::value &&support_simd< typenameField::Element >::value >::type fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::UnparametricTag, ZOSparseMatrix)`

## 11.15.1 Function Documentation

### 11.15.1.1 init\_y() [1/2]

```
template<class Field >
void init_y (
    const Field & F,
    const size_t m,
    const typename Field::Element b,
    typename Field::Element_ptr y) [inline]
```



**11.15.1.2 init\_y()** [2/2]

```
template<class Field >
void init_y (
    const Field & F,
    const size_t m,
    const size_t n,
    const typename Field::Element b,
    typename Field::Element_ptr y,
    const int ldy) [inline]
```

**11.15.1.3 fspmv\_dispatch()** [1/2]

```
template<class Field , class SM , class FC , class MZO >
std::enable_if<!(std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::Mac
>::value||std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineInt
>::value)>::type fspmv_dispatch (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FC fc,
    MZO mzo) [inline]
```

**11.15.1.4 fspmv\_dispatch()** [2/2]

```
template<class Field , class SM , class FC , class MZO >
std::enable_if< std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::Mac
>::value||std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineInt
>::value >::type fspmv_dispatch (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FC fc,
    MZO mzo) [inline]
```

**11.15.1.5 fspmv()** [1/12]

```
template<class Field , class SM >
void fspmv (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::GenericTag ,
    NotZOSparseMatrix ) [inline]
```

**11.15.1.6 fspmv()** [2/12]

```
template<class Field , class SM >
std::enable_if<!isSparseMatrixSimdFormat< Field, SM >::value >::type fspmv (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::UnparametricTag ,
    NotZOSparseMatrix ) [inline]
```

**11.15.1.7 fspmv()** [3/12]

```
template<class Field , class SM >
std::enable_if< isSparseMatrixSimdFormat< Field, SM >::value >::type fspmv (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::UnparametricTag ,
    NotZOSparseMatrix ) [inline]
```

**11.15.1.8 fspmv()** [4/12]

```
template<class Field , class SM >
std::enable_if<!isSparseMatrixSimdFormat< Field, SM >::value >::type fspmv (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::ModularTag ,
    NotZOSparseMatrix ) [inline]
```

**11.15.1.9 fspmv()** [5/12]

```
template<class Field , class SM >
std::enable_if< isSparseMatrixSimdFormat< Field, SM >::value >::type fspmv (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::ModularTag ,
    NotZOSparseMatrix ) [inline]
```

**11.15.1.10 fspmv()** [6/12]

```
template<class Field , class SM >
void fspmv (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::GenericTag ,
    ZOSparseMatrix ) [inline]
```

**11.15.1.11 fspmv()** [7/12]

```
template<class Field , class SM >
std::enable_if<!isSparseMatrixSimdFormat< Field, SM >::value >::type fspmv (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::UnparametricTag ,
    ZOSparseMatrix ) [inline]
```

**11.15.1.12 fspmv()** [8/12]

```
template<class Field , class SM >
std::enable_if< isSparseMatrixSimdFormat< Field, SM >::value >::type fspmv (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::UnparametricTag ,
    ZOSparseMatrix ) [inline]
```

**11.15.1.13 fspmv()** [9/12]

```
template<class Field , class SM >
void fspmv (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::ModularTag ,
    std::true_type ) [inline]
```

**11.15.1.14 fspmm\_dispatch()** [1/2]

```
template<class Field , class SM , class FCat , class MZO >
std::enable_if<!(std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::Ma
>::value||std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineInt
>::value)>::type fspmm_dispatch (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FCat ,
    MZO ) [inline]
```

**11.15.1.15 fspmm\_dispatch() [2/2]**

```

template<class Field , class SM , class FCat , class MZO >
std::enable_if< std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::Mac
>::value||std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineInt
>::value >::type fspmm_dispatch (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FCat ,
    MZO ) [inline]

```

**11.15.1.16 fspmm() [1/9]**

```

template<class Field , class SM >
void fspmm (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::GenericTag ,
    NotZOSparseMatrix ) [inline]

```

**11.15.1.17 fspmm() [2/9]**

```

template<class Field , class SM >
std::enable_if< support_simd< typenameField::Element >::value >::type fspmm (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::UnparametricTag ,
    NotZOSparseMatrix ) [inline]

```

**11.15.1.18 fspmm() [3/9]**

```

template<class Field , class SM >
std::enable_if< !support_simd< typenameField::Element >::value >::type fspmm (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::UnparametricTag ,
    NotZOSparseMatrix ) [inline]

```

**11.15.1.19 fspmm() [4/9]**

```
template<class Field , class SM >
std::enable_if< support_simd< typenameField::Element >::value >::type fspmm (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::ModularTag ,
    NotZOSparseMatrix ) [inline]
```

**11.15.1.20 fspmm() [5/9]**

```
template<class Field , class SM >
std::enable_if< !support_simd< typenameField::Element >::value >::type fspmm (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::ModularTag ,
    NotZOSparseMatrix ) [inline]
```

**11.15.1.21 fspmm() [6/9]**

```
template<class Field , class SM >
void fspmm (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::GenericTag ,
    ZOSparseMatrix ) [inline]
```

**11.15.1.22 fspmm() [7/9]**

```
template<class Field , class SM >
std::enable_if< support_simd< typenameField::Element >::value >::type fspmm (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::UnparametricTag ,
    ZOSparseMatrix ) [inline]
```

**11.15.1.23 fspmm()** [8/9]

```
template<class Field , class SM >
std::enable_if<!support\_simd< typenameField::Element >::value >::type fspmm (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::UnparametricTag ,
    ZOSparseMatrix ) [inline]
```

**11.15.1.24 fspmm()** [9/9]

```
template<class Field , class SM >
void fspmm (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::ModularTag ,
    ZOSparseMatrix ) [inline]
```

**11.15.1.25 pfspmm\_dispatch()** [1/2]

```
template<class Field , class SM , class FCat , class MZO >
std::enable_if<!(std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::Ma
>::value||std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineInt
>::value)>::type pfspmm_dispatch (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FCat ,
    MZO ) [inline]
```

**11.15.1.26 pfspmm\_dispatch()** [2/2]

```
template<class Field , class SM , class FCat , class MZO >
std::enable_if< std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::Mac
>::value||std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineInt
>::value >::type pfspmm_dispatch (
    const Field & F,
    const SM & A,
```

```

    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FCat ,
    MZO ) [inline]

```

#### 11.15.1.27 pfspmm() [1/9]

```

template<class Field , class SM >
void pfspmm (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::GenericTag ,
    NotZOSparseMatrix ) [inline]

```

#### 11.15.1.28 pfspmm() [2/9]

```

template<class Field , class SM >
std::enable_if< support_simd< typenameField::Element >::value >::type pfspmm (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::UnparametricTag ,
    NotZOSparseMatrix ) [inline]

```

#### 11.15.1.29 pfspmm() [3/9]

```

template<class Field , class SM >
std::enable_if< !support_simd< typenameField::Element >::value >::type pfspmm (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::UnparametricTag ,
    NotZOSparseMatrix ) [inline]

```

**11.15.1.30 pfspmm() [4/9]**

```
template<class Field , class SM >
std::enable_if< support_simd< typenameField::Element >::value >::type pfspmm (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::ModularTag ,
    NotZOSparseMatrix ) [inline]
```

**11.15.1.31 pfspmm() [5/9]**

```
template<class Field , class SM >
std::enable_if< !support_simd< typenameField::Element >::value >::type pfspmm (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::ModularTag ,
    NotZOSparseMatrix ) [inline]
```

**11.15.1.32 pfspmm() [6/9]**

```
template<class Field , class SM >
void pfspmm (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::GenericTag ,
    ZOSparseMatrix ) [inline]
```

**11.15.1.33 pfspmm() [7/9]**

```
template<class Field , class SM >
std::enable_if< support_simd< typenameField::Element >::value >::type pfspmm (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::UnparametricTag ,
    ZOSparseMatrix ) [inline]
```



**11.15.134 pfspmm()** [8/9]

```
template<class Field , class SM >
std::enable_if<!support\_simd< typenameField::Element >::value >::type pfspmm (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::UnparametricTag ,
    ZOSparseMatrix ) [inline]
```

**11.15.135 pfspmm()** [9/9]

```
template<class Field , class SM >
void pfspmm (
    const Field & F,
    const SM & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::ModularTag ,
    ZOSparseMatrix ) [inline]
```

**11.15.136 pfspmv()** [1/6]

```
template<class Field , class SM >
void pfspmv (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::GenericTag ,
    std::false_type ) [inline]
```

**11.15.137 pfspmv()** [2/6]

```
template<class Field , class SM >
void pfspmv (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::UnparametricTag ,
    std::false_type ) [inline]
```

**11.15.1.38 pfspmv() [3/6]**

```
template<class Field , class SM >
void pfspmv (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::ModularTag ,
    std::false_type ) [inline]
```

**11.15.1.39 pfspmv() [4/6]**

```
template<class Field , class SM >
void pfspmv (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::GenericTag ,
    std::true_type ) [inline]
```

**11.15.1.40 pfspmv() [5/6]**

```
template<class Field , class SM >
void pfspmv (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::UnparametricTag ,
    std::true_type ) [inline]
```

**11.15.1.41 pfspmv() [6/6]**

```
template<class Field , class SM >
void pfspmv (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::ModularTag ,
    std::true_type ) [inline]
```

**11.15.1.42 fspmv() [10/12]**

```
template<class Field , class SM >
std::enable_if< isSparseMatrixSimdFormat< Field, SM >::value &&support_simd< typenameField←
::Element >::value >::type fspmv (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::UnparametricTag ,
    NotZOSparseMatrix ) [inline]
```

**11.15.1.43 fspmv()** [11/12]

```
template<class Field , class SM >
std::enable_if< isSparseMatrixSimdFormat< Field, SM >::value &&support_simd< typenameField↵
::Element >::value >::type fspmv (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::ModularTag ,
    NotZOSparseMatrix ) [inline]
```

**11.15.1.44 fspmv()** [12/12]

```
template<class Field , class SM >
std::enable_if< isSparseMatrixSimdFormat< Field, SM >::value &&support_simd< typenameField↵
::Element >::value >::type fspmv (
    const Field & F,
    const SM & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::UnparametricTag ,
    ZOSparseMatrix ) [inline]
```

**11.16 FFLAS::sparse\_details\_impl Namespace Reference****Functions**

- template<class Field >  
void fspmm (const Field &F, const Sparse< Field, SparseMatrix\_t::COO > &A, size\_t blockSize, typename Field::ConstElement\_ptr x\_, int ldx, typename Field::Element\_ptr y\_, int ldy, FieldCategories::GenericTag)
- template<class Field >  
void fspmm (const Field &F, const Sparse< Field, SparseMatrix\_t::COO > &A, size\_t blockSize, typename Field::ConstElement\_ptr x\_, int ldx, typename Field::Element\_ptr y\_, int ldy, FieldCategories::UnparametricTag)
- template<class Field >  
void fspmm (const Field &F, const Sparse< Field, SparseMatrix\_t::COO > &A, size\_t blockSize, typename Field::ConstElement\_ptr x\_, int ldx, typename Field::Element\_ptr y\_, int ldy, const int64\_t kmax)
- template<class Field >  
void fspmm\_simd\_aligned (const Field &F, const Sparse< Field, SparseMatrix\_t::COO > &A, size\_t block↵  
Size, typename Field::ConstElement\_ptr x\_, int ldx, typename Field::Element\_ptr y\_, int ldy, const int64\_t  
kmax)
- template<class Field >  
void fspmm\_simd\_unaligned (const Field &F, const Sparse< Field, SparseMatrix\_t::COO > &A, size\_↵  
t blockSize, typename Field::ConstElement\_ptr x\_, int ldx, typename Field::Element\_ptr y\_, int ldy, const  
int64\_t kmax)
- template<class Field >  
void fspmm\_one (const Field &F, const Sparse< Field, SparseMatrix\_t::COO\_ZO > &A, size\_↵  
t blockSize, typename Field::ConstElement\_ptr x\_, int ldx, typename Field::Element\_ptr y\_, int ldy,  
FieldCategories::GenericTag)
- template<class Field >  
void fspmm\_mone (const Field &F, const Sparse< Field, SparseMatrix\_t::COO\_ZO > &A, size\_↵  
t blockSize, typename Field::ConstElement\_ptr x\_, int ldx, typename Field::Element\_ptr y\_, int ldy,  
FieldCategories::GenericTag)

- `template<class Field >`  
`void fspmm_one_simd_aligned (const Field &F, const Sparse< Field, SparseMatrix_t::COO_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_one_simd_unaligned (const Field &F, const Sparse< Field, SparseMatrix_t::COO_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_mone_simd_aligned (const Field &F, const Sparse< Field, SparseMatrix_t::COO_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_mone_simd_unaligned (const Field &F, const Sparse< Field, SparseMatrix_t::COO_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::COO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::COO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::COO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, const uint64_t kmax)`
- `template<class Field >`  
`void fspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::COO_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::COO_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::COO_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::COO_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfspmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfspmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, const int64_t kmax)`
- `template<class Field >`  
`void pfspmm_one (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspmm_mone (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspmm_one (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`

- template<class [Field](#) >  
void [pfspmm\\_mone](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x\_, int ldx, typename [Field::Element\\_ptr](#) y\_, int ldy, [FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
void [pfspmv](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::GenericTag](#))
- template<class [Field](#) >  
void [pfspmv\\_task](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, const [index\\_t](#) iStart, const [index\\_t](#) iStop, [FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
void [pfspmv](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
void [pfspmv](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, const int64\_t kmax)
- template<class [Field](#) >  
void [pfspmv\\_one](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::GenericTag](#))
- template<class [Field](#) >  
void [pfspmv\\_mone](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::GenericTag](#))
- template<class [Field](#) >  
void [pfspmv\\_one](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
void [pfspmv\\_mone](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
void [fspmm](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x\_, int ldx, typename [Field::Element\\_ptr](#) y\_, int ldy, [FieldCategories::GenericTag](#))
- template<class [Field](#) >  
void [fspmm](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, [index\\_t](#) blockSize, typename [Field::ConstElement\\_ptr](#) x\_, [index\\_t](#) ldx, typename [Field::Element\\_ptr](#) y\_, [index\\_t](#) ldy, [FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
void [fspmm\\_simd\\_aligned](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x\_, int ldx, typename [Field::Element\\_ptr](#) y\_, int ldy, [FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
void [fspmm\\_simd\\_unaligned](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x\_, int ldx, typename [Field::Element\\_ptr](#) y\_, int ldy, [FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
void [fspmm](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x\_, int ldx, typename [Field::Element\\_ptr](#) y\_, int ldy, const int64\_t kmax)
- template<class [Field](#) >  
void [fspmm\\_one](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x\_, int ldx, typename [Field::Element\\_ptr](#) y\_, int ldy, [FieldCategories::GenericTag](#))
- template<class [Field](#) >  
void [fspmm\\_mone](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x\_, int ldx, typename [Field::Element\\_ptr](#) y\_, int ldy, [FieldCategories::GenericTag](#))
- template<class [Field](#) >  
void [fspmm\\_one\\_simd\\_aligned](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A,

- ```
size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy,
FieldCategories::UnparametricTag)
```
- `template<class Field >`  
`void fspmm_one_simd_unaligned (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_ZO > &A,`  
`size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy,`  
`FieldCategories::UnparametricTag)`
  - `template<class Field >`  
`void fspmm_mone_simd_aligned (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_ZO > &A,`  
`size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy,`  
`FieldCategories::UnparametricTag)`
  - `template<class Field >`  
`void fspmm_mone_simd_unaligned (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_ZO > &A,`  
`size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy,`  
`FieldCategories::UnparametricTag)`
  - `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::CSR > &A, typename Field::ConstElement_ptr`  
`x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
  - `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::CSR > &A, typename Field::ConstElement_ptr`  
`x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
  - `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::CSR > &A, typename Field::ConstElement_ptr`  
`x_, typename Field::Element_ptr y_, const int64_t kmax)`
  - `template<class Field >`  
`void fspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_ZO > &A, typename`  
`Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
  - `template<class Field >`  
`void fspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_ZO > &A, typename`  
`Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
  - `template<class Field >`  
`void fspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_ZO > &A, typename`  
`Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
  - `template<class Field >`  
`void fspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_ZO > &A, typename`  
`Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
  - `template<class Field >`  
`void pfspmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, size_t blockSize, type-`  
`name Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::GenericTag)`
  - `template<class Field >`  
`void pfspmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, size_t blockSize, type-`  
`name Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::GenericTag)`
  - `template<class Field >`  
`void pfspmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, size_t blockSize, type-`  
`name Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::UnparametricTag)`
  - `template<class Field >`  
`void pfspmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, size_↵`  
`t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy,`  
`FieldCategories::UnparametricTag)`
  - `template<class Field >`  
`void pfspmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, size_t blockSize, type-`  
`name Field::ConstElement_ptr x, typename Field::Element_ptr y, const int64_t kmax)`
  - `template<class Field >`  
`void pfspmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, size_t blockSize, type-`  
`name Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, const int64_t kmax)`
  - `template<class Field >`  
`void pfspmv (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, typename`  
`Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`

- `template<class Field >`  
`void pfspmv (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfspmv (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, const int64_t kmax)`
- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, const int64_t kmax)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, const uint64_t kmax)`
- `template<class Field >`  
`void pfspm (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, size_t blockSize, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspm (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspm (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, size_t blockSize, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfspm (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfspm (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, size_t blockSize, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, const int64_t kmax)`
- `template<class Field >`  
`void pfspm (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, const int64_t kmax)`
- `template<class Field, class Func >`  
`void pfspm_zo (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, Func &&func)`
- `template<class Field, class Func >`  
`void pfspm_zo (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, Func &&func)`
- `template<class Field >`  
`void pfspmv (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspmv (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfspmv (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, const int64_t kmax)`



- `template<class Field >`  
`void pfspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, const int64_t kmax)`
- `template<class Field >`  
`void fspmm_mone (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmm_one (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmm_mone (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_one (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_one_simd_aligned (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_one_simd_unaligned (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_mone_simd_aligned (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_mone_simd_unaligned (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`



- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, const uint64_t kmax)`
- `template<class Field >`  
`void fspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfspmv (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_simd > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspmv (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_simd > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfspmv (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_simd > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, const uint64_t kmax)`
- `template<class Field >`  
`void pfspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_simd > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv_simd (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_simd > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_simd > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv_simd (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_simd > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, const uint64_t kmax)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_simd > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, const uint64_t kmax)`
- `template<class Field >`  
`void fspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`

- `template<class Field >`  
`void fspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv_one_simd (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv_mone_simd (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfspmm (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspmm (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfspmm (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, uint64_t kmax)`
- `template<class Field >`  
`void pfspmv (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspmv (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfspmv (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, uint64_t kmax)`
- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, uint64_t kmax)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, uint64_t kmax)`
- `template<class Field >`  
`void pfspmv (const Field &F, const Sparse< Field, SparseMatrix_t::SELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspmv (const Field &F, const Sparse< Field, SparseMatrix_t::SELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`

- `template<class Field >`  
`void pfspmv (const Field &F, const Sparse< Field, SparseMatrix_t::SELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, const int64_t kmax)`
- `template<class Field >`  
`void pfspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::SELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::SELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::SELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::SELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::SELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv_simd (const Field &F, const Sparse< Field, SparseMatrix_t::SELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::SELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv_simd (const Field &F, const Sparse< Field, SparseMatrix_t::SELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, const uint64_t kmax)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::SELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, const uint64_t kmax)`
- `template<class Field >`  
`void fspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::SELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::SELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv_one_simd (const Field &F, const Sparse< Field, SparseMatrix_t::SELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv_mone_simd (const Field &F, const Sparse< Field, SparseMatrix_t::SELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::SELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::SELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`

## 11.16.1 Function Documentation

### 11.16.1.1 fspmm() [1/15]

```
template<class Field >
void fspmm (
```

```

    const Field & F,
    const Sparse< Field, SparseMatrix_t::COO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::GenericTag ) [inline]

```

#### 11.16.1.2 fspmm() [2/15]

```

template<class Field >
void fspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::COO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]

```

#### 11.16.1.3 fspmm() [3/15]

```

template<class Field >
void fspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::COO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    const int64_t kmax) [inline]

```

#### 11.16.1.4 fspmm\_simd\_aligned() [1/2]

```

template<class Field >
void fspmm_simd_aligned (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::COO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    const int64_t kmax) [inline]

```

**11.16.1.5 fspmm\_simd\_unaligned()** [1/2]

```
template<class Field >
void fspmm_simd_unaligned (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::COO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    const int64_t kmax) [inline]
```

**11.16.1.6 fspmm\_one()** [1/4]

```
template<class Field >
void fspmm_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::COO_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.7 fspmm\_mone()** [1/4]

```
template<class Field >
void fspmm_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::COO_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.8 fspmm\_one\_simd\_aligned()** [1/3]

```
template<class Field >
void fspmm_one_simd_aligned (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::COO_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.9 fspmm\_one\_simd\_unaligned()** [1/3]

```

template<class Field >
void fspmm_one_simd_unaligned (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::COO_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]

```

**11.16.1.10 fspmm\_mone\_simd\_aligned()** [1/3]

```

template<class Field >
void fspmm_mone_simd_aligned (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::COO_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]

```

**11.16.1.11 fspmm\_mone\_simd\_unaligned()** [1/3]

```

template<class Field >
void fspmm_mone_simd_unaligned (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::COO_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]

```

**11.16.1.12 fspmv()** [1/21]

```

template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::COO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]

```

**11.16.1.13 fspmv()** [2/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::COO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.14 fspmv()** [3/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::COO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    const uint64_t kmax) [inline]
```

**11.16.1.15 fspmv\_one()** [1/10]

```
template<class Field >
void fspmv_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::COO_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.16 fspmv\_mone()** [1/10]

```
template<class Field >
void fspmv_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::COO_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.17 fspmv\_one()** [2/10]

```
template<class Field >
void fspmv_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::COO_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.18 fspmv\_mone()** [2/10]

```
template<class Field >
void fspmv_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::COO_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.19 pfspmm()** [1/18]

```
template<class Field >
void pfspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.20 pfspmm()** [2/18]

```
template<class Field >
void pfspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.21 pfspmm()** [3/18]

```
template<class Field >
void pfspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    const int64_t kmax) [inline]
```



**11.16.1.22 pfspmm\_one()** [1/2]

```
template<class Field >
void pfspmm_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.23 pfspmm\_mone()** [1/2]

```
template<class Field >
void pfspmm_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.24 pfspmm\_one()** [2/2]

```
template<class Field >
void pfspmm_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.25 pfspmm\_mone()** [2/2]

```
template<class Field >
void pfspmm_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.26 pfspmv()** [1/18]

```
template<class Field >
void pfspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.27 pfspmv\_task()**

```
template<class Field >
void pfspmv_task (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    const index_t iStart,
    const index_t iStop,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.28 pfspmv()** [2/18]

```
template<class Field >
void pfspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.29 pfspmv()** [3/18]

```
template<class Field >
void pfspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    const int64_t kmax) [inline]
```

**11.16.1.30 pfspmv\_one()** [1/8]

```
template<class Field >
void pfspmv_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.31 pfspmv\_mone()** [1/8]

```
template<class Field >
void pfspmv_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.32 pfspmv\_one()** [2/8]

```
template<class Field >
void pfspmv_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.33 pfspmv\_mone()** [2/8]

```
template<class Field >
void pfspmv_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.34 fspmm()** [4/15]

```
template<class Field >
void fspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.35 fspmm()** [5/15]

```
template<class Field >
void fspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR > & A,
    index_t blockSize,
    typename Field::ConstElement_ptr x_,
    index_t ldx,
    typename Field::Element_ptr y_,
    index_t ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.36 fspmm\_simd\_aligned()** [2/2]

```
template<class Field >
void fspmm_simd_aligned (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.37 fspmm\_simd\_unaligned()** [2/2]

```
template<class Field >
void fspmm_simd_unaligned (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.38 fspmm()** [6/15]

```
template<class Field >
void fspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    const int64_t kmax) [inline]
```

**11.16.1.39 fspmm\_one()** [2/4]

```
template<class Field >
void fspmm_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::GenericTag ) [inline]
```

**11.16.140 fspmm\_mone()** [2/4]

```
template<class Field >
void fspmm_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::GenericTag ) [inline]
```

**11.16.141 fspmm\_one\_simd\_aligned()** [2/3]

```
template<class Field >
void fspmm_one_simd_aligned (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.142 fspmm\_one\_simd\_unaligned()** [2/3]

```
template<class Field >
void fspmm_one_simd_unaligned (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.143 fspmm\_mone\_simd\_aligned()** [2/3]

```
template<class Field >
void fspmm_mone_simd_aligned (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.144 fspmm\_mone\_simd\_unaligned()** [2/3]

```
template<class Field >
void fspmm_mone_simd_unaligned (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldY,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.145 fspmv()** [4/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.146 fspmv()** [5/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.147 fspmv()** [6/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    const int64_t kmax) [inline]
```

**11.16.148 fspmv\_one()** [3/10]

```
template<class Field >
void fspmv_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.49 fspmv\_mone()** [3/10]

```
template<class Field >
void fspmv_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.50 fspmv\_one()** [4/10]

```
template<class Field >
void fspmv_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.51 fspmv\_mone()** [4/10]

```
template<class Field >
void fspmv_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.52 pfspmm()** [4/18]

```
template<class Field >
void pfspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_HYB > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.53 pfspmm()** [5/18]

```
template<class Field >
void pfspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_HYB > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::GenericTag ) [inline]
```

**11.16.154 pfspmm()** [6/18]

```
template<class Field >
void pfspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_HYB > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.155 pfspmm()** [7/18]

```
template<class Field >
void pfspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_HYB > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.156 pfspmm()** [8/18]

```
template<class Field >
void pfspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_HYB > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    const int64_t kmax) [inline]
```

**11.16.157 pfspmm()** [9/18]

```
template<class Field >
void pfspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_HYB > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    const int64_t kmax) [inline]
```



**11.16.1.58 pfspmv()** [4/18]

```
template<class Field >
void pfspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_HYB > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.59 pfspmv()** [5/18]

```
template<class Field >
void pfspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_HYB > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.60 pfspmv()** [6/18]

```
template<class Field >
void pfspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_HYB > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    const int64_t kmax) [inline]
```

**11.16.1.61 fspmm()** [7/15]

```
template<class Field >
void fspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_HYB > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.62 fspmm()** [8/15]

```
template<class Field >
void fspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_HYB > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.63 fspmm()** [9/15]

```
template<class Field >
void fspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_HYB > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    const int64_t kmax) [inline]
```

**11.16.1.64 fspmv()** [7/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_HYB > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.65 fspmv()** [8/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_HYB > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.66 fspmv()** [9/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::CSR_HYB > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    const uint64_t kmax) [inline]
```

**11.16.1.67 pfspmm()** [10/18]

```
template<class Field >
void pfspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.68 pfspmm()** [11/18]

```
template<class Field >
void pfspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.69 pfspmm()** [12/18]

```
template<class Field >
void pfspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.70 pfspmm()** [13/18]

```
template<class Field >
void pfspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.71 pfspmm()** [14/18]

```
template<class Field >
void pfspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    const int64_t kmax) [inline]
```

**11.16.1.72 pfspmm()** [15/18]

```
template<class Field >
void pfspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    const int64_t kmax) [inline]
```

**11.16.1.73 pfspmm\_zo()** [1/2]

```
template<class Field , class Func >
void pfspmm_zo (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    Func && func) [inline]
```

**11.16.1.74 pfspmm\_zo()** [2/2]

```
template<class Field , class Func >
void pfspmm_zo (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    Func && func) [inline]
```

**11.16.1.75 pfspmv()** [7/18]

```
template<class Field >
void pfspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.76 pfspmv()** [8/18]

```
template<class Field >
void pfspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.77 pfspmv()** [9/18]

```
template<class Field >
void pfspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    const int64_t kmax) [inline]
```

**11.16.1.78 pfspmv\_one()** [3/8]

```
template<class Field >
void pfspmv_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.79 pfspmv\_mone()** [3/8]

```
template<class Field >
void pfspmv_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.80 pfspmv\_one()** [4/8]

```
template<class Field >
void pfspmv_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.81 pfspmv\_mone()** [4/8]

```
template<class Field >
void pfspmv_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.82 fspmm()** [10/15]

```

template<class Field >
void fspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::GenericTag ) [inline]

```

**11.16.1.83 fspmm()** [11/15]

```

template<class Field >
void fspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]

```

**11.16.1.84 fspmm()** [12/15]

```

template<class Field >
void fspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    const int64_t kmax) [inline]

```

**11.16.1.85 fspmm\_mone()** [3/4]

```

template<class Field >
void fspmm_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::GenericTag ) [inline]

```

**11.16.1.86 fspmm\_one()** [3/4]

```
template<class Field >
void fspmm_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.87 fspmm\_mone()** [4/4]

```
template<class Field >
void fspmm_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.88 fspmm\_one()** [4/4]

```
template<class Field >
void fspmm_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.89 fspmm\_one\_simd\_aligned()** [3/3]

```
template<class Field >
void fspmm_one_simd_aligned (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.90 fspmm\_one\_simd\_unaligned()** [3/3]

```
template<class Field >
void fspmm_one_simd_unaligned (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.91 fspmm\_mone\_simd\_aligned()** [3/3]

```
template<class Field >
void fspmm_mone_simd_aligned (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.92 fspmm\_mone\_simd\_unaligned()** [3/3]

```
template<class Field >
void fspmm_mone_simd_unaligned (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x_,
    int ldx,
    typename Field::Element_ptr y_,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.93 fspmv()** [10/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```



**11.16.1.94 fspmv()** [11/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.95 fspmv()** [12/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    const uint64_t kmax) [inline]
```

**11.16.1.96 fspmv\_one()** [5/10]

```
template<class Field >
void fspmv_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.97 fspmv\_mone()** [5/10]

```
template<class Field >
void fspmv_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.98 fspmv\_one()** [6/10]

```
template<class Field >
void fspmv_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.99 fspmv\_mone()** [6/10]

```
template<class Field >
void fspmv_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.100 pfspmv()** [10/18]

```
template<class Field >
void pfspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_simd > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.101 pfspmv()** [11/18]

```
template<class Field >
void pfspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_simd > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.102 pfspmv()** [12/18]

```
template<class Field >
void pfspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_simd > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    const uint64_t kmax) [inline]
```

**11.16.1.103 pfspmv\_one()** [5/8]

```
template<class Field >
void pfspmv_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.104 pfspmv\_mone()** [5/8]

```
template<class Field >
void pfspmv_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.105 pfspmv\_one()** [6/8]

```
template<class Field >
void pfspmv_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.106 pfspmv\_mone()** [6/8]

```
template<class Field >
void pfspmv_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.107 fspmv()** [13/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_simd > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.108 fspmv\_simd()** [1/4]

```
template<class Field >
void fspmv_simd (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_simd > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.109 fspmv()** [14/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_simd > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.110 fspmv\_simd()** [2/4]

```
template<class Field >
void fspmv_simd (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_simd > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    const uint64_t kmax) [inline]
```

**11.16.1.111 fspmv()** [15/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_simd > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    const uint64_t kmax) [inline]
```

**11.16.1.112 fspmv\_one()** [7/10]

```
template<class Field >
void fspmv_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.113 fspmv\_mone()** [7/10]

```
template<class Field >
void fspmv_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.114 fspmv\_one()** [8/10]

```
template<class Field >
void fspmv_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.115 fspmv\_mone()** [8/10]

```
template<class Field >
void fspmv_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.116 fspmv\_one\_simd()** [1/2]

```
template<class Field >
void fspmv_one_simd (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.117 fspmv\_mone\_simd()** [1/2]

```
template<class Field >
void fspmv_mone_simd (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.118 pfspmm()** [16/18]

```
template<class Field >
void pfspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::HYB_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.119 pfsppmm()** [17/18]

```
template<class Field >
void pfsppmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::HYB_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.120 pfsppmm()** [18/18]

```
template<class Field >
void pfsppmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::HYB_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    uint64_t kmax) [inline]
```

**11.16.1.121 pfspmv()** [13/18]

```
template<class Field >
void pfspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::HYB_ZO > & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.122 pfspmv()** [14/18]

```
template<class Field >
void pfspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::HYB_ZO > & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.123 pfspmv()** [15/18]

```
template<class Field >
void pfspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::HYB_ZO > & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    uint64_t kmax) [inline]
```

**11.16.1.124 fspmm()** [13/15]

```
template<class Field >
void fspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::HYB_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.125 fspmm()** [14/15]

```
template<class Field >
void fspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::HYB_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.126 fspmm()** [15/15]

```
template<class Field >
void fspmm (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::HYB_ZO > & A,
    size_t blockSize,
    typename Field::ConstElement_ptr x,
    int ldx,
    typename Field::Element_ptr y,
    int ldy,
    uint64_t kmax) [inline]
```

**11.16.1.127 fspmv()** [16/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::HYB_ZO > & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.128 fspmv()** [17/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::HYB_ZO > & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.129 fspmv()** [18/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::HYB_ZO > & A,
    typename Field::ConstElement_ptr x,
    typename Field::Element_ptr y,
    uint64_t kmax) [inline]
```

**11.16.1.130 pfspmv()** [16/18]

```
template<class Field >
void pfspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::SELL > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.131 pfspmv()** [17/18]

```
template<class Field >
void pfspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::SELL > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.132 pfspmv()** [18/18]

```
template<class Field >
void pfspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::SELL > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    const int64_t kmax) [inline]
```



**11.16.1.133 pfspmv\_one()** [7/8]

```
template<class Field >
void pfspmv_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::SELL_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.134 pfspmv\_mone()** [7/8]

```
template<class Field >
void pfspmv_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::SELL_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.135 pfspmv\_one()** [8/8]

```
template<class Field >
void pfspmv_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::SELL_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.136 pfspmv\_mone()** [8/8]

```
template<class Field >
void pfspmv_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::SELL_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.137 fspmv()** [19/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::SELL > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.138 fspmv\_simd()** [3/4]

```
template<class Field >
void fspmv_simd (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::SELL > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.139 fspmv()** [20/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::SELL > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.140 fspmv\_simd()** [4/4]

```
template<class Field >
void fspmv_simd (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::SELL > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    const uint64_t kmax) [inline]
```

**11.16.1.141 fspmv()** [21/21]

```
template<class Field >
void fspmv (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::SELL > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    const uint64_t kmax) [inline]
```

**11.16.1.142 fspmv\_one()** [9/10]

```
template<class Field >
void fspmv_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::SELL_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.143 fspmv\_mone()** [9/10]

```
template<class Field >
void fspmv_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::SELL_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::GenericTag ) [inline]
```

**11.16.1.144 fspmv\_one\_simd()** [2/2]

```
template<class Field >
void fspmv_one_simd (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::SELL_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.145 fspmv\_mone\_simd()** [2/2]

```
template<class Field >
void fspmv_mone_simd (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::SELL_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.146 fspmv\_one()** [10/10]

```
template<class Field >
void fspmv_one (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::SELL_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

**11.16.1.147 fspmv\_mone()** [10/10]

```
template<class Field >
void fspmv_mone (
    const Field & F,
    const Sparse< Field, SparseMatrix_t::SELL_ZO > & A,
    typename Field::ConstElement_ptr x_,
    typename Field::Element_ptr y_,
    FieldCategories::UnparametricTag ) [inline]
```

## 11.17 FFLAS::StrategyParameter Namespace Reference

### Data Structures

- struct [Fixed](#)
- struct [Grain](#)
- struct [Threads](#)
- struct [ThreeD](#)
- struct [ThreeDAdaptive](#)
- struct [ThreeDInPlace](#)
- struct [TwoD](#)
- struct [TwoDAdaptive](#)

## 11.18 FFLAS::StructureHelper Namespace Reference

[StructureHelper](#) for ftrsm.

### Data Structures

- struct [Hybrid](#)
- struct [Iterative](#)
- struct [Recursive](#)

### 11.18.1 Detailed Description

[StructureHelper](#) for ftrsm.

## 11.19 FFLAS::vectorised Namespace Reference

### Namespaces

- namespace [unswitch](#)

### Data Structures

- struct [HelperMod](#)
- struct [HelperMod](#)< Field, ElementCategories::MachineIntTag >
- struct [HelperMod](#)< Field, FFLAS::ElementCategories::ArbitraryPrecIntTag >
- struct [HelperMod](#)< Field, FFLAS::ElementCategories::FixedPrecIntTag >
- struct [HelperMod](#)< Field, FFLAS::ElementCategories::MachineFloatTag >

## Functions

- `template<class SimdT , class Element , bool positive>`  
`std::enable_if< is_simd< SimdT >::value, void >::type VEC_ADD (SimdT &C, SimdT &A, SimdT &B, SimdT &Q, SimdT &T, SimdT &P, SimdT &NEGP, SimdT &MIN, SimdT &MAX)`
- `template<bool positive, class Element , class T1 , class T2 >`  
`std::enable_if< FFLAS::support_simd_add< Element >::value, void >::type addp (Element *T, const Element *TA, const Element *TB, size_t n, Element p, T1 min_, T2 max_)`
- `template<class SimdT , class Element , bool positive>`  
`std::enable_if< is_simd< SimdT >::value, void >::type VEC_SUB (SimdT &C, SimdT &A, SimdT &B, SimdT &Q, SimdT &T, SimdT &P, SimdT &NEGP, SimdT &MIN, SimdT &MAX)`
- `template<bool positive, class Element , class T1 , class T2 >`  
`std::enable_if< FFLAS::support_simd_add< Element >::value, void >::type subp (Element *T, const Element *TA, const Element *TB, const size_t n, const Element p, const T1 min_, const T2 max_)`
- `template<class Element >`  
`std::enable_if< FFLAS::support_simd_add< Element >::value, void >::type add (Element *T, const Element *TA, const Element *TB, size_t n)`
- `template<class Element >`  
`std::enable_if< FFLAS::support_simd_add< Element >::value, void >::type sub (Element *T, const Element *TA, const Element *TB, size_t n)`
- `template<class Field >`  
`std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type axpyp (const Field &F, const typename Field::Element a, typename Field::ConstElement_ptr X, typename Field::Element_ptr Y, const size_t n)`
- `template<class Field >`  
`std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type axpyp (const Field &F, const typename Field::Element a, typename Field::ConstElement_ptr X, typename Field::Element_ptr Y, const size_t n, const size_t incX, const size_t incY)`
- `template<class T >`  
`std::enable_if<!std::is_integral< T >::value, T >::type reduce (T A, T B)`
- `template<class T >`  
`std::enable_if< std::is_integral< T >::value, T >::type reduce (T A, T B)`
- `template<> Givaro::Integer reduce (Givaro::Integer A, Givaro::Integer B)`
- `float reduce (float A, float B, float invB, float min, float max)`
- `double reduce (double A, double B, double invB, double min, double max)`
- `int64_t reduce (int64_t A, int64_t p, double invp, double min, double max, int64_t pow50rem)`
- `template<class Field >`  
`Field::Element reduce (typename Field::Element A, HelperMod< Field, ElementCategories::MachineIntTag > &H)`
- `template<class Field >`  
`Field::Element reduce (typename Field::Element A, HelperMod< Field, ElementCategories::MachineFloatTag > &H)`
- `template<class Field >`  
`Field::Element reduce (typename Field::Element A, HelperMod< Field, ElementCategories::ArbitraryPrecIntTag > &H)`
- `template<class Field >`  
`std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type modp (const Field &F, typename Field::ConstElement_ptr U, const size_t &n, typename Field::Element_ptr T)`
- `template<class Field >`  
`std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type modp (const Field &F, typename Field::ConstElement_ptr U, const size_t &n, const size_t &incX, typename Field::Element_ptr T)`
- `template<class Field >`  
`std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type scalp (const Field &F, typename Field::Element_ptr T, const typename Field::Element alpha, typename Field::ConstElement_ptr U, const size_t n)`

- `template<class Field >`  
`std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type scalp`  
`(const Field &F, typename Field::Element_ptr T, const typename Field::Element alpha, typename`  
`Field::ConstElement_ptr U, const size_t n, const size_t &incX)`
- `template<class Field >`  
`std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type scalp`  
`(const Field &F, typename Field::Element_ptr T, const typename Field::Element alpha, typename`  
`Field::ConstElement_ptr U, const size_t n, const size_t &incX, const size_t &incY)`

## 11.19.1 Function Documentation

### 11.19.1.1 VEC\_ADD()

```
template<class SimdT , class Element , bool positive>
std::enable_if< is_simd< SimdT >::value, void >::type VEC_ADD (
    SimdT & C,
    SimdT & A,
    SimdT & B,
    SimdT & Q,
    SimdT & T,
    SimdT & P,
    SimdT & NEGP,
    SimdT & MIN,
    SimdT & MAX) [inline]
```

### 11.19.1.2 addp()

```
template<bool positive, class Element , class T1 , class T2 >
std::enable_if< FFLAS::support_simd_add< Element >::value, void >::type addp (
    Element * T,
    const Element * TA,
    const Element * TB,
    size_t n,
    Element p,
    T1 min_,
    T2 max_) [inline]
```

### 11.19.1.3 VEC\_SUB()

```
template<class SimdT , class Element , bool positive>
std::enable_if< is_simd< SimdT >::value, void >::type VEC_SUB (
    SimdT & C,
    SimdT & A,
    SimdT & B,
    SimdT & Q,
    SimdT & T,
    SimdT & P,
    SimdT & NEGP,
    SimdT & MIN,
    SimdT & MAX) [inline]
```

**11.19.1.4 subp()**

```
template<bool positive, class Element , class T1 , class T2 >
std::enable_if< FFLAS::support_simd_add< Element >::value, void >::type subp (
    Element * T,
    const Element * TA,
    const Element * TB,
    const size_t n,
    const Element p,
    const T1 min_,
    const T2 max_) [inline]
```

**11.19.1.5 add()**

```
template<class Element >
std::enable_if< FFLAS::support_simd_add< Element >::value, void >::type add (
    Element * T,
    const Element * TA,
    const Element * TB,
    size_t n) [inline]
```

**11.19.1.6 sub()**

```
template<class Element >
std::enable_if< FFLAS::support_simd_add< Element >::value, void >::type sub (
    Element * T,
    const Element * TA,
    const Element * TB,
    size_t n) [inline]
```

**11.19.1.7 axpyp() [1/2]**

```
template<class Field >
std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type axpyp
(
    const Field & F,
    const typename Field::Element a,
    typename Field::ConstElement_ptr X,
    typename Field::Element_ptr Y,
    const size_t n) [inline]
```

**11.19.1.8 axpyp() [2/2]**

```
template<class Field >
std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type axpyp
(
    const Field & F,
    const typename Field::Element a,
    typename Field::ConstElement_ptr X,
    typename Field::Element_ptr Y,
    const size_t n,
    const size_t incX,
    const size_t incY) [inline]
```

**11.19.1.9 reduce()** [1/9]

```
template<class T >
std::enable_if<!std::is_integral< T >::value, T >::type reduce (
    T A,
    T B) [inline]
```

**11.19.1.10 reduce()** [2/9]

```
template<class T >
std::enable_if< std::is_integral< T >::value, T >::type reduce (
    T A,
    T B) [inline]
```

**11.19.1.11 reduce()** [3/9]

```
template<>
Givaro::Integer reduce (
    Givaro::Integer A,
    Givaro::Integer B) [inline]
```

**11.19.1.12 reduce()** [4/9]

```
float reduce (
    float A,
    float B,
    float invB,
    float min,
    float max) [inline]
```

**11.19.1.13 reduce()** [5/9]

```
double reduce (
    double A,
    double B,
    double invB,
    double min,
    double max) [inline]
```

**11.19.1.14 reduce()** [6/9]

```
int64_t reduce (
    int64_t A,
    int64_t p,
    double invp,
    double min,
    double max,
    int64_t pow50rem) [inline]
```



**11.19.1.15 reduce()** [7/9]

```
template<class Field >
Field::Element reduce (
    typename Field::Element A,
    HelperMod< Field, ElementCategories::MachineIntTag > & H) [inline]
```

**11.19.1.16 reduce()** [8/9]

```
template<class Field >
Field::Element reduce (
    typename Field::Element A,
    HelperMod< Field, ElementCategories::MachineFloatTag > & H) [inline]
```

**11.19.1.17 reduce()** [9/9]

```
template<class Field >
Field::Element reduce (
    typename Field::Element A,
    HelperMod< Field, ElementCategories::ArbitraryPrecIntTag > & H) [inline]
```

**11.19.1.18 modp()** [1/2]

```
template<class Field >
std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type modp (
    const Field & F,
    typename Field::ConstElement_ptr U,
    const size_t & n,
    typename Field::Element_ptr T) [inline]
```

**11.19.1.19 modp()** [2/2]

```
template<class Field >
std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type modp (
    const Field & F,
    typename Field::ConstElement_ptr U,
    const size_t & n,
    const size_t & incX,
    typename Field::Element_ptr T) [inline]
```

**11.19.1.20 scalp()** [1/3]

```
template<class Field >
std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type scalp
(
    const Field & F,
    typename Field::Element_ptr T,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr U,
    const size_t n) [inline]
```

**11.19.1.21 scalp() [2/3]**

```
template<class Field >
std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type scalp
(
    const Field & F,
    typename Field::Element_ptr T,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr U,
    const size_t n,
    const size_t & incX) [inline]
```

**11.19.1.22 scalp() [3/3]**

```
template<class Field >
std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type scalp
(
    const Field & F,
    typename Field::Element_ptr T,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr U,
    const size_t n,
    const size_t & incX,
    const size_t & incY) [inline]
```

**11.20 FFLAS::vectorised::unswitch Namespace Reference****Functions**

- template<class Field >  
std::enable\_if< !FFLAS::support\_simd\_mod< typenameField::Element >::value &&FFLAS::support\_fast\_mod< typenameField::Element >::value, void >::type axypyp (const Field &F, const typename Field::Element a, typename Field::ConstElement\_ptr X, typename Field::Element\_ptr Y, const size\_t n, HelperMod< Field > &H)
- template<class Field >  
std::enable\_if< FFLAS::support\_fast\_mod< typenameField::Element >::value, void >::type axypyp (const Field &F, const typename Field::Element a, typename Field::ConstElement\_ptr X, typename Field::Element\_ptr Y, const size\_t n, const size\_t incX, const size\_t incY, HelperMod< Field > &H)
- template<class Field >  
std::enable\_if< !FFLAS::support\_simd\_mod< typenameField::Element >::value &&FFLAS::support\_fast\_mod< typenameField::Element >::value, void >::type modp (const Field &F, typename Field::ConstElement\_ptr U, const size\_t &n, typename Field::Element\_ptr T, HelperMod< Field > &H)
- template<class Field >  
std::enable\_if< FFLAS::support\_fast\_mod< typenameField::Element >::value, void >::type modp (const Field &F, typename Field::ConstElement\_ptr U, const size\_t &n, const size\_t &incX, typename Field::Element\_ptr T, HelperMod< Field > &H)
- template<class Field >  
std::enable\_if< !FFLAS::support\_simd\_mod< typenameField::Element >::value &&FFLAS::support\_fast\_mod< typenameField::Element >::value, void >::type scalp (const Field &F, typename Field::Element\_ptr T, const typename Field::Element alpha, typename Field::ConstElement\_ptr U, const size\_t n, HelperMod< Field > &H)

- `template<class Field >`  
`std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type scalp`  
`(const Field &F, typename Field::Element_ptr T, const typename Field::Element alpha, typename`  
`Field::ConstElement_ptr U, const size_t n, const size_t &incX, HelperMod< Field > &H)`
- `template<class Field >`  
`std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type scalp`  
`(const Field &F, typename Field::Element_ptr T, const typename Field::Element alpha, typename`  
`Field::ConstElement_ptr U, const size_t n, const size_t &incX, const size_t &incY, HelperMod< Field >`  
`&H)`

## 11.20.1 Function Documentation

### 11.20.1.1 axypyp() [1/2]

```
template<class Field >
std::enable_if< !FFLAS::support_simd_mod< typenameField::Element >::value &&FFLAS::support_fast_mod<
typenameField::Element >::value, void >::type axypyp (
    const Field & F,
    const typename Field::Element a,
    typename Field::ConstElement_ptr X,
    typename Field::Element_ptr Y,
    const size_t n,
    HelperMod< Field > & H) [inline]
```

### 11.20.1.2 axypyp() [2/2]

```
template<class Field >
std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type axypyp
(
    const Field & F,
    const typename Field::Element a,
    typename Field::ConstElement_ptr X,
    typename Field::Element_ptr Y,
    const size_t n,
    const size_t incX,
    const size_t incY,
    HelperMod< Field > & H) [inline]
```

### 11.20.1.3 modp() [1/2]

```
template<class Field >
std::enable_if< !FFLAS::support_simd_mod< typenameField::Element >::value &&FFLAS::support_fast_mod<
typenameField::Element >::value, void >::type modp (
    const Field & F,
    typename Field::ConstElement_ptr U,
    const size_t & n,
    typename Field::Element_ptr T,
    HelperMod< Field > & H) [inline]
```

**11.20.1.4 modp() [2/2]**

```
template<class Field >
std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type modp (
    const Field & F,
    typename Field::ConstElement_ptr U,
    const size_t & n,
    const size_t & incX,
    typename Field::Element_ptr T,
    HelperMod< Field > & H) [inline]
```

**11.20.1.5 scalp() [1/3]**

```
template<class Field >
std::enable_if<!FFLAS::support_simd_mod< typenameField::Element >::value &&FFLAS::support_fast_mod<
typenameField::Element >::value, void >::type scalp (
    const Field & F,
    typename Field::Element_ptr T,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr U,
    const size_t n,
    HelperMod< Field > & H) [inline]
```

**11.20.1.6 scalp() [2/3]**

```
template<class Field >
std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type scalp
(
    const Field & F,
    typename Field::Element_ptr T,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr U,
    const size_t n,
    const size_t & incX,
    HelperMod< Field > & H) [inline]
```

**11.20.1.7 scalp() [3/3]**

```
template<class Field >
std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type scalp
(
    const Field & F,
    typename Field::Element_ptr T,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr U,
    const size_t n,
    const size_t & incX,
    const size_t & incY,
    HelperMod< Field > & H) [inline]
```

## 11.21 FFPACK Namespace Reference

Finite Field **PACK** Set of elimination based routines for dense linear algebra.

### Namespaces

- namespace [Protected](#)

### Data Structures

- class [callLUdivine\\_small](#)
- class [callLUdivine\\_small< double >](#)
- class [callLUdivine\\_small< float >](#)
- class [CharpolyFailed](#)
- class [CheckerImplem\\_charpoly](#)
- class [CheckerImplem\\_charpoly< Givaro::ZRing< Givaro::Integer >, Polynomial >](#)
- class [CheckerImplem\\_Det](#)
- class [CheckerImplem\\_invert](#)
- class [CheckerImplem\\_PLUQ](#)
- class [Failure](#)
  - A precondition failed.*
- struct [rns\\_double](#)
- struct [rns\\_double\\_elt](#)
- struct [rns\\_double\\_elt\\_cstptr](#)
- struct [rns\\_double\\_elt\\_ptr](#)
- struct [rns\\_double\\_extended](#)
- class [RNSInteger](#)
- class [RNSIntegerMod](#)
- class [rnsRandIter](#)

### Typedefs

- template<class [Field](#) >  
using [Checker\\_PLUQ](#) = FFLAS::Checker\_Empty<[Field](#)>
- template<class [Field](#) >  
using [Checker\\_Det](#) = FFLAS::Checker\_Empty<[Field](#)>
- template<class [Field](#) >  
using [Checker\\_invert](#) = FFLAS::Checker\_Empty<[Field](#)>
- template<class [Field](#) , class Polynomial >  
using [Checker\\_charpoly](#) = FFLAS::Checker\_Empty<[Field](#)>
- template<class [Field](#) >  
using [ForceCheck\\_PLUQ](#) = [CheckerImplem\\_PLUQ](#)<[Field](#)>
- template<class [Field](#) >  
using [ForceCheck\\_Det](#) = [CheckerImplem\\_Det](#)<[Field](#)>
- template<class [Field](#) >  
using [ForceCheck\\_invert](#) = [CheckerImplem\\_invert](#)<[Field](#)>
- template<class [Field](#) , class Polynomial >  
using [ForceCheck\\_charpoly](#) = [CheckerImplem\\_charpoly](#)<[Field](#),Polynomial>

## Functions

- void [LAPACKPerm2MathPerm](#) (size\_t \*MathP, const size\_t \*LapackP, const size\_t N)  
*Conversion of a permutation from LAPACK format to Math format.*
- void [MathPerm2LAPACKPerm](#) (size\_t \*LapackP, const size\_t \*MathP, const size\_t N)  
*Conversion of a permutation from Maths format to LAPACK format.*
- template<class [Field](#) >  
void [applyP](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const [FFLAS::FFLAS\\_TRANSPOSE](#) Trans, const size\_t M, const size\_t ibeg, const size\_t iend, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t \*P)  
*Computes  $P1 \times \text{Diag}(I_R, P2)$  where  $P1$  is a LAPACK and  $P2$  a LAPACK permutation and store the result in  $P1$  as a LAPACK permutation.*
- template<class [Field](#) >  
void [applyP](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const [FFLAS::FFLAS\\_TRANSPOSE](#) Trans, const size\_t m, const size\_t ibeg, const size\_t iend, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t \*P, const [FFLAS::ParSeqHelper::Sequential](#) seq)
- template<class [Field](#) , class Cut , class Param >  
void [applyP](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const [FFLAS::FFLAS\\_TRANSPOSE](#) Trans, const size\_t m, const size\_t ibeg, const size\_t iend, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t \*P, const [FFLAS::ParSeqHelper::Parallel](#)< Cut, Param > par)
- template<class [Field](#) >  
void [MonotonicApplyP](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const [FFLAS::FFLAS\\_TRANSPOSE](#) Trans, const size\_t M, const size\_t ibeg, const size\_t iend, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t \*P, const size\_t R)  
*Apply a R-monotonically increasing permutation P, to the matrix A.*
- template<class [Field](#) >  
void [fgetrs](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, const size\_t R, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t \*P, const size\_t \*Q, typename [Field::Element\\_ptr](#) B, const size\_t ldb, int \*info)  
*Solve the system  $AX = B$  or  $XA = B$ .*
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [fgetrs](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, const size\_t NRHS, const size\_t R, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t \*P, const size\_t \*Q, typename [Field::Element\\_ptr](#) X, const size\_t ldx, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, int \*info)  
*Solve the system  $A X = B$  or  $X A = B$ .*
- template<class [Field](#) >  
size\_t [fgesv](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) B, const size\_t ldb, int \*info)  
*Square system solver.*
- template<class [Field](#) >  
size\_t [fgesv](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, const size\_t NRHS, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) X, const size\_t ldx, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, int \*info)  
*Rectangular system solver.*
- template<class [Field](#) >  
void [ftrtri](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_UPLO](#) Uplo, const [FFLAS::FFLAS\\_DIAG](#) Diag, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t threshold=[\\_\\_FFLASFFPACK\\_FTRTRI\\_THRESHOLD](#))  
*Compute the inverse of a triangular matrix.*
- template<class [Field](#) >  
void [trinv\\_left](#) (const [Field](#) &F, const size\_t N, typename [Field::ConstElement\\_ptr](#) L, const size\_t ldl, typename [Field::Element\\_ptr](#) X, const size\_t ldx)
- template<class [Field](#) >  
void [ftrtrm](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) side, const [FFLAS::FFLAS\\_DIAG](#) diag, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda)

*Compute the product of two triangular matrices of opposite shape.*

- `template<class Field >`  
`void ftrstr (const Field &F, const FFLAS::FFLAS_SIDE side, const FFLAS::FFLAS_UPLO Uplo,`  
`const FFLAS::FFLAS_DIAG diagA, const FFLAS::FFLAS_DIAG diagB, const size_t N, typename`  
`Field::ConstElement_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb, const size_t`  
`threshold=__FFLASFFPACK_FTRSTR_THRESHOLD)`

*Solve a triangular system with a triangular right hand side of the same shape.*

- `template<class Field >`  
`void ftrssyr2k (const Field &F, const FFLAS::FFLAS_UPLO Uplo, const FFLAS::FFLAS_DIAG diagA, const`  
`size_t N, typename Field::ConstElement_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t`  
`ldb, const size_t threshold=__FFLASFFPACK_FTRSSYR2K_THRESHOLD)`

*Solve a triangular system in a symmetric sum: find B upper/lower triangular such that  $A^T B + B^T A = C$  where C is symmetric.*

- `template<class Field >`  
`bool fsytrf (const Field &F, const FFLAS::FFLAS_UPLO UpLo, const size_t N, typename Field::Element_ptr`  
`A, const size_t lda, const size_t threshold=__FFLASFFPACK_FSYTRF_THRESHOLD)`

*Triangular factorization of symmetric matrices.*

- `template<class Field >`  
`bool fsytrf (const Field &F, const FFLAS::FFLAS_UPLO UpLo, const size_t N, typename Field::Element_ptr A,`  
`const size_t lda, const FFLAS::ParSeqHelper::Sequential seq, const size_t threshold=__FFLASFFPACK_FSYTRF_THRESHOLD)`
- `template<class Field, class Cut, class Param >`  
`bool fsytrf (const Field &F, const FFLAS::FFLAS_UPLO UpLo, const size_t N, typename Field::Element_ptr A,`  
`const size_t lda, const FFLAS::ParSeqHelper::Parallel< Cut, Param > par, const size_t threshold=__FFLASFFPACK_FSYTRF_THRESHOLD)`
- `template<class Field >`  
`bool fsytrf_nonunit (const Field &F, const FFLAS::FFLAS_UPLO UpLo, const size_t N, typename`  
`Field::Element_ptr A, const size_t lda, typename Field::Element_ptr D, const size_t incD, const size_t`  
`threshold=__FFLASFFPACK_FSYTRF_THRESHOLD)`

*Triangular factorization of symmetric matrices.*

- `template<class Field >`  
`size_t PLUQ (const Field &F, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, typename`  
`Field::Element_ptr A, const size_t lda, size_t *P, size_t *Q)`

*Compute a PLUQ factorization of the given matrix.*

- `template<class Field >`  
`size_t pPLUQ (const Field &F, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, typename`  
`Field::Element_ptr A, const size_t lda, size_t *P, size_t *Q)`
- `template<class Field >`  
`size_t PLUQ (const Field &F, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, type-`  
`name Field::Element_ptr A, const size_t lda, size_t *P, size_t *Q, const FFLAS::ParSeqHelper::Sequential`  
`&PShelper, size_t BCThreshold=__FFLASFFPACK_PLUQ_THRESHOLD)`
- `template<class Field, class Cut, class Param >`  
`size_t PLUQ (const Field &F, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, typename`  
`Field::Element_ptr A, const size_t lda, size_t *P, size_t *Q, const FFLAS::ParSeqHelper::Parallel< Cut,`  
`Param > &PShelper)`
- `template<class Field >`  
`size_t LUdivine (const Field &F, const FFLAS::FFLAS_DIAG Diag, const FFLAS::FFLAS_TRANSPOSE trans,`  
`const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Qt,`  
`const FFPACK_LU_TAG LuTag=FfpackSlabRecursive, const size_t cutoff=__FFLASFFPACK_LUDIVINE_THRESHOLD)`

*Compute the CUP or PLE factorization of the given matrix.*

- `template<class Field >`  
`size_t ColumnEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr`  
`A, const size_t lda, size_t *P, size_t *Qt, bool transform=false, const FFPACK_LU_TAG LuTag=FfpackSlabRecursive)`

*Compute the Column Echelon form of the input matrix in-place.*

- `template<class Field >`  
`size_t pColumnEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Qt, bool transform=false, size_t numthreads=0, const FFPACK_LU_TAG LuTag=FFpackTileRecursive)`
- `template<class Field , class PSHelper >`  
`size_t ColumnEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Qt, const bool transform, const FFPACK_LU_TAG LuTag, const PSHelper &psH)`
- `template<class Field >`  
`size_t RowEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Qt, const bool transform=false, const FFPACK_LU_TAG LuTag=FFpackSlabRecursive)`  
*Compute the Row Echelon form of the input matrix in-place.*
- `template<class Field >`  
`size_t pRowEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Qt, const bool transform=false, size_t numthreads=0, const FFPACK_LU_TAG LuTag=FFpackTileRecursive)`
- `template<class Field , class PSHelper >`  
`size_t RowEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Qt, const bool transform, const FFPACK_LU_TAG LuTag, const PSHelper &psH)`
- `template<class Field >`  
`size_t ReducedColumnEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Qt, const bool transform=false, const FFPACK_LU_TAG LuTag=FFpackSlabRecursive)`  
*Compute the Reduced Column Echelon form of the input matrix in-place.*
- `template<class Field >`  
`size_t pReducedColumnEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Qt, const bool transform=false, size_t numthreads=0, const FFPACK_LU_TAG LuTag=FFpackTileRecursive)`
- `template<class Field , class PSHelper >`  
`size_t ReducedColumnEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Qt, const bool transform, const FFPACK_LU_TAG LuTag, const PSHelper &psH)`
- `template<class Field >`  
`size_t ReducedRowEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Qt, const bool transform=false, const FFPACK_LU_TAG LuTag=FFpackSlabRecursive)`  
*Compute the Reduced Row Echelon form of the input matrix in-place.*
- `template<class Field >`  
`size_t pReducedRowEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Qt, const bool transform=false, size_t numthreads=0, const FFPACK_LU_TAG LuTag=FFpackTileRecursive)`
- `template<class Field , class PSHelper >`  
`size_t ReducedRowEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Qt, const bool transform, const FFPACK_LU_TAG LuTag, const PSHelper &psH)`
- `template<class Field >`  
`Field::Element_ptr Invert (const Field &F, const size_t M, typename Field::Element_ptr A, const size_t lda, int &nullity)`  
*Invert the given matrix in place or computes its nullity if it is singular.*
- `template<class Field >`  
`Field::Element_ptr Invert (const Field &F, const size_t M, typename Field::ConstElement_ptr A, const size_t lda, typename Field::Element_ptr X, const size_t ldx, int &nullity)`  
*Invert the given matrix or computes its nullity if it is singular.*



- template<class [Field](#) >  
[Field::Element\\_ptr](#) [Invert2](#) (const [Field](#) &F, const size\_t M, typename [Field::Element\\_ptr](#) A, const size\_t Ida, typename [Field::Element\\_ptr](#) X, const size\_t Idx, int &>nullity)  
*Invert the given matrix or computes its nullity if it is singular.*
- template<class [PolRing](#) >  
std::list< typename [PolRing::Element](#) > & [CharPoly](#) (const [PolRing](#) &R, std::list< typename [PolRing::Element](#) > &charp, const size\_t N, typename [PolRing::Domain\\_t::Element\\_ptr](#) A, const size\_t Ida, typename [PolRing::Domain\\_t::RandIter](#) &G, const FFPACK\_CHARPOLY\_TAG CharpTag=FfpackAuto, const size\_t degree=\_\_FFLASFFPACK\_ARITHPROG\_THRESHOLD)  
*Compute the characteristic polynomial of the matrix A.*
- template<class [PolRing](#) >  
[PolRing::Element](#) & [CharPoly](#) (const [PolRing](#) &R, typename [PolRing::Element](#) &charp, const size\_t N, typename [PolRing::Domain\\_t::Element\\_ptr](#) A, const size\_t Ida, typename [PolRing::Domain\\_t::RandIter](#) &G, const FFPACK\_CHARPOLY\_TAG CharpTag=FfpackAuto, const size\_t degree=\_\_FFLASFFPACK\_ARITHPROG\_THRESHOLD)  
*Compute the characteristic polynomial of the matrix A.*
- template<class [PolRing](#) >  
[PolRing::Element](#) & [CharPoly](#) (const [PolRing](#) &R, typename [PolRing::Element](#) &charp, const size\_t N, typename [PolRing::Domain\\_t::Element\\_ptr](#) A, const size\_t Ida, const FFPACK\_CHARPOLY\_TAG CharpTag=FfpackAuto, const size\_t degree=\_\_FFLASFFPACK\_ARITHPROG\_THRESHOLD)  
*Compute the characteristic polynomial of the matrix A.*
- template<class [Field](#) , class [Polynomial](#) >  
[Polynomial](#) & [MinPoly](#) (const [Field](#) &F, [Polynomial](#) &minP, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t Ida)  
*Compute the minimal polynomial of the matrix A.*
- template<class [Field](#) , class [Polynomial](#) , class [RandIter](#) >  
[Polynomial](#) & [MinPoly](#) (const [Field](#) &F, [Polynomial](#) &minP, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t Ida, [RandIter](#) &G)  
*Compute the minimal polynomial of the matrix A.*
- template<class [Field](#) , class [Polynomial](#) >  
[Polynomial](#) & [MatVecMinPoly](#) (const [Field](#) &F, [Polynomial](#) &minP, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t Ida, typename [Field::ConstElement\\_ptr](#) v, const size\_t incv)  
*Compute the minimal polynomial of the matrix A and a vector v, namely the first linear dependency relation in the Krylov basis  $(v, Av, \dots, A^N v)$ .*
- template<class [Field](#) >  
size\_t [Rank](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t Ida)  
*Computes the rank of the given matrix using a PLUQ factorization.*
- template<class [Field](#) >  
size\_t [pRank](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t Ida, size\_t numthreads=0)
- template<class [Field](#) , class [PSHelper](#) >  
size\_t [Rank](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t Ida, const [PSHelper](#) &psH)
- template<class [Field](#) >  
bool [IsSingular](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t Ida)  
*Returns true if the given matrix is singular.*
- template<class [Field](#) >  
[Field::Element](#) & [Det](#) (const [Field](#) &F, typename [Field::Element](#) &det, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t Ida, size\_t \*P=NULL, size\_t \*Q=NULL)  
*Returns the determinant of the given square matrix.*
- template<class [Field](#) >  
[Field::Element](#) & [pDet](#) (const [Field](#) &F, typename [Field::Element](#) &det, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t Ida, size\_t numthreads=0, size\_t \*P=NULL, size\_t \*Q=NULL)
- template<class [Field](#) , class [PSHelper](#) >  
[Field::Element](#) & [Det](#) (const [Field](#) &F, typename [Field::Element](#) &det, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t Ida, const [PSHelper](#) &psH, size\_t \*P=NULL, size\_t \*Q=NULL)

- template<class [Field](#) >  
[Field::Element\\_ptr](#) Solve (const [Field](#) &F, const size\_t M, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) x, const int incx, typename [Field::ConstElement\\_ptr](#) b, const int incb)  
*Solves a linear system  $AX = b$  using PLUQ factorization.*
- template<class [Field](#) , class PSHelper >  
[Field::Element\\_ptr](#) Solve (const [Field](#) &F, const size\_t M, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) x, const int incx, typename [Field::ConstElement\\_ptr](#) b, const int incb, PSHelper &psH)
- template<class [Field](#) >  
[Field::Element\\_ptr](#) pSolve (const [Field](#) &F, const size\_t M, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) x, const int incx, typename [Field::ConstElement\\_ptr](#) b, const int incb, size\_t numthreads=0)
- template<class [Field](#) >  
\*void [RandomNullSpaceVector](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*Solve  $LX = B$  or  $XL = B$  in place.*
- template<class [Field](#) >  
size\_t [NullSpaceBasis](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) &NS, size\_t &ldn, size\_t &NSdim)  
*Computes a basis of the Left/Right nullspace of the matrix A.*
- template<class [Field](#) >  
size\_t [RowRankProfile](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*&rkprofile, const [FFPACK\\_LU\\_TAG](#) LuTag=[FfpackSlabRecursive](#))  
*Computes the row rank profile of A.*
- template<class [Field](#) >  
size\_t [pRowRankProfile](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*&rkprofile, size\_t numthreads=0, const [FFPACK\\_LU\\_TAG](#) LuTag=[FfpackTileRecursive](#))
- template<class [Field](#) , class PSHelper >  
size\_t [RowRankProfile](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*&rkprofile, const [FFPACK\\_LU\\_TAG](#) LuTag, PSHelper &psH)
- template<class [Field](#) >  
size\_t [ColumnRankProfile](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*&rkprofile, const [FFPACK\\_LU\\_TAG](#) LuTag=[FfpackSlabRecursive](#))  
*Computes the column rank profile of A.*
- template<class [Field](#) >  
size\_t [pColumnRankProfile](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*&rkprofile, size\_t numthreads=0, const [FFPACK\\_LU\\_TAG](#) LuTag=[FfpackTileRecursive](#))
- template<class [Field](#) , class PSHelper >  
size\_t [ColumnRankProfile](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*&rkprofile, const [FFPACK\\_LU\\_TAG](#) LuTag, PSHelper &psH)
- void [RankProfileFromLU](#) (const size\_t \*P, const size\_t N, const size\_t R, size\_t \*rkprofile, const [FFPACK\\_LU\\_TAG](#) LuTag)  
*Recovers the column/row rank profile from the permutation of an LU decomposition.*
- size\_t [LeadingSubmatrixRankProfiles](#) (const size\_t M, const size\_t N, const size\_t R, const size\_t LSm, const size\_t LSn, const size\_t \*P, const size\_t \*Q, size\_t \*RRP, size\_t \*CRP)  
*Recovers the row and column rank profiles of any leading submatrix from the PLUQ decomposition.*
- template<class [Field](#) >  
size\_t [RowRankProfileSubmatrixIndices](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*&rowindices, size\_t \*&colindices, size\_t &R)  
*RowRankProfileSubmatrixIndices.*
- template<class [Field](#) >  
size\_t [ColRankProfileSubmatrixIndices](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*&rowindices, size\_t \*&colindices, size\_t &R)  
*Computes the indices of the submatrix  $r \times r$  X of A whose columns correspond to the column rank profile of A.*

- template<class [Field](#) >  
 size\_t [RowRankProfileSubmatrix](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) &X, size\_t &R)  
*Computes the  $r \times r$  submatrix  $X$  of  $A$ , by picking the row rank profile rows of  $A$ .*
- template<class [Field](#) >  
 size\_t [ColRankProfileSubmatrix](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) &X, size\_t &R)  
*Compute the  $r \times r$  submatrix  $X$  of  $A$ , by picking the row rank profile rows of  $A$ .*
- template<class [Field](#) >  
 void [getTriangular](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_UPLO](#) Uplo, const [FFLAS::FFLAS\\_DIAG](#) diag, const size\_t M, const size\_t N, const size\_t R, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) T, const size\_t ldt, const bool OnlyNonZeroVectors=false)  
*Extracts a triangular matrix from a compact storage  $A=L\backslash U$  of rank  $R$ .*
- template<class [Field](#) >  
 void [getTriangular](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_UPLO](#) Uplo, const [FFLAS::FFLAS\\_DIAG](#) diag, const size\_t M, const size\_t N, const size\_t R, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
*Cleans up a compact storage  $A=L\backslash U$  to reveal a triangular matrix of rank  $R$ .*
- template<class [Field](#) >  
 void [getEchelonForm](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_UPLO](#) Uplo, const [FFLAS::FFLAS\\_DIAG](#) diag, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) T, const size\_t ldt, const bool OnlyNonZeroVectors=false, const [FFPACK\\_LU\\_TAG](#) LuTag=[FfpackSlabRecursive](#))  
*Extracts a matrix in echelon form from a compact storage  $A=L\backslash U$  of rank  $R$  obtained by [RowEchelonForm](#) or [ColumnEchelonForm](#).*
- template<class [Field](#) >  
 void [getEchelonForm](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_UPLO](#) Uplo, const [FFLAS::FFLAS\\_DIAG](#) diag, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, typename [Field::Element\\_ptr](#) A, const size\_t lda, const [FFPACK\\_LU\\_TAG](#) LuTag=[FfpackSlabRecursive](#))  
*Cleans up a compact storage  $A=L\backslash U$  obtained by [RowEchelonForm](#) or [ColumnEchelonForm](#) to reveal an echelon form of rank  $R$ .*
- template<class [Field](#) >  
 void [getEchelonTransform](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_UPLO](#) Uplo, const [FFLAS::FFLAS\\_DIAG](#) diag, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, const size\_t \*Q, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) T, const size\_t ldt, const [FFPACK\\_LU\\_TAG](#) LuTag=[FfpackSlabRecursive](#))  
*Extracts a transformation matrix to echelon form from a compact storage  $A=L\backslash U$  of rank  $R$  obtained by [RowEchelonForm](#) or [ColumnEchelonForm](#).*
- template<class [Field](#) >  
 void [getReducedEchelonForm](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_UPLO](#) Uplo, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) T, const size\_t ldt, const bool OnlyNonZeroVectors=false, const [FFPACK\\_LU\\_TAG](#) LuTag=[FfpackSlabRecursive](#))  
*Extracts a matrix in echelon form from a compact storage  $A=L\backslash U$  of rank  $R$  obtained by [ReducedRowEchelonForm](#) or [ReducedColumnEchelonForm](#) with transform = true.*
- template<class [Field](#) >  
 void [getReducedEchelonForm](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_UPLO](#) Uplo, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, typename [Field::Element\\_ptr](#) A, const size\_t lda, const [FFPACK\\_LU\\_TAG](#) LuTag=[FfpackSlabRecursive](#))  
*Cleans up a compact storage  $A=L\backslash U$  of rank  $R$  obtained by [ReducedRowEchelonForm](#) or [ReducedColumnEchelonForm](#) with transform = true.*
- template<class [Field](#) >  
 void [getReducedEchelonTransform](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_UPLO](#) Uplo, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, const size\_t \*Q, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) T, const size\_t ldt, const [FFPACK\\_LU\\_TAG](#) LuTag=[FfpackSlabRecursive](#))  
*Extracts a transformation matrix to echelon form from a compact storage  $A=L\backslash U$  of rank  $R$  obtained by [RowEchelonForm](#) or [ColumnEchelonForm](#).*

- void [PLUQtoEchelonPermutation](#) (const size\_t N, const size\_t R, const size\_t \*P, size\_t \*outPerm)  
*Auxiliary routine: determines the permutation that changes a PLUQ decomposition into a echelon form revealing PLUQ decomposition.*
- template<class [Field](#) >  
size\_t [LTBruhatGen](#) (const [Field](#) &Fi, const [FFLAS::FFLAS\\_DIAG](#) diag, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*P, size\_t \*Q)  
*LTBruhatGen Suppose A is Left Triangular Matrix This procedure computes the Bruhat Representation of A and return the rank of A.*
- template<class [Field](#) >  
void [getLTBruhatGen](#) (const [Field](#) &Fi, const size\_t N, const size\_t r, const size\_t \*P, const size\_t \*Q, typename [Field::Element\\_ptr](#) R, const size\_t ldr)  
*GetLTBruhatGen This procedure Computes the Rank Revealing Matrix based on the Bruhta representation of a Matrix.*
- template<class [Field](#) >  
void [getLTBruhatGen](#) (const [Field](#) &Fi, const [FFLAS::FFLAS\\_UPLO](#) Uplo, const [FFLAS::FFLAS\\_DIAG](#) diag, const size\_t N, const size\_t r, const size\_t \*P, const size\_t \*Q, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) T, const size\_t ldt)  
*GetLTBruhatGen This procedure computes the matrix L or U f the Bruhat Representation Suppose that A is the bruhat representation of a matrix.*
- size\_t [LTQSorder](#) (const size\_t N, const size\_t r, const size\_t \*P, const size\_t \*Q)  
*LTQSorder This procedure computes the order of quasiseparability of a matrix.*
- template<class [Field](#) >  
size\_t [CompressToBlockBiDiagonal](#) (const [Field](#) &Fi, const [FFLAS::FFLAS\\_UPLO](#) Uplo, size\_t N, size\_t s, size\_t r, const size\_t \*P, const size\_t \*Q, typename [Field::Element\\_ptr](#) A, size\_t lda, typename [Field::Element\\_ptr](#) X, size\_t ldx, size\_t \*K, size\_t \*M, size\_t \*T)  
*CompressToBlockBiDiagonal This procedure compress a compact representation of a row echelon form or column echelon form.*
- template<class [Field](#) >  
void [ExpandBlockBiDiagonalToBruhat](#) (const [Field](#) &Fi, const [FFLAS::FFLAS\\_UPLO](#) Uplo, size\_t N, size\_t s, size\_t r, typename [Field::Element\\_ptr](#) A, size\_t lda, typename [Field::Element\\_ptr](#) X, size\_t ldx, size\_t NbBlocks, size\_t \*K, size\_t \*M, size\_t \*T)  
*ExpandBlockBiDiagonal This procedure expand a compact representation of a row echelon form or column echelon form.*
- void [Bruhat2EchelonPermutation](#) (size\_t N, size\_t R, const size\_t \*P, const size\_t \*Q, size\_t \*M)  
*Bruhat2EchelonPermutation (N,R,P,Q) Compute M such that LM or MU is in echelon form where L or U are factors of the Bruhat Rpresentation.*
- size\_t \* [TInverter](#) (size\_t \*T, size\_t r)
- template<class [Field](#) >  
void [ComputeRPermutation](#) (const [Field](#) &Fi, size\_t N, size\_t r, const size\_t \*P, const size\_t \*Q, size\_t \*R, size\_t \*MU, size\_t \*ML)
- template<class [Field](#) >  
void [productBruhatxTS](#) (const [Field](#) &Fi, size\_t N, size\_t s, size\_t r, const size\_t \*P, const size\_t \*Q, const typename [Field::Element\\_ptr](#) Xu, size\_t ldu, size\_t NbBlocksU, size\_t \*Ku, size\_t \*Tu, size\_t \*MU, const typename [Field::Element\\_ptr](#) XI, size\_t ldl, size\_t NbBlocksL, size\_t \*KI, size\_t \*TI, size\_t \*ML, typename [Field::Element\\_ptr](#) B, size\_t t, size\_t ldb, typename [Field::Element\\_ptr](#) C, size\_t ldc)  
*productBruhatxTS Comput the product between the CRE compact representation of a matrix A and B a tall matrix*
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [LQUptolInverseOfFullRankMinor](#) (const [Field](#) &F, const size\_t rank, typename [Field::Element\\_ptr](#) A\_factors, const size\_t lda, const size\_t \*QtPointer, typename [Field::Element\\_ptr](#) X, const size\_t ldx)  
*LQUptolInverseOfFullRankMinor.*
- template<class [Field](#) >  
void [RandomNullSpaceVector](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*Solve  $LX = B$  or  $XL = B$  in place.*

- `template<class Field >`  
`void solveLB (const Field &F, const FFLAS::FFLAS_SIDE Side, const size_t M, const size_t N, const size_t R, typename Field::Element_ptr L, const size_t ldl, const size_t *Q, typename Field::Element_ptr B, const size_t ldb)`
- `template<class Field >`  
`void solveLB2 (const Field &F, const FFLAS::FFLAS_SIDE Side, const size_t M, const size_t N, const size_t R, typename Field::Element_ptr L, const size_t ldl, const size_t *Q, typename Field::Element_ptr B, const size_t ldb)`
- `size_t * Tinverter (const size_t *T, size_t r)`
- `template<class Field >`  
`void ComputeRPermutation (const Field &Fi, size_t N, size_t r, const size_t *P, const size_t *Q, size_t *R, const size_t *MU, const size_t *ML)`
- `template<class Field >`  
`Field::Element_ptr expandLCRE (const Field &Fi, size_t N, size_t s, size_t r, size_t *R, size_t i, typename Field::ConstElement_ptr Xu, size_t ldu, size_t NbBlocksU, const size_t *Ku, const size_t *Tuinv, typename Field::ConstElement_ptr XI, size_t ldl, size_t NbBlocksL, const size_t *KI, const size_t *Tlinv, typename Field::Element_ptr CRE, size_t ldcre)`  
*Expands an anti-diagonal block of a left triangular matrix from its compact Bruhat representation.*
- `template<class Field >`  
`void productBruhatxTS (const Field &Fi, size_t N, size_t s, size_t r, size_t t, const size_t *P, const size_t *Q, typename Field::ConstElement_ptr Xu, size_t ldu, size_t NbBlocksU, const size_t *Ku, const size_t *Tu, const size_t *MU, typename Field::ConstElement_ptr XI, size_t ldl, size_t NbBlocksL, const size_t *KI, const size_t *TI, const size_t *ML, typename Field::Element_ptr B, size_t ldb, const typename Field::Element beta, typename Field::Element_ptr D, size_t ldd)`  
*Compute the product of a left-triangular quasi-separable matrix A, represented by a compact Bruhat generator, with a dense rectangular matrix B:  $C \leftarrow A \times B + \text{beta}C$ .*
- `template<class Field , class Polynomial >`  
`std::list< Polynomial > & Danilevski (const Field &F, std::list< Polynomial > &charp, const size_t N, typename Field::Element_ptr A, const size_t lda)`
- `template<class Field >`  
`Field::Element_ptr buildMatrix (const Field &F, typename Field::ConstElement_ptr E, typename Field::ConstElement_ptr C, const size_t lda, const size_t *B, const size_t *T, const size_t me, const size_t mc, const size_t lambda, const size_t mu)`
- `FFPACK::RNSInteger< FFPACK::rns_double >::Element_ptr CharPoly (const FFPACK::RNSInteger< FFPACK::rns_double > &F, typename FFPACK::RNSInteger< FFPACK::rns_double >::Element_ptr charp, const size_t N, typename FFPACK::RNSInteger< FFPACK::rns_double >::Element_ptr A, const size_t lda, Givaro::ZRing< Givaro::Integer >::RandIter &G, const FFPACK_CHARPOLY_TAG CharpTag, size_t degree)`
- `template<> Givaro::Poly1Dom< Givaro::ZRing< Givaro::Integer > >::Element & CharPoly (const Givaro::Poly1Dom< Givaro::ZRing< Givaro::Integer > > &R, Givaro::Poly1Dom< Givaro::ZRing< Givaro::Integer > >::Element &charp, const size_t N, Givaro::Integer *A, const size_t lda, Givaro::ZRing< Givaro::Integer >::RandIter &G, const FFPACK_CHARPOLY_TAG CharpTag, size_t degree)`
- `template<class PSHelper >`  
`FFPACK::RNSInteger< FFPACK::rns_double >::Element_ptr & Det (const FFPACK::RNSInteger< FFPACK::rns_double > &F, typename FFPACK::RNSInteger< FFPACK::rns_double >::Element_ptr &det, const size_t N, typename FFPACK::RNSInteger< FFPACK::rns_double >::Element_ptr A, const size_t lda, const PSHelper &psH)`
- `template<class PSHelper >`  
`Givaro::Integer & Det (const Givaro::ZRing< Givaro::Integer > &F, Givaro::Integer &det, const size_t N, Givaro::Integer *A, const size_t lda, const PSHelper &psH, size_t *P, size_t *Q)`
- `template<class Field >`  
`bool fsytrf_BC_Crout (const Field &F, const FFLAS::FFLAS_UPLO UpLo, const size_t N, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr Din, const size_t incDinv)`
- `template<class Field >`  
`size_t fsytrf_BC_RL (const Field &F, const FFLAS::FFLAS_UPLO UpLo, const size_t N, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr Din, const size_t incDinv)`
- `template<class Field >`  
`size_t fsytrf_UP_RPM_BC_RL (const Field &F, const size_t N, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr Din, const size_t incDinv, size_t *P)`

- `template<class Field >`  
`size_t fsytrf_LOW_RPM_BC_Crout` (const `Field` &F, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` lda, typename `Field::Element_ptr` Din, const `size_t` incDin, `size_t` \*P)
- `template<class Field >`  
`size_t fsytrf_UP_RPM_BC_Crout` (const `Field` &F, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` lda, typename `Field::Element_ptr` Din, const `size_t` incDin, `size_t` \*P)
- `template<class Field >`  
`size_t fsytrf_UP_RPM` (const `Field` &F, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` lda, typename `Field::Element_ptr` Din, const `size_t` incDin, `size_t` \*P, `size_t` BCThreshold)
- `template<class Field >`  
`bool fsytrf_nonunit` (const `Field` &F, const `FFLAS::FFLAS_UPLO` UpLo, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` lda, typename `Field::Element_ptr` Din, const `size_t` incDin, `FFLAS::ParSeqHelper::Sequential` seq, `size_t` threshold)
- `template<class Field, class Cut, class Param >`  
`bool fsytrf_nonunit` (const `Field` &F, const `FFLAS::FFLAS_UPLO` UpLo, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` lda, typename `Field::Element_ptr` Din, const `size_t` incDin, `FFLAS::ParSeqHelper::Parallel`< Cut, Param > par, `size_t` threshold)
- `template<class Field >`  
`size_t fsytrf_RPM` (const `Field` &F, const `FFLAS::FFLAS_UPLO` UpLo, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` lda, `size_t` \*P, `size_t` threshold)
- `template<class Field >`  
`void getTridiagonal` (const `Field` &F, const `size_t` N, const `size_t` R, typename `Field::ConstElement_ptr` A, const `size_t` lda, `size_t` \*P, typename `Field::Element_ptr` T, const `size_t` ldt)
- `template<class Field >`  
`size_t LUdivine_gauss` (const `Field` &F, const `FFLAS::FFLAS_DIAG` Diag, const `size_t` M, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` lda, `size_t` \*P, `size_t` \*Q, const `FFPACK::FFPACK_LU_TAG` LuTag)
- `template<class Field >`  
`size_t LUdivine_small` (const `Field` &F, const `FFLAS::FFLAS_DIAG` Diag, const `FFLAS::FFLAS_TRANSPOSE` trans, const `size_t` M, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` lda, `size_t` \*P, `size_t` \*Q, const `FFPACK::FFPACK_LU_TAG` LuTag)
- `template<class Field >`  
`size_t LUdivine` (const `Field` &F, const `FFLAS::FFLAS_DIAG` Diag, const `FFLAS::FFLAS_TRANSPOSE` trans, const `size_t` M, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` lda, `size_t` \*P, `size_t` \*Q, const `FFPACK::FFPACK_LU_TAG` LuTag, const `size_t` cutoff)
- `template<> size_t LUdivine` (const `Givaro::Modular`< `Givaro::Integer` > &F, const `FFLAS::FFLAS_DIAG` Diag, const `FFLAS::FFLAS_TRANSPOSE` trans, const `size_t` M, const `size_t` N, typename `Givaro::Integer` \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Q, const `FFPACK::FFPACK_LU_TAG` LuTag, const `size_t` cutoff)
- `template<class Field >`  
`void MonotonicCompress` (const `Field` &F, const `FFLAS::FFLAS_SIDE` Side, const `size_t` M, typename `Field::Element_ptr` A, const `size_t` lda, const `size_t` incA, const `size_t` \*MathP, const `size_t` R, const `size_t` maxpiv, const `size_t` rowstomove, const `std::vector`< `bool` > &ispiv)
- `template<class Field >`  
`void MonotonicCompressMorePivots` (const `Field` &F, const `FFLAS::FFLAS_SIDE` Side, const `size_t` M, typename `Field::Element_ptr` A, const `size_t` lda, const `size_t` incA, const `size_t` \*MathP, const `size_t` R, const `size_t` rowstomove, const `size_t` lenP)
- `template<class Field >`  
`void MonotonicCompressCycles` (const `Field` &F, const `FFLAS::FFLAS_SIDE` Side, const `size_t` M, typename `Field::Element_ptr` A, const `size_t` lda, const `size_t` incA, const `size_t` \*MathP, const `size_t` lenP)
- `template<class Field >`  
`void MonotonicExpand` (const `Field` &F, const `FFLAS::FFLAS_SIDE` Side, const `size_t` M, typename `Field::Element_ptr` A, const `size_t` lda, const `size_t` incA, const `size_t` \*MathP, const `size_t` R, const `size_t` maxpiv, const `size_t` rowstomove, const `std::vector`< `bool` > &ispiv)
- `template<class Field >`  
`void applyP_block` (const `Field` &F, const `FFLAS::FFLAS_SIDE` Side, const `FFLAS::FFLAS_TRANSPOSE` Trans, const `size_t` M, const `size_t` ibeg, const `size_t` iend, typename `Field::Element_ptr` A, const `size_t` lda, const `size_t` \*P)



- `template<class Field >`  
`void doApplyS (const Field &F, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr tmp, const size_t width, const size_t M2, const size_t R1, const size_t R2, const size_t R3, const size_t R4)`
- `template<class Field >`  
`void MatrixApplyS (const Field &F, typename Field::Element_ptr A, const size_t lda, const size_t width, const size_t M2, const size_t R1, const size_t R2, const size_t R3, const size_t R4)`
- `template<class Field >`  
`void MatrixApplyS (const Field &F, typename Field::Element_ptr A, const size_t lda, const size_t width, const size_t M2, const size_t R1, const size_t R2, const size_t R3, const size_t R4, const FFLAS::ParSeqHelper::Sequential seq)`
- `template<class Field, class Cut, class Param >`  
`void MatrixApplyS (const Field &F, typename Field::Element_ptr A, const size_t lda, const size_t width, const size_t M2, const size_t R1, const size_t R2, const size_t R3, const size_t R4, const FFLAS::ParSeqHelper::Parallel< Cut, Param > par)`
- `template<class T >`  
`void PermApplyS (T *A, const size_t lda, const size_t width, const size_t M2, const size_t R1, const size_t R2, const size_t R3, const size_t R4)`
- `template<class Field >`  
`void doApplyT (const Field &F, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr tmp, const size_t width, const size_t N2, const size_t R1, const size_t R2, const size_t R3, const size_t R4)`
- `template<class Field >`  
`void MatrixApplyT (const Field &F, typename Field::Element_ptr A, const size_t lda, const size_t width, const size_t N2, const size_t R1, const size_t R2, const size_t R3, const size_t R4)`
- `template<class Field >`  
`void MatrixApplyT (const Field &F, typename Field::Element_ptr A, const size_t lda, const size_t width, const size_t N2, const size_t R1, const size_t R2, const size_t R3, const size_t R4, const FFLAS::ParSeqHelper::Sequential seq)`
- `template<class Field, class Cut, class Param >`  
`void MatrixApplyT (const Field &F, typename Field::Element_ptr A, const size_t lda, const size_t width, const size_t N2, const size_t R1, const size_t R2, const size_t R3, const size_t R4, const FFLAS::ParSeqHelper::Parallel< Cut, Param > par)`
- `template<class T >`  
`void PermApplyT (T *A, const size_t lda, const size_t width, const size_t N2, const size_t R1, const size_t R2, const size_t R3, const size_t R4)`
- `void composePermutationsLLL (size_t *P1, const size_t *P2, const size_t R, const size_t N)`  
*Computes  $P1 \times \text{Diag}(I_R, P2)$  where  $P1$  is a LAPACK and  $P2$  a LAPACK permutation and store the result in  $P1$  as a LAPACK permutation.*
- `void composePermutationsLLM (size_t *MathP, const size_t *P1, const size_t *P2, const size_t R, const size_t N)`  
*Computes  $P1 \times \text{Diag}(I_R, P2)$  where  $P1$  is a LAPACK and  $P2$  a LAPACK permutation and store the result in  $MathP$  as a MathPermutation format.*
- `void composePermutationsMLM (size_t *MathP1, const size_t *P2, const size_t R, const size_t N)`  
*Computes  $MathP1 \times \text{Diag}(I_R, P2)$  where  $MathP1$  is a MathPermutation and  $P2$  a LAPACK permutation and store the result in  $MathP1$  as a MathPermutation format.*
- `void cyclic_shift_mathPerm (size_t *P, const size_t s)`
- `template<class Field >`  
`void cyclic_shift_row_col (const Field &F, typename Field::Element_ptr A, size_t m, size_t n, size_t lda)`
- `template<class Field >`  
`void cyclic_shift_row (const Field &F, typename Field::Element_ptr A, size_t m, size_t n, size_t lda)`
- `template<typename T >`  
`void cyclic_shift_row (const RNSIntegerMod< T > &F, typename T::Element_ptr A, size_t m, size_t n, size_t lda)`
- `template<class Field >`  
`void cyclic_shift_col (const Field &F, typename Field::Element_ptr A, size_t m, size_t n, size_t lda)`
- `template<typename T >`  
`void cyclic_shift_col (const RNSIntegerMod< T > &F, typename T::Element_ptr A, size_t m, size_t n, size_t lda)`

- `template<class Field >`  
`size_t PLUQ_basecaseV3 (const Field &Fi, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, typename Field::Element *A, const size_t lda, size_t *P, size_t *Q)`
- `template<class Field >`  
`size_t PLUQ_basecaseV2 (const Field &Fi, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, typename Field::Element *A, const size_t lda, size_t *P, size_t *Q)`
- `template<class Field >`  
`size_t PLUQ_basecaseCrout (const Field &Fi, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Q)`
- `template<class Field >`  
`size_t _PLUQ (const Field &Fi, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Q, size_t BCThreshold)`
- `template<class Cut , class Param >`  
`size_t PLUQ (const Givaro::Modular< Givaro::Integer > &F, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, typename Givaro::Integer *A, const size_t lda, size_t *P, size_t *Q, size_t BCThreshold, FFLAS::ParSeqHelper::Parallel< Cut, Param > &PSHelper)`
- `template<class Field >`  
`void threads_fgemm (const size_t m, const size_t n, const size_t r, int nbthreads, size_t *W1, size_t *W2, size_t *W3, size_t gamma)`
- `template<class Field >`  
`void threads_ftrsm (const size_t m, const size_t n, int nbthreads, size_t *t1, size_t *t2)`
- `template<class Field >`  
`size_t PLUQ (const Field &Fi, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Q, const FFLAS::ParSeqHelper::Parallel< FFLAS::CuttingStrategy::Recursive, FFLAS::StrategyParameter::Threads > &PSHelper)`
- `template<> rns_double_elt_ptr fflas_const_cast (rns_double_elt_cstptr x)`
- `template<> rns_double_elt_cstptr fflas_const_cast (rns_double_elt_ptr x)`
- `template<typename Base_t >`  
`void cyclic_shift_row_col (Base_t *A, size_t m, size_t n, size_t lda)`
- `template INST_OR_DECL void cyclic_shift_row (const FFLAS_FIELD< FFLAS_ELT > &F, FFLAS_ELT *A, size_t m, size_t n, size_t lda)`
- `template INST_OR_DECL void cyclic_shift_col (const FFLAS_FIELD< FFLAS_ELT > &F, FFLAS_ELT *A, size_t m, size_t n, size_t lda)`
- `template INST_OR_DECL void applyP (const FFLAS_FIELD< FFLAS_ELT > &F, const FFLAS::FFLAS_SIDE Side, const FFLAS::FFLAS_TRANSPOSE Trans, const size_t M, const size_t ibeg, const size_t iend, FFLAS_ELT *A, const size_t lda, const size_t *P)`
- `template INST_OR_DECL void fgetrs (const FFLAS_FIELD< FFLAS_ELT > &F, const FFLAS::FFLAS_SIDE Side, const size_t M, const size_t N, const size_t R, FFLAS_ELT *A, const size_t lda, const size_t *P, const size_t *Q, FFLAS_ELT *B, const size_t ldb, int *info)`
- `template INST_OR_DECL FFLAS_ELT * fgetrs (const FFLAS_FIELD< FFLAS_ELT > &F, const FFLAS::FFLAS_SIDE Side, const size_t M, const size_t N, const size_t NRHS, const size_t R, FFLAS_ELT *A, const size_t lda, const size_t *P, const size_t *Q, FFLAS_ELT *X, const size_t ldx, const FFLAS_ELT *B, const size_t ldb, int *info)`
- `template INST_OR_DECL size_t fgesv (const FFLAS_FIELD< FFLAS_ELT > &F, const FFLAS::FFLAS_SIDE Side, const size_t M, const size_t N, FFLAS_ELT *A, const size_t lda, FFLAS_ELT *B, const size_t ldb, int *info)`
- `template INST_OR_DECL size_t fgesv (const FFLAS_FIELD< FFLAS_ELT > &F, const FFLAS::FFLAS_SIDE Side, const size_t M, const size_t N, const size_t NRHS, FFLAS_ELT *A, const size_t lda, FFLAS_ELT *X, const size_t ldx, const FFLAS_ELT *B, const size_t ldb, int *info)`
- `template INST_OR_DECL void ftrtri (const FFLAS_FIELD< FFLAS_ELT > &F, const FFLAS::FFLAS_UPLO Uplo, const FFLAS::FFLAS_DIAG Diag, const size_t N, FFLAS_ELT *A, const size_t lda, const size_t threshold)`
- `template INST_OR_DECL void trinv_left (const FFLAS_FIELD< FFLAS_ELT > &F, const size_t N, const FFLAS_ELT *L, const size_t ldl, FFLAS_ELT *X, const size_t ldx)`
- `template INST_OR_DECL void ftrtrm (const FFLAS_FIELD< FFLAS_ELT > &F, const FFLAS::FFLAS_SIDE side, const FFLAS::FFLAS_DIAG diag, const size_t N, FFLAS_ELT *A, const size_t lda)`



- template `INST_OR_DECL` `size_t PLUQ` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS::FFLAS_DIAG` Diag, const `size_t M`, const `size_t N`, `FFLAS_ELT *A`, const `size_t lda`, `size_t *P`, `size_t *Q`)
- template `INST_OR_DECL` `size_t LUdivine` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS::FFLAS_DIAG` Diag, const `FFLAS::FFLAS_TRANSPOSE` trans, const `size_t M`, const `size_t N`, `FFLAS_ELT *A`, const `size_t lda`, `size_t *P`, `size_t *Qt`, const `FFPACK_LU_TAG` LuTag, const `size_t cutoff`)
- template `INST_OR_DECL` `size_t LUdivine_small` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS::FFLAS_DIAG` Diag, const `FFLAS::FFLAS_TRANSPOSE` trans, const `size_t M`, const `size_t N`, `FFLAS_ELT *A`, const `size_t lda`, `size_t *P`, `size_t *Q`, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL` `size_t LUdivine_gauss` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS::FFLAS_DIAG` Diag, const `size_t M`, const `size_t N`, `FFLAS_ELT *A`, const `size_t lda`, `size_t *P`, `size_t *Q`, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL` `size_t RowEchelonForm` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t M`, const `size_t N`, `FFLAS_ELT *A`, const `size_t lda`, `size_t *P`, `size_t *Qt`, const `bool transform`, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL` `size_t ReducedRowEchelonForm` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t M`, const `size_t N`, `FFLAS_ELT *A`, const `size_t lda`, `size_t *P`, `size_t *Qt`, const `bool transform`, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL` `size_t ColumnEchelonForm` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t M`, const `size_t N`, `FFLAS_ELT *A`, const `size_t lda`, `size_t *P`, `size_t *Qt`, const `bool transform`, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL` `size_t ReducedColumnEchelonForm` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t M`, const `size_t N`, `FFLAS_ELT *A`, const `size_t lda`, `size_t *P`, `size_t *Qt`, const `bool transform`, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL` `FFLAS_ELT * Invert` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t M`, `FFLAS_ELT *A`, const `size_t lda`, `int &nullity`)
- template `INST_OR_DECL` `FFLAS_ELT * Invert` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t M`, const `FFLAS_ELT *A`, const `size_t lda`, `FFLAS_ELT *X`, const `size_t ldx`, `int &nullity`)
- template `INST_OR_DECL` `FFLAS_ELT * Invert2` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t M`, `FFLAS_ELT *A`, const `size_t lda`, `FFLAS_ELT *X`, const `size_t ldx`, `int &nullity`)
- template `INST_OR_DECL` `std::list< Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > >::Element > & CharPoly` (const `Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > > &R`, `std::list< Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > >::Element > &charp`, const `size_t N`, `FFLAS_ELT *A`, const `size_t lda`, `FFLAS_FIELD< FFLAS_ELT >::RandIter &G`, const `FFPACK_CHARPOLY_TAG` CharpTag, const `size_t degree`)
- template `INST_OR_DECL` `Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > >::Element & CharPoly` (const `Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > > &R`, `Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > >::Element &charp`, const `size_t N`, `FFLAS_ELT *A`, const `size_t lda`, `FFLAS_FIELD< FFLAS_ELT >::RandIter &G`, const `FFPACK_CHARPOLY_TAG` CharpTag, const `size_t degree`)
- template `INST_OR_DECL` `Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > >::Element & CharPoly` (const `Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > > &R`, `Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > >::Element &charp`, const `size_t N`, `FFLAS_ELT *A`, const `size_t lda`, const `FFPACK_CHARPOLY_TAG` CharpTag, const `size_t degree`)
- template `INST_OR_DECL` `std::vector< FFLAS_ELT > & MinPoly` (const `FFLAS_FIELD< FFLAS_ELT >` &F, `std::vector< FFLAS_ELT > &minP`, const `size_t N`, const `FFLAS_ELT *A`, const `size_t lda`, `FFLAS_FIELD< FFLAS_ELT >::RandIter &G`)
- template `INST_OR_DECL` `std::vector< FFLAS_ELT > & MinPoly` (const `FFLAS_FIELD< FFLAS_ELT >` &F, `std::vector< FFLAS_ELT > &minP`, const `size_t N`, const `FFLAS_ELT *A`, const `size_t lda`)
- template `INST_OR_DECL` `std::vector< FFLAS_ELT > & MatVecMinPoly` (const `FFLAS_FIELD< FFLAS_ELT >` &F, `std::vector< FFLAS_ELT > &minP`, const `size_t N`, const `FFLAS_ELT *A`, const `size_t lda`, const `FFLAS_ELT *V`, const `size_t incv`)
- template `INST_OR_DECL` `size_t KrylovElim` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t M`, const `size_t N`, `FFLAS_ELT *A`, const `size_t lda`, `size_t *P`, `size_t *Q`, const `size_t deg`, `size_t *iterates`, `size_t *inviterates`, const `size_t maxit`, `size_t virt`)
- template `INST_OR_DECL` `size_t SpecRankProfile` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t M`, const `size_t N`, `FFLAS_ELT *A`, const `size_t lda`, const `size_t deg`, `size_t *rankProfile`)
- template `INST_OR_DECL` `size_t Rank` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t M`, const `size_t N`, `FFLAS_ELT *A`, const `size_t lda`)

- template `INST_OR_DECL` bool `IsSingular` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t M, const size\_t N, `FFLAS_ELT` \*A, const size\_t lda)
- template `INST_OR_DECL` `FFLAS_ELT` & `Det` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, `FFLAS_ELT` &det, const size\_t N, `FFLAS_ELT` \*A, const size\_t lda, size\_t \*P, size\_t \*Q)
- template `INST_OR_DECL` `FFLAS_ELT` & `Det` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, `FFLAS_ELT` &det, const size\_t N, `FFLAS_ELT` \*A, const size\_t lda, const `FFLAS::ParSeqHelper::Parallel`< `FFLAS::CuttingStrategy::Recursive`, `FFLAS::StrategyParameter::Threads` > &parH, size\_t \*P, size\_t \*Q)
- template `INST_OR_DECL` void `solveLB` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const `FFLAS::FFLAS_SIDE` Side, const size\_t M, const size\_t N, const size\_t R, `FFLAS_ELT` \*L, const size\_t ldl, const size\_t \*Q, `FFLAS_ELT` \*B, const size\_t ldb)
- template `INST_OR_DECL` void `solveLB2` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const `FFLAS::FFLAS_SIDE` Side, const size\_t M, const size\_t N, const size\_t R, `FFLAS_ELT` \*L, const size\_t ldl, const size\_t \*Q, `FFLAS_ELT` \*B, const size\_t ldb)
- template `INST_OR_DECL` void `RandomNullSpaceVector` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const `FFLAS::FFLAS_SIDE` Side, const size\_t M, const size\_t N, `FFLAS_ELT` \*A, const size\_t lda, `FFLAS_ELT` \*X, const size\_t incX)
- template `INST_OR_DECL` size\_t `NullSpaceBasis` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const `FFLAS::FFLAS_SIDE` Side, const size\_t M, const size\_t N, `FFLAS_ELT` \*A, const size\_t lda, `FFLAS_ELT` \*&NS, size\_t &ldn, size\_t &NSdim)
- template `INST_OR_DECL` size\_t `RowRankProfile` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t M, const size\_t N, `FFLAS_ELT` \*A, const size\_t lda, size\_t \*&rkprofile, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL` size\_t `ColumnRankProfile` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t M, const size\_t N, `FFLAS_ELT` \*A, const size\_t lda, size\_t \*&rkprofile, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL` size\_t `RowRankProfileSubmatrixIndices` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t M, const size\_t N, `FFLAS_ELT` \*A, const size\_t lda, size\_t \*&rowindices, size\_t \*&colindices, size\_t &R)
- template `INST_OR_DECL` size\_t `ColRankProfileSubmatrixIndices` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t M, const size\_t N, `FFLAS_ELT` \*A, const size\_t lda, size\_t \*&rowindices, size\_t \*&colindices, size\_t &R)
- template `INST_OR_DECL` size\_t `RowRankProfileSubmatrix` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t M, const size\_t N, `FFLAS_ELT` \*A, const size\_t lda, `FFLAS_ELT` \*&X, size\_t &R)
- template `INST_OR_DECL` size\_t `ColRankProfileSubmatrix` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t M, const size\_t N, `FFLAS_ELT` \*A, const size\_t lda, `FFLAS_ELT` \*&X, size\_t &R)
- template `INST_OR_DECL` void `getTriangular`< `FFLAS_FIELD`< `FFLAS_ELT` > > (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const `FFLAS::FFLAS_UPLO` Uplo, const `FFLAS::FFLAS_DIAG` diag, const size\_t M, const size\_t N, const size\_t R, const `FFLAS_ELT` \*A, const size\_t lda, `FFLAS_ELT` \*T, const size\_t ldt, const bool OnlyNonZeroVectors)
- template `INST_OR_DECL` void `getTriangular`< `FFLAS_FIELD`< `FFLAS_ELT` > > (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const `FFLAS::FFLAS_UPLO` Uplo, const `FFLAS::FFLAS_DIAG` diag, const size\_t M, const size\_t N, const size\_t R, `FFLAS_ELT` \*A, const size\_t lda)
- template `INST_OR_DECL` void `getEchelonForm`< `FFLAS_FIELD`< `FFLAS_ELT` > > (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const `FFLAS::FFLAS_UPLO` Uplo, const `FFLAS::FFLAS_DIAG` diag, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, const `FFLAS_ELT` \*A, const size\_t lda, `FFLAS_ELT` \*T, const size\_t ldt, const bool OnlyNonZeroVectors, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL` void `getEchelonForm`< `FFLAS_FIELD`< `FFLAS_ELT` > > (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const `FFLAS::FFLAS_UPLO` Uplo, const `FFLAS::FFLAS_DIAG` diag, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, `FFLAS_ELT` \*A, const size\_t lda, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL` void `getEchelonTransform`< `FFLAS_FIELD`< `FFLAS_ELT` > > (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const `FFLAS::FFLAS_UPLO` Uplo, const `FFLAS::FFLAS_DIAG` diag, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, const size\_t \*Q, const `FFLAS_ELT` \*A, const size\_t lda, `FFLAS_ELT` \*T, const size\_t ldt, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL` void `getReducedEchelonForm`< `FFLAS_FIELD`< `FFLAS_ELT` > > (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const `FFLAS::FFLAS_UPLO` Uplo, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, const `FFLAS_ELT` \*A, const size\_t lda, `FFLAS_ELT` \*T, const size\_t ldt, const bool OnlyNonZeroVectors, const `FFPACK_LU_TAG` LuTag)

- template INST\_OR\_DECL void [getReducedEchelonForm](#)< FFLAS\_FIELD< FFLAS\_ELT > > (const FFLAS\_FIELD< FFLAS\_ELT > &F, const FFLAS::FFLAS\_UPLO Uplo, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, FFLAS\_ELT \*A, const size\_t lda, const FFPACK\_LU\_TAG LuTag)
- template INST\_OR\_DECL void [getReducedEchelonTransform](#)< FFLAS\_FIELD< FFLAS\_ELT > > (const FFLAS\_FIELD< FFLAS\_ELT > &F, const FFLAS::FFLAS\_UPLO Uplo, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, const size\_t \*Q, const FFLAS\_ELT \*A, const size\_t lda, FFLAS\_ELT \*T, const size\_t ldt, const FFPACK\_LU\_TAG LuTag)
- template INST\_OR\_DECL FFLAS\_ELT \* [LQUPtoInverseOfFullRankMinor](#) (const FFLAS\_FIELD< FFLAS\_ELT > &F, const size\_t rank, FFLAS\_ELT \*A\_factors, const size\_t lda, const size\_t \*QtPointer, FFLAS\_ELT \*X, const size\_t ldx)
- template<class T, class CT = const T>  
T [fflas\\_const\\_cast](#) (CT x)
- [Failure](#) & [failure](#) ()
- template<class T >  
bool [isOdd](#) (const T &a)
- bool [isOdd](#) (const float &a)
- bool [isOdd](#) (const double &a)
- template<class Field, class Randlter >  
[Field::Element\\_ptr NonZeroRandomMatrix](#) (const Field &F, size\_t m, size\_t n, typename Field::Element\_ptr A, size\_t lda, Randlter &G)  
*Random non-zero Matrix.*
- template<class Field, class Randlter >  
[Field::Element\\_ptr NonZeroRandomMatrix](#) (const Field &F, size\_t m, size\_t n, typename Field::Element\_ptr A, size\_t lda)  
*Random non-zero Matrix.*
- template<class Field, class Randlter >  
[Field::Element\\_ptr RandomMatrix](#) (const Field &F, size\_t m, size\_t n, typename Field::Element\_ptr A, size\_t lda, Randlter &G)  
*Random Matrix.*
- template<class Field >  
[Field::Element\\_ptr RandomMatrix](#) (const Field &F, size\_t m, size\_t n, typename Field::Element\_ptr A, size\_t lda)  
*Random Matrix.*
- template<class Field, class Randlter >  
[Field::Element\\_ptr RandomTriangularMatrix](#) (const Field &F, size\_t m, size\_t n, const FFLAS::FFLAS\_UPLO UpLo, const FFLAS::FFLAS\_DIAG Diag, bool nonsingular, typename Field::Element\_ptr A, size\_t lda, Randlter &G)  
*Random Triangular Matrix.*
- template<class Field >  
[Field::Element\\_ptr RandomTriangularMatrix](#) (const Field &F, size\_t m, size\_t n, const FFLAS::FFLAS\_UPLO UpLo, const FFLAS::FFLAS\_DIAG Diag, bool nonsingular, typename Field::Element\_ptr A, size\_t lda)  
*Random Triangular Matrix.*
- size\_t [RandInt](#) (size\_t a, size\_t b)
- template<class Field, class Randlter >  
[Field::Element\\_ptr RandomSymmetricMatrix](#) (const Field &F, size\_t n, bool nonsingular, typename Field::Element\_ptr A, size\_t lda, Randlter &G)  
*Random Symmetric Matrix.*
- template<class Field, class Randlter >  
[Field::Element\\_ptr RandomMatrixWithRank](#) (const Field &F, size\_t m, size\_t n, size\_t r, typename Field::Element\_ptr A, size\_t lda, Randlter &G)  
*Random Matrix with prescribed rank.*
- template<class Field >  
[Field::Element\\_ptr RandomMatrixWithRank](#) (const Field &F, size\_t m, size\_t n, size\_t r, typename Field::Element\_ptr A, size\_t lda)  
*Random Matrix with prescribed rank.*

- `size_t * RandomIndexSubset` (size\_t N, size\_t R, size\_t \*P)  
*Pick uniformly at random a sequence of  $R$  distinct elements from the set  $\{0, \dots, N - 1\}$  using Knuth's shuffle.*
- `size_t * RandomPermutation` (size\_t N, size\_t \*P)  
*Pick uniformly at random a permutation of size  $N$  stored in LAPACK format using Knuth's shuffle.*
- `void RandomRankProfileMatrix` (size\_t M, size\_t N, size\_t R, size\_t \*rows, size\_t \*cols)  
*Pick uniformly at random an  $R$ -subpermutation of dimension  $M \times N$  : a matrix with only  $R$  non-zeros equal to one, in a random rook placement.*
- `void swapval` (size\_t k, size\_t N, size\_t \*P, size\_t val)
- `void RandomSymmetricRankProfileMatrix` (size\_t N, size\_t R, size\_t \*rows, size\_t \*cols)  
*Pick uniformly at random a symmetric  $R$ -subpermutation of dimension  $N \times N$  : a symmetric matrix with only  $R$  non-zeros, all equal to one, in a random rook placement.*
- `void RandomLTQSRankProfileMatrix` (size\_t n, size\_t r, size\_t t, size\_t \*rows, size\_t \*cols)
- `template<class Field, class RandIter >`  
`Field::Element_ptr RandomMatrixWithRankandRPM` (const Field &F, size\_t M, size\_t N, size\_t R, typename Field::Element\_ptr A, size\_t lda, const size\_t \*RRP, const size\_t \*CRP, RandIter &G)  
*Random Matrix with prescribed rank and rank profile matrix Creates an  $m \times n$  matrix with random entries and rank  $r$ .*
- `template<class Field >`  
`Field::Element_ptr RandomMatrixWithRankandRPM` (const Field &F, size\_t M, size\_t N, size\_t R, typename Field::Element\_ptr A, size\_t lda, const size\_t \*RRP, const size\_t \*CRP)  
*Random Matrix with prescribed rank and rank profile matrix Creates an  $m \times n$  matrix with random entries and rank  $r$ .*
- `template<class Field, class RandIter >`  
`Field::Element_ptr RandomSymmetricMatrixWithRankandRPM` (const Field &F, size\_t N, size\_t R, typename Field::Element\_ptr A, size\_t lda, const size\_t \*RRP, const size\_t \*CRP, RandIter &G)  
*Random Symmetric Matrix with prescribed rank and rank profile matrix Creates an  $n \times n$  symmetric matrix with random entries and rank  $r$ .*
- `template<class Field >`  
`Field::Element_ptr RandomSymmetricMatrixWithRankandRPM` (const Field &F, size\_t M, size\_t N, size\_t R, typename Field::Element\_ptr A, size\_t lda, const size\_t \*RRP, const size\_t \*CRP)  
*Random Symmetric Matrix with prescribed rank and rank profile matrix Creates an  $n \times n$  symmetric matrix with random entries and rank  $r$ .*
- `template<class Field, class RandIter >`  
`Field::Element_ptr RandomMatrixWithRankandRandomRPM` (const Field &F, size\_t M, size\_t N, size\_t R, typename Field::Element\_ptr A, size\_t lda, RandIter &G)  
*Random Matrix with prescribed rank, with random rank profile matrix Creates an  $m \times n$  matrix with random entries, rank  $r$  and with a rank profile matrix chosen uniformly at random.*
- `template<class Field >`  
`Field::Element_ptr RandomMatrixWithRankandRandomRPM` (const Field &F, size\_t M, size\_t N, size\_t R, typename Field::Element\_ptr A, size\_t lda)  
*Random Matrix with prescribed rank, with random rank profile matrix Creates an  $m \times n$  matrix with random entries, rank  $r$  and with a rank profile matrix chosen uniformly at random.*
- `template<class Field, class RandIter >`  
`Field::Element_ptr RandomSymmetricMatrixWithRankandRandomRPM` (const Field &F, size\_t N, size\_t R, typename Field::Element\_ptr A, size\_t lda, RandIter &G)  
*Random Symmetric Matrix with prescribed rank, with random rank profile matrix Creates an  $n \times n$  matrix with random entries, rank  $r$  and with a rank profile matrix chosen uniformly at random.*
- `template<class Field >`  
`Field::Element_ptr RandomSymmetricMatrixWithRankandRandomRPM` (const Field &F, size\_t N, size\_t R, typename Field::Element\_ptr A, size\_t lda)  
*Random Symmetric Matrix with prescribed rank, with random rank profile matrix Creates an  $n \times n$  matrix with random entries, rank  $r$  and with a rank profile matrix chosen uniformly at random.*
- `template<class Field >`  
`Field::Element_ptr RandomMatrixWithDet` (const Field &F, size\_t n, const typename Field::Element d, typename Field::Element\_ptr A, size\_t lda)  
*Random Matrix with prescribed det.*

- `template<class Field , class Randlter >`  
`Field::Element_ptr RandomMatrixWithDet` (const `Field` &F, `size_t` n, const typename `Field::Element` d, type-  
name `Field::Element_ptr` A, `size_t` lda, `Randlter` &G)  
*Random Matrix with prescribed det.*
- `template<class Field , class Randlter >`  
`Field::Element_ptr RandomLTQSMatrixWithRankandQSorder` (`Field` &F, `size_t` n, `size_t` r, `size_t` t, typename  
`Field::Element_ptr` A, `size_t` lda, `Randlter` &G)
- `template<typename Field >`  
`Field * chooseField` (`Givaro::Integer` q, `uint64_t` b, `uint64_t` seed)
- `template<> Givaro::ZRing< int32_t > * chooseField< Givaro::ZRing< int32_t > >` (`Givaro::Integer` q,  
`uint64_t` b, `uint64_t` seed)
- `template<> Givaro::ZRing< int64_t > * chooseField< Givaro::ZRing< int64_t > >` (`Givaro::Integer` q,  
`uint64_t` b, `uint64_t` seed)
- `template<> Givaro::ZRing< float > * chooseField< Givaro::ZRing< float > >` (`Givaro::Integer` q, `uint64_t`  
b, `uint64_t` seed)
- `template<> Givaro::ZRing< double > * chooseField< Givaro::ZRing< double > >` (`Givaro::Integer` q,  
`uint64_t` b, `uint64_t` seed)

### 11.21.1 Detailed Description

**Finite Field PACK** Set of elimination based routines for dense linear algebra.

This namespace enlarges the set of BLAS routines of the class `FFLAS`, with higher level routines based on elimination.

### 11.21.2 Typedef Documentation

#### 11.21.2.1 Checker\_PLUQ

```
template<class Field >
using Checker_PLUQ = FFLAS::Checker_Empty<Field>
```

#### 11.21.2.2 Checker\_Det

```
template<class Field >
using Checker_Det = FFLAS::Checker_Empty<Field>
```

#### 11.21.2.3 Checker\_invert

```
template<class Field >
using Checker_invert = FFLAS::Checker_Empty<Field>
```

#### 11.21.2.4 Checker\_charpoly

```
template<class Field , class Polynomial >
using Checker_charpoly = FFLAS::Checker_Empty<Field>
```

### 11.21.2.5 ForceCheck\_PLUQ

```
template<class Field >
using ForceCheck_PLUQ = CheckerImplem_PLUQ<Field>
```

### 11.21.2.6 ForceCheck\_Det

```
template<class Field >
using ForceCheck_Det = CheckerImplem_Det<Field>
```

### 11.21.2.7 ForceCheck\_invert

```
template<class Field >
using ForceCheck_invert = CheckerImplem_invert<Field>
```

### 11.21.2.8 ForceCheck\_charpoly

```
template<class Field , class Polynomial >
using ForceCheck_charpoly = CheckerImplem_charpoly<Field,Polynomial>
```

## 11.21.3 Function Documentation

### 11.21.3.1 LAPACKPerm2MathPerm()

```
void LAPACKPerm2MathPerm (
    size_t * MathP,
    const size_t * LapackP,
    const size_t N) [inline]
```

Conversion of a permutation from LAPACK format to Math format.

### 11.21.3.2 MathPerm2LAPACKPerm()

```
void MathPerm2LAPACKPerm (
    size_t * LapackP,
    const size_t * MathP,
    const size_t N) [inline]
```

Conversion of a permutation from Maths format to LAPACK format.

### 11.21.3.3 applyP() [1/4]

```
template<class Field >
void applyP (
    const Field & F,
    const FFLAS::FFLAS_SIDE Side,
    const FFLAS::FFLAS_TRANSPOSE Trans,
    const size_t M,
    const size_t ibeg,
    const size_t iend,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t * P) [inline]
```

Computes  $P1 \times \text{Diag}(I\_R, P2)$  where  $P1$  is a LAPACK and  $P2$  a LAPACK permutation and store the result in  $P1$  as a LAPACK permutation.

## Parameters

|                |           |                                  |
|----------------|-----------|----------------------------------|
| <i>in, out</i> | <i>P1</i> | a LAPACK permutation of size N   |
|                | <i>P2</i> | a LAPACK permutation of size N-R |

Applies a permutation P to the matrix A. Apply a permutation P, stored in the LAPACK format (a sequence of transpositions) between indices *ibeg* and *iend* of P to (*iend-ibeg*) vectors of size M stored in A (as column for NoTrans and rows for Trans). Side==FFLAS::FflasLeft for row permutation Side==FFLAS::FflasRight for a column permutation Trans==FFLAS::FflasTrans for the inverse permutation of P

## Parameters

|              |                                                                                                 |
|--------------|-------------------------------------------------------------------------------------------------|
| <i>F</i>     | base field                                                                                      |
| <i>Side</i>  | decides if rows (FflasLeft) or columns (FflasRight) are permuted                                |
| <i>Trans</i> | decides if the matrix is seen as columns (FflasTrans) or rows (FflasNoTrans)                    |
| <i>M</i>     | size of the elements to permute                                                                 |
| <i>ibeg</i>  | first index to consider in P                                                                    |
| <i>iend</i>  | last index to consider in P                                                                     |
| <i>A</i>     | input matrix                                                                                    |
| <i>lda</i>   | leading dimension of A                                                                          |
| <i>P</i>     | permutation in LAPACK format                                                                    |
| <i>psh</i>   | (optional): a sequential or parallel helper, to choose between sequential or parallel execution |

## Warning

not sure the submatrix is still a permutation and the one we expect in all cases... examples for *iend*=2, *ibeg*=1 and *P*=[2,2,2]

## 11.21.3.4 applyP() [2/4]

```
template<class Field >
void applyP (
    const Field & F,
    const FFLAS::FFLAS_SIDE Side,
    const FFLAS::FFLAS_TRANSPOSE Trans,
    const size_t m,
    const size_t ibeg,
    const size_t iend,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t * P,
    const FFLAS::ParSeqHelper::Sequential seq) [inline]
```

## 11.21.3.5 applyP() [3/4]

```
template<class Field , class Cut , class Param >
void applyP (
    const Field & F,
    const FFLAS::FFLAS_SIDE Side,
```

```

const FFLAS::FFLAS_TRANSPOSE Trans,
const size_t m,
const size_t ibeg,
const size_t iend,
typename Field::Element_ptr A,
const size_t lda,
const size_t * P,
const FFLAS::ParSeqHelper::Parallel< Cut, Param > par) [inline]

```

### 11.21.3.6 MonotonicApplyP()

```

template<class Field >
void MonotonicApplyP (
    const Field & F,
    const FFLAS::FFLAS_SIDE Side,
    const FFLAS::FFLAS_TRANSPOSE Trans,
    const size_t M,
    const size_t ibeg,
    const size_t iend,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t * P,
    const size_t R) [inline]

```

Apply a R-monotonically increasing permutation P, to the matrix A.

MonotonicApplyP Apply a permutation defined by the first R entries of the vector P (the pivots).

The permutation represented by P is defined as follows:

- the first R values of P is a LAPACK representation (a sequence of transpositions)
- the remaining iend-ibeg-R values of the permutation are in a monotonically increasing progression Side==FFLAS::FflasLeft for row permutation Side==FFLAS::FflasRight for a column permutation Trans==FFLAS::FflasTrans for the inverse permutation of P

#### Parameters

|              |                                                                       |
|--------------|-----------------------------------------------------------------------|
| <i>F</i>     | base field                                                            |
| <i>Side</i>  | selects if it is a row (FflasLeft) or column (FflasRight) permutation |
| <i>Trans</i> | inverse permutation (FflasTrans/NoTrans)                              |
| <i>M</i>     |                                                                       |
| <i>ibeg</i>  |                                                                       |
| <i>iend</i>  |                                                                       |
| <i>A</i>     | input matrix                                                          |
| <i>lda</i>   | leading dimension of A                                                |
| <i>P</i>     | LAPACK permutation                                                    |
| <i>R</i>     | first values of P                                                     |

The non pivot elements, are located in montonically increasing order.



## 11.21.3.7 fgetrs() [1/4]

```
template<class Field >
void fgetrs (
    const Field & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    const size_t R,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t * P,
    const size_t * Q,
    typename Field::Element_ptr B,
    const size_t ldb,
    int * info)
```

Solve the system  $AX = B$  or  $XA = B$ .

Solving using the PLUQ decomposition of A already computed inplace with PLUQ (FFLAS::FflasNonUnit). Version for A square. If A is rank deficient, a solution is returned if the system is consistent, Otherwise an info is 1

## Parameters

|             |                                                                                    |
|-------------|------------------------------------------------------------------------------------|
| <i>F</i>    | base field                                                                         |
| <i>Side</i> | Determine wheter the resolution is left (FflasLeft) or right (FflasRight) looking. |
| <i>M</i>    | row dimension of B                                                                 |
| <i>N</i>    | col dimension of B                                                                 |
| <i>R</i>    | rank of A                                                                          |
| <i>A</i>    | input matrix                                                                       |
| <i>lda</i>  | leading dimension of A                                                             |
| <i>P</i>    | row permutation of the PLUQ decomposition of A                                     |
| <i>Q</i>    | column permutation of the PLUQ decomposition of A                                  |
| <i>B</i>    | Right/Left hand side matrix. Initially stores B, finally stores the solution X.    |
| <i>ldb</i>  | leading dimension of B                                                             |
| <i>info</i> | Success of the computation: 0 if successfull, >0 if system is inconsistent         |

## 11.21.3.8 fgetrs() [2/4]

```
template<class Field >
Field::Element_ptr fgetrs (
    const Field & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    const size_t NRHS,
    const size_t R,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t * P,
    const size_t * Q,
    typename Field::Element_ptr X,
    const size_t ldx,
```

```

typename Field::ConstElement_ptr B,
const size_t ldb,
int * info)

```

Solve the system  $A X = B$  or  $X A = B$ .

Solving using the PLUQ decomposition of A already computed inplace with PLUQ(FFLAS::FflasNonUnit). Version for A rectangular. If A is rank deficient, a solution is returned if the system is consistent, Otherwise an info is 1

#### Parameters

|             |                                                                                                             |
|-------------|-------------------------------------------------------------------------------------------------------------|
| <i>F</i>    | base field                                                                                                  |
| <i>Side</i> | Determine wheter the resolution is left (FflasLeft) or right (FflasRight) looking.                          |
| <i>M</i>    | row dimension of A                                                                                          |
| <i>N</i>    | col dimension of A                                                                                          |
| <i>NRHS</i> | number of columns (if Side = FFLAS::FflasLeft) or row (if Side = FFLAS::FflasRight) of the matrices X and B |
| <i>R</i>    | rank of A                                                                                                   |
| <i>A</i>    | input matrix                                                                                                |
| <i>lda</i>  | leading dimension of A                                                                                      |
| <i>P</i>    | row permutation of the PLUQ decomposition of A                                                              |
| <i>Q</i>    | column permutation of the PLUQ decomposition of A                                                           |
| <i>X</i>    | solution matrix                                                                                             |
| <i>ldx</i>  | leading dimension of X                                                                                      |
| <i>B</i>    | Right/Left hand side matrix.                                                                                |
| <i>ldb</i>  | leading dimension of B                                                                                      |
| <i>info</i> | Succes of the computation: 0 if successfull, >0 if system is inconsistent                                   |

#### 11.21.3.9 fgesv() [1/4]

```

template<class Field >
size_t fgesv (
    const Field & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr B,
    const size_t ldb,
    int * info)

```

Square system solver.

#### Parameters

|             |                                                                                   |
|-------------|-----------------------------------------------------------------------------------|
| <i>F</i>    | The computation domain                                                            |
| <i>Side</i> | Determine wheter the resolution is left (FflasLeft) or right (FflasRight) looking |
| <i>M</i>    | row dimension of B                                                                |
| <i>N</i>    | col dimension of B                                                                |
| <i>A</i>    | input matrix                                                                      |
| <i>lda</i>  | leading dimension of A                                                            |

|             |                                                                                     |
|-------------|-------------------------------------------------------------------------------------|
| <i>B</i>    | Right/Left hand side matrix. Initially contains B, finally contains the solution X. |
| <i>ldb</i>  | leading dimension of B                                                              |
| <i>info</i> | Success of the computation: 0 if successfull, >0 if system is inconsistent          |

**Returns**

the rank of the system

Solve the system  $A X = B$  or  $X A = B$ . Version for A square. If A is rank deficient, a solution is returned if the system is consistent, Otherwise an info is 1

**11.21.3.10 fgesv() [2/4]**

```
template<class Field >
size_t fgesv (
    const Field & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    const size_t NRHS,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr X,
    const size_t ldx,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    int * info)
```

Rectangular system solver.

**Parameters**

|             |                                                                                                             |
|-------------|-------------------------------------------------------------------------------------------------------------|
| <i>F</i>    | The computation domain                                                                                      |
| <i>Side</i> | Determine wheter the resolution is left (FflasLeft) or right (FflasRight) looking                           |
| <i>M</i>    | row dimension of A                                                                                          |
| <i>N</i>    | col dimension of A                                                                                          |
| <i>NRHS</i> | number of columns (if Side = FFLAS::FflasLeft) or row (if Side = FFLAS::FflasRight) of the matrices X and B |
| <i>A</i>    | input matrix                                                                                                |
| <i>lda</i>  | leading dimension of A                                                                                      |
| <i>B</i>    | Right/Left hand side matrix. Initially contains B, finally contains the solution X.                         |
| <i>ldb</i>  | leading dimension of B                                                                                      |
| <i>X</i>    |                                                                                                             |
| <i>ldx</i>  |                                                                                                             |
| <i>info</i> | Success of the computation: 0 if successfull, >0 if system is inconsistent                                  |

**Returns**

the rank of the system

Solve the system  $A X = B$  or  $X A = B$ . Version for A square. If A is rank deficient, a solution is returned if the system is consistent, Otherwise an info is 1

**11.21.3.11 ftrtri()** [1/2]

```
template<class Field >
void ftrtri (
    const Field & F,
    const FFLAS::FFLAS_UPLO Uplo,
    const FFLAS::FFLAS_DIAG Diag,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t threshold = __FFLASFFPACK_FTRTRI_THRESHOLD)
```

Compute the inverse of a triangular matrix.

**Parameters**

|             |                                                        |
|-------------|--------------------------------------------------------|
| <i>F</i>    | base field                                             |
| <i>Uplo</i> | whether the matrix is upper or lower triangular        |
| <i>Diag</i> | whether the matrix is unit diagonal (FflasUnit/NoUnit) |
| <i>N</i>    | input matrix order                                     |
| <i>A</i>    | the input matrix                                       |
| <i>lda</i>  | leading dimension of A                                 |

**11.21.3.12 trinv\_left()** [1/2]

```
template<class Field >
void trinv_left (
    const Field & F,
    const size_t N,
    typename Field::ConstElement_ptr L,
    const size_t ldl,
    typename Field::Element_ptr X,
    const size_t ldx)
```

**11.21.3.13 ftrtrm()** [1/2]

```
template<class Field >
void ftrtrm (
    const Field & F,
    const FFLAS::FFLAS_SIDE side,
    const FFLAS::FFLAS_DIAG diag,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda)
```

Compute the product of two triangular matrices of opposite shape.

Product UL or LU of the upper, resp lower triangular matrices U and L stored one above the other in the square matrix A.

## Parameters

|             |                                                                      |
|-------------|----------------------------------------------------------------------|
| <i>F</i>    | base field                                                           |
| <i>Side</i> | set to FflasLeft to compute the product UL, FflasRight to compute LU |
| <i>diag</i> | whether the matrix U is unit diagonal (FflasUnit/NoUnit)             |
| <i>N</i>    | input matrix order                                                   |
| <i>A</i>    | the input matrix                                                     |
| <i>lda</i>  | leading dimension of A                                               |

## 11.21.3.14 ftrstr()

```
template<class Field >
void ftrstr (
    const Field & F,
    const FFLAS::FFLAS_SIDE side,
    const FFLAS::FFLAS_UPLO Uplo,
    const FFLAS::FFLAS_DIAG diagA,
    const FFLAS::FFLAS_DIAG diagB,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::Element_ptr B,
    const size_t ldb,
    const size_t threshold = __FFLASFFPACK_FTRSTR_THRESHOLD) [inline]
```

Solve a triangular system with a triangular right hand side of the same shape.

## Parameters

|              |                                                                                                                       |
|--------------|-----------------------------------------------------------------------------------------------------------------------|
| <i>F</i>     | base field                                                                                                            |
| <i>Side</i>  | set to FflasLeft to compute $U1^{-1} * U2$ or $L1^{-1} * L2$ , FflasRight to compute $U1 * U2^{-1}$ or $L1 * L2^{-1}$ |
| <i>Uplo</i>  | whether the matrix A is upper or lower triangular                                                                     |
| <i>diag1</i> | whether the matrix U1 or L2 is unit diagonal (FflasUnit/NoUnit)                                                       |
| <i>diag2</i> | whether the matrix U2 or L2 is unit diagonal (FflasUnit/NoUnit)                                                       |
| <i>N</i>     | order of the input matrices                                                                                           |
| <i>A</i>     | the input matrix to be inverted (U1 or L1)                                                                            |
| <i>lda</i>   | leading dimension of A                                                                                                |
| <i>B</i>     | the input right hand side (U2 or L2)                                                                                  |
| <i>ldb</i>   | leading dimension of B                                                                                                |

## 11.21.3.15 ftrssyr2k()

```
template<class Field >
void ftrssyr2k (
    const Field & F,
    const FFLAS::FFLAS_UPLO Uplo,
    const FFLAS::FFLAS_DIAG diagA,
    const size_t N,
    typename Field::ConstElement_ptr A,
```

```

const size_t lda,
typename Field::Element_ptr B,
const size_t ldb,
const size_t threshold = __FFLASFFPACK_FTRSSYR2K_THRESHOLD) [inline]

```

Solve a triangular system in a symmetric sum: find B upper/lower triangular such that  $A^T B + B^T A = C$  where C is symmetric.

C is overwritten by B.

#### Parameters

|         |              |                                                                                                                       |
|---------|--------------|-----------------------------------------------------------------------------------------------------------------------|
|         | <i>F</i>     | base field                                                                                                            |
|         | <i>Side</i>  | set to FflasLeft to compute $U1^{-1} * U2$ or $L1^{-1} * L2$ , FflasRight to compute $U1 * U2^{-1}$ or $L1 * L2^{-1}$ |
|         | <i>Uplo</i>  | whether the matrix A is upper or lower triangular                                                                     |
|         | <i>diagA</i> | whether the matrix A is unit diagonal (FflasUnit/NoUnit)                                                              |
|         | <i>N</i>     | order of the input matrices                                                                                           |
|         | <i>A</i>     | the input matrix                                                                                                      |
|         | <i>lda</i>   | leading dimension of A                                                                                                |
| in, out | <i>B</i>     | the input right hand side where the output is written                                                                 |
|         | <i>ldb</i>   | leading dimension of B                                                                                                |

#### 11.21.3.16 fsytrf() [1/3]

```

template<class Field >
bool fsytrf (
    const Field & F,
    const FFLAS::FFLAS_UPLO UpLo,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t threshold = __FFLASFFPACK_FSYTRF_THRESHOLD)

```

Triangular factorization of symmetric matrices.

#### Parameters

|         |             |                                                                                          |
|---------|-------------|------------------------------------------------------------------------------------------|
|         | <i>F</i>    | The computation domain                                                                   |
|         | <i>UpLo</i> | Determine wheter to store the upper (FflasUpper) or lower (FflasLower) triangular factor |
|         | <i>N</i>    | order of the matrix A                                                                    |
| in, out | <i>A</i>    | input matrix                                                                             |
|         | <i>lda</i>  | leading dimension of A                                                                   |

#### Returns

false if the A does not have generic rank profile, making the computation fail.

Compute the a triangular factorization of the matrix A:  $A = L \times D \times L^T$  if UpLo = FflasLower or  $A = U^T \times D \times U$  otherwise. D is a diagonal matrix. The matrices L and U are unit diagonal lower (resp. upper) triangular and overwrite the input matrix A. The matrix D is stored on the diagonal of A, as the diagonal of L or U is known to be all ones. If A does not have generic rank profile, the LDLT or UTDU factorizations is not defined, and the algorithm returns false.

**11.21.3.17 fsytrf() [2/3]**

```
template<class Field >
bool fsytrf (
    const Field & F,
    const FFLAS::FFLAS_UPLO UpLo,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    const FFLAS::ParSeqHelper::Sequential seq,
    const size_t threshold = __FFLASFFPACK_FSYTRF_THRESHOLD) [inline]
```

**11.21.3.18 fsytrf() [3/3]**

```
template<class Field , class Cut , class Param >
bool fsytrf (
    const Field & F,
    const FFLAS::FFLAS_UPLO UpLo,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    const FFLAS::ParSeqHelper::Parallel< Cut, Param > par,
    const size_t threshold = __FFLASFFPACK_FSYTRF_THRESHOLD) [inline]
```

**11.21.3.19 fsytrf\_nonunit() [1/3]**

```
template<class Field >
bool fsytrf_nonunit (
    const Field & F,
    const FFLAS::FFLAS_UPLO UpLo,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr D,
    const size_t incD,
    const size_t threshold = __FFLASFFPACK_FSYTRF_THRESHOLD)
```

Triangular factorization of symmetric matrices.

**Parameters**

|         |        |                                                                                          |
|---------|--------|------------------------------------------------------------------------------------------|
|         | $F$    | The computation domain                                                                   |
|         | $UpLo$ | Determine wheter to store the upper (FflasUpper) or lower (FflasLower) triangular factor |
|         | $N$    | order of the matrix A                                                                    |
| in, out | $A$    | input matrix                                                                             |
| in, out | $D$    |                                                                                          |
|         | $lda$  | leading dimension of A                                                                   |

**Returns**

false if the A does not have generic rank profile, making the computation fail.

Compute the a triangular factorization of the matrix  $A$ :  $A = L \times D_{inv} \times L^T$  if  $UpLo = FflasLower$  or  $A = U^T \times D \times U$  otherwise.  $D$  is a diagonal matrix. The matrices  $L$  and  $U$  are lower (resp. upper) triangular and overwrite the input matrix  $A$ . The matrix  $D$  need to be stored separately, as the diagonal of  $L$  or  $U$  are not unit. If  $A$  does not have generic rank profile, the LDLT or UTDU factorizations is not defined, and the algorithm returns false.

**11.21.3.20 PLUQ()** [1/6]

```
template<class Field >
size_t PLUQ (
    const Field & F,
    const FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Q) [inline]
```

Compute a PLUQ factorization of the given matrix.

Return its rank. The permutations P and Q are represented using LAPACK's convention.

**Parameters**

|             |                                                                        |
|-------------|------------------------------------------------------------------------|
| <i>F</i>    | base field                                                             |
| <i>Diag</i> | whether U should have a unit diagonal (FflasUnit) or not (FflasNoUnit) |
| <i>M</i>    | matrix row dimension                                                   |
| <i>N</i>    | matrix column dimension                                                |
| <i>A</i>    | input matrix                                                           |
| <i>lda</i>  | leading dimension of A                                                 |
| <i>P</i>    | the row permutation                                                    |
| <i>Q</i>    | the column permutation                                                 |

**Returns**

the rank of A

**Bibliography** • Dumas J-G., Pernet C., and Sultan Z. *Simultaneous computation of the row and column rank profiles*, ISSAC'13, 2013

**11.21.3.21 pPLUQ()**

```
template<class Field >
size_t pPLUQ (
    const Field & F,
    const FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Q) [inline]
```



**11.21.3.22 PLUQ()** [2/6]

```
template<class Field >
size_t PLUQ (
    const Field & F,
    const FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Q,
    const FFLAS::ParSeqHelper::Sequential & PSHelper,
    size_t BCThreshold = __FFLASFFPACK_PLUQ_THRESHOLD) [inline]
```

**11.21.3.23 PLUQ()** [3/6]

```
template<class Field , class Cut , class Param >
size_t PLUQ (
    const Field & F,
    const FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Q,
    const FFLAS::ParSeqHelper::Parallel< Cut, Param > & PSHelper)
```

**11.21.3.24 LUdivine()** [1/4]

```
template<class Field >
size_t LUdivine (
    const Field & F,
    const FFLAS::FFLAS_DIAG Diag,
    const FFLAS::FFLAS_TRANSPOSE trans,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const FFPACK_LU_TAG LuTag = FfpackSlabRecursive,
    const size_t cutoff = __FFLASFFPACK_LUDIVINE_THRESHOLD)
```

Compute the CUP or PLE factorization of the given matrix.

Using a block algorithm and return its rank. The permutations P and Q are represented using LAPACK's convention.

**Parameters**

|             |                                                                                                                             |
|-------------|-----------------------------------------------------------------------------------------------------------------------------|
| <i>F</i>    | base field                                                                                                                  |
| <i>Diag</i> | whether the transformation matrix (U of the CUP, L of the PLE) should have a unit diagonal (FflasUnit) or not (FflasNoUnit) |

## Parameters

|               |                                                                                                 |
|---------------|-------------------------------------------------------------------------------------------------|
| <i>trans</i>  | whether to compute the CUP decomposition (FflasNoTrans) or the PLE decomposition (FflasTrans)   |
| <i>M</i>      | matrix row dimension                                                                            |
| <i>N</i>      | matrix column dimension                                                                         |
| <i>A</i>      | input matrix                                                                                    |
| <i>lda</i>    | leading dimension of A                                                                          |
| <i>P</i>      | the factor of CUP or PLE                                                                        |
| <i>Q</i>      | a permutation indicating the pivot position in the echelon form C or E in its first r positions |
| <i>LuTag</i>  | flag for setting the earling termination if the matrix is singular                              |
| <i>cutoff</i> | threshold to basecase                                                                           |

## Returns

the rank of A

## Bibliography

- Jeannerod C-P, Pernet, C. and Storjohann, A. *Rank-profile revealing Gaussian elimination and the CUP matrix decomposition*, J. of Symbolic Comp., 2013
- Pernet C, Brassel M *LUdivine, une divine factorisation LU*, 2002

## 11.21.3.25 ColumnEchelonForm() [1/3]

```
template<class Field >
size_t ColumnEchelonForm (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    bool transform = false,
    const FFPACK_LU_TAG LuTag = FfpackSlabRecursive) [inline]
```

Compute the Column Echelon form of the input matrix in-place.

If  $LuTag == FfpackTileRecursive$ , then after the computation  $A = [M \setminus V]$  such that  $AU = C$  is a column echelon decomposition of A, with  $U = P^T [V]$  and  $C = M + Q [I_r] [0 \text{ } I_{n-r}] [0]$  If  $LuTag == FfpackTileRecursive$  then  $A = [N \setminus V]$  such that the same holds with  $M = Q N$

$Qt = Q^T$  If  $transform=false$ , the matrix V is not computed. See also test-colechelon for an example of use

## Parameters

|    |                  |                                                                                       |
|----|------------------|---------------------------------------------------------------------------------------|
|    | <i>F</i>         | base field                                                                            |
|    | <i>M</i>         | number of rows                                                                        |
|    | <i>N</i>         | number of columns                                                                     |
| in | <i>A</i>         | input matrix                                                                          |
|    | <i>lda</i>       | leading dimension of A                                                                |
|    | <i>P</i>         | the column permutation                                                                |
|    | <i>Qt</i>        | the row position of the pivots in the echelon form                                    |
|    | <i>transform</i> | decides whether V is computed                                                         |
|    | <i>LuTag</i>     | chooses the elimination algorithm. SlabRecursive for LUdivine, TileRecursive for PLUQ |

## 11.21.3.26 pColumnEchelonForm()

```
template<class Field >
size_t pColumnEchelonForm (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    bool transform = false,
    size_t numthreads = 0,
    const FFPACK_LU_TAG LuTag = FfpackTileRecursive) [inline]
```

## 11.21.3.27 ColumnEchelonForm() [2/3]

```
template<class Field , class PSHelper >
size_t ColumnEchelonForm (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const FFPACK_LU_TAG LuTag,
    const PSHelper & psH) [inline]
```

## 11.21.3.28 RowEchelonForm() [1/3]

```
template<class Field >
size_t RowEchelonForm (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform = false,
    const FFPACK_LU_TAG LuTag = FfpackSlabRecursive) [inline]
```

Compute the Row Echelon form of the input matrix in-place.

If  $\text{LuTag} == \text{FfpackTileRecursive}$ , then after the computation  $A = [L \setminus M]$  such that  $XA = R$  is a row echelon decomposition of  $A$ , with  $X = [L \ 0]P$  and  $R = M + [I \ 0]Q^T [In-r]$  If  $\text{LuTag} == \text{FfpackTileRecursive}$  then  $A = [L \setminus N]$  such that the same holds with  $M = NQ^TQt = Q^T$  If  $\text{transform} = \text{false}$ , the matrix  $L$  is not computed. See also `test-rowechelon` for an example of use

## Parameters

|  |     |            |
|--|-----|------------|
|  | $F$ | base field |
|--|-----|------------|

## Parameters

|    |                  |                                                                                       |
|----|------------------|---------------------------------------------------------------------------------------|
|    | $M$              | number of rows                                                                        |
|    | $N$              | number of columns                                                                     |
| in | $A$              | the input matrix                                                                      |
|    | $lda$            | leading dimension of $A$                                                              |
|    | $P$              | the row permutation                                                                   |
|    | $Qt$             | the column position of the pivots in the echelon form                                 |
|    | <i>transform</i> | decides whether $L$ is computed                                                       |
|    | <i>LuTag</i>     | chooses the elimination algorithm. SlabRecursive for LUdivine, TileRecursive for PLUQ |

## 11.21.3.29 pRowEchelonForm()

```
template<class Field >
size_t pRowEchelonForm (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform = false,
    size_t numthreads = 0,
    const FFPACK_LU_TAG LuTag = FfpackTileRecursive) [inline]
```

## 11.21.3.30 RowEchelonForm() [2/3]

```
template<class Field , class PSHelper >
size_t RowEchelonForm (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const FFPACK_LU_TAG LuTag,
    const PSHelper & psH) [inline]
```

## 11.21.3.31 ReducedColumnEchelonForm() [1/3]

```
template<class Field >
size_t ReducedColumnEchelonForm (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
```

```

size_t * P,
size_t * Qt,
const bool transform = false,
const FFPACK_LU_TAG LuTag = FfpackSlabRecursive) [inline]

```

Compute the Reduced Column Echelon form of the input matrix in-place.

After the computation  $A = [V]$  such that  $AX = R$  is a reduced col echelon  $[M \ 0]$  decomposition of  $A$ , where  $X = P^T [V]$  and  $R = Q [I_r \ 0 \ I_{n-r}] [M \ 0] Qt = Q^T$  If transform=false, the matrix  $X$  is not computed and the matrix  $A = R$

#### Parameters

|    |                  |                                                                                       |
|----|------------------|---------------------------------------------------------------------------------------|
|    | <i>F</i>         | base field                                                                            |
|    | <i>M</i>         | number of rows                                                                        |
|    | <i>N</i>         | number of columns                                                                     |
| in | <i>A</i>         | input matrix                                                                          |
|    | <i>lda</i>       | leading dimension of A                                                                |
|    | <i>P</i>         | the column permutation                                                                |
|    | <i>Qt</i>        | the row position of the pivots in the echelon form                                    |
|    | <i>transform</i> | decides whether X is computed                                                         |
|    | <i>LuTag</i>     | chooses the elimination algorithm. SlabRecursive for LUdivine, TileRecursive for PLUQ |

#### 11.21.3.32 pReducedColumnEchelonForm()

```

template<class Field >
size_t pReducedColumnEchelonForm (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform = false,
    size_t numthreads = 0,
    const FFPACK_LU_TAG LuTag = FfpackTileRecursive) [inline]

```

#### 11.21.3.33 ReducedColumnEchelonForm() [2/3]

```

template<class Field , class PSHelper >
size_t ReducedColumnEchelonForm (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const FFPACK_LU_TAG LuTag,
    const PSHelper & psH) [inline]

```

**11.21.3.34 ReducedRowEchelonForm()** [1/3]

```
template<class Field >
size_t ReducedRowEchelonForm (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform = false,
    const FFPACK_LU_TAG LuTag = FfpackSlabRecursive) [inline]
```

Compute the Reduced Row Echelon form of the input matrix in-place.

After the computation  $A = [V1 \ M]$  such that  $X \ A = R$  is a reduced row echelon  $[V2 \ 0]$  decomposition of  $A$ , where  $X = [V1 \ 0] \ P$  and  $R = [I_r \ M] \ Q^T [V2 \ In-r] [0] \ Qt = Q^T$  If transform=false, the matrix  $X$  is not computed and the matrix  $A = R$

**Parameters**

|    |             |                                                                                       |
|----|-------------|---------------------------------------------------------------------------------------|
|    | $F$         | base field                                                                            |
|    | $M$         | number of rows                                                                        |
|    | $N$         | number of columns                                                                     |
| in | $A$         | input matrix                                                                          |
|    | $lda$       | leading dimension of $A$                                                              |
|    | $P$         | the row permutation                                                                   |
|    | $Qt$        | the column position of the pivots in the echelon form                                 |
|    | $transform$ | decides whether $X$ is computed                                                       |
|    | $LuTag$     | chooses the elimination algorithm. SlabRecursive for LUdivine, TileRecursive for PLUQ |

**11.21.3.35 pReducedRowEchelonForm()**

```
template<class Field >
size_t pReducedRowEchelonForm (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform = false,
    size_t numthreads = 0,
    const FFPACK_LU_TAG LuTag = FfpackTileRecursive) [inline]
```

**11.21.3.36 ReducedRowEchelonForm()** [2/3]

```
template<class Field , class PSHelper >
size_t ReducedRowEchelonForm (
    const Field & F,
```

```

const size_t M,
const size_t N,
typename Field::Element_ptr A,
const size_t lda,
size_t * P,
size_t * Qt,
const bool transform,
const FFPACK_LU_TAG LuTag,
const PSHelper & psH) [inline]

```

### 11.21.3.37 Invert() [1/4]

```

template<class Field >
Field::Element_ptr Invert (
    const Field & F,
    const size_t M,
    typename Field::Element_ptr A,
    const size_t lda,
    int & nullity)

```

Invert the given matrix in place or computes its nullity if it is singular.

An inplace  $2n^3$  algorithm is used.

#### Parameters

|         |           |                               |
|---------|-----------|-------------------------------|
|         | $F$       | The computation domain        |
|         | $M$       | order of the matrix           |
| in, out | $A$       | input matrix ( $M \times M$ ) |
|         | $lda$     | leading dimension of A        |
|         | $nullity$ | dimension of the kernel of A  |

#### Returns

pointer to  $A$  and  $A \leftarrow A^{-1}$

### 11.21.3.38 Invert() [2/4]

```

template<class Field >
Field::Element_ptr Invert (
    const Field & F,
    const size_t M,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::Element_ptr X,
    const size_t ldx,
    int & nullity)

```

Invert the given matrix or computes its nullity if it is singular.

#### Precondition

$X$  is preallocated and should be large enough to store the  $m \times m$  matrix  $A$ .

## Parameters

|     |           |                                                                                                                  |
|-----|-----------|------------------------------------------------------------------------------------------------------------------|
|     | $F$       | The computation domain                                                                                           |
|     | $M$       | order of the matrix                                                                                              |
| in  | $A$       | input matrix ( $M \times M$ )                                                                                    |
|     | $lda$     | leading dimension of A                                                                                           |
| out | $X$       | this is the inverse of A if A is invertible (non NULL and <code>nullity = 0</code> ). It is untouched otherwise. |
|     | $ldx$     | leading dimension of X                                                                                           |
|     | $nullity$ | dimension of the kernel of A                                                                                     |

## Returns

pointer to  $X = A^{-1}$

## 11.21.3.39 Invert2() [1/2]

```
template<class Field >
Field::Element_ptr Invert2 (
    const Field & F,
    const size_t M,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr X,
    const size_t ldx,
    int & nullity)
```

Invert the given matrix or computes its nullity if it is singular.

An  $2n^3f$  algorithm is used. This routine can be % faster than `FFPACK::Invert` but is not totally inplace.

## Precondition

X is preallocated and should be large enough to store the  $m \times m$  matrix A.

## Warning

A is overwritten here !

**Bug** not tested.

## Parameters

|         |           |                                                                                                                  |
|---------|-----------|------------------------------------------------------------------------------------------------------------------|
|         | $F$       | the computation domain                                                                                           |
|         | $M$       | order of the matrix                                                                                              |
| in, out | $A$       | input matrix ( $M \times M$ ). On output, A is modified and represents a "psychological" factorisation LU.       |
|         | $lda$     | leading dimension of A                                                                                           |
| out     | $X$       | this is the inverse of A if A is invertible (non NULL and <code>nullity = 0</code> ). It is untouched otherwise. |
|         | $ldx$     | leading dimension of X                                                                                           |
|         | $nullity$ | dimension of the kernel of A                                                                                     |



## Returns

pointer to  $X = A^{-1}$

**Todo** this init is not all necessary (done after ftrtri)

**Todo** this init is not all necessary (done after ftrtri)

## 11.21.3.40 CharPoly() [1/8]

```
template<class PolRing >
std::list< typename PolRing::Element > & CharPoly (
    const PolRing & R,
    std::list< typename PolRing::Element > & charp,
    const size_t N,
    typename PolRing::Domain_t::Element_ptr A,
    const size_t lda,
    typename PolRing::Domain_t::RandIter & G,
    const FFPACK_CHARPOLY_TAG CharpTag = FfpackAuto,
    const size_t degree = __FFLASFFPACK_ARITHPROG_THRESHOLD) [inline]
```

Compute the characteristic polynomial of the matrix A.

## Parameters

|     |                 |                                                                                       |
|-----|-----------------|---------------------------------------------------------------------------------------|
|     | <i>R</i>        | the polynomial ring of charp (contains the base field)                                |
| out | <i>charp</i>    | the characteristic polynomial of as a list of factors                                 |
|     | <i>N</i>        | order of the matrix A                                                                 |
| in  | <i>A</i>        | the input matrix ( $N \times N$ ) (could be overwritten in some algorithmic variants) |
|     | <i>lda</i>      | leading dimension of A                                                                |
|     | <i>CharpTag</i> | the algorithmic variant                                                               |
|     | <i>G</i>        | a random iterator (required for the randomized variants LUKrylov and ArithProg)       |

## 11.21.3.41 CharPoly() [2/8]

```
template<class PolRing >
PolRing::Element & CharPoly (
    const PolRing & R,
    typename PolRing::Element & charp,
    const size_t N,
    typename PolRing::Domain_t::Element_ptr A,
    const size_t lda,
    typename PolRing::Domain_t::RandIter & G,
    const FFPACK_CHARPOLY_TAG CharpTag = FfpackAuto,
    const size_t degree = __FFLASFFPACK_ARITHPROG_THRESHOLD) [inline]
```

Compute the characteristic polynomial of the matrix A.

## Parameters

|  |          |                                                        |
|--|----------|--------------------------------------------------------|
|  | <i>R</i> | the polynomial ring of charp (contains the base field) |
|--|----------|--------------------------------------------------------|

|     |                 |                                                                                       |
|-----|-----------------|---------------------------------------------------------------------------------------|
| out | <i>charp</i>    | the characteristic polynomial of <i>A</i> as a single polynomial                      |
|     | <i>N</i>        | order of the matrix <i>A</i>                                                          |
| in  | <i>A</i>        | the input matrix ( $N \times N$ ) (could be overwritten in some algorithmic variants) |
|     | <i>lda</i>      | leading dimension of <i>A</i>                                                         |
|     | <i>CharpTag</i> | the algorithmic variant                                                               |
|     | <i>G</i>        | a random iterator (required for the randomized variants LUKrylov and ArithProg)       |

#### 11.21.3.42 CharPoly() [3/8]

```
template<class PolRing >
PolRing::Element & CharPoly (
    const PolRing & R,
    typename PolRing::Element & charp,
    const size_t N,
    typename PolRing::Domain_t::Element_ptr A,
    const size_t lda,
    const FFPACK_CHARPOLY_TAG CharpTag = FfpackAuto,
    const size_t degree = __FFLASFFPACK_ARITHPROG_THRESHOLD) [inline]
```

Compute the characteristic polynomial of the matrix *A*.

##### Parameters

|     |                 |                                                                                       |
|-----|-----------------|---------------------------------------------------------------------------------------|
|     | <i>R</i>        | the polynomial ring of <i>charp</i> (contains the base field)                         |
| out | <i>charp</i>    | the characteristic polynomial of <i>A</i> as a single polynomial                      |
|     | <i>N</i>        | order of the matrix <i>A</i>                                                          |
| in  | <i>A</i>        | the input matrix ( $N \times N$ ) (could be overwritten in some algorithmic variants) |
|     | <i>lda</i>      | leading dimension of <i>A</i>                                                         |
|     | <i>CharpTag</i> | the algorithmic variant                                                               |

#### 11.21.3.43 MinPoly() [1/4]

```
template<class Field , class Polynomial >
Polynomial & MinPoly (
    const Field & F,
    Polynomial & minP,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t lda) [inline]
```

Compute the minimal polynomial of the matrix *A*.

The algorithm is randomized probabilistic, and computes the minimal polynomial of the Krylov iterates of a random vector: (*v*, *Av*, ..., *A*<sup>*k*</sup>*v*)

##### Parameters

|     |             |                                    |
|-----|-------------|------------------------------------|
|     | <i>F</i>    | the base field                     |
| out | <i>minP</i> | the minimal polynomial of <i>A</i> |
|     | <i>N</i>    | order of the matrix <i>A</i>       |
| in  | <i>A</i>    | the input matrix ( $N \times N$ )  |
|     | <i>lda</i>  | leading dimension of <i>A</i>      |

**11.21.3.44 MinPoly()** [2/4]

```
template<class Field , class Polynomial , class RandIter >
Polynomial & MinPoly (
    const Field & F,
    Polynomial & minP,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    RandIter & G) [inline]
```

Compute the minimal polynomial of the matrix A.

The algorithm is randomized probabilistic, and computes the minimal polynomial of the Krylov iterates of a random vector:  $(v, Av, \dots, A^N v)$

**Parameters**

|     |        |                                   |
|-----|--------|-----------------------------------|
|     | $F$    | the base field                    |
| out | $minP$ | the minimal polynomial of A       |
|     | $N$    | order of the matrix A             |
| in  | $A$    | the input matrix ( $N \times N$ ) |
|     | $lda$  | leading dimension of A            |
|     | $G$    | a random iterator                 |

**11.21.3.45 MatVecMinPoly()** [1/2]

```
template<class Field , class Polynomial >
Polynomial & MatVecMinPoly (
    const Field & F,
    Polynomial & minP,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr v,
    const size_t incv) [inline]
```

Compute the minimal polynomial of the matrix A and a vector v, namely the first linear dependency relation in the Krylov basis  $(v, Av, \dots, A^N v)$ .

**Parameters**

|     |        |                                                                                 |
|-----|--------|---------------------------------------------------------------------------------|
|     | $F$    | the base field                                                                  |
| out | $minP$ | the minimal polynomial of A and v                                               |
|     | $N$    | order of the matrix A                                                           |
| in  | $A$    | the input matrix ( $N \times N$ )                                               |
|     | $lda$  | leading dimension of A                                                          |
|     | $K$    | an $N \times (N + 1)$ matrix containing the vector v on its first row           |
|     | $ldk$  | leading dimension of K                                                          |
|     | $P$    | [out] (optional) the permutation used in the elimination of the Krylov matrix K |

**11.21.3.46 Rank()** [1/3]

```
template<class Field >
size_t Rank (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda)
```

Computes the rank of the given matrix using a PLUQ factorization.

The input matrix is modified.

**Parameters**

|    |            |                                                                               |
|----|------------|-------------------------------------------------------------------------------|
|    | <i>F</i>   | base field                                                                    |
|    | <i>M</i>   | row dimension of the matrix                                                   |
|    | <i>N</i>   | column dimension of the matrix                                                |
| in | <i>A</i>   | input matrix                                                                  |
|    | <i>lda</i> | leading dimension of A                                                        |
|    | <i>psH</i> | (optional) a ParSeqHelper to choose between sequential and parallel execution |

**11.21.3.47 pRank()**

```
template<class Field >
size_t pRank (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t numthreads = 0)
```

**11.21.3.48 Rank()** [2/3]

```
template<class Field , class PSHelper >
size_t Rank (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    const PSHelper & psH)
```

**11.21.3.49 IsSingular()** [1/2]

```
template<class Field >
bool IsSingular (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda)
```

Returns true if the given matrix is singular.

The method is a block elimination with early termination

using LQUP factorization with early termination. If  $M \neq N$ , then the matrix is virtually padded with zeros to make it square and it's determinant is zero.

**Warning**

The input matrix is modified.

**Parameters**

|         |       |                                 |
|---------|-------|---------------------------------|
|         | $F$   | base field                      |
|         | $M$   | row dimension of the matrix     |
|         | $N$   | column dimension of the matrix. |
| in, out | $A$   | input matrix                    |
|         | $lda$ | leading dimension of A          |

**11.21.3.50 Det()** [1/6]

```
template<class Field >
Field::Element & Det (
    const Field & F,
    typename Field::Element & det,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P = NULL,
    size_t * Q = NULL) [inline]
```

Returns the determinant of the given square matrix.

The method is a block elimination using PLUQ factorization. The input matrix A is overwritten.

**Warning**

The input matrix is modified.

**Parameters**

|         |        |                                                                                                                                                             |
|---------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
|         | $F$    | base field                                                                                                                                                  |
| out     | $det$  | the determinant of A                                                                                                                                        |
|         | $N$    | the order of the square matrix A.                                                                                                                           |
| in, out | $A$    | input matrix                                                                                                                                                |
|         | $lda$  | leading dimension of A                                                                                                                                      |
|         | $psH$  | (optional) a ParSeqHelper to choose between sequential and parallel execution                                                                               |
|         | $P, Q$ | (optional) row and column permutations to be used by the PLUQ factorization. randomized checkers (see cherckes/checker_det.inl) need them for certification |

### 11.21.3.51 pDet()

```
template<class Field >
Field::Element & pDet (
    const Field & F,
    typename Field::Element & det,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t numthreads = 0,
    size_t * P = NULL,
    size_t * Q = NULL) [inline]
```

### 11.21.3.52 Det() [2/6]

```
template<class Field , class PSHelper >
Field::Element & Det (
    const Field & F,
    typename Field::Element & det,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    const PSHelper & psH,
    size_t * P = NULL,
    size_t * Q = NULL)
```

### 11.21.3.53 Solve() [1/3]

```
template<class Field >
Field::Element_ptr Solve (
    const Field & F,
    const size_t M,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr x,
    const int incx,
    typename Field::ConstElement_ptr b,
    const int incb) [inline]
```

Solves a linear system  $AX = b$  using PLUQ factorization.

@oaram F base field @oaram M matrix order

#### Parameters

|     |             |                                     |
|-----|-------------|-------------------------------------|
| in  | <i>A</i>    | input matrix                        |
|     | <i>lda</i>  | leading dimension of A              |
| out | <i>x</i>    | output solution vector              |
|     | <i>incx</i> | increment of x                      |
|     | <i>b</i>    | input right hand side of the system |
|     | <i>incb</i> | increment of b                      |

**11.21.3.54 Solve()** [2/3]

```
template<class Field , class PSHelper >
Field::Element_ptr Solve (
    const Field & F,
    const size_t M,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr x,
    const int incx,
    typename Field::ConstElement_ptr b,
    const int incb,
    PSHelper & pSH)
```

**11.21.3.55 pSolve()**

```
template<class Field >
Field::Element_ptr pSolve (
    const Field & F,
    const size_t M,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr x,
    const int incx,
    typename Field::ConstElement_ptr b,
    const int incb,
    size_t numthreads = 0) [inline]
```

**11.21.3.56 RandomNullSpaceVector()** [1/3]

```
template<class Field >
*void RandomNullSpaceVector (
    const Field & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr X,
    const size_t incX)
```

Solve  $LX = B$  or  $XL = B$  in place.

L is  $M \times M$  if Side == [FFLAS::FflasLeft](#) and  $N \times N$  if Side == [FFLAS::FflasRight](#), B is  $M \times N$ . Only the R non trivial column of L are stored in the  $M \times R$  matrix L Requirement : so that L could be expanded in-place Computes a vector of the Left/Right nullspace of the matrix A.

**Parameters**

|         |             |                                                                                  |
|---------|-------------|----------------------------------------------------------------------------------|
|         | <i>F</i>    | The computation domain                                                           |
|         | <i>Side</i> | decides whether it computes the left (FflasLeft) or right (FflasRight) nullspace |
|         | <i>M</i>    | number of rows                                                                   |
|         | <i>N</i>    | number of columns                                                                |
| in, out | <i>A</i>    | input matrix of dimension $M \times N$ , A is modified to its LU version         |
|         | <i>lda</i>  | leading dimension of A                                                           |
| out     | <i>X</i>    | output vector                                                                    |
|         | <i>incX</i> | increment of X                                                                   |

### 11.21.3.57 NullSpaceBasis() [1/2]

```
template<class Field >
size_t NullSpaceBasis (
    const Field & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr & NS,
    size_t & ldn,
    size_t & NSdim)
```

Computes a basis of the Left/Right nullspace of the matrix A.

return the dimension of the nullspace.

#### Parameters

|         |              |                                                                                  |
|---------|--------------|----------------------------------------------------------------------------------|
|         | <i>F</i>     | The computation domain                                                           |
|         | <i>Side</i>  | decides whether it computes the left (FflasLeft) or right (FflasRight) nullspace |
|         | <i>M</i>     | number of rows                                                                   |
|         | <i>N</i>     | number of columns                                                                |
| in, out | <i>A</i>     | input matrix of dimension M x N, A is modified                                   |
|         | <i>lda</i>   | leading dimension of A                                                           |
| out     | <i>NS</i>    | output matrix of dimension N x NSdim (allocated here)                            |
| out     | <i>ldn</i>   | leading dimension of NS                                                          |
| out     | <i>NSdim</i> | the dimension of the Nullspace (N-rank(A))                                       |

### 11.21.3.58 RowRankProfile() [1/3]

```
template<class Field >
size_t RowRankProfile (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t *& rkprofile,
    const FFPACK_LU_TAG LuTag = FfpackSlabRecursive) [inline]
```

Computes the row rank profile of A.

#### Parameters

|     |                  |                                                                                       |
|-----|------------------|---------------------------------------------------------------------------------------|
|     | <i>F</i>         | base field                                                                            |
|     | <i>M</i>         | number of rows                                                                        |
|     | <i>N</i>         | number of columns                                                                     |
| in  | <i>A</i>         | input matrix of dimension M x N                                                       |
|     | <i>lda</i>       | leading dimension of A                                                                |
| out | <i>rkprofile</i> | return the rank profile as an array of row indexes, of dimension r=rank(A)            |
|     | <i>LuTag</i>     | chooses the elimination algorithm. SlabRecursive for LUdivine, TileRecursive for PLUQ |

A is modified rkprofile is allocated during the computation.



## Returns

R

## 11.21.3.59 pRowRankProfile()

```
template<class Field >
size_t pRowRankProfile (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t *rkprofile,
    size_t numthreads = 0,
    const FFPACK_LU_TAG LuTag = FfpackTileRecursive) [inline]
```

## 11.21.3.60 RowRankProfile() [2/3]

```
template<class Field , class PSHelper >
size_t RowRankProfile (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t *rkprofile,
    const FFPACK_LU_TAG LuTag,
    PSHelper & psH) [inline]
```

## 11.21.3.61 ColumnRankProfile() [1/3]

```
template<class Field >
size_t ColumnRankProfile (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t *rkprofile,
    const FFPACK_LU_TAG LuTag = FfpackSlabRecursive) [inline]
```

Computes the column rank profile of A.

## Parameters

|     |             |                                                                                       |
|-----|-------------|---------------------------------------------------------------------------------------|
|     | $F$         | base field                                                                            |
|     | $M$         | number of rows                                                                        |
|     | $N$         | number of columns                                                                     |
| in  | $A$         | input matrix of dimension                                                             |
|     | $lda$       | leading dimension of A                                                                |
| out | $rkprofile$ | return the rank profile as an array of row indexes, of dimension $r=\text{rank}(A)$   |
|     | $LuTag$     | chooses the elimination algorithm. SlabRecursive for LUdivine, TileRecursive for PLUQ |

A is modified rkprofile is allocated during the computation.

## Returns

R

## 11.21.3.62 pColumnRankProfile()

```
template<class Field >
size_t pColumnRankProfile (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t *rkprofile,
    size_t numthreads = 0,
    const FFPACK_LU_TAG LuTag = FfpackTileRecursive) [inline]
```

## 11.21.3.63 ColumnRankProfile() [2/3]

```
template<class Field , class PSHelper >
size_t ColumnRankProfile (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t *rkprofile,
    const FFPACK_LU_TAG LuTag,
    PSHelper & psH) [inline]
```

## 11.21.3.64 RankProfileFromLU()

```
void RankProfileFromLU (
    const size_t * P,
    const size_t N,
    const size_t R,
    size_t * rkprofile,
    const FFPACK_LU_TAG LuTag) [inline]
```

Recovers the column/row rank profile from the permutation of an LU decomposition.

Works with both the CUP/PLE decompositions (obtained by LUdivine) or the PLUQ decomposition. Assumes that the output vector containing the rank profile is already allocated.

## Parameters

|     |             |                                                                                       |
|-----|-------------|---------------------------------------------------------------------------------------|
|     | $P$         | the permutation carrying the rank profile information                                 |
|     | $N$         | the row/col dimension for a row/column rank profile                                   |
|     | $R$         | the rank of the matrix                                                                |
| out | $rkprofile$ | return the rank profile as an array of indices                                        |
|     | $LuTag$     | chooses the elimination algorithm. SlabRecursive for LUdivine, TileRecursive for PLUQ |

**11.21.3.65 LeadingSubmatrixRankProfiles()**

```
size_t LeadingSubmatrixRankProfiles (
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t LSm,
    const size_t LSn,
    const size_t * P,
    const size_t * Q,
    size_t * RRP,
    size_t * CRP) [inline]
```

Recovers the row and column rank profiles of any leading submatrix from the PLUQ decomposition.

Only works with the PLUQ decomposition Assumes that the output vectors containing the rank profiles are already allocated.

**Parameters**

|            |                                                          |
|------------|----------------------------------------------------------|
| <i>P</i>   | the permutation carrying the rank profile information    |
| <i>M</i>   | the row dimension of the initial matrix                  |
| <i>N</i>   | the column dimension of the initial matrix               |
| <i>R</i>   | the rank of the initial matrix                           |
| <i>LSm</i> | the row dimension of the leading submatrix considered    |
| <i>LSn</i> | the column dimension of the leading submatrix considered |
| <i>P</i>   | the row permutation of the PLUQ decomposition            |
| <i>Q</i>   | the column permutation of the PLUQ decomposition         |
| <i>RRP</i> | return the row rank profile of the leading submatrix     |

**Returns**

the rank of the LSm x LSn leading submatrix

A is modified

**Bibliography** • Dumas J-G., Pernet C., and Sultan Z. *Simultaneous computation of the row and column rank profiles*, ISSAC'13.

**11.21.3.66 RowRankProfileSubmatrixIndices()** [1/2]

```
template<class Field >
size_t RowRankProfileSubmatrixIndices (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t *& rowindices,
    size_t *& colindices,
    size_t & R)
```

RowRankProfileSubmatrixIndices.

Computes the indices of the submatrix  $r \times r$  X of A whose rows correspond to the row rank profile of A.

## Parameters

|     |                   |                                    |
|-----|-------------------|------------------------------------|
|     | $F$               | base field                         |
|     | $M$               | number of rows                     |
|     | $N$               | number of columns                  |
| in  | $A$               | input matrix of dimension          |
|     | <i>rowindices</i> | array of the row indices of X in A |
|     | <i>colindices</i> | array of the col indices of X in A |
|     | <i>lda</i>        | leading dimension of A             |
| out | $R$               | list of indices                    |

rowindices and colindices are allocated during the computation. A is modified

## Returns

R

## 11.21.3.67 ColRankProfileSubmatrixIndices() [1/2]

```
template<class Field >
size_t ColRankProfileSubmatrixIndices (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t *& rowindices,
    size_t *& colindices,
    size_t & R)
```

Computes the indices of the submatrix  $r \times r$  X of A whose columns correspond to the column rank profile of A.

## Parameters

|     |                   |                                    |
|-----|-------------------|------------------------------------|
|     | $F$               | base field                         |
|     | $M$               | number of rows                     |
|     | $N$               | number of columns                  |
| in  | $A$               | input matrix of dimension          |
|     | <i>rowindices</i> | array of the row indices of X in A |
|     | <i>colindices</i> | array of the col indices of X in A |
|     | <i>lda</i>        | leading dimension of A             |
| out | $R$               | list of indices                    |

rowindices and colindices are allocated during the computation.

## Warning

A is modified

## Returns

R

**11.21.3.68 RowRankProfileSubmatrix()** [1/2]

```
template<class Field >
size_t RowRankProfileSubmatrix (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr & X,
    size_t & R)
```

Computes the  $r \times r$  submatrix  $X$  of  $A$ , by picking the row rank profile rows of  $A$ .

**Parameters**

|     |       |                                        |
|-----|-------|----------------------------------------|
|     | $F$   | base field                             |
|     | $M$   | number of rows                         |
|     | $N$   | number of columns                      |
| in  | $A$   | input matrix of dimension $M \times N$ |
|     | $lda$ | leading dimension of $A$               |
| out | $X$   | the output matrix                      |
| out | $R$   | list of indices                        |

$A$  is not modified  $X$  is allocated during the computation.

**Returns**

$R$

**11.21.3.69 ColRankProfileSubmatrix()** [1/2]

```
template<class Field >
size_t ColRankProfileSubmatrix (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr & X,
    size_t & R)
```

Compute the  $r \times r$  submatrix  $X$  of  $A$ , by picking the row rank profile rows of  $A$ .

**Parameters**

|     |       |                                        |
|-----|-------|----------------------------------------|
|     | $F$   | base field                             |
|     | $M$   | number of rows                         |
|     | $N$   | number of columns                      |
| in  | $A$   | input matrix of dimension $M \times N$ |
|     | $lda$ | leading dimension of $A$               |
| out | $X$   | the output matrix                      |
| out | $R$   | list of indices                        |

$A$  is not modified  $X$  is allocated during the computation.

## Returns

R

## 11.21.3.70 getTriangular() [1/2]

```

template<class Field >
void getTriangular (
    const Field & F,
    const FFLAS::FFLAS_UPLO UpLo,
    const FFLAS::FFLAS_DIAG diag,
    const size_t M,
    const size_t N,
    const size_t R,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::Element_ptr T,
    const size_t ldt,
    const bool OnlyNonZeroVectors = false) [inline]

```

Extracts a triangular matrix from a compact storage  $A=L\backslash U$  of rank  $R$ .

if OnlyNonZeroVectors is false, then T and A have the same dimensions Otherwise, T is  $R \times N$  if UpLo = FflasUpper, else T is  $M \times R$

## Parameters

|     |                           |                                                                                       |
|-----|---------------------------|---------------------------------------------------------------------------------------|
|     | <i>F</i>                  | base field                                                                            |
|     | <i>UpLo</i>               | selects if the upper (FflasUpper) or lower (FflasLower) triangular matrix is returned |
|     | <i>diag</i>               | selects if the triangular matrix unit-diagonal (FflasUnit/NoUnit)                     |
|     | <i>M</i>                  | row dimension of T                                                                    |
|     | <i>N</i>                  | column dimension of T                                                                 |
|     | <i>R</i>                  | rank of the triangular matrix (how many rows/columns need to be copied)               |
| in  | <i>A</i>                  | input matrix                                                                          |
|     | <i>lda</i>                | leading dimension of A                                                                |
| out | <i>T</i>                  | output matrix                                                                         |
|     | <i>ldt</i>                | leading dimension of T                                                                |
|     | <i>OnlyNonZeroVectors</i> | decides whether the last zero rows/columns should be ignored                          |

**Todo** just one triangular fzero+fassign ?

**Todo** just one triangular fzero+fassign ?

**11.21.3.71 getTriangular()** [2/2]

```
template<class Field >
void getTriangular (
    const Field & F,
    const FFLAS::FFLAS_UPLO Uplo,
    const FFLAS::FFLAS_DIAG diag,
    const size_t M,
    const size_t N,
    const size_t R,
    typename Field::Element_ptr A,
    const size_t lda) [inline]
```

Cleans up a compact storage  $A=LU$  to reveal a triangular matrix of rank  $R$ .

**Parameters**

|         |             |                                                                                       |
|---------|-------------|---------------------------------------------------------------------------------------|
|         | <i>F</i>    | base field                                                                            |
|         | <i>UpLo</i> | selects if the upper (FflasUpper) or lower (FflasLower) triangular matrix is revealed |
|         | <i>diag</i> | selects if the triangular matrix unit-diagonal (FflasUnit/NoUnit)                     |
|         | <i>M</i>    | row dimension of A                                                                    |
|         | <i>N</i>    | column dimension of A                                                                 |
|         | <i>R</i>    | rank of the triangular matrix                                                         |
| in, out | <i>A</i>    | input/output matrix                                                                   |
|         | <i>lda</i>  | leading dimension of A                                                                |

**Todo** just one triangular fzero+fassign ?

**Todo** just one triangular fzero+fassign ?

**11.21.3.72 getEchelonForm()** [1/2]

```
template<class Field >
void getEchelonForm (
    const Field & F,
    const FFLAS::FFLAS_UPLO Uplo,
    const FFLAS::FFLAS_DIAG diag,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::Element_ptr T,
    const size_t ldt,
    const bool OnlyNonZeroVectors = false,
    const FFPACK_LU_TAG LuTag = FfpackSlabRecursive) [inline]
```

Extracts a matrix in echelon form from a compact storage  $A=LU$  of rank  $R$  obtained by RowEchelonForm or ColumnEchelonForm.

Either L or U is in Echelon form (depending on Uplo) The echelon structure is defined by the first  $R$  values of the array  $P$ . row and column dimension of  $T$  are greater or equal to that of  $A$

## Parameters

|     |                           |                                                                                       |
|-----|---------------------------|---------------------------------------------------------------------------------------|
|     | <i>F</i>                  | base field                                                                            |
|     | <i>UpLo</i>               | selects if the upper (FflasUpper) or lower (FflasLower) triangular matrix is returned |
|     | <i>diag</i>               | selects if the echelon matrix has unit pivots (FflasUnit/NoUnit)                      |
|     | <i>M</i>                  | row dimension of T                                                                    |
|     | <i>N</i>                  | column dimension of T                                                                 |
|     | <i>R</i>                  | rank of the triangular matrix (how many rows/columns need to be copied)               |
|     | <i>P</i>                  | positions of the R pivots                                                             |
| in  | <i>A</i>                  | input matrix                                                                          |
|     | <i>lda</i>                | leading dimension of A                                                                |
| out | <i>T</i>                  | output matrix                                                                         |
|     | <i>ldt</i>                | leading dimension of T                                                                |
|     | <i>OnlyNonZeroVectors</i> | decides whether the last zero rows/columns should be ignored                          |
|     | <i>LuTag</i>              | which factorized form (CUP/PLE if FfpackSlabRecursive, PLUQ if FfpackTileRecursive)   |

11.21.3.73 `getEchelonForm()` [2/2]

```
template<class Field >
void getEchelonForm (
    const Field & F,
    const FFLAS::FFLAS_UPLO Uplo,
    const FFLAS::FFLAS_DIAG diag,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    typename Field::Element_ptr A,
    const size_t lda,
    const FFPACK_LU_TAG LuTag = FfpackSlabRecursive) [inline]
```

Cleans up a compact storage  $A=LU$  obtained by RowEchelonForm or ColumnEchelonForm to reveal an echelon form of rank R.

Either L or U is in Echelon form (depending on Uplo) The echelon structure is defined by the first R values of the array P.

## Parameters

|         |              |                                                                                       |
|---------|--------------|---------------------------------------------------------------------------------------|
|         | <i>F</i>     | base field                                                                            |
|         | <i>UpLo</i>  | selects if the upper (FflasUpper) or lower (FflasLower) triangular matrix is returned |
|         | <i>diag</i>  | selects if the echelon matrix has unit pivots (FflasUnit/NoUnit)                      |
|         | <i>M</i>     | row dimension of A                                                                    |
|         | <i>N</i>     | column dimension of A                                                                 |
|         | <i>R</i>     | rank of the triangular matrix (how many rows/columns need to be copied)               |
|         | <i>P</i>     | positions of the R pivots                                                             |
| in, out | <i>A</i>     | input/output matrix                                                                   |
|         | <i>lda</i>   | leading dimension of A                                                                |
|         | <i>LuTag</i> | which factorized form (CUP/PLE if FfpackSlabRecursive, PLUQ if FfpackTileRecursive)   |



**11.21.3.74 getEchelonTransform()**

```
template<class Field >
void getEchelonTransform (
    const Field & F,
    const FFLAS::FFLAS_UPLO Uplo,
    const FFLAS::FFLAS_DIAG diag,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    const size_t * Q,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::Element_ptr T,
    const size_t ldt,
    const FFPACK_LU_TAG LuTag = FfpackSlabRecursive) [inline]
```

Extracts a transformation matrix to echelon form from a compact storage  $A=LU$  of rank  $R$  obtained by Row↔EchelonForm or ColumnEchelonForm.

If Uplo == FflasLower:  $T$  is  $N \times N$  (already allocated) such that  $A T = C$  is a transformation of  $A$  in Column echelon form Else  $T$  is  $M \times M$  (already allocated) such that  $T A = E$  is a transformation of  $A$  in Row Echelon form

**Parameters**

|     |              |                                                                                                         |
|-----|--------------|---------------------------------------------------------------------------------------------------------|
|     | <i>F</i>     | base field                                                                                              |
|     | <i>UpLo</i>  | Lower (FflasLower) means Transformation to Column Echelon Form, Upper (FflasUpper), to Row Echelon Form |
|     | <i>diag</i>  | selects if the echelon matrix has unit pivots (FflasUnit/NoUnit)                                        |
|     | <i>M</i>     | row dimension of A                                                                                      |
|     | <i>N</i>     | column dimension of A                                                                                   |
|     | <i>R</i>     | rank of the triangular matrix                                                                           |
|     | <i>P</i>     | permutation matrix                                                                                      |
| in  | <i>A</i>     | input matrix                                                                                            |
|     | <i>lda</i>   | leading dimension of A                                                                                  |
| out | <i>T</i>     | output matrix                                                                                           |
|     | <i>ldt</i>   | leading dimension of T                                                                                  |
|     | <i>LuTag</i> | which factorized form (CUP/PLE if FfpackSlabRecursive, PLUQ if FfpackTileRecursive)                     |

**11.21.3.75 getReducedEchelonForm() [1/2]**

```
template<class Field >
void getReducedEchelonForm (
    const Field & F,
    const FFLAS::FFLAS_UPLO Uplo,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::Element_ptr T,
```

```
const size_t ldt,
const bool OnlyNonZeroVectors = false,
const FFPACK_LU_TAG LuTag = FfpackSlabRecursive) [inline]
```

Extracts a matrix in echelon form from a compact storage  $A=L\backslash U$  of rank  $R$  obtained by ReducedRowEchelonForm or ReducedColumnEchelonForm with transform = true.

Either  $L$  or  $U$  is in Echelon form (depending on Uplo) The echelon structure is defined by the first  $R$  values of the array  $P$ . row and column dimension of  $T$  are greater or equal to that of  $A$

#### Parameters

|    |                      |                                                                                       |
|----|----------------------|---------------------------------------------------------------------------------------|
|    | $F$                  | base field                                                                            |
|    | $UpLo$               | selects if the upper (FflasUpper) or lower (FflasLower) triangular matrix is returned |
|    | $diag$               | selects if the echelon matrix has unit pivots (FflasUnit/NoUnit)                      |
|    | $M$                  | row dimension of $T$                                                                  |
|    | $N$                  | column dimension of $T$                                                               |
|    | $R$                  | rank of the triangular matrix (how many rows/columns need to be copied)               |
|    | $P$                  | positions of the $R$ pivots                                                           |
| in | $A$                  | input matrix                                                                          |
|    | $lda$                | leading dimension of $A$                                                              |
|    | $ldt$                | leading dimension of $T$                                                              |
|    | $LuTag$              | which factorized form (CUP/PLE if FfpackSlabRecursive, PLUQ if FfpackTileRecursive)   |
|    | $OnlyNonZeroVectors$ | decides whether the last zero rows/columns should be ignored                          |

#### 11.21.3.76 getReducedEchelonForm() [2/2]

```
template<class Field >
void getReducedEchelonForm (
    const Field & F,
    const FFLAS::FFLAS_UPLO Uplo,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    typename Field::Element_ptr A,
    const size_t lda,
    const FFPACK_LU_TAG LuTag = FfpackSlabRecursive) [inline]
```

Cleans up a compact storage  $A=L\backslash U$  of rank  $R$  obtained by ReducedRowEchelonForm or ReducedColumnEchelonForm with transform = true.

Either  $L$  or  $U$  is in Echelon form (depending on Uplo) The echelon structure is defined by the first  $R$  values of the array  $P$ .

#### Parameters

|  |        |                                                                                       |
|--|--------|---------------------------------------------------------------------------------------|
|  | $F$    | base field                                                                            |
|  | $UpLo$ | selects if the upper (FflasUpper) or lower (FflasLower) triangular matrix is returned |
|  | $diag$ | selects if the echelon matrix has unit pivots (FflasUnit/NoUnit)                      |
|  | $M$    | row dimension of $A$                                                                  |

## Parameters

|         |         |                                                                                     |
|---------|---------|-------------------------------------------------------------------------------------|
|         | $N$     | column dimension of A                                                               |
|         | $R$     | rank of the triangular matrix (how many rows/columns need to be copied)             |
|         | $P$     | positions of the R pivots                                                           |
| in, out | $A$     | input/output matrix                                                                 |
|         | $lda$   | leading dimension of A                                                              |
|         | $LuTag$ | which factorized form (CUP/PLE if FfpackSlabRecursive, PLUQ if FfpackTileRecursive) |

## 11.21.3.77 getReducedEchelonTransform()

```
template<class Field >
void getReducedEchelonTransform (
    const Field & F,
    const FFLAS::FFLAS_UPLO Uplo,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    const size_t * Q,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::Element_ptr T,
    const size_t ldt,
    const FFPACK_LU_TAG LuTag = FfpackSlabRecursive) [inline]
```

Extracts a transformation matrix to echelon form from a compact storage  $A=LU$  of rank  $R$  obtained by Row↔EchelonForm or ColumnEchelonForm.

If Uplo == FflasLower: T is  $N \times N$  (already allocated) such that  $A T = C$  is a transformation of A in Column echelon form Else T is  $M \times M$  (already allocated) such that  $T A = E$  is a transformation of A in Row Echelon form

## Parameters

|     |         |                                                                                     |
|-----|---------|-------------------------------------------------------------------------------------|
|     | $F$     | base field                                                                          |
|     | $UpLo$  | selects Col (FflasLower) or Row (FflasUpper) Echelon Form                           |
|     | $diag$  | selects if the echelon matrix has unit pivots (FflasUnit/NoUnit)                    |
|     | $M$     | row dimension of A                                                                  |
|     | $N$     | column dimension of A                                                               |
|     | $R$     | rank of the triangular matrix                                                       |
|     | $P$     | permutation matrix                                                                  |
| in  | $A$     | input matrix                                                                        |
|     | $lda$   | leading dimension of A                                                              |
| out | $T$     | output matrix                                                                       |
|     | $ldt$   | leading dimension of T                                                              |
|     | $LuTag$ | which factorized form (CUP/PLE if FfpackSlabRecursive, PLUQ if FfpackTileRecursive) |

### 11.21.3.78 PLUQtoEchelonPermutation()

```
void PLUQtoEchelonPermutation (
    const size_t N,
    const size_t R,
    const size_t * P,
    size_t * outPerm) [inline]
```

Auxiliary routine: determines the permutation that changes a PLUQ decomposition into a echelon form revealing PLUQ decomposition.

### 11.21.3.79 LTBruhatGen()

```
template<class Field >
size_t LTBruhatGen (
    const Field & Fi,
    const FFLAS::FFLAS_DIAG diag,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Q) [inline]
```

LTBruhatGen Suppose A is Left Triangular Matrix This procedure computes the Bruhat Representation of A and return the rank of A.

#### Parameters

|             |                                                |
|-------------|------------------------------------------------|
| <i>Fi</i>   | base Field                                     |
| <i>diag</i> |                                                |
| <i>N</i>    | size of A                                      |
| <i>A</i>    | the matrix we search the Bruhat representation |
| <i>lda</i>  | the leading dimension of A                     |
| <i>P</i>    | a permutation matrix                           |
| <i>Q</i>    | a permutation matrix                           |

### 11.21.3.80 getLTBruhatGen() [1/2]

```
template<class Field >
void getLTBruhatGen (
    const Field & Fi,
    const size_t N,
    const size_t r,
    const size_t * P,
    const size_t * Q,
    typename Field::Element_ptr R,
    const size_t ldr) [inline]
```

GetLTBruhatGen This procedure Computes the Rank Revealing Matrix based on the Bruhta representation of a Matrix.

## Parameters

|            |                                                        |
|------------|--------------------------------------------------------|
| <i>Fi</i>  | base Field                                             |
| <i>N</i>   | size of the matrix                                     |
| <i>r</i>   | the rank of the matrix                                 |
| <i>P</i>   | a permutation matrix                                   |
| <i>Q</i>   | a permutation matrix                                   |
| <i>R</i>   | the matrix that will contain the rank revealing matrix |
| <i>ldr</i> | the leading fimension of R                             |

## 11.21.3.81 getLTBruhatGen() [2/2]

```
template<class Field >
void getLTBruhatGen (
    const Field & Fi,
    const FFLAS::FFLAS_UPLO Uplo,
    const FFLAS::FFLAS_DIAG diag,
    const size_t N,
    const size_t r,
    const size_t * P,
    const size_t * Q,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::Element_ptr T,
    const size_t ldt) [inline]
```

GetLTBruhatGen This procedure computes the matrix L or U f the Bruhat Representation Suppose that A is the bruhat representation of a matrix.

## Parameters

|             |                                       |
|-------------|---------------------------------------|
| <i>Fi</i>   | base Field                            |
| <i>Uplo</i> | choose if the procedure return L or U |
| <i>diag</i> |                                       |
| <i>N</i>    | size of A                             |
| <i>r</i>    | rank of A                             |
| <i>P</i>    | permutaion matrix                     |
| <i>Q</i>    | permutation matrix                    |
| <i>A</i>    | a bruhat representation               |
| <i>lda</i>  | leading dimension of A                |
| <i>T</i>    | matrix that will contains L or U      |
| <i>ldt</i>  | leading dimension of T                |

## 11.21.3.82 LTQSorter()

```
size_t LTQSorter (
    const size_t N,
    const size_t r,
    const size_t * P,
    const size_t * Q) [inline]
```

LTQSorter This procedure computes the order of quasiseparability of a matrix.

## Parameters

|     |                    |
|-----|--------------------|
| $N$ | size of the matrix |
| $r$ | rank of the matrix |
| $P$ | permutation matrix |
| $Q$ | permutation matrix |

**11.21.3.83 CompressToBlockBiDiagonal()**

```

template<class Field >
size_t CompressToBlockBiDiagonal (
    const Field & Fi,
    const FFLAS::FFLAS_UPLO Uplo,
    size_t N,
    size_t s,
    size_t r,
    const size_t * P,
    const size_t * Q,
    typename Field::Element_ptr A,
    size_t lda,
    typename Field::Element_ptr X,
    size_t ldx,
    size_t * K,
    size_t * M,
    size_t * T) [inline]

```

**CompressToBlockBiDiagonal** This procedure compress a compact representation of a row echelon form or column echelon form.

## Parameters

|        |                                                   |
|--------|---------------------------------------------------|
| $Fi$   | base Field                                        |
| $Uplo$ | chosse if the procedure is based on row or column |
| $N$    | size of the matrix                                |
| $s$    | order of qausiseparability                        |
| $r$    | rank                                              |
| $P$    | permutation matrix                                |
| $Q$    | permutation matrix                                |
| $A$    | the matrix to compact                             |
| $lda$  | leading dimension of A                            |
| $X$    | matrix that will stock the representation         |
| $ldx$  | leading dimension of X                            |
| $K$    | stock the position of the blocks in A             |
| $M$    | permutation matrix                                |
| $T$    | stock the operation done in the procedure         |

**11.21.3.84 ExpandBlockBiDiagonalToBruhat()**

```

template<class Field >
void ExpandBlockBiDiagonalToBruhat (

```

```

const Field & Fi,
const FFLAS::FFLAS_UPLO Uplo,
size_t N,
size_t s,
size_t r,
typename Field::Element_ptr A,
size_t lda,
typename Field::Element_ptr X,
size_t ldx,
size_t NbBlocks,
size_t * K,
size_t * M,
size_t * T) [inline]

```

**ExpandBlockBiDiagonal** This procedure expand a compact representation of a row echelon form or column echelon form.

#### Parameters

|             |                                                        |
|-------------|--------------------------------------------------------|
| <i>Fi</i>   | base Field                                             |
| <i>Uplo</i> | chosse if the procedure is based on row or column      |
| <i>N</i>    | size of the matrix                                     |
| <i>s</i>    | order of qausiseparability                             |
| <i>r</i>    | rank                                                   |
| <i>A</i>    | the matrix that will sotck the expanded representation |
| <i>lda</i>  | leading dimension of A                                 |
| <i>X</i>    | matrix to expand                                       |
| <i>ldx</i>  | leading dimension of X                                 |
| <i>K</i>    | stock the position of the blocks in A                  |
| <i>M</i>    | permutation matrix                                     |
| <i>T</i>    | stock the operation done in the procedure              |

#### 11.21.3.85 Bruhat2EchelonPermutation()

```

void Bruhat2EchelonPermutation (
    size_t N,
    size_t R,
    const size_t * P,
    const size_t * Q,
    size_t * M) [inline]

```

**Bruhat2EchelonPermutation (N,R,P,Q)** Compute M such that LM or MU is in echelon form where L or U are factors of the Bruhat Rpresentation.

#### Parameters

|     |          |                           |
|-----|----------|---------------------------|
| in  | <i>N</i> | size of the matrix        |
| in  | <i>R</i> | rank                      |
| in  | <i>P</i> | permutation Matrix        |
| in  | <i>Q</i> | permutation Matrix        |
| out | <i>M</i> | output permutation matrix |

**11.21.3.86 TInverter()** [1/2]

```
size_t * TInverter (
    size_t * T,
    size_t r)
```

**11.21.3.87 ComputeRPermutation()** [1/2]

```
template<class Field >
void ComputeRPermutation (
    const Field & Fi,
    size_t N,
    size_t r,
    const size_t * P,
    const size_t * Q,
    size_t * R,
    size_t * MU,
    size_t * ML)
```

**11.21.3.88 productBruhatxTS()** [1/2]

```
template<class Field >
void productBruhatxTS (
    const Field & Fi,
    size_t N,
    size_t s,
    size_t r,
    const size_t * P,
    const size_t * Q,
    const typename Field::Element_ptr Xu,
    size_t ldu,
    size_t NbBlocksU,
    size_t * Ku,
    size_t * Tu,
    size_t * MU,
    const typename Field::Element_ptr Xl,
    size_t ldl,
    size_t NbBlocksL,
    size_t * Kl,
    size_t * Tl,
    size_t * ML,
    typename Field::Element_ptr B,
    size_t t,
    size_t ldb,
    typename Field::Element_ptr C,
    size_t ldc)
```

productBruhatxTS Comput the product between the CRE compact representation of a matrix A and B a tall matrix



**11.21.3.89 LQUPtoInverseOfFullRankMinor()** [1/2]

```
template<class Field >
Field::Element_ptr LQUPtoInverseOfFullRankMinor (
    const Field & F,
    const size_t rank,
    typename Field::Element_ptr A_factors,
    const size_t lda,
    const size_t * QtPointer,
    typename Field::Element_ptr X,
    const size_t ldx)
```

LQUPtoInverseOfFullRankMinor.

Suppose A has been factorized as L.Q.U.P, with rank r. Then Qt.A.Pt has an invertible leading principal  $r \times r$  submatrix This procedure efficiently computes the inverse of this minor and puts it into X.

**Note**

It changes the lower entries of A\_factors in the process (NB: unless A was nonsingular and square)

**Parameters**

|                  |                                                            |
|------------------|------------------------------------------------------------|
| <i>F</i>         | base field                                                 |
| <i>rank</i>      | rank of the matrix.                                        |
| <i>A_factors</i> | matrix containing the L and U entries of the factorization |
| <i>lda</i>       | leading dimension of A                                     |
| <i>QtPointer</i> | theLQUP->getQ()->getPointer() (note: getQ returns Qt!)     |
| <i>X</i>         | desired location for output                                |
| <i>ldx</i>       | leading dimension of X                                     |

**11.21.3.90 RandomNullSpaceVector()** [2/3]

```
template<class Field >
void RandomNullSpaceVector (
    const Field & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr X,
    const size_t incX)
```

Solve  $LX = B$  or  $XL = B$  in place.

L is  $M \times M$  if Side == FFLAS::FflasLeft and  $N \times N$  if Side == FFLAS::FflasRight, B is  $M \times N$ . Only the R non trivial column of L are stored in the  $M \times R$  matrix L Requirement : so that L could be expanded in-place Computes a vector of the Left/Right nullspace of the matrix A.

**Parameters**

|  |          |                        |
|--|----------|------------------------|
|  | <i>F</i> | The computation domain |
|--|----------|------------------------|

## Parameters

|                |             |                                                                                  |
|----------------|-------------|----------------------------------------------------------------------------------|
|                | <i>Side</i> | decides whether it computes the left (FflasLeft) or right (FflasRight) nullspace |
|                | <i>M</i>    | number of rows                                                                   |
|                | <i>N</i>    | number of columns                                                                |
| <i>in, out</i> | <i>A</i>    | input matrix of dimension M x N, A is modified to its LU version                 |
|                | <i>lda</i>  | leading dimension of A                                                           |
| <i>out</i>     | <i>X</i>    | output vector                                                                    |
|                | <i>incX</i> | increment of X                                                                   |

**11.21.3.91 solveLB()** [1/2]

```
template<class Field >
void solveLB (
    const Field & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    const size_t R,
    typename Field::Element_ptr L,
    const size_t ldl,
    const size_t * Q,
    typename Field::Element_ptr B,
    const size_t ldb)
```

**11.21.3.92 solveLB2()** [1/2]

```
template<class Field >
void solveLB2 (
    const Field & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    const size_t R,
    typename Field::Element_ptr L,
    const size_t ldl,
    const size_t * Q,
    typename Field::Element_ptr B,
    const size_t ldb)
```

**11.21.3.93 TInverter()** [2/2]

```
size_t * TInverter (
    const size_t * T,
    size_t r) [inline]
```

**11.21.3.94 ComputeRPermutation()** [2/2]

```
template<class Field >
void ComputeRPermutation (
    const Field & Fi,
    size_t N,
    size_t r,
    const size_t * P,
    const size_t * Q,
    size_t * R,
    const size_t * MU,
    const size_t * ML) [inline]
```

**11.21.3.95 expandLCRE()**

```
template<class Field >
Field::Element_ptr expandLCRE (
    const Field & Fi,
    size_t N,
    size_t s,
    size_t r,
    size_t * R,
    size_t i,
    typename Field::ConstElement_ptr Xu,
    size_t ldu,
    size_t NbBlocksU,
    const size_t * Ku,
    const size_t * Tuinv,
    typename Field::ConstElement_ptr Xl,
    size_t ldl,
    size_t NbBlocksL,
    const size_t * Kl,
    const size_t * Tlinv,
    typename Field::Element_ptr CRE,
    size_t ldcres) [inline]
```

Expands an anti-diagonal block of a left triangular matrix from its compact Bruhat representation.

**11.21.3.96 productBruhatxTS()** [2/2]

```
template<class Field >
void productBruhatxTS (
    const Field & Fi,
    size_t N,
    size_t s,
    size_t r,
    size_t t,
    const size_t * P,
    const size_t * Q,
    typename Field::ConstElement_ptr Xu,
    size_t ldu,
    size_t NbBlocksU,
    const size_t * Ku,
    const size_t * Tu,
```

```

const size_t * MU,
typename Field::ConstElement_ptr Xl,
size_t ldl,
size_t NbBlocksL,
const size_t * Kl,
const size_t * Tl,
const size_t * ML,
typename Field::Element_ptr B,
size_t ldb,
const typename Field::Element beta,
typename Field::Element_ptr D,
size_t ldd) [inline]

```

Compute the product of a left-triangular quasi-separable matrix A, represented by a compact Bruhat generator, with a dense rectangular matrix B:  $C \leftarrow A \times B + \text{beta}C$ .

#### Parameters

|         |               |                                                                                             |
|---------|---------------|---------------------------------------------------------------------------------------------|
|         | $F$           | the base field                                                                              |
|         | $N$           | the order of A                                                                              |
|         | $s$           | the order of quasiseparability of A                                                         |
|         | $r$           | the number of pivots in the left-triangular par of the rank profile matrix of A             |
|         | $t$           | the number of columns of B                                                                  |
|         | $P$           | the row indices of the pivots of A                                                          |
|         | $Q$           | the column indices of the pivots of A                                                       |
|         | $Xu$          | the compact storage of U: Du blocks in the first s rows, Su blocks in the last s rows       |
|         | $ldxu$        | the leading dimension of Xu                                                                 |
|         | $NbBlocksU$   | the number of diagonal blocks in the compact storage of U                                   |
|         | $Ku$          | the list of starting column positions for each block of the storage of U                    |
|         | $Tu$          | the folding matrix for the compact storage of U: $Du + TuSu$ is in row echelon form         |
|         | $Mu$          | a permutation matrix such that $Mu(Du + TuSu)$ is the U factor of the Bruhat generator      |
|         | $Xl$          | the compact storage of L: Dl blocks in the first s columns, Sl blocks in the last s columns |
|         | $ldxl$        | the leading dimension of Xl                                                                 |
|         | $NbBlocksL$   | the number of diagonal blocks in the compact storage of L                                   |
|         | $Kl$          | the list of starting row positions for each block of the storage of L                       |
|         | $Tl$          | the folding matrix for the compact storage of L: $Dl + SlTl$ is in column echelon form      |
|         | $Ml$          | a permutation matrix such that $(Dl + SlTl)Ml$ is the L factor of the Bruhat generator      |
|         | $B$           | an $N \times t$ dense matrix                                                                |
|         | $ldb$         | leading dimension of B                                                                      |
|         | $\text{beta}$ | scaling constant                                                                            |
| in, out | $C$           | output matrix                                                                               |
|         | $ldc$         | leading dimension of C                                                                      |

**Bibliography** Pernet C. and Storjohann A. *Time and space efficient generators for quasiseparable matrices*, JSC (85), 2018, doi:10.1016/j.jsc.2017.07.010

**11.21.3.97 Danilevski()**

```
template<class Field , class Polynomial >
std::list< Polynomial > & Danilevski (
    const Field & F,
    std::list< Polynomial > & charp,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda)
```

**11.21.3.98 buildMatrix()**

```
template<class Field >
Field::Element_ptr buildMatrix (
    const Field & F,
    typename Field::ConstElement_ptr E,
    typename Field::ConstElement_ptr C,
    const size_t lda,
    const size_t * B,
    const size_t * T,
    const size_t me,
    const size_t mc,
    const size_t lambda,
    const size_t mu)
```

**Bug** is this :

**11.21.3.99 CharPoly() [4/8]**

```
FFPACK::RNSInteger< FFPACK::rns_double >::Element_ptr CharPoly (
    const FFPACK::RNSInteger< FFPACK::rns_double > & F,
    typename FFPACK::RNSInteger< FFPACK::rns_double >::Element_ptr charp,
    const size_t N,
    typename FFPACK::RNSInteger< FFPACK::rns_double >::Element_ptr A,
    const size_t lda,
    Givaro::ZRing< Givaro::Integer >::RandIter & G,
    const FFPACK_CHARPOLY_TAG CharpTag,
    size_t degree) [inline]
```

**11.21.3.100 CharPoly() [5/8]**

```
template<>
Givaro::Poly1Dom< Givaro::ZRing< Givaro::Integer > >::Element & CharPoly (
    const Givaro::Poly1Dom< Givaro::ZRing< Givaro::Integer > > & R,
    Givaro::Poly1Dom< Givaro::ZRing< Givaro::Integer > >::Element & charp,
    const size_t N,
    Givaro::Integer * A,
    const size_t lda,
    Givaro::ZRing< Givaro::Integer >::RandIter & G,
    const FFPACK_CHARPOLY_TAG CharpTag,
    size_t degree) [inline]
```

**11.21.3.101 Det()** [3/6]

```
template<class PSHelper >
FFPACK::RNSInteger< FFPACK::rns_double >::Element_ptr & Det (
    const FFPACK::RNSInteger< FFPACK::rns_double > & F,
    typename FFPACK::RNSInteger< FFPACK::rns_double >::Element_ptr & det,
    const size_t N,
    typename FFPACK::RNSInteger< FFPACK::rns_double >::Element_ptr A,
    const size_t lda,
    const PSHelper & psH) [inline]
```

**11.21.3.102 Det()** [4/6]

```
template<class PSHelper >
Givaro::Integer & Det (
    const Givaro::ZRing< Givaro::Integer > & F,
    Givaro::Integer & det,
    const size_t N,
    Givaro::Integer * A,
    const size_t lda,
    const PSHelper & psH,
    size_t * P,
    size_t * Q) [inline]
```

**11.21.3.103 fsytrf\_BC\_Crout()**

```
template<class Field >
bool fsytrf_BC_Crout (
    const Field & F,
    const FFLAS::FFLAS_UPLO UpLo,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr Dinv,
    const size_t incDinv) [inline]
```

**11.21.3.104 fsytrf\_BC\_RL()**

```
template<class Field >
size_t fsytrf_BC_RL (
    const Field & F,
    const FFLAS::FFLAS_UPLO UpLo,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr Dinv,
    const size_t incDinv) [inline]
```

**11.21.3.105 fsytrf\_UP\_RPM\_BC\_RL()**

```
template<class Field >
size_t fsytrf_UP_RPM_BC_RL (
    const Field & F,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr Dinv,
    const size_t incDinv,
    size_t * P) [inline]
```

**11.21.3.106 fsytrf\_LOW\_RPM\_BC\_Crout()**

```
template<class Field >
size_t fsytrf_LOW_RPM_BC_Crout (
    const Field & F,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr Dinv,
    const size_t incDinv,
    size_t * P) [inline]
```

**11.21.3.107 fsytrf\_UP\_RPM\_BC\_Crout()**

```
template<class Field >
size_t fsytrf_UP_RPM_BC_Crout (
    const Field & F,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr Dinv,
    const size_t incDinv,
    size_t * P) [inline]
```

**11.21.3.108 fsytrf\_UP\_RPM()**

```
template<class Field >
size_t fsytrf_UP_RPM (
    const Field & Fi,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr Dinv,
    const size_t incDinv,
    size_t * P,
    size_t BCThreshold) [inline]
```

MathP <-[ [ I ] x P1 | [ [ L (N1+R2) ] [ P2^T ] ] ] x [ P3^T ] [ ----- | ---- ] [ [ Q2^T ]

Changing [ U1 V1 | E1 E21 E22 ] into [ U1 E11 E12 V1 E\* E\* ] [ 0 | L2 \ U2 V21 V22 ] [ U4 V41 0 V42 V43 ] [ 0 | M2 0 0 ] [ U3 0 0 V3 ] [ ----- ] [ 0 0 0 ] [ 0 | H1 H21 H22 ] [ 0 | U3 V3 ] [ 0 | 0 ] where U4 is the 2R2 x 2R2 matrix formed by interleaving U2, L2^T and H1

**11.21.3.109 fsytrf\_nonunit() [2/3]**

```

template<class Field >
bool fsytrf_nonunit (
    const Field & F,
    const FFLAS::FFLAS_UPLO UpLo,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr Dinv,
    const size_t incDinv,
    FFLAS::ParSeqHelper::Sequential seq,
    size_t threshold) [inline]

```

**11.21.3.110 fsytrf\_nonunit() [3/3]**

```

template<class Field , class Cut , class Param >
bool fsytrf_nonunit (
    const Field & F,
    const FFLAS::FFLAS_UPLO UpLo,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr Dinv,
    const size_t incDinv,
    FFLAS::ParSeqHelper::Parallel< Cut, Param > par,
    size_t threshold) [inline]

```

**11.21.3.111 fsytrf\_RPM()**

```

template<class Field >
size_t fsytrf_RPM (
    const Field & F,
    const FFLAS::FFLAS_UPLO UpLo,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t threshold) [inline]

```

**11.21.3.112 getTridiagonal()**

```

template<class Field >
void getTridiagonal (
    const Field & F,
    const size_t N,
    const size_t R,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    size_t * P,
    typename Field::Element_ptr T,
    const size_t ldt) [inline]

```



**11.21.3.113 LUdivine\_gauss()** [1/2]

```
template<class Field >
size_t LUdivine_gauss (
    const Field & F,
    const FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Q,
    const FFPACK::FFPACK_LU_TAG LuTag) [inline]
```

**11.21.3.114 LUdivine\_small()** [1/2]

```
template<class Field >
size_t LUdivine_small (
    const Field & F,
    const FFLAS::FFLAS_DIAG Diag,
    const FFLAS::FFLAS_TRANSPOSE trans,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Q,
    const FFPACK::FFPACK_LU_TAG LuTag) [inline]
```

**11.21.3.115 LUdivine()** [2/4]

```
template<class Field >
size_t LUdivine (
    const Field & F,
    const FFLAS::FFLAS_DIAG Diag,
    const FFLAS::FFLAS_TRANSPOSE trans,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Q,
    const FFPACK::FFPACK_LU_TAG LuTag,
    const size_t cutoff) [inline]
```

**Todo** std::swap ?

**11.21.3.116 LUdivine() [3/4]**

```

template<>
size_t LUdivine (
    const Givaro::Modular< Givaro::Integer > & F,
    const FFLAS::FFLAS_DIAG Diag,
    const FFLAS::FFLAS_TRANSPOSE trans,
    const size_t M,
    const size_t N,
    typename Givaro::Integer * A,
    const size_t lda,
    size_t * P,
    size_t * Q,
    const FFPACK::FFPACK_LU_TAG LuTag,
    const size_t cutoff) [inline]

```

**11.21.3.117 MonotonicCompress()**

```

template<class Field >
void MonotonicCompress (
    const Field & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t incA,
    const size_t * MathP,
    const size_t R,
    const size_t maxpiv,
    const size_t rowstomove,
    const std::vector< bool > & ispiv) [inline]

```

**11.21.3.118 MonotonicCompressMorePivots()**

```

template<class Field >
void MonotonicCompressMorePivots (
    const Field & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t incA,
    const size_t * MathP,
    const size_t R,
    const size_t rowstomove,
    const size_t lenP) [inline]

```

**11.21.3.119 MonotonicCompressCycles()**

```

template<class Field >
void MonotonicCompressCycles (
    const Field & F,

```

```

    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t incA,
    const size_t * MathP,
    const size_t lenP) [inline]

```

### 11.21.3.120 MonotonicExpand()

```

template<class Field >
void MonotonicExpand (
    const Field & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t incA,
    const size_t * MathP,
    const size_t R,
    const size_t maxpiv,
    const size_t rowstomove,
    const std::vector< bool > & ispiv)

```

### 11.21.3.121 applyP\_block()

```

template<class Field >
void applyP_block (
    const Field & F,
    const FFLAS::FFLAS_SIDE Side,
    const FFLAS::FFLAS_TRANSPOSE Trans,
    const size_t M,
    const size_t ibeg,
    const size_t iend,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t * P) [inline]

```

### 11.21.3.122 doApplyS()

```

template<class Field >
void doApplyS (
    const Field & F,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr tmp,
    const size_t width,
    const size_t M2,
    const size_t R1,
    const size_t R2,
    const size_t R3,
    const size_t R4) [inline]

```

**11.21.3.123 MatrixApplyS()** [1/3]

```
template<class Field >
void MatrixApplyS (
    const Field & F,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t width,
    const size_t M2,
    const size_t R1,
    const size_t R2,
    const size_t R3,
    const size_t R4) [inline]
```

**11.21.3.124 MatrixApplyS()** [2/3]

```
template<class Field >
void MatrixApplyS (
    const Field & F,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t width,
    const size_t M2,
    const size_t R1,
    const size_t R2,
    const size_t R3,
    const size_t R4,
    const FFLAS::ParSeqHelper::Sequential seq) [inline]
```

**11.21.3.125 MatrixApplyS()** [3/3]

```
template<class Field , class Cut , class Param >
void MatrixApplyS (
    const Field & F,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t width,
    const size_t M2,
    const size_t R1,
    const size_t R2,
    const size_t R3,
    const size_t R4,
    const FFLAS::ParSeqHelper::Parallel< Cut, Param > par) [inline]
```

**11.21.3.126 PermApplyS()**

```
template<class T >
void PermApplyS (
    T * A,
    const size_t lda,
    const size_t width,
    const size_t M2,
    const size_t R1,
    const size_t R2,
    const size_t R3,
    const size_t R4) [inline]
```

**11.21.3.127 doApplyT()**

```
template<class Field >
void doApplyT (
    const Field & F,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr tmp,
    const size_t width,
    const size_t N2,
    const size_t R1,
    const size_t R2,
    const size_t R3,
    const size_t R4) [inline]
```

**11.21.3.128 MatrixApplyT() [1/3]**

```
template<class Field >
void MatrixApplyT (
    const Field & F,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t width,
    const size_t N2,
    const size_t R1,
    const size_t R2,
    const size_t R3,
    const size_t R4) [inline]
```

**11.21.3.129 MatrixApplyT() [2/3]**

```
template<class Field >
void MatrixApplyT (
    const Field & F,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t width,
    const size_t N2,
    const size_t R1,
    const size_t R2,
    const size_t R3,
    const size_t R4,
    const FFLAS::ParSeqHelper::Sequential seq) [inline]
```

**11.21.3.130 MatrixApplyT() [3/3]**

```
template<class Field , class Cut , class Param >
void MatrixApplyT (
    const Field & F,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t width,
```

```

const size_t N2,
const size_t R1,
const size_t R2,
const size_t R3,
const size_t R4,
const FFLAS::ParSeqHelper::Parallel< Cut, Param > par) [inline]

```

### 11.21.3.131 PermApplyT()

```

template<class T >
void PermApplyT (
    T * A,
    const size_t lda,
    const size_t width,
    const size_t N2,
    const size_t R1,
    const size_t R2,
    const size_t R3,
    const size_t R4) [inline]

```

### 11.21.3.132 composePermutationsLLL()

```

void composePermutationsLLL (
    size_t * P1,
    const size_t * P2,
    const size_t R,
    const size_t N) [inline]

```

Computes  $P1 \times \text{Diag}(I_R, P2)$  where  $P1$  is a LAPACK and  $P2$  a LAPACK permutation and store the result in  $P1$  as a LAPACK permutation.

#### Parameters

|         |      |                                  |
|---------|------|----------------------------------|
| in, out | $P1$ | a LAPACK permutation of size N   |
|         | $P2$ | a LAPACK permutation of size N-R |

### 11.21.3.133 composePermutationsLLM()

```

void composePermutationsLLM (
    size_t * MathP,
    const size_t * P1,
    const size_t * P2,
    const size_t R,
    const size_t N) [inline]

```

Computes  $P1 \times \text{Diag}(I_R, P2)$  where  $P1$  is a LAPACK and  $P2$  a LAPACK permutation and store the result in  $\text{MathP}$  as a  $\text{MathPermutation}$  format.

#### Parameters

|     |  |  |
|-----|--|--|
| out |  |  |
|-----|--|--|

a  $\text{MathPermutation}$  of size N

## Parameters

|           |                                  |
|-----------|----------------------------------|
| <i>P1</i> | a LAPACK permutation of size N   |
| <i>P2</i> | a LAPACK permutation of size N-R |

**11.21.3.134 composePermutationsMLM()**

```
void composePermutationsMLM (
    size_t * MathP1,
    const size_t * P2,
    const size_t R,
    const size_t N) [inline]
```

Computes MathP1 x Diag (I\_R, P2) where MathP1 is a MathPermutation and P2 a LAPACK permutation and store the result in MathP1 as a MathPermutation format.

## Parameters

|         |               |                                  |
|---------|---------------|----------------------------------|
| in, out | <i>MathP1</i> | a MathPermutation of size N      |
|         | <i>P2</i>     | a LAPACK permutation of size N-R |

**11.21.3.135 cyclic\_shift\_mathPerm()**

```
void cyclic_shift_mathPerm (
    size_t * P,
    const size_t s) [inline]
```

**11.21.3.136 cyclic\_shift\_row\_col() [1/2]**

```
template<class Field >
void cyclic_shift_row_col (
    const Field & F,
    typename Field::Element_ptr A,
    size_t m,
    size_t n,
    size_t lda) [inline]
```

**11.21.3.137 cyclic\_shift\_row() [1/3]**

```
template<class Field >
void cyclic_shift_row (
    const Field & F,
    typename Field::Element_ptr A,
    size_t m,
    size_t n,
    size_t lda) [inline]
```

**11.21.3.138 cyclic\_shift\_row()** [2/3]

```
template<typename T >
void cyclic_shift_row (
    const RNSIntegerMod< T > & F,
    typename T::Element_ptr A,
    size_t m,
    size_t n,
    size_t lda) [inline]
```

**11.21.3.139 cyclic\_shift\_col()** [1/3]

```
template<class Field >
void cyclic_shift_col (
    const Field & F,
    typename Field::Element_ptr A,
    size_t m,
    size_t n,
    size_t lda) [inline]
```

**11.21.3.140 cyclic\_shift\_col()** [2/3]

```
template<typename T >
void cyclic_shift_col (
    const RNSIntegerMod< T > & F,
    typename T::Element_ptr A,
    size_t m,
    size_t n,
    size_t lda) [inline]
```

**11.21.3.141 PLUQ\_basecaseV3()**

```
template<class Field >
size_t PLUQ_basecaseV3 (
    const Field & Fi,
    const FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    typename Field::Element * A,
    const size_t lda,
    size_t * P,
    size_t * Q) [inline]
```

**11.21.3.142 PLUQ\_basecaseV2()**

```
template<class Field >
size_t PLUQ_basecaseV2 (
    const Field & Fi,
    const FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    typename Field::Element * A,
    const size_t lda,
    size_t * P,
    size_t * Q) [inline]
```



**11.21.3.143 PLUQ\_basecaseCrout()**

```
template<class Field >
size_t PLUQ_basecaseCrout (
    const Field & Fi,
    const FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Q) [inline]
```

**11.21.3.144 \_PLUQ()**

```
template<class Field >
size_t _PLUQ (
    const Field & Fi,
    const FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Q,
    size_t BCThreshold) [inline]
```

**11.21.3.145 PLUQ() [4/6]**

```
template<class Cut , class Param >
size_t PLUQ (
    const Givaro::Modular< Givaro::Integer > & F,
    const FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    typename Givaro::Integer * A,
    const size_t lda,
    size_t * P,
    size_t * Q,
    size_t BCThreshold,
    FFLAS::ParSeqHelper::Parallel< Cut, Param > & PSHelper) [inline]
```

**11.21.3.146 threads\_fgemm()**

```
template<class Field >
void threads_fgemm (
    const size_t m,
    const size_t n,
    const size_t r,
    int nbthreads,
    size_t * W1,
    size_t * W2,
    size_t * W3,
    size_t gamma)
```

**11.21.3.147 threads\_ftrsm()**

```
template<class Field >
void threads_ftrsm (
    const size_t m,
    const size_t n,
    int nbthreads,
    size_t * t1,
    size_t * t2)
```

**11.21.3.148 PLUQ() [5/6]**

```
template<class Field >
size_t PLUQ (
    const Field & Fi,
    const FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Q,
    const FFLAS::ParSeqHelper::Parallel< FFLAS::CuttingStrategy::Recursive, FFLAS::StrategyParameter
> & PSHelper) [inline]
```

**11.21.3.149 fflas\_const\_cast() [1/3]**

```
template<>
rns_double_elt_ptr fflas_const_cast (
    rns_double_elt_cstptr x) [inline]
```

**11.21.3.150 fflas\_const\_cast() [2/3]**

```
template<>
rns_double_elt_cstptr fflas_const_cast (
    rns_double_elt_ptr x) [inline]
```

**11.21.3.151 cyclic\_shift\_row\_col() [2/2]**

```
template<typename Base_t >
void cyclic_shift_row_col (
    Base_t * A,
    size_t m,
    size_t n,
    size_t lda)
```

**11.21.3.152 cyclic\_shift\_row()** [3/3]

```
template INST_OR_DECL void cyclic_shift_row (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    FFLAS_ELT * A,
    size_t m,
    size_t n,
    size_t lda)
```

**11.21.3.153 cyclic\_shift\_col()** [3/3]

```
template INST_OR_DECL void cyclic_shift_col (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    FFLAS_ELT * A,
    size_t m,
    size_t n,
    size_t lda)
```

**11.21.3.154 applyP()** [4/4]

```
template INST_OR_DECL void applyP (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_SIDE Side,
    const FFLAS::FFLAS_TRANSPOSE Trans,
    const size_t M,
    const size_t ibeg,
    const size_t iend,
    FFLAS_ELT * A,
    const size_t lda,
    const size_t * P)
```

**11.21.3.155 fgetrs()** [3/4]

```
template INST_OR_DECL void fgetrs (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    const size_t R,
    FFLAS_ELT * A,
    const size_t lda,
    const size_t * P,
    const size_t * Q,
    FFLAS_ELT * B,
    const size_t ldb,
    int * info)
```

**11.21.3.156 fgetrs()** [4/4]

```
template INST_OR_DECL FFLAS_ELT * fgetrs (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    const size_t NRHS,
    const size_t R,
    FFLAS_ELT * A,
    const size_t lda,
    const size_t * P,
    const size_t * Q,
    FFLAS_ELT * X,
    const size_t ldx,
    const FFLAS_ELT * B,
    const size_t ldb,
    int * info)
```

**11.21.3.157 fgesv()** [3/4]

```
template INST_OR_DECL size_t fgesv (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    FFLAS_ELT * B,
    const size_t ldb,
    int * info)
```

**11.21.3.158 fgesv()** [4/4]

```
template INST_OR_DECL size_t fgesv (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    const size_t NRHS,
    FFLAS_ELT * A,
    const size_t lda,
    FFLAS_ELT * X,
    const size_t ldx,
    const FFLAS_ELT * B,
    const size_t ldb,
    int * info)
```

**11.21.3.159 ftrtri()** [2/2]

```
template INST_OR_DECL void ftrtri (
    const FFLAS_FIELD< FFLAS_ELT > & F,
```

```

const FFLAS::FFLAS_UPLO Uplo,
const FFLAS::FFLAS_DIAG Diag,
const size_t N,
FFLAS_ELT * A,
const size_t lda,
const size_t threshold)

```

#### 11.21.3.160 trinv\_left() [2/2]

```

template INST_OR_DECL void trinv_left (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t N,
    const FFLAS_ELT * L,
    const size_t ldl,
    FFLAS_ELT * X,
    const size_t ldx)

```

#### 11.21.3.161 ftrtrm() [2/2]

```

template INST_OR_DECL void ftrtrm (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_SIDE side,
    const FFLAS::FFLAS_DIAG diag,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda)

```

#### 11.21.3.162 PLUQ() [6/6]

```

template INST_OR_DECL size_t PLUQ (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    size_t * P,
    size_t * Q)

```

#### 11.21.3.163 LUdivine() [4/4]

```

template INST_OR_DECL size_t LUdivine (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_DIAG Diag,
    const FFLAS::FFLAS_TRANSPOSE trans,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const FFPACK_LU_TAG LuTag,
    const size_t cutoff)

```

**11.21.3.164 LUdivine\_small() [2/2]**

```
template INST_OR_DECL size_t LUdivine_small (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_DIAG Diag,
    const FFLAS::FFLAS_TRANSPOSE trans,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    size_t * P,
    size_t * Q,
    const FFPACK_LU_TAG LuTag)
```

**11.21.3.165 LUdivine\_gauss() [2/2]**

```
template INST_OR_DECL size_t LUdivine_gauss (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    size_t * P,
    size_t * Q,
    const FFPACK_LU_TAG LuTag)
```

**11.21.3.166 RowEchelonForm() [3/3]**

```
template INST_OR_DECL size_t RowEchelonForm (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const FFPACK_LU_TAG LuTag)
```

**11.21.3.167 ReducedRowEchelonForm() [3/3]**

```
template INST_OR_DECL size_t ReducedRowEchelonForm (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const FFPACK_LU_TAG LuTag)
```

**11.21.3.168 ColumnEchelonForm()** [3/3]

```
template INST_OR_DECL size_t ColumnEchelonForm (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const FFPACK_LU_TAG LuTag)
```

**11.21.3.169 ReducedColumnEchelonForm()** [3/3]

```
template INST_OR_DECL size_t ReducedColumnEchelonForm (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const FFPACK_LU_TAG LuTag)
```

**11.21.3.170 Invert()** [3/4]

```
template INST_OR_DECL FFLAS_ELT * Invert (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    FFLAS_ELT * A,
    const size_t lda,
    int & nullity)
```

**11.21.3.171 Invert()** [4/4]

```
template INST_OR_DECL FFLAS_ELT * Invert (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const FFLAS_ELT * A,
    const size_t lda,
    FFLAS_ELT * X,
    const size_t ldx,
    int & nullity)
```

**11.21.3.172 Invert2()** [2/2]

```
template INST_OR_DECL FFLAS_ELT * Invert2 (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    FFLAS_ELT * A,
    const size_t lda,
    FFLAS_ELT * X,
    const size_t ldx,
    int & nullity)
```

**11.21.3.173 CharPoly() [6/8]**

```
template INST_OR_DECL std::list< Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > >::Element > &
CharPoly (
    const Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > > & R,
    std::list< Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > >::Element > & charp,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    FFLAS_FIELD< FFLAS_ELT >::RandIter & G,
    const FFPACK_CHARPOLY_TAG CharpTag,
    const size_t degree)
```

**11.21.3.174 CharPoly() [7/8]**

```
template INST_OR_DECL Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > >::Element & CharPoly (
    const Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > > & R,
    Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > >::Element & charp,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    FFLAS_FIELD< FFLAS_ELT >::RandIter & G,
    const FFPACK_CHARPOLY_TAG CharpTag,
    const size_t degree)
```

**11.21.3.175 CharPoly() [8/8]**

```
template INST_OR_DECL Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > >::Element & CharPoly (
    const Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > > & R,
    Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > >::Element & charp,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    const FFPACK_CHARPOLY_TAG CharpTag,
    const size_t degree)
```

**11.21.3.176 MinPoly() [3/4]**

```
template INST_OR_DECL std::vector< FFLAS_ELT > & MinPoly (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    std::vector< FFLAS_ELT > & minP,
    const size_t N,
    const FFLAS_ELT * A,
    const size_t lda,
    FFLAS_FIELD< FFLAS_ELT >::RandIter & G)
```

**11.21.3.177 MinPoly() [4/4]**

```
template INST_OR_DECL std::vector< FFLAS_ELT > & MinPoly (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    std::vector< FFLAS_ELT > & minP,
    const size_t N,
    const FFLAS_ELT * A,
    const size_t lda)
```



**11.21.3.178 MatVecMinPoly()** [2/2]

```
template INST_OR_DECL std::vector< FFLAS_ELT > & MatVecMinPoly (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    std::vector< FFLAS_ELT > & minP,
    const size_t N,
    const FFLAS_ELT * A,
    const size_t lda,
    const FFLAS_ELT * V,
    const size_t incv)
```

**11.21.3.179 KrylovElim()**

```
template INST_OR_DECL size_t KrylovElim (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    size_t * P,
    size_t * Q,
    const size_t deg,
    size_t * iterates,
    size_t * inviterates,
    const size_t maxit,
    size_t virt)
```

**11.21.3.180 SpecRankProfile()**

```
template INST_OR_DECL size_t SpecRankProfile (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    const size_t deg,
    size_t * rankProfile)
```

**11.21.3.181 Rank()** [3/3]

```
template INST_OR_DECL size_t Rank (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda)
```

**11.21.3.182 IsSingular()** [2/2]

```
template INST_OR_DECL bool IsSingular (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda)
```

**11.21.3.183 Det()** [5/6]

```
template INST_OR_DECL FFLAS_ELT & Det (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    FFLAS_ELT & det,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    size_t * P,
    size_t * Q)
```

**11.21.3.184 Det()** [6/6]

```
template INST_OR_DECL FFLAS_ELT & Det (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    FFLAS_ELT & det,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    const FFLAS::ParSeqHelper::Parallel< FFLAS::CuttingStrategy::Recursive, FFLAS::StrategyParameter
> & parH,
    size_t * P,
    size_t * Q)
```

**11.21.3.185 Solve()** [3/3]

```
template INST_OR_DECL FFLAS_ELT * Solve (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    FFLAS_ELT * A,
    const size_t lda,
    FFLAS_ELT * x,
    const int incx,
    const FFLAS_ELT * b,
    const int incb)
```

**11.21.3.186 solveLB()** [2/2]

```
template INST_OR_DECL void solveLB (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    const size_t R,
    FFLAS_ELT * L,
    const size_t ldl,
    const size_t * Q,
    FFLAS_ELT * B,
    const size_t ldb)
```

**11.21.3.187 solveLB2()** [2/2]

```
template INST_OR_DECL void solveLB2 (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    const size_t R,
    FFLAS_ELT * L,
    const size_t ldl,
    const size_t * Q,
    FFLAS_ELT * B,
    const size_t ldb)
```

**11.21.3.188 RandomNullSpaceVector()** [3/3]

```
template INST_OR_DECL void RandomNullSpaceVector (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    FFLAS_ELT * X,
    const size_t incX)
```

**11.21.3.189 NullSpaceBasis()** [2/2]

```
template INST_OR_DECL size_t NullSpaceBasis (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    FFLAS_ELT *& NS,
    size_t & ldn,
    size_t & NSdim)
```

**11.21.3.190 RowRankProfile()** [3/3]

```
template INST_OR_DECL size_t RowRankProfile (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    size_t *& rkprofile,
    const FFPACK_LU_TAG LuTag)
```

**11.21.3.191 ColumnRankProfile() [3/3]**

```
template INST_OR_DECL size_t ColumnRankProfile (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    size_t * rkprofile,
    const FFPACK_LU_TAG LuTag)
```

**11.21.3.192 RowRankProfileSubmatrixIndices() [2/2]**

```
template INST_OR_DECL size_t RowRankProfileSubmatrixIndices (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    size_t * rowindices,
    size_t * colindices,
    size_t & R)
```

**11.21.3.193 ColRankProfileSubmatrixIndices() [2/2]**

```
template INST_OR_DECL size_t ColRankProfileSubmatrixIndices (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    size_t * rowindices,
    size_t * colindices,
    size_t & R)
```

**11.21.3.194 RowRankProfileSubmatrix() [2/2]**

```
template INST_OR_DECL size_t RowRankProfileSubmatrix (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    FFLAS_ELT * X,
    size_t & R)
```

**11.21.3.195 ColRankProfileSubmatrix() [2/2]**

```
template INST_OR_DECL size_t ColRankProfileSubmatrix (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t M,
    const size_t N,
    FFLAS_ELT * A,
    const size_t lda,
    FFLAS_ELT * X,
    size_t & R)
```

**11.21.3.196 getTriangular< FFLAS\_FIELD< FFLAS\_ELT > >() [1/2]**

```
template INST_OR_DECL void getTriangular< FFLAS_FIELD< FFLAS_ELT > > > (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_UPLO Uplo,
    const FFLAS::FFLAS_DIAG diag,
    const size_t M,
    const size_t N,
    const size_t R,
    const FFLAS_ELT * A,
    const size_t lda,
    FFLAS_ELT * T,
    const size_t ldt,
    const bool OnlyNonZeroVectors)
```

**11.21.3.197 getTriangular< FFLAS\_FIELD< FFLAS\_ELT > >() [2/2]**

```
template INST_OR_DECL void getTriangular< FFLAS_FIELD< FFLAS_ELT > > > (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_UPLO Uplo,
    const FFLAS::FFLAS_DIAG diag,
    const size_t M,
    const size_t N,
    const size_t R,
    FFLAS_ELT * A,
    const size_t lda)
```

**11.21.3.198 getEchelonForm< FFLAS\_FIELD< FFLAS\_ELT > >() [1/2]**

```
template INST_OR_DECL void getEchelonForm< FFLAS_FIELD< FFLAS_ELT > > > (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_UPLO Uplo,
    const FFLAS::FFLAS_DIAG diag,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    const FFLAS_ELT * A,
    const size_t lda,
    FFLAS_ELT * T,
    const size_t ldt,
    const bool OnlyNonZeroVectors,
    const FFPACK_LU_TAG LuTag)
```

**11.21.3.199 getEchelonForm< FFLAS\_FIELD< FFLAS\_ELT > >() [2/2]**

```
template INST_OR_DECL void getEchelonForm< FFLAS_FIELD< FFLAS_ELT > > > (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_UPLO Uplo,
    const FFLAS::FFLAS_DIAG diag,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    FFLAS_ELT * A,
    const size_t lda,
    const FFPACK_LU_TAG LuTag)
```

**11.21.3.200 getEchelonTransform< FFLAS\_FIELD< FFLAS\_ELT > >()**

```
template INST_OR_DECL void getEchelonTransform< FFLAS_FIELD< FFLAS_ELT > > (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_UPLO Uplo,
    const FFLAS::FFLAS_DIAG diag,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    const size_t * Q,
    const FFLAS_ELT * A,
    const size_t lda,
    FFLAS_ELT * T,
    const size_t ldt,
    const FFPACK_LU_TAG LuTag)
```

**11.21.3.201 getReducedEchelonForm< FFLAS\_FIELD< FFLAS\_ELT > >() [1/2]**

```
template INST_OR_DECL void getReducedEchelonForm< FFLAS_FIELD< FFLAS_ELT > > (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_UPLO Uplo,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    const FFLAS_ELT * A,
    const size_t lda,
    FFLAS_ELT * T,
    const size_t ldt,
    const bool OnlyNonZeroVectors,
    const FFPACK_LU_TAG LuTag)
```

**11.21.3.202 getReducedEchelonForm< FFLAS\_FIELD< FFLAS\_ELT > >() [2/2]**

```
template INST_OR_DECL void getReducedEchelonForm< FFLAS_FIELD< FFLAS_ELT > > (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_UPLO Uplo,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    FFLAS_ELT * A,
    const size_t lda,
    const FFPACK_LU_TAG LuTag)
```

**11.21.3.203 getReducedEchelonTransform< FFLAS\_FIELD< FFLAS\_ELT > >()**

```
template INST_OR_DECL void getReducedEchelonTransform< FFLAS_FIELD< FFLAS_ELT > > (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const FFLAS::FFLAS_UPLO Uplo,
    const size_t M,
```

```

    const size_t N,
    const size_t R,
    const size_t * P,
    const size_t * Q,
    const FFLAS_ELT * A,
    const size_t lda,
    FFLAS_ELT * T,
    const size_t ldt,
    const FFPACK_LU_TAG LuTag)

```

#### 11.21.3.204 LQUPtoInverseOfFullRankMinor() [2/2]

```

template INST_OR_DECL FFLAS_ELT * LQUPtoInverseOfFullRankMinor (
    const FFLAS_FIELD< FFLAS_ELT > & F,
    const size_t rank,
    FFLAS_ELT * A_factors,
    const size_t lda,
    const size_t * QtPointer,
    FFLAS_ELT * X,
    const size_t ldx)

```

#### 11.21.3.205 fflas\_const\_cast() [3/3]

```

template<class T , class CT = const T>
T fflas_const_cast (
    CT x)

```

#### 11.21.3.206 failure()

```

Failure & failure () [inline]

```

#### 11.21.3.207 isOdd() [1/3]

```

template<class T >
bool isOdd (
    const T & a) [inline]

```

#### 11.21.3.208 isOdd() [2/3]

```

bool isOdd (
    const float & a) [inline]

```

#### 11.21.3.209 isOdd() [3/3]

```

bool isOdd (
    const double & a) [inline]

```

**11.21.3.210 NonZeroRandomMatrix()** [1/2]

```
template<class Field , class RandIter >
Field::Element_ptr NonZeroRandomMatrix (
    const Field & F,
    size_t m,
    size_t n,
    typename Field::Element_ptr A,
    size_t lda,
    RandIter & G) [inline]
```

Random non-zero Matrix.

Creates a  $m \times n$  matrix with random entries, and at least one of them is non zero.

**Parameters**

|     |       |                                                                     |
|-----|-------|---------------------------------------------------------------------|
|     | $F$   | field                                                               |
|     | $m$   | number of rows in A                                                 |
|     | $n$   | number of cols in A                                                 |
| out | $A$   | the matrix (preallocated to at least $m \times lda$ field elements) |
|     | $lda$ | leading dimension of A                                              |
|     | $G$   | a random iterator                                                   |

**Returns**

A.

**11.21.3.211 NonZeroRandomMatrix()** [2/2]

```
template<class Field , class RandIter >
Field::Element_ptr NonZeroRandomMatrix (
    const Field & F,
    size_t m,
    size_t n,
    typename Field::Element_ptr A,
    size_t lda) [inline]
```

Random non-zero Matrix.

Creates a  $m \times n$  matrix with random entries, and at least one of them is non zero.

**Parameters**

|     |       |                                                                     |
|-----|-------|---------------------------------------------------------------------|
|     | $F$   | field                                                               |
|     | $m$   | number of rows in A                                                 |
|     | $n$   | number of cols in A                                                 |
| out | $A$   | the matrix (preallocated to at least $m \times lda$ field elements) |
|     | $lda$ | leading dimension of A                                              |

**Returns**

A.



**11.21.3.212 RandomMatrix() [1/2]**

```
template<class Field , class RandIter >
Field::Element_ptr RandomMatrix (
    const Field & F,
    size_t m,
    size_t n,
    typename Field::Element_ptr A,
    size_t lda,
    RandIter & G) [inline]
```

Random Matrix.

Creates a  $m \times n$  matrix with random entries.

**Parameters**

|     |       |                                                                     |
|-----|-------|---------------------------------------------------------------------|
|     | $F$   | field                                                               |
|     | $m$   | number of rows in A                                                 |
|     | $n$   | number of cols in A                                                 |
| out | $A$   | the matrix (preallocated to at least $m \times lda$ field elements) |
|     | $lda$ | leading dimension of A                                              |
|     | $G$   | a random iterator                                                   |

**Returns**

A.

**11.21.3.213 RandomMatrix() [2/2]**

```
template<class Field >
Field::Element_ptr RandomMatrix (
    const Field & F,
    size_t m,
    size_t n,
    typename Field::Element_ptr A,
    size_t lda) [inline]
```

Random Matrix.

Creates a  $m \times n$  matrix with random entries.

**Parameters**

|     |       |                                                                     |
|-----|-------|---------------------------------------------------------------------|
|     | $F$   | field                                                               |
|     | $m$   | number of rows in A                                                 |
|     | $n$   | number of cols in A                                                 |
| out | $A$   | the matrix (preallocated to at least $m \times lda$ field elements) |
|     | $lda$ | leading dimension of A                                              |

**Returns**

A.

**11.21.3.214 RandomTriangularMatrix() [1/2]**

```
template<class Field , class RandIter >
Field::Element_ptr RandomTriangularMatrix (
    const Field & F,
    size_t m,
    size_t n,
    const FFLAS::FFLAS_UPLO UpLo,
    const FFLAS::FFLAS_DIAG Diag,
    bool nonsingular,
    typename Field::Element_ptr A,
    size_t lda,
    RandIter & G) [inline]
```

Random Triangular Matrix.

Creates a  $m \times n$  triangular matrix with random entries. The `UpLo` parameter defines whether it is upper or lower triangular.

**Parameters**

|     |             |                                                                     |
|-----|-------------|---------------------------------------------------------------------|
|     | <i>F</i>    | field                                                               |
|     | <i>m</i>    | number of rows in A                                                 |
|     | <i>n</i>    | number of cols in A                                                 |
|     | <i>UpLo</i> | whether A is upper or lower triangular                              |
| out | <i>A</i>    | the matrix (preallocated to at least $m \times lda$ field elements) |
|     | <i>lda</i>  | leading dimension of A                                              |
|     | <i>G</i>    | a random iterator                                                   |

**Returns**

A.

**11.21.3.215 RandomTriangularMatrix() [2/2]**

```
template<class Field >
Field::Element_ptr RandomTriangularMatrix (
    const Field & F,
    size_t m,
    size_t n,
    const FFLAS::FFLAS_UPLO UpLo,
    const FFLAS::FFLAS_DIAG Diag,
    bool nonsingular,
    typename Field::Element_ptr A,
    size_t lda) [inline]
```

Random Triangular Matrix.

Creates a  $m \times n$  triangular matrix with random entries. The `UpLo` parameter defines whether it is upper or lower triangular.

## Parameters

|     |        |                                                                     |
|-----|--------|---------------------------------------------------------------------|
|     | $F$    | field                                                               |
|     | $m$    | number of rows in $A$                                               |
|     | $n$    | number of cols in $A$                                               |
|     | $UpLo$ | whether $A$ is upper or lower triangular                            |
| out | $A$    | the matrix (preallocated to at least $m \times lda$ field elements) |
|     | $lda$  | leading dimension of $A$                                            |

## Returns

$A$ .

## 11.21.3.216 RandInt()

```
size_t RandInt (
    size_t a,
    size_t b) [inline]
```

## 11.21.3.217 RandomSymmetricMatrix()

```
template<class Field , class RandIter >
Field::Element_ptr RandomSymmetricMatrix (
    const Field & F,
    size_t n,
    bool nonsingular,
    typename Field::Element_ptr A,
    size_t lda,
    RandIter & G) [inline]
```

Random Symmetric Matrix.

Creates a  $m \times n$  triangular matrix with random entries. The  $UpLo$  parameter defines whether it is upper or lower triangular.

## Parameters

|     |       |                                                                     |
|-----|-------|---------------------------------------------------------------------|
|     | $F$   | field                                                               |
|     | $n$   | order of $A$                                                        |
| out | $A$   | the matrix (preallocated to at least $n \times lda$ field elements) |
|     | $lda$ | leading dimension of $A$                                            |
|     | $G$   | a random iterator                                                   |

## Returns

$A$ .

**11.21.3.218 RandomMatrixWithRank()** [1/2]

```
template<class Field , class RandIter >
Field::Element_ptr RandomMatrixWithRank (
    const Field & F,
    size_t m,
    size_t n,
    size_t r,
    typename Field::Element_ptr A,
    size_t lda,
    RandIter & G) [inline]
```

Random Matrix with prescribed rank.

Creates an  $m \times n$  matrix with random entries and rank  $r$ .

**Parameters**

|       |                                                                     |
|-------|---------------------------------------------------------------------|
| $F$   | field                                                               |
| $m$   | number of rows in A                                                 |
| $n$   | number of cols in A                                                 |
| $r$   | rank of the matrix to build                                         |
| $A$   | the matrix (preallocated to at least $m \times lda$ field elements) |
| $lda$ | leading dimension of A                                              |
| $G$   | a random iterator                                                   |

**Returns**

A.

**11.21.3.219 RandomMatrixWithRank()** [2/2]

```
template<class Field >
Field::Element_ptr RandomMatrixWithRank (
    const Field & F,
    size_t m,
    size_t n,
    size_t r,
    typename Field::Element_ptr A,
    size_t lda) [inline]
```

Random Matrix with prescribed rank.

Creates an  $m \times n$  matrix with random entries and rank  $r$ .

**Parameters**

|     |       |                                                                     |
|-----|-------|---------------------------------------------------------------------|
|     | $F$   | field                                                               |
|     | $m$   | number of rows in A                                                 |
|     | $n$   | number of cols in A                                                 |
|     | $r$   | rank of the matrix to build                                         |
| out | $A$   | the matrix (preallocated to at least $m \times lda$ field elements) |
|     | $lda$ | leading dimension of A                                              |

**Returns**

A.

**11.21.3.220 RandomIndexSubset()**

```
size_t * RandomIndexSubset (
    size_t N,
    size_t R,
    size_t * P) [inline]
```

Pick uniformly at random a sequence of  $R$  distinct elements from the set  $\{0, \dots, N - 1\}$  using Knuth's shuffle.

**Parameters**

|     |     |                                                             |
|-----|-----|-------------------------------------------------------------|
|     | $N$ | the cardinality of the sampling set                         |
|     | $R$ | the number of elements to sample                            |
| out | $P$ | the output sequence (pre-allocated to at least $R$ indices) |

**11.21.3.221 RandomPermutation()**

```
size_t * RandomPermutation (
    size_t N,
    size_t * P) [inline]
```

Pick uniformly at random a permutation of size  $N$  stored in LAPACK format using Knuth's shuffle.

**Parameters**

|     |     |                                                                |
|-----|-----|----------------------------------------------------------------|
|     | $N$ | the length of the permutation                                  |
| out | $P$ | the output permutation (pre-allocated to at least $N$ indices) |

**11.21.3.222 RandomRankProfileMatrix()**

```
void RandomRankProfileMatrix (
    size_t M,
    size_t N,
    size_t R,
    size_t * rows,
    size_t * cols) [inline]
```

Pick uniformly at random an  $R$ -subpermutation of dimension  $M \times N$  : a matrix with only  $R$  non-zeros equal to one, in a random rook placement.

**Parameters**

|     |             |                                                              |
|-----|-------------|--------------------------------------------------------------|
|     | $M$         | row dimension                                                |
|     | $N$         | column dimension                                             |
| out | <i>rows</i> | the row position of each non zero element (pre-allocated)    |
| out | <i>cols</i> | the column position of each non zero element (pre-allocated) |

**11.21.3.223 swapval()**

```
void swapval (
    size_t k,
    size_t N,
    size_t * P,
    size_t val) [inline]
```

**11.21.3.224 RandomSymmetricRankProfileMatrix()**

```
void RandomSymmetricRankProfileMatrix (
    size_t N,
    size_t R,
    size_t * rows,
    size_t * cols) [inline]
```

Pick uniformly at random a symmetric  $R$ -subpermutation of dimension  $N \times N$  : a symmetric matrix with only  $R$  non-zeros, all equal to one, in a random rook placement.

**Parameters**

|     |        |                                                              |
|-----|--------|--------------------------------------------------------------|
|     | $N$    | matrix order                                                 |
| out | $rows$ | the row position of each non zero element (pre-allocated)    |
| out | $cols$ | the column position of each non zero element (pre-allocated) |

**11.21.3.225 RandomLTQSRankProfileMatrix()**

```
void RandomLTQSRankProfileMatrix (
    size_t n,
    size_t r,
    size_t t,
    size_t * rows,
    size_t * cols) [inline]
```

**11.21.3.226 RandomMatrixWithRankandRPM()** [1/2]

```
template<class Field , class RandIter >
Field::Element_ptr RandomMatrixWithRankandRPM (
    const Field & F,
    size_t M,
    size_t N,
    size_t R,
    typename Field::Element_ptr A,
    size_t lda,
    const size_t * RRP,
    const size_t * CRP,
    RandIter & G) [inline]
```

Random Matrix with prescribed rank and rank profile matrix Creates an  $m \times n$  matrix with random entries and rank  $r$ .

## Parameters

|            |                                                                                  |
|------------|----------------------------------------------------------------------------------|
| <i>F</i>   | field                                                                            |
| <i>m</i>   | number of rows in A                                                              |
| <i>n</i>   | number of cols in A                                                              |
| <i>r</i>   | rank of the matrix to build                                                      |
| <i>A</i>   | the matrix (preallocated to at least $m \times lda$ field elements)              |
| <i>lda</i> | leading dimension of A                                                           |
| <i>RRP</i> | the R dimensional array with row positions of the rank profile matrix' pivots    |
| <i>CRP</i> | the R dimensional array with column positions of the rank profile matrix' pivots |
| <i>G</i>   | a random iterator                                                                |

## Returns

A.

## 11.21.3.227 RandomMatrixWithRankandRPM() [2/2]

```
template<class Field >
Field::Element_ptr RandomMatrixWithRankandRPM (
    const Field & F,
    size_t M,
    size_t N,
    size_t R,
    typename Field::Element_ptr A,
    size_t lda,
    const size_t * RRP,
    const size_t * CRP) [inline]
```

Random Matrix with prescribed rank and rank profile matrix Creates an  $m \times n$  matrix with random entries and rank  $r$ .

## Parameters

|            |                                                                                  |
|------------|----------------------------------------------------------------------------------|
| <i>F</i>   | field                                                                            |
| <i>m</i>   | number of rows in A                                                              |
| <i>n</i>   | number of cols in A                                                              |
| <i>r</i>   | rank of the matrix to build                                                      |
| <i>A</i>   | the matrix (preallocated to at least $m \times lda$ field elements)              |
| <i>lda</i> | leading dimension of A                                                           |
| <i>RRP</i> | the R dimensional array with row positions of the rank profile matrix' pivots    |
| <i>CRP</i> | the R dimensional array with column positions of the rank profile matrix' pivots |

## Returns

A.

**11.21.3.228 RandomSymmetricMatrixWithRankandRPM()** [1/2]

```
template<class Field , class RandIter >
Field::Element_ptr RandomSymmetricMatrixWithRankandRPM (
    const Field & F,
    size_t N,
    size_t R,
    typename Field::Element_ptr A,
    size_t lda,
    const size_t * RRP,
    const size_t * CRP,
    RandIter & G) [inline]
```

Random Symmetric Matrix with prescribed rank and rank profile matrix Creates an  $n \times n$  symmetric matrix with random entries and rank  $r$ .

**Parameters**

|       |                                                                                    |
|-------|------------------------------------------------------------------------------------|
| $F$   | field                                                                              |
| $n$   | order of $A$                                                                       |
| $r$   | rank of $A$                                                                        |
| $A$   | the matrix (preallocated to at least $n \times lda$ field elements)                |
| $lda$ | leading dimension of $A$                                                           |
| $RRP$ | the $R$ dimensional array with row positions of the rank profile matrix' pivots    |
| $CRP$ | the $R$ dimensional array with column positions of the rank profile matrix' pivots |
| $G$   | a random iterator                                                                  |

**Returns**

$A$ .

**11.21.3.229 RandomSymmetricMatrixWithRankandRPM()** [2/2]

```
template<class Field >
Field::Element_ptr RandomSymmetricMatrixWithRankandRPM (
    const Field & F,
    size_t M,
    size_t N,
    size_t R,
    typename Field::Element_ptr A,
    size_t lda,
    const size_t * RRP,
    const size_t * CRP) [inline]
```

Random Symmetric Matrix with prescribed rank and rank profile matrix Creates an  $n \times n$  symmetric matrix with random entries and rank  $r$ .

**Parameters**

|     |                                                                     |
|-----|---------------------------------------------------------------------|
| $F$ | field                                                               |
| $n$ | order of $A$                                                        |
| $r$ | rank of $A$                                                         |
| $A$ | the matrix (preallocated to at least $n \times lda$ field elements) |



|            |                                                                                         |
|------------|-----------------------------------------------------------------------------------------|
| <i>lda</i> | leading dimension of <i>A</i>                                                           |
| <i>RRP</i> | the <i>R</i> dimensional array with row positions of the rank profile matrix' pivots    |
| <i>CRP</i> | the <i>R</i> dimensional array with column positions of the rank profile matrix' pivots |

**Returns**

*A*.

**11.21.3.230 RandomMatrixWithRankandRandomRPM() [1/2]**

```
template<class Field , class RandIter >
Field::Element_ptr RandomMatrixWithRankandRandomRPM (
    const Field & F,
    size_t M,
    size_t N,
    size_t R,
    typename Field::Element_ptr A,
    size_t lda,
    RandIter & G) [inline]
```

Random Matrix with prescribed rank, with random rank profile matrix Creates an  $m \times n$  matrix with random entries, rank  $r$  and with a rank profile matrix chosen uniformly at random.

**Parameters**

|            |                                                                     |
|------------|---------------------------------------------------------------------|
| <i>F</i>   | field                                                               |
| <i>m</i>   | number of rows in <i>A</i>                                          |
| <i>n</i>   | number of cols in <i>A</i>                                          |
| <i>r</i>   | rank of the matrix to build                                         |
| <i>A</i>   | the matrix (preallocated to at least $m \times lda$ field elements) |
| <i>lda</i> | leading dimension of <i>A</i>                                       |
| <i>G</i>   | a random iterator                                                   |

**Returns**

*A*.

**11.21.3.231 RandomMatrixWithRankandRandomRPM() [2/2]**

```
template<class Field >
Field::Element_ptr RandomMatrixWithRankandRandomRPM (
    const Field & F,
    size_t M,
    size_t N,
    size_t R,
    typename Field::Element_ptr A,
    size_t lda) [inline]
```

Random Matrix with prescribed rank, with random rank profile matrix Creates an  $m \times n$  matrix with random entries, rank  $r$  and with a rank profile matrix chosen uniformly at random.

## Parameters

|       |                                                                     |
|-------|---------------------------------------------------------------------|
| $F$   | field                                                               |
| $m$   | number of rows in $A$                                               |
| $n$   | number of cols in $A$                                               |
| $r$   | rank of the matrix to build                                         |
| $A$   | the matrix (preallocated to at least $m \times lda$ field elements) |
| $lda$ | leading dimension of $A$                                            |

## Returns

$A$ .

### 11.21.3.232 RandomSymmetricMatrixWithRankandRandomRPM() [1/2]

```
template<class Field , class RandIter >
Field::Element_ptr RandomSymmetricMatrixWithRankandRandomRPM (
    const Field & F,
    size_t N,
    size_t R,
    typename Field::Element_ptr A,
    size_t lda,
    RandIter & G) [inline]
```

Random Symmetric Matrix with prescribed rank, with random rank profile matrix Creates an  $n \times n$  matrix with random entries, rank  $r$  and with a rank profile matrix chosen uniformly at random.

## Parameters

|       |                                                                     |
|-------|---------------------------------------------------------------------|
| $F$   | field                                                               |
| $n$   | order of $A$                                                        |
| $r$   | rank of $A$                                                         |
| $A$   | the matrix (preallocated to at least $n \times lda$ field elements) |
| $lda$ | leading dimension of $A$                                            |
| $G$   | a random iterator                                                   |

## Returns

$A$ .

### 11.21.3.233 RandomSymmetricMatrixWithRankandRandomRPM() [2/2]

```
template<class Field >
Field::Element_ptr RandomSymmetricMatrixWithRankandRandomRPM (
    const Field & F,
    size_t N,
    size_t R,
    typename Field::Element_ptr A,
    size_t lda) [inline]
```

Random Symmetric Matrix with prescribed rank, with random rank profile matrix Creates an  $n \times n$  matrix with random entries, rank  $r$  and with a rank profile matrix chosen uniformly at random.

## Parameters

|            |                                                                     |
|------------|---------------------------------------------------------------------|
| <i>F</i>   | field                                                               |
| <i>n</i>   | order of A                                                          |
| <i>r</i>   | rank of A                                                           |
| <i>A</i>   | the matrix (preallocated to at least $n \times lda$ field elements) |
| <i>lda</i> | leading dimension of A                                              |

## Returns

A.

**11.21.3.234 RandomMatrixWithDet()** [1/2]

```
template<class Field >
Field::Element_ptr RandomMatrixWithDet (
    const Field & F,
    size_t n,
    const typename Field::Element d,
    typename Field::Element_ptr A,
    size_t lda) [inline]
```

Random Matrix with prescribed det.

Creates a  $m \times n$  matrix with random entries and rank  $r$ .

## Parameters

|            |                                                                                     |
|------------|-------------------------------------------------------------------------------------|
| <i>F</i>   | field                                                                               |
| <i>d</i>   | the prescribed value for the determinant of A                                       |
| <i>n</i>   | number of cols in A                                                                 |
| <i>A</i>   | the matrix to be generated (preallocated to at least $n \times lda$ field elements) |
| <i>lda</i> | leading dimension of A                                                              |

## Returns

A.

**11.21.3.235 RandomMatrixWithDet()** [2/2]

```
template<class Field , class RandIter >
Field::Element_ptr RandomMatrixWithDet (
    const Field & F,
    size_t n,
    const typename Field::Element d,
    typename Field::Element_ptr A,
    size_t lda,
    RandIter & G) [inline]
```

Random Matrix with prescribed det.

Creates a  $m \times n$  matrix with random entries and rank  $r$ .

## Parameters

|       |                                                                                     |
|-------|-------------------------------------------------------------------------------------|
| $F$   | field                                                                               |
| $d$   | the prescribed value for the determinant of $A$                                     |
| $n$   | number of cols in $A$                                                               |
| $A$   | the matrix to be generated (preallocated to at least $n \times lda$ field elements) |
| $lda$ | leading dimension of $A$                                                            |

## Returns

$A$ .

**11.21.3.236 RandomLTQSMatrixWithRankandQSorder()**

```
template<class Field , class RandIter >
Field::Element_ptr RandomLTQSMatrixWithRankandQSorder (
    Field & F,
    size_t n,
    size_t r,
    size_t t,
    typename Field::Element_ptr A,
    size_t lda,
    RandIter & G) [inline]
```

**11.21.3.237 chooseField()**

```
template<typename Field >
Field * chooseField (
    Givaro::Integer q,
    uint64_t b,
    uint64_t seed)
```

**11.21.3.238 chooseField< Givaro::ZRing< int32\_t > >()**

```
template<>
Givaro::ZRing< int32_t > * chooseField< Givaro::ZRing< int32_t > > (
    Givaro::Integer q,
    uint64_t b,
    uint64_t seed)
```

**11.21.3.239 chooseField< Givaro::ZRing< int64\_t > >()**

```
template<>
Givaro::ZRing< int64_t > * chooseField< Givaro::ZRing< int64_t > > (
    Givaro::Integer q,
    uint64_t b,
    uint64_t seed)
```

**11.21.3.240 chooseField< Givaro::ZRing< float > >()**

```
template<>
Givaro::ZRing< float > * chooseField< Givaro::ZRing< float > > (
    Givaro::Integer q,
    uint64_t b,
    uint64_t seed)
```

**11.21.3.241 chooseField< Givaro::ZRing< double > >()**

```
template<>
Givaro::ZRing< double > * chooseField< Givaro::ZRing< double > > (
    Givaro::Integer q,
    uint64_t b,
    uint64_t seed)
```

**11.22 FFPACK::Protected Namespace Reference****Functions**

- template<class [Field](#) >  
size\_t [LUdivine\\_construct](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) X, const size\_t ldx, typename [Field::Element\\_ptr](#) u, const size\_t incu, size\_t \*P, bool computeX, const FFPACK\_MINPOLY\_TAG MinTag=[FpackDense](#), const size\_t kg\_mc=0, const size\_t kg\_mb=0, const size\_t kg\_j=0)
- template<class [Field](#) >  
size\_t [GaussJordan](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t colbeg, const size\_t rowbeg, const size\_t colsize, size\_t \*P, size\_t \*Q, const FFPACK::FFPACK\_LU\_TAG LuTag)  
*Gauss-Jordan algorithm computing the Reduced Row echelon form and its transform matrix.*
- template<class [Field](#) , class Polynomial >  
std::list< Polynomial > & [KellerGehrig](#) (const [Field](#) &F, std::list< Polynomial > &charp, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda)
- template<class [Field](#) , class Polynomial >  
int [KGFast](#) (const [Field](#) &F, std::list< Polynomial > &charp, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*kg\_mc, size\_t \*kg\_mb, size\_t \*kg\_j)
- template<class [Field](#) , class Polynomial >  
std::list< Polynomial > & [KGFast\\_generalized](#) (const [Field](#) &F, std::list< Polynomial > &charp, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda)
- template<class [Field](#) >  
void [fgemv\\_kgf](#) (const [Field](#) &F, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, typename [Field::Element\\_ptr](#) Y, const size\_t incY, const size\_t kg\_mc, const size\_t kg\_mb, const size\_t kg\_j)
- template<class [Field](#) , class Polynomial , class RandIter >  
std::list< Polynomial > & [LUKrylov](#) (const [Field](#) &F, std::list< Polynomial > &charp, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) U, const size\_t ldu, RandIter &G)
- template<class [Field](#) , class Polynomial >  
std::list< Polynomial > & [Danilevski](#) (const [Field](#) &F, std::list< Polynomial > &charp, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda)
- template<class PolRing >  
void [RandomKrylovPrecond](#) (const PolRing &PR, std::list< typename PolRing::Element > &completed← Factors, const size\_t N, typename PolRing::Domain\_t::Element\_ptr A, const size\_t lda, size\_t &Nb, typename PolRing::Domain\_t::Element\_ptr &B, size\_t &ldb, typename PolRing::Domain\_t::RandIter &g, const size\_t ← degree=\_\_FFLASFFPACK\_ARITHPROG\_THRESHOLD)

- `template<class PolRing >`  
`std::list< typename PolRing::Element > & ArithProg (const PolRing &PR, std::list< typename PolRing::Element > &frobeniusForm, const size_t N, typename PolRing::Domain_t::Element_ptr A, const size_t lda, const size_t degree)`
- `template<class Field , class Polynomial >`  
`std::list< Polynomial > & LUKrylov_KGFast (const Field &F, std::list< Polynomial > &charp, const size_t N, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr X, const size_t ldx)`
- `template<class Field , class Polynomial >`  
`Polynomial & MatVecMinPoly (const Field &F, Polynomial &minP, const size_t N, typename Field::ConstElement_ptr A, const size_t lda, typename Field::Element_ptr v, const size_t incv, typename Field::Element_ptr K, const size_t ldk, size_t *P)`
- `template<class Field , class Polynomial >`  
`Polynomial & Hybrid_KGF_LUK_MinPoly (const Field &F, Polynomial &minP, const size_t N, typename Field::ConstElement_ptr A, const size_t lda, typename Field::Element_ptr X, const size_t ldx, size_t *P, const FFPACK_MINPOLY_TAG MinTag=FFPACK::FfpackDense, const size_t kg_mc=0, const size_t kg_mb=0, const size_t kg_j=0)`
- `template<class Field >`  
`size_t updatedD (const Field &F, size_t *d, size_t k, std::vector< std::vector< typename Field::Element > > &minpt)`
- `template<class Field >`  
`size_t newD (const Field &F, size_t *d, bool &KeepOn, const size_t l, const size_t N, typename Field::Element_ptr X, const size_t *Q, std::vector< std::vector< typename Field::Element > > &minpt)`
- `template<class Field >`  
`void CompressRows (Field &F, const size_t M, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr tmp, const size_t ldtmp, const size_t *d, const size_t nb_blocs)`
- `template<class Field >`  
`void CompressRowsQK (Field &F, const size_t M, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr tmp, const size_t ldtmp, const size_t *d, const size_t deg, const size_t nb_blocs)`
- `template<class Field >`  
`void DeCompressRows (Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr tmp, const size_t ldtmp, const size_t *d, const size_t nb_blocs)`
- `template<class Field >`  
`void DeCompressRowsQK (Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr tmp, const size_t ldtmp, const size_t *d, const size_t deg, const size_t nb_blocs)`
- `template<class Field >`  
`void CompressRowsQA (Field &F, const size_t M, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr tmp, const size_t ldtmp, const size_t *d, const size_t nb_blocs)`
- `template<class Field >`  
`void DeCompressRowsQA (Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr tmp, const size_t ldtmp, const size_t *d, const size_t nb_blocs)`
- `template<class Field >`  
`size_t LUdivine_construct (const Field &F, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, typename Field::ConstElement_ptr A, const size_t lda, typename Field::Element_ptr X, const size_t ldx, typename Field::Element_ptr u, const size_t incu, size_t *P, bool computeX, const FFPACK::FFPACK_MINPOLY_TAG MinTag, const size_t kg_mc, const size_t kg_mb, const size_t kg_j)`

## 11.22.1 Function Documentation

### 11.22.1.1 LUdivine\_construct() [1/2]

```
template<class Field >
size_t LUdivine_construct (
    const Field & F,
    const FFLAS::FFLAS_DIAG Diag,
```

```

const size_t M,
const size_t N,
typename Field::ConstElement_ptr A,
const size_t lda,
typename Field::Element_ptr X,
const size_t ldx,
typename Field::Element_ptr u,
const size_t incu,
size_t * P,
bool computeX,
const FFPACK_MINPOLY_TAG MinTag = FfpackDense,
const size_t kg_mc = 0,
const size_t kg_mb = 0,
const size_t kg_j = 0)

```

### 11.22.1.2 GaussJordan()

```

template<class Field >
size_t GaussJordan (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    const size_t colbeg,
    const size_t rowbeg,
    const size_t colsize,
    size_t * P,
    size_t * Q,
    const FFPACK::FFPACK_LU_TAG LuTag) [inline]

```

Gauss-Jordan algorithm computing the Reduced Row echelon form and its transform matrix.

- Bibliography**
- Algorithm 2.8 of A. Storjohann Thesis 2000,
  - Algorithm 11 of Jeannerod C-P., Pernet, C. and Storjohann, A. *Rank-profile revealing Gaussian elimination and the CUP matrix decomposition*, J. of Symbolic Comp., 2013

#### Parameters

|                |              |                                                                                                          |
|----------------|--------------|----------------------------------------------------------------------------------------------------------|
|                | <i>M</i>     | row dimension of A                                                                                       |
|                | <i>N</i>     | column dimension of A                                                                                    |
| <i>in, out</i> | <i>A</i>     | an m x n matrix                                                                                          |
|                | <i>lda</i>   | leading dimension of A                                                                                   |
|                | <i>P</i>     | row permutation                                                                                          |
|                | <i>Q</i>     | column permutation                                                                                       |
|                | <i>LuTag</i> | set the base case to a Tile (FfpackGaussJordanTile) or Slab (FfpackGaussJordanSlab) recursive RedEchelon |

where the transformation matrix is stored at the pivot column position

**11.22.1.3 KellerGehrig()**

```
template<class Field , class Polynomial >
std::list< Polynomial > & KellerGehrig (
    const Field & F,
    std::list< Polynomial > & charp,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t lda)
```

**11.22.1.4 KGFast()**

```
template<class Field , class Polynomial >
int KGFast (
    const Field & F,
    std::list< Polynomial > & charp,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * kg_mc,
    size_t * kg_mb,
    size_t * kg_j)
```

**11.22.1.5 KGFast\_generalized()**

```
template<class Field , class Polynomial >
std::list< Polynomial > & KGFast_generalized (
    const Field & F,
    std::list< Polynomial > & charp,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda)
```

**11.22.1.6 fgemv\_kgf()**

```
template<class Field >
void fgemv_kgf (
    const Field & F,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr X,
    const size_t incX,
    typename Field::Element_ptr Y,
    const size_t incY,
    const size_t kg_mc,
    const size_t kg_mb,
    const size_t kg_j)
```

**11.22.1.7 LUKrylov()**

```
template<class Field , class Polynomial , class RandIter >
std::list< Polynomial > & LUKrylov (
    const Field & F,
    std::list< Polynomial > & charp,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr U,
```



```
const size_t ldu,
RandIter & G)
```

### 11.22.1.8 Danilevski()

```
template<class Field , class Polynomial >
std::list< Polynomial > & Danilevski (
    const Field & F,
    std::list< Polynomial > & charp,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda)
```

### 11.22.1.9 RandomKrylovPrecond()

```
template<class PolRing >
void RandomKrylovPrecond (
    const PolRing & PR,
    std::list< typename PolRing::Element > & completedFactors,
    const size_t N,
    typename PolRing::Domain_t::Element_ptr A,
    const size_t lda,
    size_t & Nb,
    typename PolRing::Domain_t::Element_ptr & B,
    size_t & ldb,
    typename PolRing::Domain_t::RandIter & g,
    const size_t degree = __FFLASFFPACK_ARITHPROG_THRESHOLD) [inline]
```

**Todo** swap to save space ??

**Todo**

**Todo** don't assing K2 c\*noc x N but only mas (c,noc) x N and store each one after the other

**Todo** swap to save space ??

**Todo**

**Todo** don't assing K2 c\*noc x N but only mas (c,noc) x N and store each one after the other

### 11.22.1.10 ArithProg()

```
template<class PolRing >
std::list< typename PolRing::Element > & ArithProg (
    const PolRing & PR,
    std::list< typename PolRing::Element > & frobeniusForm,
    const size_t N,
    typename PolRing::Domain_t::Element_ptr A,
    const size_t lda,
    const size_t degree) [inline]
```

### 11.22.1.11 LUKrylov\_KGFast()

```
template<class Field , class Polynomial >
std::list< Polynomial > & LUKrylov_KGFast (
    const Field & F,
    std::list< Polynomial > & charp,
    const size_t N,
```

```

typename Field::Element_ptr A,
const size_t lda,
typename Field::Element_ptr X,
const size_t ldX)

```

#### 11.22.1.12 MatVecMinPoly()

```

template<class Field , class Polynomial >
Polynomial & MatVecMinPoly (
    const Field & F,
    Polynomial & minP,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::Element_ptr v,
    const size_t incv,
    typename Field::Element_ptr K,
    const size_t ldK,
    size_t * P) [inline]

```

#### 11.22.1.13 Hybrid\_KGF\_LUK\_MinPoly()

```

template<class Field , class Polynomial >
Polynomial & Hybrid_KGF_LUK_MinPoly (
    const Field & F,
    Polynomial & minP,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::Element_ptr X,
    const size_t ldX,
    size_t * P,
    const FFPACK_MINPOLY_TAG MinTag = FFPACK::FfpackDense,
    const size_t kg_mc = 0,
    const size_t kg_mb = 0,
    const size_t kg_j = 0)

```

#### 11.22.1.14 updateD()

```

template<class Field >
size_t updateD (
    const Field & F,
    size_t * d,
    size_t k,
    std::vector< std::vector< typename Field::Element > > & minpt)

```

#### 11.22.1.15 newD()

```

template<class Field >
size_t newD (
    const Field & F,
    size_t * d,
    bool & KeepOn,
    const size_t l,
    const size_t N,
    typename Field::Element_ptr X,
    const size_t * Q,
    std::vector< std::vector< typename Field::Element > > & minpt)

```

**11.22.1.16 CompressRows()**

```
template<class Field >
void CompressRows (
    Field & F,
    const size_t M,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr tmp,
    const size_t ldtmp,
    const size_t * d,
    const size_t nb_blocs) [inline]
```

**11.22.1.17 CompressRowsQK()**

```
template<class Field >
void CompressRowsQK (
    Field & F,
    const size_t M,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr tmp,
    const size_t ldtmp,
    const size_t * d,
    const size_t deg,
    const size_t nb_blocs) [inline]
```

**11.22.1.18 DeCompressRows()**

```
template<class Field >
void DeCompressRows (
    Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr tmp,
    const size_t ldtmp,
    const size_t * d,
    const size_t nb_blocs) [inline]
```

**11.22.1.19 DeCompressRowsQK()**

```
template<class Field >
void DeCompressRowsQK (
    Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr tmp,
    const size_t ldtmp,
    const size_t * d,
    const size_t deg,
    const size_t nb_blocs) [inline]
```

**11.22.1.20 CompressRowsQA()**

```
template<class Field >
void CompressRowsQA (
```

```

    Field & F,
    const size_t M,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr tmp,
    const size_t ldtmp,
    const size_t * d,
    const size_t nb_blocs) [inline]

```

#### 11.22.1.21 DeCompressRowsQA()

```

template<class Field >
void DeCompressRowsQA (
    Field & F,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    typename Field::Element_ptr tmp,
    const size_t ldtmp,
    const size_t * d,
    const size_t nb_blocs) [inline]

```

#### 11.22.1.22 LUdivine\_construct() [2/2]

```

template<class Field >
size_t LUdivine_construct (
    const Field & F,
    const FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::Element_ptr X,
    const size_t ldx,
    typename Field::Element_ptr u,
    const size_t incu,
    size_t * P,
    bool computeX,
    const FFPACK::FFPACK_MINPOLY_TAG MinTag,
    const size_t kg_mc,
    const size_t kg_mb,
    const size_t kg_j)

```

## 11.23 Givaro Namespace Reference

### Data Structures

- class [ModularBalanced](#)
- class [Montgomery](#)

## 11.24 MKL\_CONFIG Namespace Reference

## 11.25 Reclnt Namespace Reference

### Data Structures

- class [rint](#)

- class [ruint](#)



# Chapter 12

## Data Structure Documentation

### 12.1 AlgoChooser< ModeT, ParSeq > Struct Template Reference

#### Public Types

- typedef [MMHelperAlgo::Winograd value](#)

#### 12.1.1 Member Typedef Documentation

##### 12.1.1.1 value

```
template<class ModeT , class ParSeq >
MMHelperAlgo::Winograd value
```

The documentation for this struct was generated from the following file:

- [fflas\\_helpers.inl](#)

### 12.2 AlgoChooser< ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeq > Struct Template Reference

#### Public Types

- typedef [MMHelperAlgo::Classic value](#)

#### 12.2.1 Member Typedef Documentation

##### 12.2.1.1 value

```
template<class ParSeq >
MMHelperAlgo::Classic value
```

The documentation for this struct was generated from the following file:

- [fflas\\_helpers.inl](#)

### 12.3 ALL< v > Struct Template Reference

The documentation for this struct was generated from the following file:

- [test-simd.C](#)

## 12.4 ALL< false, v... > Struct Template Reference

### Static Public Attributes

- static constexpr bool [value](#) = false

### 12.4.1 Field Documentation

#### 12.4.1.1 value

```
template<bool... v>
bool value = false [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [test-simd.C](#)

## 12.5 ALL< true, v... > Struct Template Reference

### Static Public Attributes

- static constexpr bool [value](#) = [ALL<v...>::value](#)

### 12.5.1 Field Documentation

#### 12.5.1.1 value

```
template<bool... v>
bool value = ALL<v...>::value [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [test-simd.C](#)

## 12.6 ALL<> Struct Reference

### Static Public Attributes

- static constexpr bool [value](#) = true

### 12.6.1 Field Documentation

#### 12.6.1.1 value

```
bool value = true [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [test-simd.C](#)

## 12.7 ArbitraryPrecIntTag Struct Reference

Arbitrary precision integers: GMP.

```
#include <field-traits.h>
```

### 12.7.1 Detailed Description

Arbitrary precision integers: GMP.

The documentation for this struct was generated from the following file:

- [field-traits.h](#)



## 12.8 AreEqual< X, Y > Class Template Reference

```
#include <fflas_enum.h>
```

### Static Public Attributes

- static const bool [value](#) = false

### 12.8.1 Field Documentation

#### 12.8.1.1 value

```
template<class X , class Y >
const bool value = false [static]
```

The documentation for this class was generated from the following file:

- [fflas\\_enum.h](#)

## 12.9 AreEqual< X, X > Class Template Reference

```
#include <fflas_enum.h>
```

### Static Public Attributes

- static const bool [value](#) = true

### 12.9.1 Field Documentation

#### 12.9.1.1 value

```
template<class X >
const bool value = true [static]
```

The documentation for this class was generated from the following file:

- [fflas\\_enum.h](#)

## 12.10 Argument Struct Reference

```
#include <args-parser.h>
```

### Data Fields

- char [c](#)
- const char \* [example](#)
- const char \* [helpString](#)
- [ArgumentType](#) type
- void \* [data](#)

### 12.10.1 Field Documentation

#### 12.10.1.1 c

```
char c
```

#### 12.10.1.2 example

```
const char* example
```

### 12.10.1.3 helpString

```
const char* helpString
```

### 12.10.1.4 type

[ArgumentType](#) type

### 12.10.1.5 data

```
void* data
```

The documentation for this struct was generated from the following file:

- [args-parser.h](#)

## 12.11 associatedDelayedField< Field > Struct Template Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [Field](#) field
- typedef [Field](#) & type

### 12.11.1 Member Typedef Documentation

#### 12.11.1.1 field

```
template<class Field >
Field field
```

#### 12.11.1.2 type

```
template<class Field >
Field& type
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.12 associatedDelayedField< const FFPACK::RNSIntegerMod< RNS > > Struct Template Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [FFPACK::RNSInteger< RNS >](#) field
- typedef [FFPACK::RNSInteger< RNS >](#) type

### 12.12.1 Member Typedef Documentation

#### 12.12.1.1 field

```
template<typename RNS >
FFPACK::RNSInteger<RNS> field
```

### 12.12.1.2 type

```
template<typename RNS >
FFPACK::RNSInteger<RNS> type
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.13 associatedDelayedField< const Givaro::Modular< T, X > > Struct Template Reference

```
#include <field-traits.h>
```

### Public Types

- typedef Givaro::ZRing< T > [field](#)
- typedef Givaro::ZRing< T > [type](#)

### 12.13.1 Member Typedef Documentation

#### 12.13.1.1 field

```
template<typename T , typename X >
Givaro::ZRing<T> field
```

#### 12.13.1.2 type

```
template<typename T , typename X >
Givaro::ZRing<T> type
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.14 associatedDelayedField< const Givaro::ModularBalanced< T > > Struct Template Reference

```
#include <field-traits.h>
```

### Public Types

- typedef Givaro::ZRing< T > [field](#)
- typedef Givaro::ZRing< T > [type](#)

### 12.14.1 Member Typedef Documentation

#### 12.14.1.1 field

```
template<typename T >
Givaro::ZRing<T> field
```

#### 12.14.1.2 type

```
template<typename T >
Givaro::ZRing<T> type
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.15 associatedDelayedField< const Givaro::ZRing< T > > Struct Template Reference

```
#include <field-traits.h>
```

### Public Types

- typedef Givaro::ZRing< T > [field](#)
- typedef Givaro::ZRing< T > [type](#)

### 12.15.1 Member Typedef Documentation

#### 12.15.1.1 field

```
template<typename T >
Givaro::ZRing<T> field
```

#### 12.15.1.2 type

```
template<typename T >
Givaro::ZRing<T> type
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.16 Auto Struct Reference

The documentation for this struct was generated from the following file:

- [fflas\\_helpers.inl](#)

## 12.17 Bench< Elt > Class Template Reference

### Public Types

- using [Field](#) = Modular<Elt>
- using [Elt\\_ptr](#) = typename [Field::Element\\_ptr](#)
- using [Residu](#) = typename [Field::Residu\\_t](#)
- template<bool B, class T = void>
 using [enable\\_if\\_t](#) = typename std::enable\_if<B, T>::type
- template<typename [Simd](#) >
 using [is\\_same\\_element](#) = typename [Simd::template is\\_same\\_element](#)<[Field](#)>
- template<typename E >
 using [enable\\_if\\_no\\_simd\\_t](#) = [enable\\_if\\_t](#)<[Simd](#)<E>::vect\_size == 1>
- template<typename E >
 using [enable\\_if\\_simd128\\_t](#) = [enable\\_if\\_t](#)<sizeof(E)\*[Simd](#)<E>::vect\_size == 16>
- template<typename E >
 using [enable\\_if\\_simd256\\_t](#) = [enable\\_if\\_t](#)<sizeof(E)\*[Simd](#)<E>::vect\_size == 32>
- template<typename E >
 using [enable\\_if\\_simd512\\_t](#) = [enable\\_if\\_t](#)<sizeof(E)\*[Simd](#)<E>::vect\_size == 64>

### Public Member Functions

- [Bench](#) (size\_t m, size\_t n, size\_t iters, bool inplace)
- template<typename [Simd](#) = NoSimd<Elt>, [enable\\_if\\_t](#)< [is\\_same\\_element](#)< [Simd](#)>::value > \* = nullptr>
 void [doBenchs](#) ()
- template<typename \_E = Elt, [enable\\_if\\_t](#)< is\_same< \_E, Elt >::value > \* = nullptr, [enable\\_if\\_no\\_simd\\_t](#)< \_E > \* = nullptr>
 void [run](#) (bool allsimd)

## Static Public Member Functions

- `template<typename _E = Elt, enable\_if\_t<lis_same<_E, Givaro::Integer>::value> * = nullptr> static Residu cardinality ()`
- `template<typename _E = Elt, enable\_if\_t<is_same<_E, Givaro::Integer>::value> * = nullptr> static Residu cardinality ()`

## Protected Attributes

- [Field F](#)
- `const size_t m`
- `const size_t n`
- `const size_t iters`
- `const bool inplace`

## 12.17.1 Member Typedef Documentation

### 12.17.1.1 Field

```
template<typename Elt >
using Field = Modular<Elt>
```

### 12.17.1.2 Elt\_ptr

```
template<typename Elt >
using Elt\_ptr = typename Field::Element\_ptr
```

### 12.17.1.3 Residu

```
template<typename Elt >
using Residu = typename Field::Residu\_t
```

### 12.17.1.4 enable\_if\_t

```
template<typename Elt >
template<bool B, class T = void>
using enable\_if\_t = typename std::enable_if<B, T>::type
```

### 12.17.1.5 is\_same\_element

```
template<typename Elt >
template<typename Simd >
using is\_same\_element = typename Simd::template is\_same\_element<Field>
```

### 12.17.1.6 enable\_if\_no\_simd\_t

```
template<typename Elt >
template<typename E >
using enable\_if\_no\_simd\_t = enable\_if\_t<Simd<E>::vect_size == 1>
```

### 12.17.1.7 enable\_if\_simd128\_t

```
template<typename Elt >
template<typename E >
using enable\_if\_simd128\_t = enable\_if\_t<sizeof(E)*Simd<E>::vect_size == 16>
```

### 12.17.1.8 enable\_if\_simd256\_t

```
template<typename Elt >
template<typename E >
using enable\_if\_simd256\_t = enable\_if\_t<sizeof(E)*Simd<E>::vect_size == 32>
```

### 12.17.1.9 enable\_if\_simd512\_t

```
template<typename Elt >
template<typename E >
using enable_if_simd512_t = enable_if_t<sizeof(E)*Simd<E>::vect_size == 64>
```

## 12.17.2 Constructor & Destructor Documentation

### 12.17.2.1 Bench()

```
template<typename Elt >
Bench (
    size_t m,
    size_t n,
    size_t iters,
    bool inplace) [inline]
```

## 12.17.3 Member Function Documentation

### 12.17.3.1 cardinality() [1/2]

```
template<typename Elt >
template<typename _E = Elt, enable_if_t<!is_same< _E, Givaro::Integer >::value > * = nullptr>
static Residu cardinality () [inline], [static]
```

### 12.17.3.2 cardinality() [2/2]

```
template<typename Elt >
template<typename _E = Elt, enable_if_t< is_same< _E, Givaro::Integer >::value > * = nullptr>
static Residu cardinality () [inline], [static]
```

### 12.17.3.3 doBenchs()

```
template<typename Elt >
template<typename Simd = NoSimd<Elt>, enable_if_t< is_same_element< Simd >::value > * =
nullptr>
void doBenchs () [inline]
```

### 12.17.3.4 run()

```
template<typename Elt >
template<typename _E = Elt, enable_if_t< is_same< _E, Elt >::value > * = nullptr, enable_if_no_simd_t<
_E > * = nullptr>
void run (
    bool allsimd) [inline]
```

## 12.17.4 Field Documentation

### 12.17.4.1 F

```
template<typename Elt >
Field F [protected]
```

### 12.17.4.2 m

```
template<typename Elt >
const size_t m [protected]
```

**12.17.4.3 n**

```
template<typename Elt >
const size_t n [protected]
```

**12.17.4.4 iters**

```
template<typename Elt >
const size_t iters [protected]
```

**12.17.4.5 inplace**

```
template<typename Elt >
const bool inplace [protected]
```

The documentation for this class was generated from the following file:

- [benchmark-storage-transpose.C](#)

**12.18 Bini Struct Reference**

The documentation for this struct was generated from the following file:

- [fflas\\_helpers.inl](#)

**12.19 Block Struct Reference**

The documentation for this struct was generated from the following file:

- [blockcuts.inl](#)

**12.20 BlockTransposeSIMD< Field, Simd, > Struct Template Reference**

```
#include <fflas_transpose.h>
```

**Public Member Functions**

- template<size\_t s = Simd::vect\_size, lsSimdSize<\_s, 1> \* = nullptr>  
void [transpose](#) (const [Field](#) &F, ConstElement\_ptr A, size\_t lda, Element\_ptr B, size\_t ldb) const
- template<size\_t s = Simd::vect\_size, lsSimdSize<\_s, 2> \* = nullptr>  
void [transpose](#) (const [Field](#) &F, ConstElement\_ptr A, size\_t lda, Element\_ptr B, size\_t ldb) const
- template<size\_t s = Simd::vect\_size, lsSimdSize<\_s, 4> \* = nullptr>  
void [transpose](#) (const [Field](#) &F, ConstElement\_ptr A, size\_t lda, Element\_ptr B, size\_t ldb) const
- template<size\_t s = Simd::vect\_size, lsSimdSize<\_s, 8> \* = nullptr>  
void [transpose](#) (const [Field](#) &F, ConstElement\_ptr A, size\_t lda, Element\_ptr B, size\_t ldb) const
- template<size\_t s = Simd::vect\_size, lsSimdSize<\_s, 16> \* = nullptr>  
void [transpose](#) (const [Field](#) &F, ConstElement\_ptr A, size\_t lda, Element\_ptr B, size\_t ldb) const

**Static Public Member Functions**

- static constexpr size\_t [size](#) ()
- static const std::string [info](#) ()

**12.20.1 Member Function Documentation****12.20.1.1 size()**

```
template<typename Field , typename Simd , typename std::enable_if< Simd::template is_same_↔
element< Field >::value >::type * = nullptr>
static constexpr size_t size () [inline], [static], [constexpr]
```

**12.20.1.2 info()**

```
template<typename Field , typename Simd , typename std::enable_if< Simd::template is_same_↵
element< Field >::value >::type * = nullptr>
static const std::string info () [inline], [static]
```

**12.20.1.3 transpose() [1/5]**

```
template<typename Field , typename Simd , typename std::enable_if< Simd::template is_same_↵
element< Field >::value >::type * = nullptr>
template<size_t _s = Simd::vect_size, IsSimdSize< _s, 1 > * = nullptr>
void transpose (
    const Field & F,
    ConstElement_ptr A,
    size_t lda,
    Element_ptr B,
    size_t ldb) const [inline]
```

**12.20.1.4 transpose() [2/5]**

```
template<typename Field , typename Simd , typename std::enable_if< Simd::template is_same_↵
element< Field >::value >::type * = nullptr>
template<size_t _s = Simd::vect_size, IsSimdSize< _s, 2 > * = nullptr>
void transpose (
    const Field & F,
    ConstElement_ptr A,
    size_t lda,
    Element_ptr B,
    size_t ldb) const [inline]
```

**12.20.1.5 transpose() [3/5]**

```
template<typename Field , typename Simd , typename std::enable_if< Simd::template is_same_↵
element< Field >::value >::type * = nullptr>
template<size_t _s = Simd::vect_size, IsSimdSize< _s, 4 > * = nullptr>
void transpose (
    const Field & F,
    ConstElement_ptr A,
    size_t lda,
    Element_ptr B,
    size_t ldb) const [inline]
```

**12.20.1.6 transpose() [4/5]**

```
template<typename Field , typename Simd , typename std::enable_if< Simd::template is_same_↵
element< Field >::value >::type * = nullptr>
template<size_t _s = Simd::vect_size, IsSimdSize< _s, 8 > * = nullptr>
void transpose (
    const Field & F,
    ConstElement_ptr A,
    size_t lda,
    Element_ptr B,
    size_t ldb) const [inline]
```

**12.20.1.7 transpose() [5/5]**

```
template<typename Field , typename Simd , typename std::enable_if< Simd::template is_same_↵
element< Field >::value >::type * = nullptr>
template<size_t _s = Simd::vect_size, IsSimdSize< _s, 16 > * = nullptr>
```



```
void transpose (
    const Field & F,
    ConstElement_ptr A,
    size_t lda,
    Element_ptr B,
    size_t ldb) const [inline]
```

The documentation for this struct was generated from the following file:

- [fflas\\_transpose.h](#)

## 12.21 callLUdivine\_small< Element > Class Template Reference

### Public Member Functions

- `template<class Field >`  
`size_t operator() (const Field &F, const FFLAS::FFLAS_DIAG Diag, const FFLAS::FFLAS_TRANSPOSE trans, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Q, const FFPACK::FFPACK_LU_TAG LuTag)`

### 12.21.1 Member Function Documentation

#### 12.21.1.1 operator>()

```
template<class Element >
template<class Field >
size_t operator() (
    const Field & F,
    const FFLAS::FFLAS_DIAG Diag,
    const FFLAS::FFLAS_TRANSPOSE trans,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Q,
    const FFPACK::FFPACK_LU_TAG LuTag) [inline]
```

The documentation for this class was generated from the following file:

- [ffpack\\_ludivine.inl](#)

## 12.22 callLUdivine\_small< double > Class Reference

### Public Member Functions

- `template<class Field >`  
`size_t operator() (const Field &F, const FFLAS::FFLAS_DIAG Diag, const FFLAS::FFLAS_TRANSPOSE trans, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Q, const FFPACK::FFPACK_LU_TAG LuTag)`

### 12.22.1 Member Function Documentation

#### 12.22.1.1 operator>()

```
template<class Field >
size_t operator() (
    const Field & F,
    const FFLAS::FFLAS_DIAG Diag,
    const FFLAS::FFLAS_TRANSPOSE trans,
    const size_t M,
```

```

const size_t N,
typename Field::Element_ptr A,
const size_t lda,
size_t * P,
size_t * Q,
const FFPACK::FFPACK_LU_TAG LuTag) [inline]

```

The documentation for this class was generated from the following file:

- [ffpack\\_ludivine.inl](#)

## 12.23 callLUdivine\_small< float > Class Reference

### Public Member Functions

- `template<class Field >`  
`size_t operator() (const Field &F, const FFLAS::FFLAS_DIAG Diag, const FFLAS::FFLAS_TRANSPOSE trans, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Q, const FFPACK::FFPACK_LU_TAG LuTag)`

### 12.23.1 Member Function Documentation

#### 12.23.1.1 operator>()()

```

template<class Field >
size_t operator() (
    const Field & F,
    const FFLAS::FFLAS_DIAG Diag,
    const FFLAS::FFLAS_TRANSPOSE trans,
    const size_t M,
    const size_t N,
    typename Field::Element_ptr A,
    const size_t lda,
    size_t * P,
    size_t * Q,
    const FFPACK::FFPACK_LU_TAG LuTag) [inline]

```

The documentation for this class was generated from the following file:

- [ffpack\\_ludivine.inl](#)

## 12.24 CharpolyFailed Class Reference

```
#include <ffpack.h>
```

The documentation for this class was generated from the following file:

- [ffpack.h](#)

## 12.25 Checker\_Empty< Field > Struct Template Reference

```
#include <checker_empty.h>
```

### Public Member Functions

- `template<typename... Params>`  
`Checker_Empty (Params... parameters)`
- `template<typename... Params>`  
`bool check (Params... parameters)`

## 12.25.1 Constructor & Destructor Documentation

### 12.25.1.1 Checker\_Empty()

```
template<class Field >
template<typename... Params>
Checker_Empty (
    Params... parameters) [inline]
```

## 12.25.2 Member Function Documentation

### 12.25.2.1 check()

```
template<class Field >
template<typename... Params>
bool check (
    Params... parameters) [inline]
```

The documentation for this struct was generated from the following file:

- [checker\\_empty.h](#)

## 12.26 CheckerImplem\_charpoly< Field, Polynomial > Class Template Reference

### Public Member Functions

- [CheckerImplem\\_charpoly](#) (const [Field](#) &F\_, const size\_t n\_, typename [Field::ConstElement\\_ptr](#) A, size\_t lda\_)
- [CheckerImplem\\_charpoly](#) (typename [Field::RandIter](#) &G, const size\_t n\_, typename [Field::ConstElement\\_ptr](#) A, size\_t lda\_)
- [~CheckerImplem\\_charpoly](#) ()
- bool [check](#) (Polynomial &g)

## 12.26.1 Constructor & Destructor Documentation

### 12.26.1.1 CheckerImplem\_charpoly() [1/2]

```
template<class Field , class Polynomial >
CheckerImplem_charpoly (
    const Field & F_,
    const size_t n_,
    typename Field::ConstElement_ptr A,
    size_t lda_) [inline]
```

### 12.26.1.2 CheckerImplem\_charpoly() [2/2]

```
template<class Field , class Polynomial >
CheckerImplem_charpoly (
    typename Field::RandIter & G,
    const size_t n_,
    typename Field::ConstElement_ptr A,
    size_t lda_) [inline]
```

### 12.26.1.3 ~CheckerImplem\_charpoly()

```
template<class Field , class Polynomial >
~CheckerImplem_charpoly () [inline]
```

## 12.26.2 Member Function Documentation

### 12.26.2.1 check()

```
template<class Field , class Polynomial >
bool check (
    Polynomial & g) [inline]
```

The documentation for this class was generated from the following files:

- [checker\\_charpoly.inl](#)
- [checkers\\_ffpack.h](#)

## 12.27 CheckerImplem\_charpoly< Givaro::ZRing< Givaro::Integer >, Polynomial > Class Template Reference

### Public Types

- typedef Givaro::ZRing< Givaro::Integer > [Ring](#)

### Public Member Functions

- [CheckerImplem\\_charpoly](#) (const [Ring](#) &F\_, const size\_t n\_, typename Ring::ConstElement\_ptr A, size\_t lda\_)
- [CheckerImplem\\_charpoly](#) (typename Ring::RandIter &G, const size\_t n\_, typename Ring::ConstElement\_ptr A, size\_t lda\_)
- [~CheckerImplem\\_charpoly](#) ()
- bool [check](#) (Polynomial &g)

## 12.27.1 Member Typedef Documentation

### 12.27.1.1 Ring

```
template<class Polynomial >
Givaro::ZRing<Givaro::Integer> Ring
```

## 12.27.2 Constructor & Destructor Documentation

### 12.27.2.1 CheckerImplem\_charpoly() [1/2]

```
template<class Polynomial >
CheckerImplem\_charpoly (
    const Ring & F_,
    const size_t n_,
    typename Ring::ConstElement_ptr A,
    size_t lda_) [inline]
```

### 12.27.2.2 CheckerImplem\_charpoly() [2/2]

```
template<class Polynomial >
CheckerImplem\_charpoly (
    typename Ring::RandIter & G,
    const size_t n_,
    typename Ring::ConstElement_ptr A,
    size_t lda_) [inline]
```

### 12.27.2.3 ~CheckerImplem\_charpoly()

```
template<class Polynomial >
~CheckerImplem\_charpoly () [inline]
```

## 12.27.3 Member Function Documentation

### 12.27.3.1 check()

```
template<class Polynomial >
bool check (
    Polynomial & g) [inline]
```

The documentation for this class was generated from the following file:

- [checker\\_charpoly.inl](#)

## 12.28 CheckerImplem\_Det< Field > Class Template Reference

### Public Member Functions

- [CheckerImplem\\_Det](#) (const [Field](#) &F\_, size\_t n\_, typename [Field::ConstElement\\_ptr](#) A, size\_t lda)
- [CheckerImplem\\_Det](#) (typename [Field::RandIter](#) &G, size\_t n\_, typename [Field::ConstElement\\_ptr](#) A, size\_t lda)
- [~CheckerImplem\\_Det](#) ()
- bool [check](#) (const typename [Field::Element](#) &det, typename [Field::ConstElement\\_ptr](#) LU, size\_t lda, size\_t \*P, size\_t \*Q) const  
*check if the Det factorization is correct.*

## 12.28.1 Constructor & Destructor Documentation

### 12.28.1.1 CheckerImplem\_Det() [1/2]

```
template<class Field >
CheckerImplem_Det (
    const Field & F_,
    size_t n_,
    typename Field::ConstElement_ptr A,
    size_t lda) [inline]
```

### 12.28.1.2 CheckerImplem\_Det() [2/2]

```
template<class Field >
CheckerImplem_Det (
    typename Field::RandIter & G,
    size_t n_,
    typename Field::ConstElement_ptr A,
    size_t lda) [inline]
```

### 12.28.1.3 ~CheckerImplem\_Det()

```
template<class Field >
~CheckerImplem_Det () [inline]
```

## 12.28.2 Member Function Documentation

### 12.28.2.1 check()

```
template<class Field >
bool check (
    const typename Field::Element & det,
    typename Field::ConstElement_ptr LU,
    size_t lda,
    size_t * P,
    size_t * Q) const [inline]
```

check if the Det factorization is correct.

Needs matrix in LU form

## Parameters

|                   |             |
|-------------------|-------------|
| <i>LU,storage</i> | for L and U |
| <i>det</i>        |             |
| <i>P</i>          |             |
| <i>Q</i>          |             |

The documentation for this class was generated from the following files:

- [checker\\_det.ini](#)
- [checkers\\_ffpack.h](#)

## 12.29 CheckerImplem\_fgemm< Field > Class Template Reference

### Public Member Functions

- [CheckerImplem\\_fgemm](#) (const [Field](#) &F\_, const size\_t m\_, const size\_t n\_, const size\_t k\_, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc\_)
- [CheckerImplem\\_fgemm](#) (typename [Field::RandIter](#) &G, const size\_t m\_, const size\_t n\_, const size\_t k\_, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc\_)
- [~CheckerImplem\\_fgemm](#) ()
- bool [check](#) (const [FFLAS::FFLAS\\_TRANSPOSE](#) ta, const [FFLAS::FFLAS\\_TRANSPOSE](#) tb, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, typename [Field::ConstElement\\_ptr](#) C)

### 12.29.1 Constructor & Destructor Documentation

#### 12.29.1.1 CheckerImplem\_fgemm() [1/2]

```
template<class Field >
CheckerImplem_fgemm (
    const Field & F_,
    const size_t m_,
    const size_t n_,
    const size_t k_,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc_) [inline]
```

#### 12.29.1.2 CheckerImplem\_fgemm() [2/2]

```
template<class Field >
CheckerImplem_fgemm (
    typename Field::RandIter & G,
    const size_t m_,
    const size_t n_,
    const size_t k_,
    const typename Field::Element beta,
    typename Field::Element_ptr C,
    const size_t ldc_) [inline]
```

#### 12.29.1.3 ~CheckerImplem\_fgemm()

```
template<class Field >
~CheckerImplem_fgemm () [inline]
```

## 12.29.2 Member Function Documentation

### 12.29.2.1 check()

```
template<class Field >
bool check (
    const FFLAS::FFLAS_TRANSPOSE ta,
    const FFLAS::FFLAS_TRANSPOSE tb,
    const typename Field::Element alpha,
    typename Field::ConstElement_ptr A,
    const size_t lda,
    typename Field::ConstElement_ptr B,
    const size_t ldb,
    typename Field::ConstElement_ptr C) [inline]
```

The documentation for this class was generated from the following files:

- [checker\\_fgemv.inl](#)
- [checkers\\_fflas.h](#)

## 12.30 CheckerImplem\_ftrsm< Field > Class Template Reference

### Public Member Functions

- [CheckerImplem\\_ftrsm](#) (const [Field](#) &F\_, const size\_t m, const size\_t n, const typename [Field::Element](#) alpha, const typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb)
- [CheckerImplem\\_ftrsm](#) (typename [Field::RandIter](#) &G, const size\_t m, const size\_t n, const typename [Field::Element](#) alpha, const typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb)
- [~CheckerImplem\\_ftrsm](#) ()
- bool [check](#) (const [FFLAS::FFLAS\\_SIDE](#) side, const [FFLAS::FFLAS\\_UPLO](#) uplo, const [FFLAS::FFLAS\\_TRANSPOSE](#) trans, const [FFLAS::FFLAS\\_DIAG](#) diag, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, size\_t lda, const typename [Field::ConstElement\\_ptr](#) X, size\_t idx)

### 12.30.1 Constructor & Destructor Documentation

#### 12.30.1.1 CheckerImplem\_ftrsm() [1/2]

```
template<class Field >
CheckerImplem_ftrsm (
    const Field & F_,
    const size_t m,
    const size_t n,
    const typename Field::Element alpha,
    const typename Field::ConstElement_ptr B,
    const size_t ldb) [inline]
```

#### 12.30.1.2 CheckerImplem\_ftrsm() [2/2]

```
template<class Field >
CheckerImplem_ftrsm (
    typename Field::RandIter & G,
    const size_t m,
    const size_t n,
    const typename Field::Element alpha,
    const typename Field::ConstElement_ptr B,
    const size_t ldb) [inline]
```

#### 12.30.1.3 ~CheckerImplem\_ftrsm()

```
template<class Field >
~CheckerImplem_ftrsm () [inline]
```



## 12.30.2 Member Function Documentation

### 12.30.2.1 check()

```
template<class Field >
bool check (
    const FFLAS::FFLAS_SIDE side,
    const FFLAS::FFLAS_UPLO uplo,
    const FFLAS::FFLAS_TRANSPOSE trans,
    const FFLAS::FFLAS_DIAG diag,
    const size_t m,
    const size_t n,
    typename Field::Element_ptr A,
    size_t lda,
    const typename Field::ConstElement_ptr X,
    size_t ldx) [inline]
```

The documentation for this class was generated from the following files:

- [checker\\_ftsm.inl](#)
- [checkers\\_fflas.h](#)

## 12.31 CheckerImplem\_invert< Field > Class Template Reference

### Public Member Functions

- [CheckerImplem\\_invert](#) (const [Field](#) &F\_, const size\_t m\_, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda\_)
- [CheckerImplem\\_invert](#) (typename [Field::RandIter](#) &G, const size\_t m\_, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda\_)
- [~CheckerImplem\\_invert](#) ()
- bool [check](#) (typename [Field::ConstElement\\_ptr](#) A, int nullity)

## 12.31.1 Constructor & Destructor Documentation

### 12.31.1.1 CheckerImplem\_invert() [1/2]

```
template<class Field >
CheckerImplem_invert (
    const Field & F_,
    const size_t m_,
    typename Field::ConstElement_ptr A,
    const size_t lda_) [inline]
```

### 12.31.1.2 CheckerImplem\_invert() [2/2]

```
template<class Field >
CheckerImplem_invert (
    typename Field::RandIter & G,
    const size_t m_,
    typename Field::ConstElement_ptr A,
    const size_t lda_) [inline]
```

### 12.31.1.3 ~CheckerImplem\_invert()

```
template<class Field >
~CheckerImplem_invert () [inline]
```

## 12.31.2 Member Function Documentation

### 12.31.2.1 check()

```
template<class Field >
bool check (
    typename Field::ConstElement_ptr A,
    int nullity) [inline]
```

The documentation for this class was generated from the following files:

- [checker\\_invert.inl](#)
- [checkers\\_ffpack.h](#)

## 12.32 CheckerImplem\_PLUQ< Field > Class Template Reference

### Public Member Functions

- [CheckerImplem\\_PLUQ](#) (const [Field](#) &F\_, size\_t m\_, size\_t n\_, typename [Field::ConstElement\\_ptr](#) A, size\_t lda)
- [CheckerImplem\\_PLUQ](#) (typename [Field::RandIter](#) &G, size\_t m\_, size\_t n\_, typename [Field::ConstElement\\_ptr](#) A, size\_t lda)
- [~CheckerImplem\\_PLUQ](#) ()
- bool [check](#) (typename [Field::ConstElement\\_ptr](#) A, size\_t lda, const [FFLAS::FFLAS\\_DIAG](#) Diag, size\_t r, size\_t \*P, size\_t \*Q) const  
*check if the PLUQ factorization is correct.*

## 12.32.1 Constructor & Destructor Documentation

### 12.32.1.1 CheckerImplem\_PLUQ() [1/2]

```
template<class Field >
CheckerImplem_PLUQ (
    const Field & F_,
    size_t m_,
    size_t n_,
    typename Field::ConstElement_ptr A,
    size_t lda) [inline]
```

### 12.32.1.2 CheckerImplem\_PLUQ() [2/2]

```
template<class Field >
CheckerImplem_PLUQ (
    typename Field::RandIter & G,
    size_t m_,
    size_t n_,
    typename Field::ConstElement_ptr A,
    size_t lda) [inline]
```

### 12.32.1.3 ~CheckerImplem\_PLUQ()

```
template<class Field >
~CheckerImplem_PLUQ () [inline]
```

## 12.32.2 Member Function Documentation

### 12.32.2.1 check()

```
template<class Field >
bool check (
    typename Field::ConstElement_ptr A,
```

```

size_t lda,
const FFLAS::FFLAS_DIAG Diag,
size_t r,
size_t * P,
size_t * Q) const [inline]

```

check if the PLUQ factorization is correct.

Returns true if  $w - P(L(U(Q.v))) == 0$

#### Parameters

|          |  |
|----------|--|
| <i>A</i> |  |
| <i>r</i> |  |
| <i>P</i> |  |
| <i>Q</i> |  |

The documentation for this class was generated from the following files:

- [checker\\_pluq.inl](#)
- [checkers\\_ffpack.h](#)

## 12.33 Classic Struct Reference

The documentation for this struct was generated from the following file:

- [fflas\\_helpers.inl](#)

## 12.34 Column Struct Reference

The documentation for this struct was generated from the following file:

- [blockcuts.inl](#)

## 12.35 CompactElement< Element > Struct Template Reference

### Public Types

- typedef Element [type](#)

### 12.35.1 Member Typedef Documentation

#### 12.35.1.1 type

```

template<class Element >
Element type

```

The documentation for this struct was generated from the following file:

- [test-io.C](#)

## 12.36 CompactElement< double > Struct Reference

### Public Types

- typedef int32\_t [type](#)

### 12.36.1 Member Typedef Documentation

#### 12.36.1.1 type

`int32_t` [type](#)

The documentation for this struct was generated from the following file:

- [test-io.C](#)

## 12.37 CompactElement< float > Struct Reference

### Public Types

- `typedef int16_t` [type](#)

### 12.37.1 Member Typedef Documentation

#### 12.37.1.1 type

`int16_t` [type](#)

The documentation for this struct was generated from the following file:

- [test-io.C](#)

## 12.38 CompactElement< int16\_t > Struct Reference

### Public Types

- `typedef int8_t` [type](#)

### 12.38.1 Member Typedef Documentation

#### 12.38.1.1 type

`int8_t` [type](#)

The documentation for this struct was generated from the following file:

- [test-io.C](#)

## 12.39 CompactElement< int32\_t > Struct Reference

### Public Types

- `typedef int16_t` [type](#)

### 12.39.1 Member Typedef Documentation

#### 12.39.1.1 type

`int16_t` [type](#)

The documentation for this struct was generated from the following file:

- [test-io.C](#)

## 12.40 CompactElement< int64\_t > Struct Reference

### Public Types

- `typedef int32_t` [type](#)

## 12.40.1 Member Typedef Documentation

### 12.40.1.1 type

`int32_t type`

The documentation for this struct was generated from the following file:

- [test-io.C](#)

## 12.41 compatible\_data\_type< Field > Struct Template Reference

### Static Public Attributes

- static constexpr bool `value` = true

### 12.41.1 Field Documentation

#### 12.41.1.1 value

`template<typename Field >`

`bool value = true [static], [constexpr]`

The documentation for this struct was generated from the following file:

- [benchmark-fgemv.C](#)

## 12.42 compatible\_data\_type< Givaro::ZRing< double > > Struct Reference

### Static Public Attributes

- static constexpr bool `value` = false

### 12.42.1 Field Documentation

#### 12.42.1.1 value

`bool value = false [static], [constexpr]`

The documentation for this struct was generated from the following file:

- [benchmark-fgemv.C](#)

## 12.43 compatible\_data\_type< Givaro::ZRing< float > > Struct Reference

### Static Public Attributes

- static constexpr bool `value` = false

### 12.43.1 Field Documentation

#### 12.43.1.1 value

`bool value = false [static], [constexpr]`

The documentation for this struct was generated from the following file:

- [benchmark-fgemv.C](#)

## 12.44 `Compose< H1, H2 >` Struct Template Reference

### Public Member Functions

- `Compose ()`
- `Compose (const Compose &other)`
- `Compose (const Sequential &S)`
- `Compose (size_t th1, size_t th2)`
- `Compose (const H1 &o1, const H2 &o2)`
- `H1 first_component () const`
- `H2 second_component () const`

### Friends

- `std::ostream & operator<< (std::ostream &o, const Compose &c)`

### 12.44.1 Constructor & Destructor Documentation

#### 12.44.1.1 `Compose()` [1/5]

```
template<typename H1 = Sequential, typename H2 = Sequential>
Compose () [inline]
```

#### 12.44.1.2 `Compose()` [2/5]

```
template<typename H1 = Sequential, typename H2 = Sequential>
Compose (
    const Compose< H1, H2 > & other) [inline]
```

#### 12.44.1.3 `Compose()` [3/5]

```
template<typename H1 = Sequential, typename H2 = Sequential>
Compose (
    const Sequential & S) [inline]
```

#### 12.44.1.4 `Compose()` [4/5]

```
template<typename H1 = Sequential, typename H2 = Sequential>
Compose (
    size_t th1,
    size_t th2) [inline]
```

#### 12.44.1.5 `Compose()` [5/5]

```
template<typename H1 = Sequential, typename H2 = Sequential>
Compose (
    const H1 & o1,
    const H2 & o2) [inline]
```

### 12.44.2 Member Function Documentation

#### 12.44.2.1 `first_component()`

```
template<typename H1 = Sequential, typename H2 = Sequential>
H1 first_component () const [inline]
```

#### 12.44.2.2 `second_component()`

```
template<typename H1 = Sequential, typename H2 = Sequential>
H2 second_component () const [inline]
```

### 12.44.3 Friends And Related Symbol Documentation

#### 12.44.3.1 operator<<

```
template<typename H1 = Sequential, typename H2 = Sequential>
std::ostream & operator<< (
    std::ostream & o,
    const Compose< H1, H2 > & c) [friend]
```

The documentation for this struct was generated from the following file:

- [blockcuts.inl](#)

## 12.45 Simd128\_impl< true, true, false, 2 >::Converter Union Reference

### Data Fields

- [vect\\_t v](#)
- [scalar\\_t t\[vect\\_size\]](#)

### 12.45.1 Field Documentation

#### 12.45.1.1 v

[vect\\_t v](#)

#### 12.45.1.2 t

[scalar\\_t t\[vect\\_size\]](#)

The documentation for this union was generated from the following file:

- [simd128\\_int16.inl](#)

## 12.46 Simd128\_impl< true, true, false, 4 >::Converter Union Reference

### Data Fields

- [vect\\_t v](#)
- [scalar\\_t t\[vect\\_size\]](#)

### 12.46.1 Field Documentation

#### 12.46.1.1 v

[vect\\_t v](#)

#### 12.46.1.2 t

[scalar\\_t t\[vect\\_size\]](#)

The documentation for this union was generated from the following file:

- [simd128\\_int32.inl](#)

## 12.47 Simd128\_impl< true, true, false, 8 >::Converter Union Reference

### Data Fields

- [vect\\_t v](#)
- [scalar\\_t t\[vect\\_size\]](#)

### 12.47.1 Field Documentation

#### 12.47.1.1 `v`

`vect_t v`

#### 12.47.1.2 `t`

`scalar_t t[vect_size]`

The documentation for this union was generated from the following file:

- [simd128\\_int64.inl](#)

## 12.48 `Simd128_impl< true, true, true, 2 >::Converter` Union Reference

### Data Fields

- `vect_t v`
- `scalar_t t[vect_size]`

### 12.48.1 Field Documentation

#### 12.48.1.1 `v`

`vect_t v`

#### 12.48.1.2 `t`

`scalar_t t[vect_size]`

The documentation for this union was generated from the following file:

- [simd128\\_int16.inl](#)

## 12.49 `Simd128_impl< true, true, true, 4 >::Converter` Union Reference

### Data Fields

- `vect_t v`
- `scalar_t t[vect_size]`

### 12.49.1 Field Documentation

#### 12.49.1.1 `v`

`vect_t v`

#### 12.49.1.2 `t`

`scalar_t t[vect_size]`

The documentation for this union was generated from the following file:

- [simd128\\_int32.inl](#)

## 12.50 `Simd128_impl< true, true, true, 8 >::Converter` Union Reference

### Data Fields

- `vect_t v`
- `scalar_t t[vect_size]`



### 12.50.1 Field Documentation

#### 12.50.1.1 v

[vect\\_t](#) v

#### 12.50.1.2 t

[scalar\\_t](#) t[[vect\\_size](#)]

The documentation for this union was generated from the following file:

- [simd128\\_int64.inl](#)

## 12.51 Simd256\_impl< true, false, true, 8 >::Converter Union Reference

### Data Fields

- [vect\\_t](#) v
- [scalar\\_t](#) t[[vect\\_size](#)]

### 12.51.1 Field Documentation

#### 12.51.1.1 v

[vect\\_t](#) v

#### 12.51.1.2 t

[scalar\\_t](#) t[[vect\\_size](#)]

The documentation for this union was generated from the following file:

- [simd256\\_double.inl](#)

## 12.52 Simd256\_impl< true, true, false, 2 >::Converter Union Reference

### Data Fields

- [vect\\_t](#) v
- [scalar\\_t](#) t[[vect\\_size](#)]

### 12.52.1 Field Documentation

#### 12.52.1.1 v

[vect\\_t](#) v

#### 12.52.1.2 t

[scalar\\_t](#) t[[vect\\_size](#)]

The documentation for this union was generated from the following file:

- [simd256\\_int16.inl](#)

## 12.53 Simd256\_impl< true, true, false, 4 >::Converter Union Reference

### Data Fields

- [vect\\_t](#) v
- [scalar\\_t](#) t[[vect\\_size](#)]

### 12.53.1 Field Documentation

#### 12.53.1.1 `v`

`vect_t v`

#### 12.53.1.2 `t`

`scalar_t t`

The documentation for this union was generated from the following files:

- [simd256\\_int32.inl](#)
- [simd512\\_int32.inl](#)

## 12.54 `Simd256_impl< true, true, false, 8 >::Converter Union Reference`

### Data Fields

- `vect_t v`
- `scalar_t t [vect_size]`

### 12.54.1 Field Documentation

#### 12.54.1.1 `v`

`vect_t v`

#### 12.54.1.2 `t`

`scalar_t t [vect_size]`

The documentation for this union was generated from the following file:

- [simd256\\_int64.inl](#)

## 12.55 `Simd256_impl< true, true, true, 2 >::Converter Union Reference`

### Data Fields

- `vect_t v`
- `scalar_t t [vect_size]`

### 12.55.1 Field Documentation

#### 12.55.1.1 `v`

`vect_t v`

#### 12.55.1.2 `t`

`scalar_t t [vect_size]`

The documentation for this union was generated from the following file:

- [simd256\\_int16.inl](#)

## 12.56 `Simd256_impl< true, true, true, 4 >::Converter Union Reference`

### Data Fields

- `vect_t v`
- `scalar_t t [vect_size]`

## 12.56.1 Field Documentation

### 12.56.1.1 v

`vect_t v`

### 12.56.1.2 t

`scalar_t t`

The documentation for this union was generated from the following files:

- [simd256\\_int32.inl](#)
- [simd512\\_int32.inl](#)

## 12.57 Simd256\_impl< true, true, true, 8 >::Converter Union Reference

### Data Fields

- [vect\\_t v](#)
- [scalar\\_t t \[vect\\_size\]](#)

## 12.57.1 Field Documentation

### 12.57.1.1 v

`vect_t v`

### 12.57.1.2 t

`scalar_t t [vect_size]`

The documentation for this union was generated from the following file:

- [simd256\\_int64.inl](#)

## 12.58 Simd512\_impl< true, true, false, 8 >::Converter Union Reference

### Data Fields

- [vect\\_t v](#)
- [scalar\\_t t \[vect\\_size\]](#)

## 12.58.1 Field Documentation

### 12.58.1.1 v

`vect_t v`

### 12.58.1.2 t

`scalar_t t [vect_size]`

The documentation for this union was generated from the following file:

- [simd512\\_int64.inl](#)

## 12.59 Simd512\_impl< true, true, true, 8 >::Converter Union Reference

### Data Fields

- [vect\\_t v](#)
- [scalar\\_t t \[vect\\_size\]](#)

## 12.59.1 Field Documentation

### 12.59.1.1 `v`

`vect_t` `v`

### 12.59.1.2 `t`

`scalar_t` `t[vect_size]`

The documentation for this union was generated from the following file:

- [simd512\\_int64.inl](#)

## 12.60 `ConvertTo< T >` Struct Template Reference

Force conversion to appropriate element type of ElementCategory T.

```
#include <field-traits.h>
```

### 12.60.1 Detailed Description

```
template<class T>
```

```
struct FFLAS::ModeCategories::ConvertTo< T >
```

Force conversion to appropriate element type of ElementCategory T.

e.g.

- `ConvertTo<ElementCategories::MachineFloatTag>` tries conversion of `Modular<int>` to `Modular<double>`
- `ConvertTo<ElementCategories::FixedPreIntTag>` tries conversion of `Modular<Integer>` to `Modular<RecInt<K>>`
- `ConvertTo<ElementCategories::ArbitraryPreIntTag>` tries conversion of `Modular<Integer>` to `RNSInteger`

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.61 `Coo< ValT, IdxT >` Struct Template Reference

### Public Types

- using `Self` = `Coo<ValT, IdxT>`

### Public Member Functions

- `Coo` (`ValT` `v`, `IdxT` `r`, `IdxT` `c`)
- `Coo` ()=default
- `Coo` (const `Self` &)=default
- `Coo` (`Self` &&)=default
- `Self` & `operator=` (const `Self` &)=default
- `Self` & `operator=` (`Self` &&)=default

### Data Fields

- `ValT` `val` = 0
- `IdxT` `row` = 0
- `IdxT` `col` = 0

## 12.61.1 Member Typedef Documentation

### 12.61.1.1 Self

```
template<class ValT , class IdxT >
using Self = Coo<ValT, IdxT>
```

## 12.61.2 Constructor & Destructor Documentation

### 12.61.2.1 Coo() [1/4]

```
template<class ValT , class IdxT >
Coo (
    ValT v,
    IdxT r,
    IdxT c) [inline]
```

### 12.61.2.2 Coo() [2/4]

```
template<class ValT , class IdxT >
Coo () [default]
```

### 12.61.2.3 Coo() [3/4]

```
template<class ValT , class IdxT >
Coo (
    const Self & ) [default]
```

### 12.61.2.4 Coo() [4/4]

```
template<class ValT , class IdxT >
Coo (
    Self && ) [default]
```

## 12.61.3 Member Function Documentation

### 12.61.3.1 operator=() [1/2]

```
template<class ValT , class IdxT >
Self & operator= (
    const Self & ) [default]
```

### 12.61.3.2 operator=() [2/2]

```
template<class ValT , class IdxT >
Self & operator= (
    Self && ) [default]
```

## 12.61.4 Field Documentation

### 12.61.4.1 val

```
template<class ValT , class IdxT >
ValT val = 0
```

### 12.61.4.2 row

```
template<class ValT , class IdxT >
IdxT row = 0
```

### 12.61.4.3 col

```
template<class ValT , class IdxT >
IdxT col = 0
```

The documentation for this struct was generated from the following file:

- [csr\\_hyb\\_utils.inl](#)

## 12.62 **Coo**< **Field** > Struct Template Reference

```
#include <read_sparse.h>
```

### Public Member Functions

- **Coo** ()=default
- **Coo** (typename **Field**::**Element** v, **index\_t** r, **index\_t** c)
- **Coo** (const **Self** &)=default
- **Coo** (**Self** &&)=default
- **Self** & **operator=** (const **Self** &)=default
- **Self** & **operator=** (**Self** &&)=default

### Data Fields

- **Field**::**Element** val = 0
- **index\_t** col = 0
- **index\_t** row = 0
- bool **deleted** = false

## 12.62.1 Constructor & Destructor Documentation

### 12.62.1.1 **Coo**() [1/4]

```
template<class Field >
Coo () [default]
```

### 12.62.1.2 **Coo**() [2/4]

```
template<class Field >
Coo (
    typename Field::Element v,
    index_t r,
    index_t c) [inline]
```

### 12.62.1.3 **Coo**() [3/4]

```
template<class Field >
Coo (
    const Self & ) [default]
```

### 12.62.1.4 **Coo**() [4/4]

```
template<class Field >
Coo (
    Self && ) [default]
```

## 12.62.2 Member Function Documentation

### 12.62.2.1 `operator=()` [1/2]

```
template<class Field >
Self & operator= (
    const Self & ) [default]
```

### 12.62.2.2 `operator=()` [2/2]

```
template<class Field >
Self & operator= (
    Self && ) [default]
```

## 12.62.3 Field Documentation

### 12.62.3.1 `val`

```
template<class Field >
Field::Element val = 0
```

### 12.62.3.2 `col`

```
template<class Field >
index_t col = 0
```

### 12.62.3.3 `row`

```
template<class Field >
index_t row = 0
```

### 12.62.3.4 `deleted`

```
template<class Field >
bool deleted = false
```

The documentation for this struct was generated from the following file:

- [read\\_sparse.h](#)

## 12.63 `Coo< ValT, IdxT >` Struct Template Reference

### Public Types

- using `Self` = `Coo<ValT, IdxT>`

### Public Member Functions

- `Coo` (`ValT` v, `IdxT` r, `IdxT` c)
- `Coo` ()=default
- `Coo` (const `Self` &)=default
- `Coo` (`Self` &&)=default
- `Self` & `operator=` (const `Self` &)=default
- `Self` & `operator=` (`Self` &&)=default

### Data Fields

- `ValT` `val` = 0
- `IdxT` `row` = 0
- `IdxT` `col` = 0

## 12.63.1 Member Typedef Documentation

### 12.63.1.1 Self

```
template<class ValT , class IdxT >
using Self = Coo<ValT, IdxT>
```

## 12.63.2 Constructor & Destructor Documentation

### 12.63.2.1 Coo() [1/4]

```
template<class ValT , class IdxT >
Coo (
    ValT v,
    IdxT r,
    IdxT c) [inline]
```

### 12.63.2.2 Coo() [2/4]

```
template<class ValT , class IdxT >
Coo () [default]
```

### 12.63.2.3 Coo() [3/4]

```
template<class ValT , class IdxT >
Coo (
    const Self & ) [default]
```

### 12.63.2.4 Coo() [4/4]

```
template<class ValT , class IdxT >
Coo (
    Self && ) [default]
```

## 12.63.3 Member Function Documentation

### 12.63.3.1 operator=() [1/2]

```
template<class ValT , class IdxT >
Self & operator= (
    const Self & ) [default]
```

### 12.63.3.2 operator=() [2/2]

```
template<class ValT , class IdxT >
Self & operator= (
    Self && ) [default]
```

## 12.63.4 Field Documentation

### 12.63.4.1 val

```
template<class ValT , class IdxT >
ValT val = 0
```

### 12.63.4.2 row

```
template<class ValT , class IdxT >
IdxT row = 0
```



**12.63.4.3 col**

```
template<class ValT , class IdxT >
IdxT col = 0
```

The documentation for this struct was generated from the following file:

- [sell\\_utils.inl](#)

**12.64 CooMat< Field > Struct Template Reference**

```
#include <fflas_sparse.h>
```

**Data Fields**

- [FFLAS::Sparse< Field, SparseMatrix\\_t::COO, int16\\_t > \\* \\_coo16](#) = nullptr
- [FFLAS::Sparse< Field, SparseMatrix\\_t::COO, int32\\_t > \\* \\_coo32](#) = nullptr
- [FFLAS::Sparse< Field, SparseMatrix\\_t::COO, int64\\_t > \\* \\_coo64](#) = nullptr
- [FFLAS::Sparse< Field, SparseMatrix\\_t::COO\\_ZO, int16\\_t > \\* \\_coo16\\_zo](#) = nullptr
- [FFLAS::Sparse< Field, SparseMatrix\\_t::COO\\_ZO, int32\\_t > \\* \\_coo32\\_zo](#) = nullptr
- [FFLAS::Sparse< Field, SparseMatrix\\_t::COO\\_ZO, int64\\_t > \\* \\_coo64\\_zo](#) = nullptr

**12.64.1 Field Documentation****12.64.1.1 \_coo16**

```
template<class Field >
FFLAS::Sparse<Field, SparseMatrix_t::COO, int16_t>* _coo16 = nullptr
```

**12.64.1.2 \_coo32**

```
template<class Field >
FFLAS::Sparse<Field, SparseMatrix_t::COO, int32_t>* _coo32 = nullptr
```

**12.64.1.3 \_coo64**

```
template<class Field >
FFLAS::Sparse<Field, SparseMatrix_t::COO, int64_t>* _coo64 = nullptr
```

**12.64.1.4 \_coo16\_zo**

```
template<class Field >
FFLAS::Sparse<Field, SparseMatrix_t::COO_ZO, int16_t>* _coo16_zo = nullptr
```

**12.64.1.5 \_coo32\_zo**

```
template<class Field >
FFLAS::Sparse<Field, SparseMatrix_t::COO_ZO, int32_t>* _coo32_zo = nullptr
```

**12.64.1.6 \_coo64\_zo**

```
template<class Field >
FFLAS::Sparse<Field, SparseMatrix_t::COO_ZO, int64_t>* _coo64_zo = nullptr
```

The documentation for this struct was generated from the following file:

- [fflas\\_sparse.h](#)

## 12.65 `count_nonconst_lvalue_reference< T >` Struct Template Reference

The documentation for this struct was generated from the following file:

- [test-simd.C](#)

## 12.66 `count_nonconst_lvalue_reference< const T &, O... >` Struct Template Reference

### Static Public Attributes

- static constexpr `size_t` `n` = `count_nonconst_lvalue_reference<O...>::n`

### 12.66.1 Field Documentation

#### 12.66.1.1 `n`

```
template<typename T , typename... O>
size_t n = count_nonconst_lvalue_reference<O...>::n [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [test-simd.C](#)

## 12.67 `count_nonconst_lvalue_reference< T &, O... >` Struct Template Reference

### Static Public Attributes

- static constexpr `size_t` `n`

### 12.67.1 Field Documentation

#### 12.67.1.1 `n`

```
template<typename T , typename... O>
size_t n [static], [constexpr]
Initial value:
= std::integral_constant<size_t, 1>::value
  + count_nonconst_lvalue_reference<O...>::n
```

The documentation for this struct was generated from the following file:

- [test-simd.C](#)

## 12.68 `count_nonconst_lvalue_reference< T, O... >` Struct Template Reference

### Static Public Attributes

- static constexpr `size_t` `n` = `count_nonconst_lvalue_reference<O...>::n`

### 12.68.1 Field Documentation

#### 12.68.1.1 `n`

```
template<typename T , typename... O>
size_t n = count_nonconst_lvalue_reference<O...>::n [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [test-simd.C](#)

## 12.69 count\_nonconst\_lvalue\_reference<> Struct Reference

### Static Public Attributes

- static constexpr size\_t [n](#) = std::integral\_constant<size\_t, 0>::value

### 12.69.1 Field Documentation

#### 12.69.1.1 [n](#)

size\_t [n](#) = std::integral\_constant<size\_t, 0>::value [static], [constexpr]

The documentation for this struct was generated from the following file:

- [test-simd.C](#)

## 12.70 CsrMat< Field > Struct Template Reference

```
#include <fflas_sparse.h>
```

### Data Fields

- [FFLAS::Sparse< Field, SparseMatrix\\_t::CSR, int16\\_t > \\* \\_csr16](#) = nullptr
- [FFLAS::Sparse< Field, SparseMatrix\\_t::CSR, int32\\_t > \\* \\_csr32](#) = nullptr
- [FFLAS::Sparse< Field, SparseMatrix\\_t::CSR, int64\\_t > \\* \\_csr64](#) = nullptr
- [FFLAS::Sparse< Field, SparseMatrix\\_t::CSR\\_ZO, int16\\_t > \\* \\_csr16\\_zo](#) = nullptr
- [FFLAS::Sparse< Field, SparseMatrix\\_t::CSR\\_ZO, int32\\_t > \\* \\_csr32\\_zo](#) = nullptr
- [FFLAS::Sparse< Field, SparseMatrix\\_t::CSR\\_ZO, int64\\_t > \\* \\_csr64\\_zo](#) = nullptr

### 12.70.1 Field Documentation

#### 12.70.1.1 [\\_csr16](#)

```
template<class Field >
FFLAS::Sparse<Field, SparseMatrix_t::CSR, int16_t>* _csr16 = nullptr
```

#### 12.70.1.2 [\\_csr32](#)

```
template<class Field >
FFLAS::Sparse<Field, SparseMatrix_t::CSR, int32_t>* _csr32 = nullptr
```

#### 12.70.1.3 [\\_csr64](#)

```
template<class Field >
FFLAS::Sparse<Field, SparseMatrix_t::CSR, int64_t>* _csr64 = nullptr
```

#### 12.70.1.4 [\\_csr16\\_zo](#)

```
template<class Field >
FFLAS::Sparse<Field, SparseMatrix_t::CSR_ZO, int16_t>* _csr16_zo = nullptr
```

#### 12.70.1.5 [\\_csr32\\_zo](#)

```
template<class Field >
FFLAS::Sparse<Field, SparseMatrix_t::CSR_ZO, int32_t>* _csr32_zo = nullptr
```

#### 12.70.1.6 [\\_csr64\\_zo](#)

```
template<class Field >
FFLAS::Sparse<Field, SparseMatrix_t::CSR_ZO, int64_t>* _csr64_zo = nullptr
```

The documentation for this struct was generated from the following file:

- [fflas\\_sparse.h](#)

## 12.71 DefaultBoundedTag Struct Reference

Use standard field operations, but keeps track of bounds on input and output.

```
#include <field-traits.h>
```

### 12.71.1 Detailed Description

Use standard field operations, but keeps track of bounds on input and output.

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.72 DefaultTag Struct Reference

No specific mode of action: use standard field operations.

```
#include <field-traits.h>
```

### 12.72.1 Detailed Description

No specific mode of action: use standard field operations.

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.73 DelayedTag Struct Reference

Performs field operations with delayed mod reductions. Ensures result is reduced.

```
#include <field-traits.h>
```

### 12.73.1 Detailed Description

Performs field operations with delayed mod reductions. Ensures result is reduced.

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.74 DivideAndConquer Struct Reference

The documentation for this struct was generated from the following file:

- [fflas\\_helpers.inl](#)

## 12.75 ElementTraits< Element > Struct Template Reference

[ElementTraits](#).

```
#include <field-traits.h>
```

### Public Types

- typedef [ElementCategories::GenericTag](#) value

### 12.75.1 Detailed Description

```
template<class Element>
```

```
struct FFLAS::ElementTraits< Element >
```

[ElementTraits](#).

## 12.75.2 Member Typedef Documentation

### 12.75.2.1 value

```
template<class Element >
```

```
ElementCategories::GenericTag value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.76 ElementTraits< double > Struct Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ElementCategories::MachineFloatTag](#) value

## 12.76.1 Member Typedef Documentation

### 12.76.1.1 value

```
ElementCategories::MachineFloatTag value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.77 ElementTraits< FFPACK::rns\_double\_elt > Struct Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ElementCategories::RNSElementTag](#) value

## 12.77.1 Member Typedef Documentation

### 12.77.1.1 value

```
ElementCategories::RNSElementTag value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.78 ElementTraits< float > Struct Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ElementCategories::MachineFloatTag](#) value

## 12.78.1 Member Typedef Documentation

### 12.78.1.1 value

```
ElementCategories::MachineFloatTag value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.79 ElementTraits< Givaro::Integer > Struct Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ElementCategories::ArbitraryPrecIntTag](#) value

### 12.79.1 Member Typedef Documentation

#### 12.79.1.1 value

[ElementCategories::ArbitraryPrecIntTag](#) value

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.80 ElementTraits< int16\_t > Struct Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ElementCategories::MachineIntTag](#) value

### 12.80.1 Member Typedef Documentation

#### 12.80.1.1 value

[ElementCategories::MachineIntTag](#) value

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.81 ElementTraits< int32\_t > Struct Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ElementCategories::MachineIntTag](#) value

### 12.81.1 Member Typedef Documentation

#### 12.81.1.1 value

[ElementCategories::MachineIntTag](#) value

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.82 ElementTraits< int64\_t > Struct Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ElementCategories::MachineIntTag](#) value

## 12.82.1 Member Typedef Documentation

### 12.82.1.1 value

[ElementCategories::MachineIntTag](#) value

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.83 ElementTraits< int8\_t > Struct Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ElementCategories::MachineIntTag](#) value

## 12.83.1 Member Typedef Documentation

### 12.83.1.1 value

[ElementCategories::MachineIntTag](#) value

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.84 ElementTraits< RecInt::rint< K > > Struct Template Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ElementCategories::FixedPrecIntTag](#) value

## 12.84.1 Member Typedef Documentation

### 12.84.1.1 value

```
template<size_t K>
```

[ElementCategories::FixedPrecIntTag](#) value

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.85 ElementTraits< RecInt::rmint< K, MG > > Struct Template Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ElementCategories::FixedPrecIntTag](#) value

## 12.85.1 Member Typedef Documentation

### 12.85.1.1 value

```
template<size_t K, int MG>
```

[ElementCategories::FixedPrecIntTag](#) value

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.86 ElementTraits< Reclnt::ruint< K > > Struct Template Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ElementCategories::FixedPrecIntTag](#) value

### 12.86.1 Member Typedef Documentation

#### 12.86.1.1 value

```
template<size_t K>
```

```
ElementCategories::FixedPrecIntTag value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.87 ElementTraits< uint16\_t > Struct Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ElementCategories::MachineIntTag](#) value

### 12.87.1 Member Typedef Documentation

#### 12.87.1.1 value

```
ElementCategories::MachineIntTag value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.88 ElementTraits< uint32\_t > Struct Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ElementCategories::MachineIntTag](#) value

### 12.88.1 Member Typedef Documentation

#### 12.88.1.1 value

```
ElementCategories::MachineIntTag value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.89 ElementTraits< uint64\_t > Struct Reference

```
#include <field-traits.h>
```



**Public Types**

- typedef [ElementCategories::MachineIntTag](#) value

**12.89.1 Member Typedef Documentation****12.89.1.1 value**

[ElementCategories::MachineIntTag](#) value

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

**12.90 ElementTraits< uint8\_t > Struct Reference**

```
#include <field-traits.h>
```

**Public Types**

- typedef [ElementCategories::MachineIntTag](#) value

**12.90.1 Member Typedef Documentation****12.90.1.1 value**

[ElementCategories::MachineIntTag](#) value

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

**12.91 EILMat< Field > Struct Template Reference**

```
#include <fflas_sparse.h>
```

**Data Fields**

- [FFLAS::Sparse< Field, SparseMatrix\\_t::ELL, int16\\_t > \\* \\_ell16](#) = nullptr
- [FFLAS::Sparse< Field, SparseMatrix\\_t::ELL, int32\\_t > \\* \\_ell32](#) = nullptr
- [FFLAS::Sparse< Field, SparseMatrix\\_t::ELL, int64\\_t > \\* \\_ell64](#) = nullptr
- [FFLAS::Sparse< Field, SparseMatrix\\_t::ELL\\_ZO, int16\\_t > \\* \\_ell16\\_zo](#) = nullptr
- [FFLAS::Sparse< Field, SparseMatrix\\_t::ELL\\_ZO, int32\\_t > \\* \\_ell32\\_zo](#) = nullptr
- [FFLAS::Sparse< Field, SparseMatrix\\_t::ELL\\_ZO, int64\\_t > \\* \\_ell64\\_zo](#) = nullptr

**12.91.1 Field Documentation****12.91.1.1 \_ell16**

```
template<class Field >
```

```
FFLAS::Sparse<Field, SparseMatrix_t::ELL, int16_t>* _ell16 = nullptr
```

**12.91.1.2 \_ell32**

```
template<class Field >
```

```
FFLAS::Sparse<Field, SparseMatrix_t::ELL, int32_t>* _ell32 = nullptr
```

**12.91.1.3 \_ell64**

```
template<class Field >
```

```
FFLAS::Sparse<Field, SparseMatrix_t::ELL, int64_t>* _ell64 = nullptr
```

#### 12.91.1.4 `_ell16_zo`

```
template<class Field >
FFLAS::Sparse<Field, SparseMatrix_t::ELL_ZO, int16_t>* _ell16_zo = nullptr
```

#### 12.91.1.5 `_ell32_zo`

```
template<class Field >
FFLAS::Sparse<Field, SparseMatrix_t::ELL_ZO, int32_t>* _ell32_zo = nullptr
```

#### 12.91.1.6 `_ell64_zo`

```
template<class Field >
FFLAS::Sparse<Field, SparseMatrix_t::ELL_ZO, int64_t>* _ell64_zo = nullptr
```

The documentation for this struct was generated from the following file:

- [fflas\\_sparse.h](#)

## 12.92 Failure Class Reference

A precondition failed.

```
#include <debug.h>
```

### Public Member Functions

- [Failure](#) ()
- void [operator](#)() (const char \*function, int line, const char \*check)
- void [operator](#)() (const char \*function, const char \*file, int line, const char \*check)
- void [setErrorStream](#) (std::ostream &stream)
- std::ostream & [print](#) (std::ostream &o) const

### Protected Attributes

- std::ostream \* [\\_errorStream](#)

### 12.92.1 Detailed Description

A precondition failed.

The `throw` mechanism is usually used here as in

```
if (!check)
failure()(__func__, __LINE__, "this check just failed");
```

The parameters of the constructor help debugging.

### 12.92.2 Constructor & Destructor Documentation

#### 12.92.2.1 `Failure()`

```
Failure () [inline]
```

### 12.92.3 Member Function Documentation

#### 12.92.3.1 `operator>()` [1/2]

```
void operator() (
    const char * function,
    int line,
    const char * check) [inline]
```

A precondition failed.

## Parameters

|                 |                                                                   |
|-----------------|-------------------------------------------------------------------|
| <i>function</i> | usually <code>__func__</code> , the function that threw the error |
| <i>line</i>     | usually <code>__LINE__</code> , the line where it happened        |
| <i>check</i>    | a string telling what failed.                                     |

**12.92.3.2 operator>() [2/2]**

```
void operator() (
    const char * function,
    const char * file,
    int line,
    const char * check) [inline]
```

A precondition failed. The parameter help debugging. This is not much different from the previous except we can digg faster in the file where the exception was triggered.

## Parameters

|                 |                                                                   |
|-----------------|-------------------------------------------------------------------|
| <i>function</i> | usually <code>__func__</code> , the function that threw the error |
| <i>file</i>     | usually <code>__FILE__</code> , the file where this function is   |
| <i>line</i>     | usually <code>__LINE__</code> , the line where it happened        |
| <i>check</i>    | a string telling what failed.                                     |

**12.92.3.3 setErrorMessage()**

```
void setErrorMessage (
    std::ostream & stream)
```

**12.92.3.4 print()**

```
std::ostream & print (
    std::ostream & o) const [inline]
```

overload the virtual print of LinboxError.

## Parameters

|          |               |
|----------|---------------|
| <i>o</i> | output stream |
|----------|---------------|

**12.92.4 Field Documentation****12.92.4.1 \_errorMessage**

```
std::ostream* _errorMessage [protected]
```

The documentation for this class was generated from the following file:

- [debug.h](#)

**12.93 FailureCharpolyCheck Class Reference**

```
#include <checkers_ffpack.h>
```

The documentation for this class was generated from the following file:

- [checkers\\_ffpack.h](#)

## 12.94 FailureDetCheck Class Reference

```
#include <checkers_ffpack.h>
```

The documentation for this class was generated from the following file:

- [checkers\\_ffpack.h](#)

## 12.95 FailureFgemmCheck Class Reference

```
#include <checkers_fflas.h>
```

The documentation for this class was generated from the following file:

- [checkers\\_fflas.h](#)

## 12.96 FailureInvertCheck Class Reference

```
#include <checkers_ffpack.h>
```

The documentation for this class was generated from the following file:

- [checkers\\_ffpack.h](#)

## 12.97 FailurePLUQCheck Class Reference

```
#include <checkers_ffpack.h>
```

The documentation for this class was generated from the following file:

- [checkers\\_ffpack.h](#)

## 12.98 FailureTrsmCheck Class Reference

```
#include <checkers_fflas.h>
```

The documentation for this class was generated from the following file:

- [checkers\\_fflas.h](#)

## 12.99 FieldSimd<\_Field> Class Template Reference

### Public Types

- using [Field](#) = [\\_Field](#)
- using [Element](#) = typename [Field::Element](#)
- using [simd](#) = [Simd](#)<typename [\\_Field::Element](#)>
- using [vect\\_t](#) = typename [simd::vect\\_t](#)
- using [scalar\\_t](#) = typename [simd::scalar\\_t](#)

### Public Member Functions

- [FieldSimd](#) (const [Field](#) &f)
- [FieldSimd](#) (const [Self](#) &)=default
- [FieldSimd](#) ([Self](#) &&)=default
- [Self](#) & operator= (const [Self](#) &)=default
- [Self](#) & operator= ([Self](#) &&)=default
- [INLINE vect\\_t](#) init ([vect\\_t](#) &x, const [vect\\_t](#) a) const
- [INLINE vect\\_t](#) init (const [vect\\_t](#) a) const
- [INLINE vect\\_t](#) add ([vect\\_t](#) &c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- [INLINE vect\\_t](#) add (const [vect\\_t](#) a, const [vect\\_t](#) b)

- `INLINE vect_t addin (vect_t &a, const vect_t b) const`
- `INLINE vect_t add_r (vect_t &c, const vect_t a, const vect_t b) const`
- `INLINE vect_t add_r (const vect_t a, const vect_t b) const`
- `INLINE vect_t addin_r (vect_t &a, const vect_t b) const`
- `INLINE vect_t sub (vect_t &c, const vect_t a, const vect_t b)`
- `INLINE vect_t sub (const vect_t a, const vect_t b)`
- `INLINE vect_t subin (vect_t &a, const vect_t b) const`
- `INLINE vect_t sub_r (vect_t &c, const vect_t a, const vect_t b) const`
- `INLINE vect_t sub_r (const vect_t a, const vect_t b) const`
- `INLINE vect_t subin_r (vect_t &a, const vect_t b) const`
- `INLINE vect_t zero (vect_t &x) const`
- `INLINE vect_t zero () const`
- `INLINE vect_t mod (vect_t &c) const`
- `INLINE vect_t mul (vect_t &c, const vect_t a, const vect_t b) const`
- `INLINE vect_t mul (const vect_t a, const vect_t b) const`
- `INLINE vect_t mulin (vect_t &a, const vect_t b) const`
- `INLINE vect_t mul_r (vect_t &c, const vect_t a, const vect_t b) const`
- `INLINE vect_t mul_r (const vect_t a, const vect_t b) const`
- `INLINE vect_t axpy (vect_t &r, const vect_t a, const vect_t b, const vect_t c) const`
- `INLINE vect_t axpy (const vect_t c, const vect_t a, const vect_t b) const`
- `INLINE vect_t axpyin (vect_t &c, const vect_t a, const vect_t b) const`
- `INLINE vect_t axpy_r (vect_t &r, const vect_t a, const vect_t b, const vect_t c) const`
- `INLINE vect_t axpy_r (const vect_t c, const vect_t a, const vect_t b) const`
- `INLINE vect_t axpyin_r (vect_t &c, const vect_t a, const vect_t b) const`
- `INLINE vect_t maxpy (vect_t &r, const vect_t a, const vect_t b, const vect_t c) const`
- `INLINE vect_t maxpy (const vect_t c, const vect_t a, const vect_t b) const`
- `INLINE vect_t maxpyin (vect_t &c, const vect_t a, const vect_t b) const`

### Static Public Attributes

- static const constexpr size\_t `vect_size` = `simd::vect_size`
- static const constexpr size\_t `alignment` = `simd::alignment`

## 12.99.1 Member Typedef Documentation

### 12.99.1.1 Field

```
template<class _Field >
using Field = _Field
```

### 12.99.1.2 Element

```
template<class _Field >
using Element = typename Field::Element
```

### 12.99.1.3 simd

```
template<class _Field >
using simd = Simd<typename _Field::Element>
```

### 12.99.1.4 vect\_t

```
template<class _Field >
using vect_t = typename simd::vect_t
```

### 12.99.1.5 scalar\_t

```
template<class _Field >
using scalar_t = typename simd::scalar_t
```

## 12.99.2 Constructor & Destructor Documentation

### 12.99.2.1 FieldSimd() [1/3]

```
template<class _Field >
FieldSimd (
    const Field & f) [inline]
```

### 12.99.2.2 FieldSimd() [2/3]

```
template<class _Field >
FieldSimd (
    const Self & ) [default]
```

### 12.99.2.3 FieldSimd() [3/3]

```
template<class _Field >
FieldSimd (
    Self && ) [default]
```

## 12.99.3 Member Function Documentation

### 12.99.3.1 operator=() [1/2]

```
template<class _Field >
Self & operator= (
    const Self & ) [default]
```

### 12.99.3.2 operator=() [2/2]

```
template<class _Field >
Self & operator= (
    Self && ) [default]
```

### 12.99.3.3 init() [1/2]

```
template<class _Field >
INLINE vect_t init (
    vect_t & x,
    const vect_t a) const [inline]
```

### 12.99.3.4 init() [2/2]

```
template<class _Field >
INLINE vect_t init (
    const vect_t a) const [inline]
```

### 12.99.3.5 add() [1/2]

```
template<class _Field >
INLINE vect_t add (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline]
```

**12.99.3.6 add()** [2/2]

```
template<class _Field >
INLINE vect_t add (
    const vect_t a,
    const vect_t b) [inline]
```

**12.99.3.7 addin()**

```
template<class _Field >
INLINE vect_t addin (
    vect_t & a,
    const vect_t b) const [inline]
```

**12.99.3.8 add\_r()** [1/2]

```
template<class _Field >
INLINE vect_t add_r (
    vect_t & c,
    const vect_t a,
    const vect_t b) const [inline]
```

**12.99.3.9 add\_r()** [2/2]

```
template<class _Field >
INLINE vect_t add_r (
    const vect_t a,
    const vect_t b) const [inline]
```

**12.99.3.10 addin\_r()**

```
template<class _Field >
INLINE vect_t addin_r (
    vect_t & a,
    const vect_t b) const [inline]
```

**12.99.3.11 sub()** [1/2]

```
template<class _Field >
INLINE vect_t sub (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline]
```

**12.99.3.12 sub()** [2/2]

```
template<class _Field >
INLINE vect_t sub (
    const vect_t a,
    const vect_t b) [inline]
```

**12.99.3.13 subin()**

```
template<class _Field >
INLINE vect_t subin (
    vect_t & a,
    const vect_t b) const [inline]
```

**12.99.3.14 sub\_r()** [1/2]

```
template<class _Field >
INLINE vect_t sub_r (
    vect_t & c,
    const vect_t a,
    const vect_t b) const [inline]
```

**12.99.3.15 sub\_r()** [2/2]

```
template<class _Field >
INLINE vect_t sub_r (
    const vect_t a,
    const vect_t b) const [inline]
```

**12.99.3.16 subin\_r()**

```
template<class _Field >
INLINE vect_t subin_r (
    vect_t & a,
    const vect_t b) const [inline]
```

**12.99.3.17 zero()** [1/2]

```
template<class _Field >
INLINE vect_t zero (
    vect_t & x) const [inline]
```

**12.99.3.18 zero()** [2/2]

```
template<class _Field >
INLINE vect_t zero () const [inline]
```

**12.99.3.19 mod()**

```
template<class _Field >
INLINE vect_t mod (
    vect_t & c) const [inline]
```

**12.99.3.20 mul()** [1/2]

```
template<class _Field >
INLINE vect_t mul (
    vect_t & c,
    const vect_t a,
    const vect_t b) const [inline]
```

**12.99.3.21 mul()** [2/2]

```
template<class _Field >
INLINE vect_t mul (
    const vect_t a,
    const vect_t b) const [inline]
```

**12.99.3.22 mulin()**

```
template<class _Field >
INLINE vect_t mulin (
    vect_t & a,
    const vect_t b) const [inline]
```



**12.99.3.23 mul\_r() [1/2]**

```
template<class _Field >
INLINE vect_t mul_r (
    vect_t & c,
    const vect_t a,
    const vect_t b) const [inline]
```

**12.99.3.24 mul\_r() [2/2]**

```
template<class _Field >
INLINE vect_t mul_r (
    const vect_t a,
    const vect_t b) const [inline]
```

**12.99.3.25 axpy() [1/2]**

```
template<class _Field >
INLINE vect_t axpy (
    vect_t & r,
    const vect_t a,
    const vect_t b,
    const vect_t c) const [inline]
```

**12.99.3.26 axpy() [2/2]**

```
template<class _Field >
INLINE vect_t axpy (
    const vect_t c,
    const vect_t a,
    const vect_t b) const [inline]
```

**12.99.3.27 axpyin()**

```
template<class _Field >
INLINE vect_t axpyin (
    vect_t & c,
    const vect_t a,
    const vect_t b) const [inline]
```

**12.99.3.28 axpy\_r() [1/2]**

```
template<class _Field >
INLINE vect_t axpy_r (
    vect_t & r,
    const vect_t a,
    const vect_t b,
    const vect_t c) const [inline]
```

**12.99.3.29 axpy\_r() [2/2]**

```
template<class _Field >
INLINE vect_t axpy_r (
    const vect_t c,
    const vect_t a,
    const vect_t b) const [inline]
```

**12.99.3.30 axpyin\_r()**

```
template<class _Field >
INLINE vect_t axpyin_r (
    vect_t & c,
    const vect_t a,
    const vect_t b) const [inline]
```

**12.99.3.31 maxpy() [1/2]**

```
template<class _Field >
INLINE vect_t maxpy (
    vect_t & r,
    const vect_t a,
    const vect_t b,
    const vect_t c) const [inline]
```

**12.99.3.32 maxpy() [2/2]**

```
template<class _Field >
INLINE vect_t maxpy (
    const vect_t c,
    const vect_t a,
    const vect_t b) const [inline]
```

**12.99.3.33 maxpyin()**

```
template<class _Field >
INLINE vect_t maxpyin (
    vect_t & c,
    const vect_t a,
    const vect_t b) const [inline]
```

**12.99.4 Field Documentation****12.99.4.1 vect\_size**

```
template<class _Field >
const constexpr size_t vect_size = simd::vect_size [static], [constexpr]
```

**12.99.4.2 alignment**

```
template<class _Field >
const constexpr size_t alignment = simd::alignment [static], [constexpr]
```

The documentation for this class was generated from the following file:

- [simd\\_modular.inl](#)

**12.100 FieldTraits< Field > Struct Template Reference**

FieldTrait.

```
#include <field-traits.h>
```

**Public Types**

- typedef [FieldCategories::GenericTag](#) category

**Static Public Attributes**

- static const bool [balanced](#) = false

### 12.100.1 Detailed Description

```
template<class Field>
struct FFLAS::FieldTraits< Field >
```

FieldTrait.

### 12.100.2 Member Typedef Documentation

#### 12.100.2.1 category

```
template<class Field >
FieldCategories::GenericTag category
```

### 12.100.3 Field Documentation

#### 12.100.3.1 balanced

```
template<class Field >
const bool balanced = false [static]
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.101 FieldTraits< FFPACK::RNSInteger< T > > Struct Template Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [FieldCategories::UnparametricTag](#) category

### Static Public Attributes

- static const bool [balanced](#) = false

### 12.101.1 Member Typedef Documentation

#### 12.101.1.1 category

```
template<typename T >
FieldCategories::UnparametricTag category
```

### 12.101.2 Field Documentation

#### 12.101.2.1 balanced

```
template<typename T >
const bool balanced = false [static]
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.102 FieldTraits< FFPACK::RNSIntegerMod< T > > Struct Template Reference

```
#include <field-traits.h>
```

**Public Types**

- typedef [FieldCategories::ModularTag](#) category

**Static Public Attributes**

- static const bool [balanced](#) = false

**12.102.1 Member Typedef Documentation****12.102.1.1 category**

```
template<typename T >
FieldCategories::ModularTag category
```

**12.102.2 Field Documentation****12.102.2.1 balanced**

```
template<typename T >
const bool balanced = false [static]
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

**12.103 FieldTraits< Givaro::Modular< Element > > Struct Template Reference**

```
#include <field-traits.h>
```

**Public Types**

- typedef [FieldCategories::ModularTag](#) category

**Static Public Attributes**

- static const bool [balanced](#) = false

**12.103.1 Member Typedef Documentation****12.103.1.1 category**

```
template<class Element >
FieldCategories::ModularTag category
```

**12.103.2 Field Documentation****12.103.2.1 balanced**

```
template<class Element >
const bool balanced = false [static]
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

**12.104 FieldTraits< Givaro::ModularBalanced< Element > > Struct Template Reference**

```
#include <field-traits.h>
```

**Public Types**

- typedef [FieldCategories::ModularTag](#) category

**Static Public Attributes**

- static const bool [balanced](#) = true

**12.104.1 Member Typedef Documentation****12.104.1.1 category**

```
template<class Element >
FieldCategories::ModularTag category
```

**12.104.2 Field Documentation****12.104.2.1 balanced**

```
template<class Element >
const bool balanced = true [static]
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

**12.105 FieldTraits< Givaro::ZRing< double > > Struct Reference**

```
#include <field-traits.h>
```

**Public Types**

- typedef [FieldCategories::UnparametricTag](#) category

**Static Public Attributes**

- static const bool [balanced](#) = false

**12.105.1 Member Typedef Documentation****12.105.1.1 category**

```
FieldCategories::UnparametricTag category
```

**12.105.2 Field Documentation****12.105.2.1 balanced**

```
const bool balanced = false [static]
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

**12.106 FieldTraits< Givaro::ZRing< float > > Struct Reference**

```
#include <field-traits.h>
```

**Public Types**

- typedef [FieldCategories::UnparametricTag](#) category

**Static Public Attributes**

- static const bool [balanced](#) = false

**12.106.1 Member Typedef Documentation****12.106.1.1 category**

[FieldCategories::UnparametricTag category](#)

**12.106.2 Field Documentation****12.106.2.1 balanced**

```
const bool balanced = false [static]
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

**12.107 FieldTraits< Givaro::ZRing< Givaro::Integer > > Struct Reference**

```
#include <field-traits.h>
```

**Public Types**

- typedef [FieldCategories::UnparametricTag category](#)

**Static Public Attributes**

- static const bool [balanced](#) = false

**12.107.1 Member Typedef Documentation****12.107.1.1 category**

[FieldCategories::UnparametricTag category](#)

**12.107.2 Field Documentation****12.107.2.1 balanced**

```
const bool balanced = false [static]
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

**12.108 FieldTraits< Givaro::ZRing< int16\_t > > Struct Reference**

```
#include <field-traits.h>
```

**Public Types**

- typedef [FieldCategories::UnparametricTag category](#)

**Static Public Attributes**

- static const bool [balanced](#) = false

## 12.108.1 Member Typedef Documentation

### 12.108.1.1 category

[FieldCategories::UnparametricTag category](#)

## 12.108.2 Field Documentation

### 12.108.2.1 balanced

```
const bool balanced = false [static]
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.109 FieldTraits< Givaro::ZRing< int32\_t > > Struct Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [FieldCategories::UnparametricTag category](#)

### Static Public Attributes

- static const bool [balanced](#) = false

## 12.109.1 Member Typedef Documentation

### 12.109.1.1 category

[FieldCategories::UnparametricTag category](#)

## 12.109.2 Field Documentation

### 12.109.2.1 balanced

```
const bool balanced = false [static]
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.110 FieldTraits< Givaro::ZRing< int64\_t > > Struct Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [FieldCategories::UnparametricTag category](#)

### Static Public Attributes

- static const bool [balanced](#) = false

## 12.110.1 Member Typedef Documentation

### 12.110.1.1 category

[FieldCategories::UnparametricTag category](#)

## 12.110.2 Field Documentation

### 12.110.2.1 `balanced`

```
const bool balanced = false [static]
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.111 `FieldTraits< Givaro::ZRing< Reclnt::ruint< K > > > Struct Template Reference`

```
#include <field-traits.h>
```

### Public Types

- typedef [FieldCategories::UnparametricTag](#) `category`

### Static Public Attributes

- static const bool [balanced](#) = false

## 12.111.1 Member Typedef Documentation

### 12.111.1.1 `category`

```
template<size_t K>
```

```
FieldCategories::UnparametricTag category
```

## 12.111.2 Field Documentation

### 12.111.2.1 `balanced`

```
template<size_t K>
```

```
const bool balanced = false [static]
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.112 `FieldTraits< Givaro::ZRing< uint16_t > > Struct Reference`

```
#include <field-traits.h>
```

### Public Types

- typedef [FieldCategories::UnparametricTag](#) `category`

### Static Public Attributes

- static const bool [balanced](#) = false

## 12.112.1 Member Typedef Documentation

### 12.112.1.1 `category`

```
FieldCategories::UnparametricTag category
```



## 12.112.2 Field Documentation

### 12.112.2.1 balanced

```
const bool balanced = false [static]
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.113 FieldTraits< Givaro::ZRing< uint32\_t > > Struct Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [FieldCategories::UnparametricTag](#) category

### Static Public Attributes

- static const bool [balanced](#) = false

## 12.113.1 Member Typedef Documentation

### 12.113.1.1 category

```
FieldCategories::UnparametricTag category
```

## 12.113.2 Field Documentation

### 12.113.2.1 balanced

```
const bool balanced = false [static]
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.114 FieldTraits< Givaro::ZRing< uint64\_t > > Struct Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [FieldCategories::UnparametricTag](#) category

### Static Public Attributes

- static const bool [balanced](#) = false

## 12.114.1 Member Typedef Documentation

### 12.114.1.1 category

```
FieldCategories::UnparametricTag category
```

## 12.114.2 Field Documentation

### 12.114.2.1 balanced

```
const bool balanced = false [static]
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.115 Fixed Struct Reference

The documentation for this struct was generated from the following file:

- [blockcuts.inl](#)

## 12.116 FixedPrecIntTag Struct Reference

Fixed precision integers above machine precision: Givaro::reclnt.

```
#include <field-traits.h>
```

### 12.116.1 Detailed Description

Fixed precision integers above machine precision: Givaro::reclnt.

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.117 ScalFunctionsBase< Element, typename enable\_if< is\_floating\_point< Element >::value >::type >::FloatingPointTestDistribution Class Reference

### Public Types

- using [IntType](#) = typename make\_unsigned\_int<Element>::type

### Public Member Functions

- [FloatingPointTestDistribution](#) ()
- template<class Generator >  
Element [operator\(\)](#) (Generator &g)

### 12.117.1 Member Typedef Documentation

#### 12.117.1.1 IntType

```
template<typename Element >
using IntType = typename make_unsigned_int<Element>::type
```

### 12.117.2 Constructor & Destructor Documentation

#### 12.117.2.1 FloatingPointTestDistribution()

```
template<typename Element >
FloatingPointTestDistribution () [inline]
```

### 12.117.3 Member Function Documentation

#### 12.117.3.1 operator>()()

```
template<typename Element >
template<class Generator >
Element operator\(\) (
    Generator & g) [inline]
```

The documentation for this class was generated from the following file:

- [test-simd.C](#)

## 12.118 ForStrategy1D< blocksize\_t, Cut, Param > Struct Template Reference

### Public Member Functions

- [ForStrategy1D](#) (const blocksize\_t n, const [ParSeqHelper::Parallel](#)< Cut, Param > H)
- [ForStrategy1D](#) (const blocksize\_t b, const blocksize\_t e, const [ParSeqHelper::Parallel](#)< Cut, Param > H)
- void [build](#) (const blocksize\_t n, const [ParSeqHelper::Parallel](#)< Cut, Param > H)
- blocksize\_t [initialize](#) ()
- bool [isTerminated](#) () const
- blocksize\_t [begin](#) () const
- blocksize\_t [end](#) () const
- blocksize\_t [numblocks](#) () const
- blocksize\_t [blockindex](#) () const
- blocksize\_t [operator++](#) ()

### Protected Attributes

- blocksize\_t [ibeg](#)
- blocksize\_t [iend](#)
- blocksize\_t [current](#)
- blocksize\_t [firstBlockSize](#)
- blocksize\_t [lastBlockSize](#)
- blocksize\_t [changeBS](#)
- blocksize\_t [numBlock](#)

## 12.118.1 Constructor & Destructor Documentation

### 12.118.1.1 ForStrategy1D() [1/2]

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
ForStrategy1D (
    const blocksize_t n,
    const ParSeqHelper::Parallel< Cut, Param > H) [inline]
```

### 12.118.1.2 ForStrategy1D() [2/2]

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
ForStrategy1D (
    const blocksize_t b,
    const blocksize_t e,
    const ParSeqHelper::Parallel< Cut, Param > H) [inline]
```

## 12.118.2 Member Function Documentation

### 12.118.2.1 build()

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
void build (
    const blocksize_t n,
    const ParSeqHelper::Parallel< Cut, Param > H) [inline]
```

### 12.118.2.2 initialize()

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t initialize () [inline]
```

**12.118.2.3 isTerminated()**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
bool isTerminated () const [inline]
```

**12.118.2.4 begin()**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t begin () const [inline]
```

**12.118.2.5 end()**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t end () const [inline]
```

**12.118.2.6 numblocks()**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t numblocks () const [inline]
```

**12.118.2.7 blockindex()**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t blockindex () const [inline]
```

**12.118.2.8 operator++()**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t operator++ () [inline]
```

**12.118.3 Field Documentation****12.118.3.1 ibeg**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t ibeg [protected]
```

**12.118.3.2 iend**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t iend [protected]
```

**12.118.3.3 current**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t current [protected]
```

**12.118.3.4 firstBlockSize**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t firstBlockSize [protected]
```

**12.118.3.5 lastBlockSize**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t lastBlockSize [protected]
```

**12.118.3.6 changeBS**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t changeBS [protected]
```

**12.118.3.7 numBlock**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t numBlock [protected]
```

The documentation for this struct was generated from the following file:

- [blockcuts.inl](#)

## 12.119 ForStrategy2D< blocksize\_t, Cut, Param > Struct Template Reference

**Public Member Functions**

- [ForStrategy2D](#) (const blocksize\_t m, const blocksize\_t n, const [ParSeqHelper::Parallel](#)< Cut, Param > H)
- blocksize\_t [initialize](#) ()
- bool [isTerminated](#) () const
- blocksize\_t [ibegin](#) () const
- blocksize\_t [jbegin](#) () const
- blocksize\_t [iend](#) () const
- blocksize\_t [jend](#) () const
- blocksize\_t [operator++](#) ()
- blocksize\_t [rownumblocks](#) () const
- blocksize\_t [colnumblocks](#) () const
- blocksize\_t [blockindex](#) () const
- blocksize\_t [rowblockindex](#) () const
- blocksize\_t [colblockindex](#) () const

**Protected Attributes**

- blocksize\_t [\\_ibeg](#)
- blocksize\_t [\\_jend](#)
- blocksize\_t [\\_jbeg](#)
- blocksize\_t [\\_jend](#)
- blocksize\_t [rowBlockSize](#)
- blocksize\_t [colBlockSize](#)
- blocksize\_t [current](#)
- blocksize\_t [lastRBS](#)
- blocksize\_t [lastCBS](#)
- blocksize\_t [changeRBS](#)
- blocksize\_t [changeCBS](#)
- blocksize\_t [numRowBlock](#)
- blocksize\_t [numColBlock](#)
- blocksize\_t [BLOCKS](#)

## Friends

- `std::ostream & operator<< (std::ostream &out, const ForStrategy2D &FS2D)`

## 12.119.1 Constructor & Destructor Documentation

### 12.119.1.1 ForStrategy2D()

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
ForStrategy2D (
    const blocksize_t m,
    const blocksize_t n,
    const ParSeqHelper::Parallel< Cut, Param > H) [inline]
```

## 12.119.2 Member Function Documentation

### 12.119.2.1 initialize()

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t initialize () [inline]
```

### 12.119.2.2 isTerminated()

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
bool isTerminated () const [inline]
```

### 12.119.2.3 ibegin()

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t ibegin () const [inline]
```

### 12.119.2.4 jbegin()

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t jbegin () const [inline]
```

### 12.119.2.5 iend()

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t iend () const [inline]
```

### 12.119.2.6 jend()

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t jend () const [inline]
```

### 12.119.2.7 operator++()

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t operator++ () [inline]
```

**12.119.2.8 rownumblocks()**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t rownumblocks () const [inline]
```

**12.119.2.9 colnumblocks()**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t colnumblocks () const [inline]
```

**12.119.2.10 blockindex()**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t blockindex () const [inline]
```

**12.119.2.11 rowblockindex()**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t rowblockindex () const [inline]
```

**12.119.2.12 colblockindex()**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t colblockindex () const [inline]
```

**12.119.3 Friends And Related Symbol Documentation****12.119.3.1 operator<<**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
std::ostream & operator<< (
    std::ostream & out,
    const ForStrategy2D< blocksize_t, Cut, Param > & FS2D) [friend]
```

**12.119.4 Field Documentation****12.119.4.1 \_ibeg**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t _ibeg [protected]
```

**12.119.4.2 \_iend**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t _iend [protected]
```

**12.119.4.3 \_jbeg**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t _jbeg [protected]
```

**12.119.4.4 \_jend**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t _jend [protected]
```

**12.119.4.5 rowBlockSize**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t rowBlockSize [protected]
```

**12.119.4.6 colBlockSize**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t colBlockSize [protected]
```

**12.119.4.7 current**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t current [protected]
```

**12.119.4.8 lastRBS**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t lastRBS [protected]
```

**12.119.4.9 lastCBS**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t lastCBS [protected]
```

**12.119.4.10 changeRBS**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t changeRBS [protected]
```

**12.119.4.11 changeCBS**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t changeCBS [protected]
```

**12.119.4.12 numRowsBlock**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t numRowsBlock [protected]
```

**12.119.4.13 numColBlock**

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
blocksize_t numColBlock [protected]
```



#### 12.119.4.14 BLOCKS

```
template<typename blocksize_t = size_t, typename Cut = CuttingStrategy::Block, typename Param
= StrategyParameter::Threads>
```

```
blocksize_t BLOCKS [protected]
```

The documentation for this struct was generated from the following file:

- [blockcuts.inl](#)

### 12.120 ftrmmLeftLowerNoTransNonUnit< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

### 12.121 ftrmmLeftLowerNoTransUnit< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

### 12.122 ftrmmLeftLowerTransNonUnit< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

### 12.123 ftrmmLeftLowerTransUnit< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

### 12.124 ftrmmLeftUpperNoTransNonUnit< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

### 12.125 ftrmmLeftUpperNoTransUnit< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

### 12.126 ftrmmLeftUpperTransNonUnit< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

## 12.127 `ftrmmLeftUpperTransUnit`< `Element` > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

## 12.128 `ftrmmRightLowerNoTransNonUnit`< `Element` > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

## 12.129 `ftrmmRightLowerNoTransUnit`< `Element` > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

## 12.130 `ftrmmRightLowerTransNonUnit`< `Element` > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

## 12.131 `ftrmmRightLowerTransUnit`< `Element` > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

## 12.132 `ftrmmRightUpperNoTransNonUnit`< `Element` > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

## 12.133 `ftrmmRightUpperNoTransUnit`< `Element` > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

## 12.134 `ftrmmRightUpperTransNonUnit`< `Element` > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

## 12.135 ftrmmRightUpperTransUnit< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

## 12.136 ftrsmLeftLowerNoTransNonUnit< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

## 12.137 ftrsmLeftLowerNoTransUnit< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

## 12.138 ftrsmLeftLowerTransNonUnit< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

## 12.139 ftrsmLeftLowerTransUnit< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

## 12.140 ftrsmLeftUpperNoTransNonUnit< Element > Class Template Reference

Computes the maximal size for delaying the modular reduction in a triangular system resolution.

### 12.140.1 Detailed Description

**template<class Element>**

**class FFLAS::Protected::ftrsmLeftUpperNoTransNonUnit< Element >**

Computes the maximal size for delaying the modular reduction in a triangular system resolution.

Compute the maximal dimension  $k$ , such that a unit diagonal triangular system of dimension  $k$  can be solved over  $Z$  without overflow of the underlying floating point representation.

**Bibliography** • Dumas, Giorgi, Pernet 06, arXiv:cs/0601133.

Parameters

|     |                                      |
|-----|--------------------------------------|
| $F$ | Finite Field/Ring of the computation |
|-----|--------------------------------------|

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

### 12.141 **ftrsmLeftUpperNoTransUnit**< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

### 12.142 **ftrsmLeftUpperTransNonUnit**< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

### 12.143 **ftrsmLeftUpperTransUnit**< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

### 12.144 **ftrsmRightLowerNoTransNonUnit**< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

### 12.145 **ftrsmRightLowerNoTransUnit**< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

### 12.146 **ftrsmRightLowerTransNonUnit**< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

### 12.147 **ftrsmRightLowerTransUnit**< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

### 12.148 **ftrsmRightUpperNoTransNonUnit**< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

## 12.149 ftrsmRightUpperNoTransUnit< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

## 12.150 ftrsmRightUpperTransNonUnit< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

## 12.151 ftrsmRightUpperTransUnit< Element > Class Template Reference

The documentation for this class was generated from the following file:

- [fflas\\_level3.inl](#)

## 12.152 GenericTag Struct Reference

default is generic

```
#include <field-traits.h>
```

### 12.152.1 Detailed Description

default is generic

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.153 GenericTag Struct Reference

generic ring.

```
#include <field-traits.h>
```

### 12.153.1 Detailed Description

generic ring.

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.154 Grain Struct Reference

The documentation for this struct was generated from the following file:

- [blockcuts.inl](#)

## 12.155 has\_minus\_eq\_impl< C > Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

**Static Public Attributes**

- static constexpr bool [value](#) = type::value

**12.155.1 Field Documentation****12.155.1.1 value**

```
template<typename C >
bool value = type::value [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

**12.156 has\_minus\_impl< C > Struct Template Reference**

```
#include <sparse_matrix_traits.h>
```

**Static Public Attributes**

- static constexpr bool [value](#) = type::value

**12.156.1 Field Documentation****12.156.1.1 value**

```
template<typename C >
bool value = type::value [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

**12.157 has\_mul\_eq\_impl< C > Struct Template Reference**

```
#include <sparse_matrix_traits.h>
```

**Static Public Attributes**

- static constexpr bool [value](#) = type::value

**12.157.1 Field Documentation****12.157.1.1 value**

```
template<typename C >
bool value = type::value [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

**12.158 has\_mul\_impl< C > Struct Template Reference**

```
#include <sparse_matrix_traits.h>
```

**Static Public Attributes**

- static constexpr bool [value](#) = type::value

### 12.158.1 Field Documentation

#### 12.158.1.1 value

```
template<typename C >
bool value = type::value [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.159 `has_operation< T >` Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

### Static Public Attributes

- static constexpr bool [value](#)

### 12.159.1 Field Documentation

#### 12.159.1.1 value

```
template<class T >
bool value [static], [constexpr]
Initial value:
= (has_plus<T>::value && has_minus<T>::value && has_equal<T>::value &&
    has_plus_eq<T>::value && has_minus_eq<T>::value && has_mul<T>::value
    && has_mul_eq<T>::value)
```

The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.160 `has_plus_eq_impl< C >` Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

### Static Public Attributes

- static constexpr bool [value](#) = type::value

### 12.160.1 Field Documentation

#### 12.160.1.1 value

```
template<typename C >
bool value = type::value [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.161 `has_plus_impl< C >` Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

### Static Public Attributes

- static constexpr bool [value](#) = type::value

### 12.161.1 Field Documentation

#### 12.161.1.1 value

```
template<typename C >
bool value = type::value [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.162 HelperFlag Struct Reference

```
#include <fflas_sparse.h>
```

### Static Public Attributes

- static constexpr uint64\_t [none](#) = 0\_ui64
- static constexpr uint64\_t [coo](#) = 1\_ui64
- static constexpr uint64\_t [csr](#) = 1\_ui64 << 1
- static constexpr uint64\_t [ell](#) = 1\_ui64 << 2
- static constexpr uint64\_t [aut](#) = 1\_ui64 << 32
- static constexpr uint64\_t [pm1](#) = 1\_ui64 << 33

### 12.162.1 Field Documentation

#### 12.162.1.1 none

```
uint64_t none = 0_ui64 [static], [constexpr]
```

#### 12.162.1.2 coo

```
uint64_t coo = 1_ui64 [static], [constexpr]
```

#### 12.162.1.3 csr

```
uint64_t csr = 1_ui64 << 1 [static], [constexpr]
```

#### 12.162.1.4 ell

```
uint64_t ell = 1_ui64 << 2 [static], [constexpr]
```

#### 12.162.1.5 aut

```
uint64_t aut = 1_ui64 << 32 [static], [constexpr]
```

#### 12.162.1.6 pm1

```
uint64_t pm1 = 1_ui64 << 33 [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [fflas\\_sparse.h](#)

## 12.163 HelperMod< Field, ElementTraits > Struct Template Reference

The documentation for this struct was generated from the following file:

- [fflas\\_freduce.inl](#)



## 12.164 HelperMod< Field, ElementCategories::MachineIntTag > Struct Template Reference

### Public Member Functions

- [HelperMod](#) ()
- [HelperMod](#) (const [Field](#) &F)

### Data Fields

- [Field::Element](#) p
- double [invp](#)
- double [min](#)
- double [max](#)
- int64\_t [pow50rem](#)

### 12.164.1 Constructor & Destructor Documentation

#### 12.164.1.1 HelperMod() [1/2]

```
template<class Field >  
HelperMod () [inline]
```

#### 12.164.1.2 HelperMod() [2/2]

```
template<class Field >  
HelperMod (  
    const Field & F) [inline]
```

### 12.164.2 Field Documentation

#### 12.164.2.1 p

```
template<class Field >  
Field::Element p
```

#### 12.164.2.2 invp

```
template<class Field >  
double invp
```

#### 12.164.2.3 min

```
template<class Field >  
double min
```

#### 12.164.2.4 max

```
template<class Field >  
double max
```

#### 12.164.2.5 pow50rem

```
template<class Field >  
int64_t pow50rem
```

The documentation for this struct was generated from the following file:

- [fflas\\_freduce.inl](#)

## 12.165 HelperMod< Field, FFLAS::ElementCategories::ArbitraryPrecIntTag > Struct Template Reference

### Public Member Functions

- [HelperMod \(\)](#)
- [HelperMod \(const \[Field\]\(#\) &F\)](#)

### Data Fields

- [Field::Element p](#)

### 12.165.1 Constructor & Destructor Documentation

#### 12.165.1.1 HelperMod() [1/2]

```
template<class Field >
HelperMod () [inline]
```

#### 12.165.1.2 HelperMod() [2/2]

```
template<class Field >
HelperMod (
    const Field & F) [inline]
```

### 12.165.2 Field Documentation

#### 12.165.2.1 p

```
template<class Field >
Field::Element p
```

The documentation for this struct was generated from the following file:

- [fflas\\_freduce.inl](#)

## 12.166 HelperMod< Field, FFLAS::ElementCategories::FixedPrecIntTag > Struct Template Reference

### Public Member Functions

- [HelperMod \(\)](#)
- [HelperMod \(const \[Field\]\(#\) &F\)](#)

### Data Fields

- [Field::Element p](#)

### 12.166.1 Constructor & Destructor Documentation

#### 12.166.1.1 HelperMod() [1/2]

```
template<class Field >
HelperMod () [inline]
```

#### 12.166.1.2 HelperMod() [2/2]

```
template<class Field >
HelperMod (
    const Field & F) [inline]
```

## 12.166.2 Field Documentation

### 12.166.2.1 p

```
template<class Field >
Field::Element p
```

The documentation for this struct was generated from the following file:

- [fflas\\_freduce.inl](#)

## 12.167 HelperMod< Field, FFLAS::ElementCategories::MachineFloatTag > Struct Template Reference

### Public Member Functions

- [HelperMod](#) ()
- [HelperMod](#) (const [Field](#) &F)

### Data Fields

- [Field::Element](#) p
- [Field::Element](#) invp
- [Field::Element](#) min
- [Field::Element](#) max

## 12.167.1 Constructor & Destructor Documentation

### 12.167.1.1 HelperMod() [1/2]

```
template<class Field >
HelperMod () [inline]
```

### 12.167.1.2 HelperMod() [2/2]

```
template<class Field >
HelperMod (
    const Field & F) [inline]
```

## 12.167.2 Field Documentation

### 12.167.2.1 p

```
template<class Field >
Field::Element p
```

### 12.167.2.2 invp

```
template<class Field >
Field::Element invp
```

### 12.167.2.3 min

```
template<class Field >
Field::Element min
```

### 12.167.2.4 max

```
template<class Field >
Field::Element max
```

The documentation for this struct was generated from the following file:

- [fflas\\_freduce.inl](#)

## 12.168 Hybrid Struct Reference

The documentation for this struct was generated from the following file:

- [fflas\\_helpers.inl](#)

## 12.169 Info Struct Reference

### Public Member Functions

- [Info](#) (uint64\_t it, uint64\_t s, uint64\_t p)
- [Info](#) ()=default
- [Info](#) (const [Info](#) &)=default
- [Info](#) ([Info](#) &&)=default
- [Info](#) & [operator=](#) (const [Info](#) &)=default
- [Info](#) & [operator=](#) ([Info](#) &&)=default

### Data Fields

- uint64\_t [size](#) = 0
- uint64\_t [perm](#) = 0
- uint64\_t [begin](#) = 0

### 12.169.1 Constructor & Destructor Documentation

#### 12.169.1.1 Info() [1/4]

```
Info (
    uint64_t it,
    uint64_t s,
    uint64_t p) [inline]
```

#### 12.169.1.2 Info() [2/4]

```
Info () [default]
```

#### 12.169.1.3 Info() [3/4]

```
Info (
    const Info & ) [default]
```

#### 12.169.1.4 Info() [4/4]

```
Info (
    Info && ) [default]
```

### 12.169.2 Member Function Documentation

#### 12.169.2.1 operator=() [1/2]

```
Info & operator= (
    const Info & ) [default]
```

#### 12.169.2.2 operator=() [2/2]

```
Info & operator= (
    Info && ) [default]
```

### 12.169.3 Field Documentation

#### 12.169.3.1 size

uint64\_t size = 0

#### 12.169.3.2 perm

uint64\_t perm = 0

#### 12.169.3.3 begin

uint64\_t begin = 0

The documentation for this struct was generated from the following file:

- [csr\\_hyb\\_utils.inl](#)

## 12.170 Info Struct Reference

### Public Member Functions

- [Info](#) (uint64\_t it, uint64\_t s, uint64\_t p)
- [Info](#) ()=default
- [Info](#) (const [Info](#) &)=default
- [Info](#) ([Info](#) &&)=default
- [Info](#) & [operator=](#) (const [Info](#) &)=default
- [Info](#) & [operator=](#) ([Info](#) &&)=default

### Data Fields

- uint64\_t [size](#) = 0
- uint64\_t [perm](#) = 0
- uint64\_t [begin](#) = 0

### 12.170.1 Constructor & Destructor Documentation

#### 12.170.1.1 Info() [1/4]

```
Info (
    uint64_t it,
    uint64_t s,
    uint64_t p) [inline]
```

#### 12.170.1.2 Info() [2/4]

```
Info () [default]
```

#### 12.170.1.3 Info() [3/4]

```
Info (
    const Info & ) [default]
```

#### 12.170.1.4 Info() [4/4]

```
Info (
    Info && ) [default]
```

## 12.170.2 Member Function Documentation

### 12.170.2.1 operator=() [1/2]

```
Info & operator= (
    const Info & ) [default]
```

### 12.170.2.2 operator=() [2/2]

```
Info & operator= (
    Info && ) [default]
```

## 12.170.3 Field Documentation

### 12.170.3.1 size

```
uint64_t size = 0
```

### 12.170.3.2 perm

```
uint64_t perm = 0
```

### 12.170.3.3 begin

```
uint64_t begin = 0
```

The documentation for this struct was generated from the following file:

- [sell\\_utils.inl](#)

## 12.171 is\_all\_same< Args > Struct Template Reference

The documentation for this struct was generated from the following file:

- [test-simd.C](#)

## 12.172 is\_all\_same< T, Args... > Struct Template Reference

### Static Public Attributes

- static constexpr bool [value](#) = [ALL](#)<std::is\_same<typename decay<T>::type, typename decay<Args>::type>::value...>::value

### 12.172.1 Field Documentation

#### 12.172.1.1 value

```
template<typename T , typename... Args>
bool value = ALL<std::is_same<typename decay<T>::type, typename decay<Args>::type>::value...>::value [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [test-simd.C](#)

## 12.173 is\_all\_same<> Struct Reference

### Static Public Attributes

- static constexpr bool [value](#) = true

### 12.173.1 Field Documentation

#### 12.173.1.1 value

```
bool value = true [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [test-simd.C](#)

## 12.174 is\_simd< T > Struct Template Reference

```
#include <fflas_simd.h>
```

### Public Types

- using [type](#) = std::integral\_constant<bool, false>

### Static Public Attributes

- static const constexpr bool [value](#) = false

### 12.174.1 Member Typedef Documentation

#### 12.174.1.1 type

```
template<class T >
using type = std::integral_constant<bool, false>
```

### 12.174.2 Field Documentation

#### 12.174.2.1 value

```
template<class T >
const constexpr bool value = false [static], [constexpr]
```


The documentation for this struct was generated from the following file:

- [fflas\\_simd.h](#)

## 12.175 isSparseMatrix< Field, M > Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for isSparseMatrix< Field, M >:

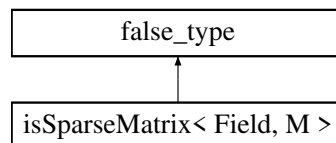


The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.176 isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::COO > > Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::COO > >:



The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.177 isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::COO\_ZO > > Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for `isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::COO_ZO > >`:



The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.178 isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::CSR > > Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for `isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::CSR > >`:



The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.179 isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::CSR\_HYB > > Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for `isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::CSR_HYB > >`:






The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.180 isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::CSR\_ZO > > Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::CSR\_ZO > >:




The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.181 isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::ELL > > Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::ELL > >:



The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.182 isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::ELL\_simd > > Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::ELL\_simd > >:



The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

### 12.183 `isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::ELL_simd_ZO > >` Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for `isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::ELL_simd_ZO > >`:



The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

### 12.184 `isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::ELL_ZO > >` Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for `isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::ELL_ZO > >`:



The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

### 12.185 `isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::HYB_ZO > >` Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for `isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::HYB_ZO > >`:




The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

### 12.186 `isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::SELL > >` Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for `isSparseMatrix< Field, Sparse< Field, SparseMatrix_t::SELL > >`:




The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.187 isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::SELL\_ZO > > Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::SELL\_ZO > >:




The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.188 isSparseMatrixMKLFormat< F, M > Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for isSparseMatrixMKLFormat< F, M >:




The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.189 isSparseMatrixSimdFormat< F, M > Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for isSparseMatrixSimdFormat< F, M >:



The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.190 isZOSparseMatrix< F, M > Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for isZOSparseMatrix< F, M >:




The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.191 isZOSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::COO\_ZO > > Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for isZOSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::COO\_ZO > >:




The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.192 isZOSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::CSR\_ZO > > Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for isZOSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::CSR\_ZO > >:




The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.193 isZOSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::ELL\_simd\_ZO > > Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for isZOSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::ELL\_simd\_ZO > >:




The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.194 isZOSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::ELL\_ZO > > Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for `isZOSparseMatrix< Field, Sparse< Field, SparseMatrix_t::ELL_ZO > >`:




The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.195 isZOSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::SELL\_ZO > > Struct Template Reference

```
#include <sparse_matrix_traits.h>
```

Inheritance diagram for `isZOSparseMatrix< Field, Sparse< Field, SparseMatrix_t::SELL_ZO > >`:



The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.196 Iterative Struct Reference

The documentation for this struct was generated from the following file:

- [fflas\\_helpers.inl](#)

## 12.197 LazyTag Struct Reference

Performs field operations with delayed mod only when necessary. Result may not be reduced.

```
#include <field-traits.h>
```

### 12.197.1 Detailed Description

Performs field operations with delayed mod only when necessary. Result may not be reduced.  
The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.198 `limits< T >` Struct Template Reference

The documentation for this struct was generated from the following file:

- [flimits.h](#)

## 12.199 `limits< char >` Struct Reference

```
#include <flimits.h>
```

### Public Types

- typedef char [T](#)

### Static Public Member Functions

- static constexpr char [max](#) () noexcept
- static constexpr char [min](#) () noexcept
- static constexpr int32\_t [digits](#) () noexcept

### 12.199.1 Member Typedef Documentation

#### 12.199.1.1 `T`

```
char T
```

### 12.199.2 Member Function Documentation

#### 12.199.2.1 `max()`

```
static constexpr char max () [inline], [static], [constexpr], [noexcept]
```

#### 12.199.2.2 `min()`

```
static constexpr char min () [inline], [static], [constexpr], [noexcept]
```

#### 12.199.2.3 `digits()`

```
static constexpr int32_t digits () [inline], [static], [constexpr], [noexcept]
```

The documentation for this struct was generated from the following file:

- [flimits.h](#)

## 12.200 `limits< double >` Struct Reference

```
#include <flimits.h>
```

### Public Types

- typedef double [T](#)

### Static Public Member Functions

- static constexpr int64\_t [max](#) () noexcept
- static constexpr int64\_t [min](#) () noexcept
- static constexpr int32\_t [digits](#) () noexcept

## 12.200.1 Member Typedef Documentation

### 12.200.1.1 T

double [T](#)

## 12.200.2 Member Function Documentation

### 12.200.2.1 max()

```
static constexpr int64_t max () [inline], [static], [constexpr], [noexcept]
```

### 12.200.2.2 min()

```
static constexpr int64_t min () [inline], [static], [constexpr], [noexcept]
```

### 12.200.2.3 digits()

```
static constexpr int32_t digits () [inline], [static], [constexpr], [noexcept]
```

The documentation for this struct was generated from the following file:

- [flimits.h](#)

## 12.201 limits< float > Struct Reference

```
#include <flimits.h>
```

### Public Types

- typedef float [T](#)

### Static Public Member Functions

- static constexpr int32\_t [max](#) () noexcept
- static constexpr int32\_t [min](#) () noexcept
- static constexpr int32\_t [digits](#) () noexcept

## 12.201.1 Member Typedef Documentation

### 12.201.1.1 T

float [T](#)

## 12.201.2 Member Function Documentation

### 12.201.2.1 max()

```
static constexpr int32_t max () [inline], [static], [constexpr], [noexcept]
```

### 12.201.2.2 min()

```
static constexpr int32_t min () [inline], [static], [constexpr], [noexcept]
```

### 12.201.2.3 digits()

```
static constexpr int32_t digits () [inline], [static], [constexpr], [noexcept]
```

The documentation for this struct was generated from the following file:

- [flimits.h](#)

## 12.202 limits< Givaro::Integer > Struct Reference

```
#include <flimits.h>
```

### Public Types

- typedef Givaro::Integer [T](#)

### Static Public Member Functions

- static constexpr int [max](#) () noexcept
- static constexpr int [min](#) () noexcept

### 12.202.1 Member Typedef Documentation

#### 12.202.1.1 T

```
Givaro::Integer T
```

### 12.202.2 Member Function Documentation

#### 12.202.2.1 max()

```
static constexpr int max () [inline], [static], [constexpr], [noexcept]
```

#### 12.202.2.2 min()

```
static constexpr int min () [inline], [static], [constexpr], [noexcept]
```

The documentation for this struct was generated from the following file:

- [flimits.h](#)

## 12.203 limits< int > Struct Reference

```
#include <flimits.h>
```

### Public Types

- typedef int [T](#)

### Static Public Member Functions

- static constexpr int [max](#) () noexcept
- static constexpr int [min](#) () noexcept
- static constexpr int32\_t [digits](#) () noexcept

### 12.203.1 Member Typedef Documentation

#### 12.203.1.1 T

```
int T
```



## 12.203.2 Member Function Documentation

### 12.203.2.1 max()

```
static constexpr int max () [inline], [static], [constexpr], [noexcept]
```

### 12.203.2.2 min()

```
static constexpr int min () [inline], [static], [constexpr], [noexcept]
```

### 12.203.2.3 digits()

```
static constexpr int32_t digits () [inline], [static], [constexpr], [noexcept]
```

The documentation for this struct was generated from the following file:

- [flimits.h](#)

## 12.204 limits< long > Struct Reference

```
#include <flimits.h>
```

### Public Types

- typedef long [T](#)

### Static Public Member Functions

- static constexpr long [max](#) () noexcept
- static constexpr long [min](#) () noexcept
- static constexpr int32\_t [digits](#) () noexcept

## 12.204.1 Member Typedef Documentation

### 12.204.1.1 T

```
long T
```

## 12.204.2 Member Function Documentation

### 12.204.2.1 max()

```
static constexpr long max () [inline], [static], [constexpr], [noexcept]
```

### 12.204.2.2 min()

```
static constexpr long min () [inline], [static], [constexpr], [noexcept]
```

### 12.204.2.3 digits()

```
static constexpr int32_t digits () [inline], [static], [constexpr], [noexcept]
```

The documentation for this struct was generated from the following file:

- [flimits.h](#)

## 12.205 limits< long long > Struct Reference

```
#include <flimits.h>
```

### Public Types

- typedef long long [T](#)

### Static Public Member Functions

- static constexpr long long [max](#) () noexcept
- static constexpr long long [min](#) () noexcept
- static constexpr int32\_t [digits](#) () noexcept

## 12.205.1 Member Typedef Documentation

### 12.205.1.1 T

long long [T](#)

## 12.205.2 Member Function Documentation

### 12.205.2.1 max()

```
static constexpr long long max () [inline], [static], [constexpr], [noexcept]
```

### 12.205.2.2 min()

```
static constexpr long long min () [inline], [static], [constexpr], [noexcept]
```

### 12.205.2.3 digits()

```
static constexpr int32_t digits () [inline], [static], [constexpr], [noexcept]
```

The documentation for this struct was generated from the following file:

- [flimits.h](#)

## 12.206 limits< RecInt::rint< K > > Struct Template Reference

```
#include <flimits.h>
```

### Public Types

- typedef [RecInt::ruint](#)< K > [T](#)

### Static Public Member Functions

- static constexpr [RecInt::rint](#)< K > [max](#) () noexcept
- static constexpr [RecInt::rint](#)< K > [min](#) () noexcept

## 12.206.1 Member Typedef Documentation

### 12.206.1.1 T

```
template<size_t K>
RecInt::ruint<K> T
```

## 12.206.2 Member Function Documentation

### 12.206.2.1 max()

```
template<size_t K>
static constexpr RecInt::rint< K > max () [inline], [static], [constexpr], [noexcept]
```

**12.206.2.2 min()**

```
template<size_t K>
static constexpr RecInt::rint< K > min () [inline], [static], [constexpr], [noexcept]
```

The documentation for this struct was generated from the following file:

- [flimits.h](#)

**12.207 limits< RecInt::ruint< K > > Struct Template Reference**

```
#include <flimits.h>
```

**Public Types**

- typedef [RecInt::ruint< K > T](#)

**Static Public Member Functions**

- static constexpr [RecInt::ruint< K > max](#) () noexcept
- static constexpr [RecInt::ruint< K > min](#) () noexcept

**12.207.1 Member Typedef Documentation****12.207.1.1 T**

```
template<size_t K>
RecInt::ruint<K> T
```

**12.207.2 Member Function Documentation****12.207.2.1 max()**

```
template<size_t K>
static constexpr RecInt::ruint< K > max () [inline], [static], [constexpr], [noexcept]
```

**12.207.2.2 min()**

```
template<size_t K>
static constexpr RecInt::ruint< K > min () [inline], [static], [constexpr], [noexcept]
```

The documentation for this struct was generated from the following file:

- [flimits.h](#)

**12.208 limits< short int > Struct Reference**

```
#include <flimits.h>
```

**Public Types**

- typedef short int [T](#)

**Static Public Member Functions**

- static constexpr short int [max](#) () noexcept
- static constexpr short int [min](#) () noexcept
- static constexpr int32\_t [digits](#) () noexcept

## 12.208.1 Member Typedef Documentation

### 12.208.1.1 T

short int [T](#)

## 12.208.2 Member Function Documentation

### 12.208.2.1 max()

static constexpr short int max () [inline], [static], [constexpr], [noexcept]

### 12.208.2.2 min()

static constexpr short int min () [inline], [static], [constexpr], [noexcept]

### 12.208.2.3 digits()

static constexpr int32\_t digits () [inline], [static], [constexpr], [noexcept]

The documentation for this struct was generated from the following file:

- [flimits.h](#)

## 12.209 limits< signed char > Struct Reference

```
#include <flimits.h>
```

### Public Types

- typedef signed char [T](#)

### Static Public Member Functions

- static constexpr signed char [max](#) () noexcept
- static constexpr signed char [min](#) () noexcept
- static constexpr int32\_t [digits](#) () noexcept

## 12.209.1 Member Typedef Documentation

### 12.209.1.1 T

signed char [T](#)

## 12.209.2 Member Function Documentation

### 12.209.2.1 max()

static constexpr signed char max () [inline], [static], [constexpr], [noexcept]

### 12.209.2.2 min()

static constexpr signed char min () [inline], [static], [constexpr], [noexcept]

### 12.209.2.3 digits()

static constexpr int32\_t digits () [inline], [static], [constexpr], [noexcept]

The documentation for this struct was generated from the following file:

- [flimits.h](#)

## 12.210 limits< unsigned char > Struct Reference

```
#include <flimits.h>
```

### Public Types

- typedef unsigned char [T](#)

### Static Public Member Functions

- static constexpr unsigned char [max](#) () noexcept
- static constexpr unsigned char [min](#) () noexcept
- static constexpr int32\_t [digits](#) () noexcept

### 12.210.1 Member Typedef Documentation

#### 12.210.1.1 T

```
unsigned char T
```

### 12.210.2 Member Function Documentation

#### 12.210.2.1 max()

```
static constexpr unsigned char max () [inline], [static], [constexpr], [noexcept]
```

#### 12.210.2.2 min()

```
static constexpr unsigned char min () [inline], [static], [constexpr], [noexcept]
```

#### 12.210.2.3 digits()

```
static constexpr int32_t digits () [inline], [static], [constexpr], [noexcept]
```

The documentation for this struct was generated from the following file:

- [flimits.h](#)

## 12.211 limits< unsigned int > Struct Reference

```
#include <flimits.h>
```

### Public Types

- typedef unsigned int [T](#)

### Static Public Member Functions

- static constexpr unsigned int [max](#) () noexcept
- static constexpr unsigned int [min](#) () noexcept
- static constexpr int32\_t [digits](#) () noexcept

### 12.211.1 Member Typedef Documentation

#### 12.211.1.1 T

```
unsigned int T
```

## 12.211.2 Member Function Documentation

### 12.211.2.1 max()

```
static constexpr unsigned int max () [inline], [static], [constexpr], [noexcept]
```

### 12.211.2.2 min()

```
static constexpr unsigned int min () [inline], [static], [constexpr], [noexcept]
```

### 12.211.2.3 digits()

```
static constexpr int32_t digits () [inline], [static], [constexpr], [noexcept]
```

The documentation for this struct was generated from the following file:

- [flimits.h](#)

## 12.212 limits< unsigned long > Struct Reference

```
#include <flimits.h>
```

### Public Types

- typedef unsigned long [T](#)

### Static Public Member Functions

- static constexpr unsigned long [max](#) () noexcept
- static constexpr unsigned long [min](#) () noexcept
- static constexpr int32\_t [digits](#) () noexcept

## 12.212.1 Member Typedef Documentation

### 12.212.1.1 T

```
unsigned long T
```

## 12.212.2 Member Function Documentation

### 12.212.2.1 max()

```
static constexpr unsigned long max () [inline], [static], [constexpr], [noexcept]
```

### 12.212.2.2 min()

```
static constexpr unsigned long min () [inline], [static], [constexpr], [noexcept]
```

### 12.212.2.3 digits()

```
static constexpr int32_t digits () [inline], [static], [constexpr], [noexcept]
```

The documentation for this struct was generated from the following file:

- [flimits.h](#)

## 12.213 limits< unsigned long long > Struct Reference

```
#include <flimits.h>
```

### Public Types

- typedef unsigned long long [T](#)

### Static Public Member Functions

- static constexpr unsigned long long [max](#) () noexcept
- static constexpr unsigned long long [min](#) () noexcept
- static constexpr int32\_t [digits](#) () noexcept

## 12.213.1 Member Typedef Documentation

### 12.213.1.1 T

unsigned long long [T](#)

## 12.213.2 Member Function Documentation

### 12.213.2.1 max()

static constexpr unsigned long long max () [inline], [static], [constexpr], [noexcept]

### 12.213.2.2 min()

static constexpr unsigned long long min () [inline], [static], [constexpr], [noexcept]

### 12.213.2.3 digits()

static constexpr int32\_t digits () [inline], [static], [constexpr], [noexcept]

The documentation for this struct was generated from the following file:

- [flimits.h](#)

## 12.214 limits< unsigned short int > Struct Reference

```
#include <flimits.h>
```

### Public Types

- typedef unsigned short int [T](#)

### Static Public Member Functions

- static constexpr unsigned short int [max](#) () noexcept
- static constexpr unsigned short int [min](#) () noexcept
- static constexpr int32\_t [digits](#) () noexcept

## 12.214.1 Member Typedef Documentation

### 12.214.1.1 T

unsigned short int [T](#)

## 12.214.2 Member Function Documentation

### 12.214.2.1 max()

static constexpr unsigned short int max () [inline], [static], [constexpr], [noexcept]

### 12.214.2.2 min()

static constexpr unsigned short int min () [inline], [static], [constexpr], [noexcept]

### 12.214.2.3 digits()

```
static constexpr int32_t digits () [inline], [static], [constexpr], [noexcept]
```

The documentation for this struct was generated from the following file:

- [flimits.h](#)

## 12.215 MachineFloatTag Struct Reference

float or double

```
#include <field-traits.h>
```

### 12.215.1 Detailed Description

float or double

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.216 MachineIntTag Struct Reference

short, int, long, long long, and unsigned variants

```
#include <field-traits.h>
```

### 12.216.1 Detailed Description

short, int, long, long long, and unsigned variants

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.217 MMHelper< Field, AlgoTrait, ModeTrait, ParSeqTrait > Struct Template Reference

### Public Types

- typedef [MMHelper](#)< [Field](#), [AlgoTrait](#), [ModeTrait](#), [ParSeqTrait](#) > [Self\\_t](#)
- typedef [associatedDelayedField](#)< [constField](#) >::type [DelayedField\\_t](#)
- typedef [associatedDelayedField](#)< [constField](#) >::field [DelayedField](#)
- typedef [DelayedField](#)::Element [DFElt](#)

### Public Member Functions

- void [initC](#) ()
- void [initA](#) ()
- void [initB](#) ()
- void [initOut](#) ()
- [size\\_t](#) [MaxDelayedDim](#) ([DFElt](#) beta)
- bool [Aunfit](#) ()
- bool [Bunfit](#) ()
- void [setOutBounds](#) (const [size\\_t](#) k, const [DFElt](#) alpha, const [DFElt](#) beta)
- bool [checkA](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_TRANSPOSE](#) ta, const [size\\_t](#) M, const [size\\_t](#) N, typename [Field::ConstElement\\_ptr](#) A, const [size\\_t](#) lda)
- bool [checkB](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_TRANSPOSE](#) tb, const [size\\_t](#) M, const [size\\_t](#) N, typename [Field::ConstElement\\_ptr](#) B, const [size\\_t](#) ldb)
- bool [checkOut](#) (const [Field](#) &F, const [size\\_t](#) M, const [size\\_t](#) N, typename [Field::ConstElement\\_ptr](#) A, const [size\\_t](#) lda)



- bool [checkOut](#) (const [Field](#) &F, [FFLAS\\_UPLO](#) uplo, const size\_t M, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda)
- [MMHelper](#) ()
- [MMHelper](#) (const [Field](#) &F, size\_t m, size\_t k, size\_t n, ParSeqTrait \_PS)
- [MMHelper](#) (const [Field](#) &F, int w, ParSeqTrait \_PS=ParSeqTrait())
- template<class F2 , typename AlgoT2 , typename FT2 , typename PS2 >  
[MMHelper](#) ([MMHelper](#)< F2, AlgoT2, FT2, PS2 > &WH)
- [MMHelper](#) (const [Field](#) &F, int w, [DFElt](#) \_Amin, [DFElt](#) \_Amax, [DFElt](#) \_Bmin, [DFElt](#) \_Bmax, [DFElt](#) \_Cmin, [DFElt](#) \_Cmax, ParSeqTrait \_PS=ParSeqTrait())

## Data Fields

- int [recLevel](#)
- [DFElt](#) [FieldMin](#)
- [DFElt](#) [FieldMax](#)
- [DFElt](#) [Amin](#)
- [DFElt](#) [Amax](#)
- [DFElt](#) [Bmin](#)
- [DFElt](#) [Bmax](#)
- [DFElt](#) [Cmin](#)
- [DFElt](#) [Cmax](#)
- [DFElt](#) [Outmin](#)
- [DFElt](#) [Outmax](#)
- [DFElt](#) [MaxStorableValue](#)
- const [DelayedField\\_t](#) [delayedField](#)
- ParSeqTrait [parseq](#)

## Friends

- std::ostream & [operator<<](#) (std::ostream &out, const [Self\\_t](#) &M)

## 12.217.1 Member Typedef Documentation

### 12.217.1.1 Self\_t

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
MMHelper<Field,AlgoTrait,ModeTrait,ParSeqTrait> Self\_t
```

### 12.217.1.2 DelayedField\_t

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
associatedDelayedField<constField>::type DelayedField\_t
```

### 12.217.1.3 DelayedField

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
associatedDelayedField<constField>::field DelayedField
```

### 12.217.1.4 DFElt

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
DelayedField::Element DFElt
```

## 12.217.2 Constructor & Destructor Documentation

### 12.217.2.1 MMHelper() [1/5]

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
MMHelper () [inline]
```

**12.217.2.2 MMHelper() [2/5]**

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
MMHelper (
    const Field & F,
    size_t m,
    size_t k,
    size_t n,
    ParSeqTrait _PS) [inline]
```

**12.217.2.3 MMHelper() [3/5]**

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
MMHelper (
    const Field & F,
    int w,
    ParSeqTrait _PS = ParSeqTrait()) [inline]
```

**12.217.2.4 MMHelper() [4/5]**

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
template<class F2 , typename AlgoT2 , typename FT2 , typename PS2 >
MMHelper (
    MMHelper< F2, AlgoT2, FT2, PS2 > & WH) [inline]
```

**12.217.2.5 MMHelper() [5/5]**

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
MMHelper (
    const Field & F,
    int w,
    DFelt _Amin,
    DFelt _Amax,
    DFelt _Bmin,
    DFelt _Bmax,
    DFelt _Cmin,
    DFelt _Cmax,
    ParSeqTrait _PS = ParSeqTrait()) [inline]
```

**12.217.3 Member Function Documentation****12.217.3.1 initC()**

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
void initC () [inline]
```

**12.217.3.2 initA()**

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
void initA () [inline]
```

**12.217.3.3 initB()**

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
void initB () [inline]
```

**12.217.3.4 initOut()**

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
void initOut () [inline]
```

**12.217.3.5 MaxDelayedDim()**

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
size_t MaxDelayedDim (
    DFelt beta) [inline]
```

**12.217.3.6 Aunfit()**

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
bool Aunfit () [inline]
```

**12.217.3.7 Bunfit()**

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
bool Bunfit () [inline]
```

**12.217.3.8 setOutBounds()**

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
void setOutBounds (
    const size_t k,
    const DFelt alpha,
    const DFelt beta) [inline]
```

**12.217.3.9 checkA()**

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
bool checkA (
    const Field & F,
    const FFLAS::FFLAS_TRANSPOSE ta,
    const size_t M,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t lda) [inline]
```

**12.217.3.10 checkB()**

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
bool checkB (
    const Field & F,
    const FFLAS::FFLAS_TRANSPOSE tb,
    const size_t M,
    const size_t N,
    typename Field::ConstElement_ptr B,
    const size_t ldb) [inline]
```

**12.217.3.11 checkOut() [1/2]**

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
bool checkOut (
    const Field & F,
    const size_t M,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t lda) [inline]
```

**12.217.3.12 checkOut() [2/2]**

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
bool checkOut (
```

```

    const Field & F,
    FFLAS_UPLO uplo,
    const size_t M,
    const size_t N,
    typename Field::ConstElement_ptr A,
    const size_t lda) [inline]

```

## 12.217.4 Friends And Related Symbol Documentation

### 12.217.4.1 operator<<

```

template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
std::ostream & operator<< (
    std::ostream & out,
    const Self_t & M) [friend]

```

## 12.217.5 Field Documentation

### 12.217.5.1 recLevel

```

template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
int recLevel

```

### 12.217.5.2 FieldMin

```

template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
DFElt FieldMin

```

### 12.217.5.3 FieldMax

```

template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
DFElt FieldMax

```

### 12.217.5.4 Amin

```

template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
DFElt Amin

```

### 12.217.5.5 Amax

```

template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
DFElt Amax

```

### 12.217.5.6 Bmin

```

template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
DFElt Bmin

```

### 12.217.5.7 Bmax

```

template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
DFElt Bmax

```

### 12.217.5.8 Cmin

```

template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
DFElt Cmin

```

#### 12.217.5.9 Cmax

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
DFelt Cmax
```

#### 12.217.5.10 Outmin

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
DFelt Outmin
```

#### 12.217.5.11 Outmax

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
DFelt Outmax
```

#### 12.217.5.12 MaxStorableValue

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
DFelt MaxStorableValue
```

#### 12.217.5.13 delayedField

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
const DelayedField_t delayedField
```

#### 12.217.5.14 parseq

```
template<class Field , typename AlgoTrait , typename ModeTrait , typename ParSeqTrait >
ParSeqTrait parseq
```

The documentation for this struct was generated from the following file:

- [fflas\\_helpers.inl](#)

## 12.218 MMHelper< FFPACK::RNSInteger< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait > Struct Template Reference

### Public Types

- typedef [MMHelper](#)< [FFPACK::RNSInteger](#)< E >, [AlgoTrait](#), [ModeCategories::DefaultTag](#), [ParSeqTrait](#) > [Self\\_t](#)

### Public Member Functions

- [MMHelper](#) ()
- [MMHelper](#) (Givaro::Integer Amax, Givaro::Integer Bmax)
- [MMHelper](#) (const [FFPACK::RNSInteger](#)< E > &F, size\_t m, size\_t n, size\_t k, [ParSeqTrait](#) PS=[ParSeqTrait](#)())
- [MMHelper](#) (const [FFPACK::RNSInteger](#)< E > &F, int wino, [ParSeqTrait](#) PS=[ParSeqTrait](#)())
- template<class F2 , class A2 , class M2 , class PS2 > [MMHelper](#) ([MMHelper](#)< F2, A2, M2, PS2 > H2)
- void [setNorm](#) (Givaro::Integer p)

### Data Fields

- Givaro::Integer [normA](#)
- Givaro::Integer [normB](#)
- int [recLevel](#)
- [ParSeqTrait](#) [parseq](#)

## Friends

- `std::ostream & operator<< (std::ostream &out, const Self_t &M)`

## 12.218.1 Member Typedef Documentation

### 12.218.1.1 Self\_t

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
MMHelper<FFPACK::RNSInteger<E>, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait> Self_t
```

## 12.218.2 Constructor & Destructor Documentation

### 12.218.2.1 MMHelper() [1/5]

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
MMHelper () [inline]
```

### 12.218.2.2 MMHelper() [2/5]

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
MMHelper (
    Givaro::Integer Amax,
    Givaro::Integer Bmax) [inline]
```

### 12.218.2.3 MMHelper() [3/5]

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
MMHelper (
    const FFPACK::RNSInteger< E > & F,
    size_t m,
    size_t n,
    size_t k,
    ParSeqTrait PS = ParSeqTrait()) [inline]
```

### 12.218.2.4 MMHelper() [4/5]

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
MMHelper (
    const FFPACK::RNSInteger< E > & F,
    int wino,
    ParSeqTrait PS = ParSeqTrait()) [inline]
```

### 12.218.2.5 MMHelper() [5/5]

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
template<class F2 , class A2 , class M2 , class PS2 >
MMHelper (
    MMHelper< F2, A2, M2, PS2 > H2) [inline]
```

## 12.218.3 Member Function Documentation

### 12.218.3.1 setNorm()

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
void setNorm (
    Givaro::Integer p) [inline]
```

## 12.218.4 Friends And Related Symbol Documentation

### 12.218.4.1 operator<<

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
std::ostream & operator<< (
    std::ostream & out,
    const Self_t & M) [friend]
```

## 12.218.5 Field Documentation

### 12.218.5.1 normA

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
Givaro::Integer normA
```

### 12.218.5.2 normB

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
Givaro::Integer normB
```

### 12.218.5.3 recLevel

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
int recLevel
```

### 12.218.5.4 parseq

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
ParSeqTrait parseq
```

The documentation for this struct was generated from the following file:

- [fgemm\\_classical\\_mp.inl](#)

## 12.219 MMHelper< FFPACK::RNSIntegerMod< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait > Struct Template Reference

### Public Types

- typedef [MMHelper< FFPACK::RNSIntegerMod< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait > Self\\_t](#)

### Public Member Functions

- [MMHelper](#) ()
- [MMHelper](#) (Givaro::Integer Amax, Givaro::Integer Bmax)
- [MMHelper](#) (const [FFPACK::RNSIntegerMod< E >](#) &F, size\_t m, size\_t n, size\_t k, ParSeqTrait PS=[ParSeqTrait](#)())
- [MMHelper](#) (const [FFPACK::RNSIntegerMod< E >](#) &F, int wino, ParSeqTrait PS=[ParSeqTrait](#)())
- template<class F2 , typename AlgoT2 , typename FT2 , typename PS2 > [MMHelper](#) ([MMHelper](#)< F2, AlgoT2, FT2, PS2 > &WH)
- void [setNorm](#) (Givaro::Integer p)

### Data Fields

- Givaro::Integer [normA](#)
- Givaro::Integer [normB](#)
- int [recLevel](#)
- ParSeqTrait [parseq](#)

## Friends

- `std::ostream & operator<< (std::ostream &out, const Self_t &M)`

## 12.219.1 Member Typedef Documentation

### 12.219.1.1 Self\_t

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
MMHelper<FFPACK::RNSIntegerMod<E>, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait> Self_t
```

## 12.219.2 Constructor & Destructor Documentation

### 12.219.2.1 MMHelper() [1/5]

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
MMHelper () [inline]
```

### 12.219.2.2 MMHelper() [2/5]

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
MMHelper (
    Givaro::Integer Amax,
    Givaro::Integer Bmax) [inline]
```

### 12.219.2.3 MMHelper() [3/5]

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
MMHelper (
    const FFPACK::RNSIntegerMod< E > & F,
    size_t m,
    size_t n,
    size_t k,
    ParSeqTrait PS = ParSeqTrait()) [inline]
```

### 12.219.2.4 MMHelper() [4/5]

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
MMHelper (
    const FFPACK::RNSIntegerMod< E > & F,
    int wino,
    ParSeqTrait PS = ParSeqTrait()) [inline]
```

### 12.219.2.5 MMHelper() [5/5]

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
template<class F2 , typename AlgoT2 , typename FT2 , typename PS2 >
MMHelper (
    MMHelper< F2, AlgoT2, FT2, PS2 > & WH) [inline]
```

## 12.219.3 Member Function Documentation

### 12.219.3.1 setNorm()

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
void setNorm (
    Givaro::Integer p) [inline]
```



## 12.219.4 Friends And Related Symbol Documentation

### 12.219.4.1 operator<<

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
std::ostream & operator<< (
    std::ostream & out,
    const Self_t & M) [friend]
```

## 12.219.5 Field Documentation

### 12.219.5.1 normA

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
Givaro::Integer normA
```

### 12.219.5.2 normB

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
Givaro::Integer normB
```

### 12.219.5.3 recLevel

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
int recLevel
```

### 12.219.5.4 parseq

```
template<typename E , typename AlgoTrait , typename ParSeqTrait >
ParSeqTrait parseq
```

The documentation for this struct was generated from the following file:

- [fgemm\\_classical\\_mp.inl](#)

## 12.220 MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo< Dest >, ParSeqTrait > Struct Template Reference

### Public Types

- typedef MMHelper< [Field](#), AlgoTrait, [ModeCategories::ConvertTo< Dest >](#), ParSeqTrait > [Self\\_t](#)

### Public Member Functions

- [MMHelper](#) ()
- [MMHelper](#) (const [Field](#) &F, size\_t m, size\_t k, size\_t n, ParSeqTrait \_PS)
- [MMHelper](#) (const [Field](#) &F, int w, ParSeqTrait \_PS=ParSeqTrait())
- template<class F2 , typename AlgoT2 , typename FT2 , typename PS2 > [MMHelper](#) ([MMHelper](#)< F2, AlgoT2, FT2, PS2 > &WH)

### Data Fields

- int [recLevel](#)
- ParSeqTrait [parseq](#)

### Friends

- std::ostream & [operator<<](#) (std::ostream &out, const [Self\\_t](#) &M)

## 12.220.1 Member Typedef Documentation

### 12.220.1.1 Self\_t

```
template<class Field , typename AlgoTrait , typename Dest , typename ParSeqTrait >
MMHelper<Field,AlgoTrait, ModeCategories::ConvertTo<Dest>,ParSeqTrait> Self_t
```

## 12.220.2 Constructor & Destructor Documentation

### 12.220.2.1 MMHelper() [1/4]

```
template<class Field , typename AlgoTrait , typename Dest , typename ParSeqTrait >
MMHelper () [inline]
```

### 12.220.2.2 MMHelper() [2/4]

```
template<class Field , typename AlgoTrait , typename Dest , typename ParSeqTrait >
MMHelper (
    const Field & F,
    size_t m,
    size_t k,
    size_t n,
    ParSeqTrait _PS) [inline]
```

### 12.220.2.3 MMHelper() [3/4]

```
template<class Field , typename AlgoTrait , typename Dest , typename ParSeqTrait >
MMHelper (
    const Field & F,
    int w,
    ParSeqTrait _PS = ParSeqTrait()) [inline]
```

### 12.220.2.4 MMHelper() [4/4]

```
template<class Field , typename AlgoTrait , typename Dest , typename ParSeqTrait >
template<class F2 , typename AlgoT2 , typename FT2 , typename PS2 >
MMHelper (
    MMHelper< F2, AlgoT2, FT2, PS2 > & WH) [inline]
```

## 12.220.3 Friends And Related Symbol Documentation

### 12.220.3.1 operator<<

```
template<class Field , typename AlgoTrait , typename Dest , typename ParSeqTrait >
std::ostream & operator<< (
    std::ostream & out,
    const Self_t & M) [friend]
```

## 12.220.4 Field Documentation

### 12.220.4.1 recLevel

```
template<class Field , typename AlgoTrait , typename Dest , typename ParSeqTrait >
int recLevel
```

### 12.220.4.2 parseq

```
template<class Field , typename AlgoTrait , typename Dest , typename ParSeqTrait >
ParSeqTrait parseq
```

The documentation for this struct was generated from the following file:

- [fflas\\_helpers.inl](#)

## 12.221 MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeqTrait > Struct Template Reference

### Public Types

- typedef [MMHelper](#)< [Field](#), [AlgoTrait](#), [ModeCategories::ConvertTo](#)< [ElementCategories::RNSElementTag](#) >, [ParSeqTrait](#) > [Self\\_t](#)

### Public Member Functions

- [MMHelper](#) ()
- template<class F2 , class A2 , class M2 , class PS2 >  
[MMHelper](#) ([MMHelper](#)< F2, A2, M2, PS2 > H2)
- [MMHelper](#) (Givaro::Integer Amax, Givaro::Integer Bmax)
- [MMHelper](#) (const [Field](#) &F, size\_t m, size\_t n, size\_t k, [ParSeqTrait](#) PS=[ParSeqTrait](#)())
- [MMHelper](#) (const [Field](#) &F, int wino, [ParSeqTrait](#) PS=[ParSeqTrait](#)())
- void [setNorm](#) (Givaro::Integer p)

### Data Fields

- Givaro::Integer [normA](#)
- Givaro::Integer [normB](#)
- int [recLevel](#)
- [ParSeqTrait](#) [parseq](#)

### Friends

- std::ostream & [operator<<](#) (std::ostream &out, const [Self\\_t](#) &M)

## 12.221.1 Member Typedef Documentation

### 12.221.1.1 Self\_t

```
template<typename Field , typename AlgoTrait , typename ParSeqTrait >
MMHelper<Field, AlgoTrait,ModeCategories::ConvertTo<ElementCategories::RNSElementTag>, ParSeqTrait> Self\_t
```

## 12.221.2 Constructor & Destructor Documentation

### 12.221.2.1 MMHelper() [1/5]

```
template<typename Field , typename AlgoTrait , typename ParSeqTrait >
MMHelper () [inline]
```

### 12.221.2.2 MMHelper() [2/5]

```
template<typename Field , typename AlgoTrait , typename ParSeqTrait >
template<class F2 , class A2 , class M2 , class PS2 >
MMHelper (
    MMHelper< F2, A2, M2, PS2 > H2) [inline]
```

### 12.221.2.3 MMHelper() [3/5]

```
template<typename Field , typename AlgoTrait , typename ParSeqTrait >
MMHelper (
    Givaro::Integer Amax,
    Givaro::Integer Bmax) [inline]
```

**12.221.2.4 MMHelper() [4/5]**

```
template<typename Field , typename AlgoTrait , typename ParSeqTrait >
MMHelper (
    const Field & F,
    size_t m,
    size_t n,
    size_t k,
    ParSeqTrait PS = ParSeqTrait()) [inline]
```

**12.221.2.5 MMHelper() [5/5]**

```
template<typename Field , typename AlgoTrait , typename ParSeqTrait >
MMHelper (
    const Field & F,
    int wino,
    ParSeqTrait PS = ParSeqTrait()) [inline]
```

**12.221.3 Member Function Documentation****12.221.3.1 setNorm()**

```
template<typename Field , typename AlgoTrait , typename ParSeqTrait >
void setNorm (
    Givaro::Integer p) [inline]
```

**12.221.4 Friends And Related Symbol Documentation****12.221.4.1 operator<<**

```
template<typename Field , typename AlgoTrait , typename ParSeqTrait >
std::ostream & operator<< (
    std::ostream & out,
    const Self_t & M) [friend]
```

**12.221.5 Field Documentation****12.221.5.1 normA**

```
template<typename Field , typename AlgoTrait , typename ParSeqTrait >
Givaro::Integer normA
```

**12.221.5.2 normB**

```
template<typename Field , typename AlgoTrait , typename ParSeqTrait >
Givaro::Integer normB
```

**12.221.5.3 recLevel**

```
template<typename Field , typename AlgoTrait , typename ParSeqTrait >
int recLevel
```

**12.221.5.4 parseq**

```
template<typename Field , typename AlgoTrait , typename ParSeqTrait >
ParSeqTrait parseq
```

The documentation for this struct was generated from the following file:

- [fgemm\\_classical\\_mp.inl](#)

## 12.222 MMHelper< Field, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait > Struct Template Reference

FGEMM Helper for Default and ConvertTo modes of operation.

### Public Types

- typedef [MMHelper](#)< [Field](#), [AlgoTrait](#), [ModeCategories::DefaultTag](#), [ParSeqTrait](#) > [Self\\_t](#)

### Public Member Functions

- [MMHelper](#) ()
- [MMHelper](#) (const [Field](#) &F, size\_t m, size\_t k, size\_t n, [ParSeqTrait](#) \_PS)
- [MMHelper](#) (const [Field](#) &F, int w, [ParSeqTrait](#) \_PS=[ParSeqTrait](#)())
- template<class F2 , typename AlgoT2 , typename FT2 , typename PS2 >  
[MMHelper](#) ([MMHelper](#)< F2, AlgoT2, FT2, PS2 > &WH)

### Data Fields

- int [recLevel](#)
- [ParSeqTrait](#) [parseq](#)

### Friends

- std::ostream & [operator<<](#) (std::ostream &out, const [Self\\_t](#) &M)

### 12.222.1 Detailed Description

```
template<class Field, typename AlgoTrait, typename ParSeqTrait>
struct FFLAS::MMHelper< Field, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >
```

FGEMM Helper for Default and ConvertTo modes of operation.

### 12.222.2 Member Typedef Documentation

#### 12.222.2.1 Self\_t

```
template<class Field , typename AlgoTrait , typename ParSeqTrait >
MMHelper<Field,AlgoTrait, ModeCategories::DefaultTag,ParSeqTrait> Self\_t
```

### 12.222.3 Constructor & Destructor Documentation

#### 12.222.3.1 MMHelper() [1/4]

```
template<class Field , typename AlgoTrait , typename ParSeqTrait >
MMHelper () [inline]
```

#### 12.222.3.2 MMHelper() [2/4]

```
template<class Field , typename AlgoTrait , typename ParSeqTrait >
MMHelper (
    const Field & F,
    size_t m,
    size_t k,
    size_t n,
    ParSeqTrait _PS) [inline]
```

**12.222.3.3 MMHelper() [3/4]**

```
template<class Field , typename AlgoTrait , typename ParSeqTrait >
MMHelper (
    const Field & F,
    int w,
    ParSeqTrait _PS = ParSeqTrait()) [inline]
```

**12.222.3.4 MMHelper() [4/4]**

```
template<class Field , typename AlgoTrait , typename ParSeqTrait >
template<class F2 , typename AlgoT2 , typename FT2 , typename PS2 >
MMHelper (
    MMHelper< F2, AlgoT2, FT2, PS2 > & WH) [inline]
```

**12.222.4 Friends And Related Symbol Documentation****12.222.4.1 operator<<**

```
template<class Field , typename AlgoTrait , typename ParSeqTrait >
std::ostream & operator<< (
    std::ostream & out,
    const Self_t & M) [friend]
```

**12.222.5 Field Documentation****12.222.5.1 recLevel**

```
template<class Field , typename AlgoTrait , typename ParSeqTrait >
int recLevel
```

**12.222.5.2 parseq**

```
template<class Field , typename AlgoTrait , typename ParSeqTrait >
ParSeqTrait parseq
```

The documentation for this struct was generated from the following file:

- [fflas\\_helpers.inl](#)

**12.223 ModeTraits< Field > Struct Template Reference**

[ModeTraits.](#)

```
#include <field-traits.h>
```

**Public Types**

- typedef [ModeCategories::DefaultTag](#) value

**12.223.1 Detailed Description**

```
template<class Field>
struct FFLAS::ModeTraits< Field >
```

[ModeTraits.](#)

**12.223.2 Member Typedef Documentation****12.223.2.1 value**

```
template<class Field >
ModeCategories::DefaultTag value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.224 ModeTraits< Givaro::Modular< Element, Compute > > Struct Template Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ModeCategories::DelayedTag](#) value

### 12.224.1 Member Typedef Documentation

#### 12.224.1.1 value

```
template<typename Element , typename Compute >
```

```
ModeCategories::DelayedTag value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.225 ModeTraits< Givaro::Modular< Givaro::Integer, Compute > > Struct Template Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ModeCategories::ConvertTo< ElementCategories::RNSElementTag >](#) value

### 12.225.1 Member Typedef Documentation

#### 12.225.1.1 value

```
template<typename Compute >
```

```
ModeCategories::ConvertTo<ElementCategories::RNSElementTag> value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.226 ModeTraits< Givaro::Modular< int16\_t, Compute > > Struct Template Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ModeCategories::ConvertTo< ElementCategories::MachineFloatTag >](#) value

### 12.226.1 Member Typedef Documentation

#### 12.226.1.1 value

```
template<typename Compute >
```

```
ModeCategories::ConvertTo<ElementCategories::MachineFloatTag> value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.227 ModeTraits< Givaro::Modular< int32\_t, Compute > > Struct Template Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ModeCategories::ConvertTo< ElementCategories::MachineFloatTag > value](#)

### 12.227.1 Member Typedef Documentation

#### 12.227.1.1 value

```
template<typename Compute >
```

```
ModeCategories::ConvertTo<ElementCategories::MachineFloatTag> value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.228 ModeTraits< Givaro::Modular< int64\_t, uint64\_t > > Struct Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ModeCategories::DefaultTag value](#)

### 12.228.1 Member Typedef Documentation

#### 12.228.1.1 value

```
ModeCategories::DefaultTag value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.229 ModeTraits< Givaro::Modular< int8\_t, Compute > > Struct Template Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ModeCategories::ConvertTo< ElementCategories::MachineFloatTag > value](#)

### 12.229.1 Member Typedef Documentation

#### 12.229.1.1 value

```
template<typename Compute >
```

```
ModeCategories::ConvertTo<ElementCategories::MachineFloatTag> value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)



## 12.230 ModeTraits< Givaro::Modular< RecInt::ruint< K >, Compute > > Struct Template Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ModeCategories::ConvertTo< ElementCategories::RNSElementTag > value](#)

### 12.230.1 Member Typedef Documentation

#### 12.230.1.1 value

```
template<typename Compute , size_t K>
```

```
ModeCategories::ConvertTo<ElementCategories::RNSElementTag> value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.231 ModeTraits< Givaro::Modular< uint16\_t, Compute > > Struct Template Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ModeCategories::ConvertTo< ElementCategories::MachineFloatTag > value](#)

### 12.231.1 Member Typedef Documentation

#### 12.231.1.1 value

```
template<typename Compute >
```

```
ModeCategories::ConvertTo<ElementCategories::MachineFloatTag> value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.232 ModeTraits< Givaro::Modular< uint32\_t, Compute > > Struct Template Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ModeCategories::ConvertTo< ElementCategories::MachineFloatTag > value](#)

### 12.232.1 Member Typedef Documentation

#### 12.232.1.1 value

```
template<typename Compute >
```

```
ModeCategories::ConvertTo<ElementCategories::MachineFloatTag> value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.233 ModeTraits< Givaro::Modular< uint8\_t, Compute > > Struct Template Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ModeCategories::ConvertTo< ElementCategories::MachineFloatTag > value](#)

### 12.233.1 Member Typedef Documentation

#### 12.233.1.1 value

```
template<typename Compute >
```

```
ModeCategories::ConvertTo<ElementCategories::MachineFloatTag> value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.234 ModeTraits< Givaro::ModularBalanced< Element > > Struct Template Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ModeCategories::DelayedTag value](#)

### 12.234.1 Member Typedef Documentation

#### 12.234.1.1 value

```
template<typename Element >
```

```
ModeCategories::DelayedTag value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.235 ModeTraits< Givaro::ModularBalanced< Givaro::Integer > > Struct Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ModeCategories::ConvertTo< ElementCategories::RNSElementTag > value](#)

### 12.235.1 Member Typedef Documentation

#### 12.235.1.1 value

```
ModeCategories::ConvertTo<ElementCategories::RNSElementTag> value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.236 ModeTraits< Givaro::ModularBalanced< int16\_t > > Struct Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ModeCategories::ConvertTo< ElementCategories::MachineFloatTag > value](#)

### 12.236.1 Member Typedef Documentation

#### 12.236.1.1 value

[ModeCategories::ConvertTo<ElementCategories::MachineFloatTag> value](#)

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.237 ModeTraits< Givaro::ModularBalanced< int32\_t > > Struct Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ModeCategories::ConvertTo< ElementCategories::MachineFloatTag > value](#)

### 12.237.1 Member Typedef Documentation

#### 12.237.1.1 value

[ModeCategories::ConvertTo<ElementCategories::MachineFloatTag> value](#)

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.238 ModeTraits< Givaro::ModularBalanced< int8\_t > > Struct Reference

```
#include <field-traits.h>
```

### Public Types

- typedef [ModeCategories::ConvertTo< ElementCategories::MachineFloatTag > value](#)

### 12.238.1 Member Typedef Documentation

#### 12.238.1.1 value

[ModeCategories::ConvertTo<ElementCategories::MachineFloatTag> value](#)

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.239 ModeTraits< Givaro::Montgomery< T > > Struct Template Reference

```
#include <field-traits.h>
```

**Public Types**

- typedef [ModeCategories::DefaultBoundedTag](#) value

**12.239.1 Member Typedef Documentation****12.239.1.1 value**

```
template<class T >
```

```
ModeCategories::DefaultBoundedTag value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

**12.240 ModeTraits< Givaro::ZRing< double > > Struct Reference**

```
#include <field-traits.h>
```

**Public Types**

- typedef [ModeCategories::DefaultBoundedTag](#) value

**12.240.1 Member Typedef Documentation****12.240.1.1 value**

```
ModeCategories::DefaultBoundedTag value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

**12.241 ModeTraits< Givaro::ZRing< float > > Struct Reference**

```
#include <field-traits.h>
```

**Public Types**

- typedef [ModeCategories::DefaultBoundedTag](#) value

**12.241.1 Member Typedef Documentation****12.241.1.1 value**

```
ModeCategories::DefaultBoundedTag value
```

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

**12.242 ModeTraits< Givaro::ZRing< Givaro::Integer > > Struct Reference**

```
#include <field-traits.h>
```

**Public Types**

- typedef [ModeCategories::ConvertTo< ElementCategories::RNSElementTag >](#) value

### 12.242.1 Member Typedef Documentation

#### 12.242.1.1 value

`ModeCategories::ConvertTo<ElementCategories::RNSElementTag> value`

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.243 ModularBalanced< T > Class Template Reference

The documentation for this class was generated from the following file:

- [field-traits.h](#)

### 12.244 ModularTag Struct Reference

This is a modular field like e.g. `Modular<T>` or `ModularBalanced<T>`  
`#include <field-traits.h>`

#### 12.244.1 Detailed Description

This is a modular field like e.g. `Modular<T>` or `ModularBalanced<T>`  
 The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.245 Montgomery< T > Class Template Reference

The documentation for this class was generated from the following file:

- [field-traits.h](#)

## 12.246 need\_field\_characteristic< Field > Struct Template Reference

### Static Public Attributes

- static constexpr bool [value](#) = false

#### 12.246.1 Field Documentation

##### 12.246.1.1 value

```
template<typename Field >
bool value = false [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [benchmark-fgemv.C](#)

## 12.247 need\_field\_characteristic< Givaro::Modular< Field > > Struct Template Reference

### Static Public Attributes

- static constexpr bool [value](#) = true

## 12.247.1 Field Documentation

### 12.247.1.1 value

```
template<typename Field >
bool value = true [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [benchmark-fgemv.C](#)

## 12.248 need\_field\_characteristic< Givaro::ModularBalanced< Field > > Struct Template Reference

### Static Public Attributes

- static constexpr bool [value](#) = true

## 12.248.1 Field Documentation

### 12.248.1.1 value

```
template<typename Field >
bool value = true [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [benchmark-fgemv.C](#)

## 12.249 NoSimd< T > Struct Template Reference

```
#include <fflas_simd.h>
```

### Public Types

- using [vect\\_t](#) = T\*
- using [scalar\\_t](#) = T
- using [aligned\\_allocator](#) = AlignedAllocator<[scalar\\_t](#), Alignment([alignment](#))>
- using [aligned\\_vector](#) = std::vector<[scalar\\_t](#), [aligned\\_allocator](#)>
- template<class [Field](#) >
 using [is\\_same\\_element](#) = std::is\_same<typename [Field::Element](#), T>

### Static Public Member Functions

- static const std::string [type\\_string](#) ()
- template<class TT >
 static constexpr bool [valid](#) (TT p)
- template<class TT >
 static constexpr bool [compliant](#) (TT n)

### Static Public Attributes

- static const constexpr size\_t [vect\\_size](#) = 1
- static const constexpr size\_t [alignment](#) = static\_cast<size\_t>(Alignment::Normal)

## 12.249.1 Member Typedef Documentation

### 12.249.1.1 vect\_t

```
template<typename T >
using vect\_t = T*
```

**12.249.1.2 scalar\_t**

```
template<typename T >
using scalar_t = T
```

**12.249.1.3 aligned\_allocator**

```
template<typename T >
using aligned_allocator = AlignedAllocator<scalar_t, Alignment(alignment)>
```

**12.249.1.4 aligned\_vector**

```
template<typename T >
using aligned_vector = std::vector<scalar_t, aligned_allocator>
```

**12.249.1.5 is\_same\_element**

```
template<typename T >
template<class Field >
using is_same_element = std::is_same<typename Field::Element, T>
```

**12.249.2 Member Function Documentation****12.249.2.1 type\_string()**

```
template<typename T >
static const std::string type_string () [inline], [static]
```

**12.249.2.2 valid()**

```
template<typename T >
template<class TT >
static constexpr bool valid (
    TT p) [inline], [static], [constexpr]
```

**12.249.2.3 compliant()**

```
template<typename T >
template<class TT >
static constexpr bool compliant (
    TT n) [inline], [static], [constexpr]
```

**12.249.3 Field Documentation****12.249.3.1 vect\_size**

```
template<typename T >
const constexpr size_t vect_size = 1 [static], [constexpr]
```

**12.249.3.2 alignment**

```
template<typename T >
const constexpr size_t alignment = static_cast<size_t>(Alignment::Normal) [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [fflas\\_simd.h](#)

## 12.250 Parallel< C, P > Struct Template Reference

### Public Types

- typedef C [Cut](#)
- typedef P [Param](#)

### Public Member Functions

- [Parallel](#) (size\_t n=NUM\_THREADS)
- size\_t [numthreads](#) () const
- size\_t & [set\\_numthreads](#) (size\_t n)

### Friends

- std::ostream & [operator<<](#) (std::ostream &out, const [Parallel](#) &p)

## 12.250.1 Member Typedef Documentation

### 12.250.1.1 Cut

```
template<typename C = CuttingStrategy::Block, typename P = StrategyParameter::Threads>
C Cut
```

### 12.250.1.2 Param

```
template<typename C = CuttingStrategy::Block, typename P = StrategyParameter::Threads>
P Param
```

## 12.250.2 Constructor & Destructor Documentation

### 12.250.2.1 Parallel()

```
template<typename C = CuttingStrategy::Block, typename P = StrategyParameter::Threads>
Parallel (
    size_t n = NUM\_THREADS) [inline]
```

## 12.250.3 Member Function Documentation

### 12.250.3.1 numthreads()

```
template<typename C = CuttingStrategy::Block, typename P = StrategyParameter::Threads>
size_t numthreads () const [inline]
```

### 12.250.3.2 set\_numthreads()

```
template<typename C = CuttingStrategy::Block, typename P = StrategyParameter::Threads>
size_t & set_numthreads (
    size_t n) [inline]
```

## 12.250.4 Friends And Related Symbol Documentation

### 12.250.4.1 operator<<

```
template<typename C = CuttingStrategy::Block, typename P = StrategyParameter::Threads>
std::ostream & operator<< (
    std::ostream & out,
    const Parallel< C, P > & p) [friend]
```

The documentation for this struct was generated from the following file:


- [blockcuts.inl](#)



## 12.251 RNSInteger< RNS >::RandIter Class Reference

```
#include <rns-integer.h>
```

Inheritance diagram for RNSInteger< RNS >::RandIter:



### Public Member Functions

- [RandIter](#) (const [RNSInteger< RNS >](#) &F, uint64\_t seed=0)
- [RNS::Element](#) & [random](#) (typename [RNS::Element](#) &elt) const  
*RNS ring Element random assignment.*
- [RNS::Element](#) [random](#) () const
- [RNS::Element](#) & [operator\(\)](#) (typename [RNS::Element](#) &elt) const
- [RNS::Element](#) [operator\(\)](#) () const
- const [RNS](#) & [ring](#) () const

### 12.251.1 Constructor & Destructor Documentation

#### 12.251.1.1 RandIter()

```
template<typename RNS >
RandIter (
    const RNSInteger< RNS > & F,
    uint64_t seed = 0) [inline]
```

### 12.251.2 Member Function Documentation

#### 12.251.2.1 random() [1/2]

```
template<typename RNS >
RNS::Element & random (
    typename RNS::Element & elt) const [inline], [inherited]
```

RNS ring Element random assignment.

Element is supposed to be initialized

Returns

random ring Element

#### 12.251.2.2 random() [2/2]

```
template<typename RNS >
RNS::Element random () const [inline], [inherited]
```

#### 12.251.2.3 operator>() [1/2]

```
template<typename RNS >
RNS::Element & operator() (
    typename RNS::Element & elt) const [inline], [inherited]
```

#### 12.251.2.4 operator>() [2/2]

```
template<typename RNS >
RNS::Element operator() () const [inline], [inherited]
```

### 12.251.2.5 ring()

```
template<typename RNS >
```

```
const RNS & ring () const [inline], [inherited]
```

The documentation for this class was generated from the following file:

- [rns-integer.h](#)

## 12.252 RNSIntegerMod< RNS >::RandIter Class Reference

```
#include <rns-integer-mod.h>
```

Inheritance diagram for RNSIntegerMod< RNS >::RandIter:



### Public Member Functions

- [RandIter](#) (const [RNSIntegerMod< RNS >](#) &F, uint64\_t seed=0)
- [RNS::Element](#) & [random](#) (typename [RNS::Element](#) &elt) const
- [RNS::Element](#) [random](#) () const
- [RNS::Element](#) & [operator\(\)](#) (typename [RNS::Element](#) &elt) const
- [RNS::Element](#) [operator\(\)](#) () const
- const [RNS](#) & [ring](#) () const

### 12.252.1 Constructor & Destructor Documentation

#### 12.252.1.1 RandIter()

```
template<typename RNS >
```

```
RandIter (
    const RNSIntegerMod< RNS > & F,
    uint64_t seed = 0) [inline]
```

### 12.252.2 Member Function Documentation

#### 12.252.2.1 random() [1/2]

```
template<typename RNS >
```

```
RNS::Element & random (
    typename RNS::Element & elt) const [inline]
```

#### 12.252.2.2 random() [2/2]

```
template<typename RNS >
```

```
RNS::Element random () const [inline], [inherited]
```

#### 12.252.2.3 operator>() [1/2]

```
template<typename RNS >
```

```
RNS::Element & operator() (
    typename RNS::Element & elt) const [inline], [inherited]
```

#### 12.252.2.4 operator>() [2/2]

```
template<typename RNS >
```

```
RNS::Element operator() () const [inline], [inherited]
```

**12.252.2.5 ring()**

```
template<typename RNS >
```

```
const RNS & ring () const [inline], [inherited]
```

The documentation for this class was generated from the following file:

- [rns-integer-mod.h](#)

**12.253 readMyMachineType< Field, T > Struct Template Reference**

```
#include <read_sparse.h>
```

**Public Types**

- typedef [Field::Element](#) [Element](#)
- typedef [Field::Element\\_ptr](#) [Element\\_ptr](#)

**Public Member Functions**

- void [operator\(\)](#) (const [Field](#) &F, [Element](#) &modulo, [Element\\_ptr](#) val, std::ifstream &file, const uint64\_t dims, const [mask\\_t](#) data\_type, const [mask\\_t](#) field\_desc)

**12.253.1 Member Typedef Documentation****12.253.1.1 Element**

```
template<class Field , class T >
```

```
Field::Element Element
```

**12.253.1.2 Element\_ptr**

```
template<class Field , class T >
```

```
Field::Element_ptr Element_ptr
```

**12.253.2 Member Function Documentation****12.253.2.1 operator>()()**

```
template<class Field , typename T >
```

```
void operator() (
    const Field & F,
    Element & modulo,
    Element_ptr val,
    std::ifstream & file,
    const uint64_t dims,
    const mask_t data_type,
    const mask_t field_desc)
```

The documentation for this struct was generated from the following file:

- [read\\_sparse.h](#)

**12.254 readMyMachineType< Field, mpz\_t > Struct Template Reference**

```
#include <read_sparse.h>
```

**Public Types**

- typedef [Field::Element](#) [Element](#)
- typedef [Field::Element\\_ptr](#) [Element\\_ptr](#)

## Public Member Functions

- void [operator\(\)](#) (const [Field](#) &F, [Element](#) &modulo, [Element\\_ptr](#) val, std::ifstream &file, const uint64\_t dims, const [mask\\_t](#) data\_type, const [mask\\_t](#) field\_desc)

## 12.254.1 Member Typedef Documentation

### 12.254.1.1 Element

```
template<class Field >
Field::Element Element
```

### 12.254.1.2 Element\_ptr

```
template<class Field >
Field::Element\_ptr Element\_ptr
```

## 12.254.2 Member Function Documentation

### 12.254.2.1 operator>()

```
template<class Field >
void operator\(\) (
    const Field & F,
    typename Field::Element & modulo,
    typename Field::Element\_ptr val,
    std::ifstream & file,
    const uint64_t dims,
    const mask\_t data_type,
    const mask\_t field_desc)
```

The documentation for this struct was generated from the following file:

- [read\\_sparse.h](#)

## 12.255 Recursive Struct Reference

The documentation for this struct was generated from the following file:

- [blockcuts.inl](#)

## 12.256 Recursive Struct Reference

The documentation for this struct was generated from the following file:

- [fflas\\_helpers.inl](#)

## 12.257 rint< K > Class Template Reference

The documentation for this class was generated from the following file:

- [field-traits.h](#)

## 12.258 rns\_double Struct Reference

```
#include <rns-double.h>
```

## Public Types

- typedef Givaro::Integer [integer](#)
- typedef Givaro::Modular< double > [ModField](#)
- typedef double [BasisElement](#)
- typedef [rns\\_double\\_elt](#) [Element](#)
- typedef [rns\\_double\\_elt\\_ptr](#) [Element\\_ptr](#)
- typedef [rns\\_double\\_elt\\_cstptr](#) [ConstElement\\_ptr](#)

## Public Member Functions

- [rns\\_double](#) (const [integer](#) &bound, size\_t pbits, bool rnsmod=false, long seed=time(NULL))
- [rns\\_double](#) (size\_t pbits, size\_t size, long seed=time(NULL))
- template<typename Vect >  
  [rns\\_double](#) (const Vect &basis, bool rnsmod=false, long seed=time(NULL))
- [rns\\_double](#) (const [RNSIntegerMod](#)< [rns\\_double](#) > &basis, bool rnsmod=false, long seed=time(NULL))
- void [precompute\\_cst](#) (size\_t K=0)
- template<typename T >  
  void [init](#) (size\_t m, size\_t n, double \*Arns, size\_t rda, const T \*A, size\_t lda, const [integer](#) &maxA, bool RNS\_MAJOR=false) const
- void [init](#) (size\_t m, size\_t n, double \*Arns, size\_t rda, const [integer](#) \*A, size\_t lda, size\_t k, bool RNS\_MAJOR=false) const
- void [init\\_transpose](#) (size\_t m, size\_t n, double \*Arns, size\_t rda, const [integer](#) \*A, size\_t lda, size\_t k, bool RNS\_MAJOR=false) const
- void [convert](#) (size\_t m, size\_t n, [integer](#) gamma, [integer](#) \*A, size\_t lda, const double \*Arns, size\_t rda, bool RNS\_MAJOR=false) const
- void [convert\\_transpose](#) (size\_t m, size\_t n, [integer](#) gamma, [integer](#) \*A, size\_t lda, const double \*Arns, size\_t rda, bool RNS\_MAJOR=false) const
- void [reduce](#) (size\_t n, double \*Arns, size\_t rda, bool RNS\_MAJOR=false) const
- template<size\_t K>  
  void [init](#) (size\_t m, size\_t n, double \*Arns, size\_t rda, const [Reclnt::ruint](#)< K > \*A, size\_t lda, size\_t k, bool RNS\_MAJOR=false) const
- template<size\_t K>  
  void [convert](#) (size\_t m, size\_t n, [integer](#) gamma, [Reclnt::ruint](#)< K > \*A, size\_t lda, const double \*Arns, size\_t rda, [integer](#) p=0, bool RNS\_MAJOR=false) const

## Data Fields

- std::vector< double, AlignedAllocator< double, Alignment::CACHE\_LINE > > [\\_basis](#)
- std::vector< double, AlignedAllocator< double, Alignment::CACHE\_LINE > > [\\_basisMax](#)
- std::vector< double, AlignedAllocator< double, Alignment::CACHE\_LINE > > [\\_negbasis](#)
- std::vector< double, AlignedAllocator< double, Alignment::CACHE\_LINE > > [\\_invbasis](#)
- std::vector< [ModField](#) > [\\_field\\_rns](#)
- [integer](#) [\\_M](#)
- std::vector< [integer](#) > [\\_Mi](#)
- std::vector< double > [\\_MMi](#)
- std::vector< double > [\\_crt\\_in](#)
- std::vector< double > [\\_crt\\_out](#)
- size\_t [\\_size](#)
- size\_t [\\_pbits](#)
- size\_t [\\_ldm](#)
- [integer](#) [\\_mi\\_sum](#)

## 12.258.1 Member Typedef Documentation

### 12.258.1.1 integer

Givaro::Integer [integer](#)

**12.258.1.2 ModField**

```
Givaro::Modular<double> ModField
```

**12.258.1.3 BasisElement**

```
double BasisElement
```

**12.258.1.4 Element**

```
rns_double_elt Element
```

**12.258.1.5 Element\_ptr**

```
rns_double_elt_ptr Element_ptr
```

**12.258.1.6 ConstElement\_ptr**

```
rns_double_elt_cstptr ConstElement_ptr
```

**12.258.2 Constructor & Destructor Documentation****12.258.2.1 rns\_double() [1/4]**

```
rns_double (
    const integer & bound,
    size_t pbits,
    bool rnsmod = false,
    long seed = time(NULL)) [inline]
```

**12.258.2.2 rns\_double() [2/4]**

```
rns_double (
    size_t pbits,
    size_t size,
    long seed = time(NULL)) [inline]
```

**12.258.2.3 rns\_double() [3/4]**

```
template<typename Vect >
rns_double (
    const Vect & basis,
    bool rnsmod = false,
    long seed = time(NULL)) [inline]
```

**12.258.2.4 rns\_double() [4/4]**

```
rns_double (
    const RNSIntegerMod< rns_double > & basis,
    bool rnsmod = false,
    long seed = time(NULL)) [inline]
```

**12.258.3 Member Function Documentation****12.258.3.1 precompute\_cst()**

```
void precompute_cst (
    size_t K = 0) [inline]
```

### 12.258.3.2 init() [1/3]

```
template<typename T >
void init (
    size_t m,
    size_t n,
    double * Arns,
    size_t rda,
    const T * A,
    size_t lda,
    const integer & maxA,
    bool RNS_MAJOR = false) const [inline]
```

### 12.258.3.3 init() [2/3]

```
void init (
    size_t m,
    size_t n,
    double * Arns,
    size_t rda,
    const integer * A,
    size_t lda,
    size_t k,
    bool RNS_MAJOR = false) const [inline]
```

### 12.258.3.4 init\_transpose()

```
void init_transpose (
    size_t m,
    size_t n,
    double * Arns,
    size_t rda,
    const integer * A,
    size_t lda,
    size_t k,
    bool RNS_MAJOR = false) const [inline]
```

### 12.258.3.5 convert() [1/2]

```
void convert (
    size_t m,
    size_t n,
    integer gamma,
    integer * A,
    size_t lda,
    const double * Arns,
    size_t rda,
    bool RNS_MAJOR = false) const [inline]
```

### 12.258.3.6 convert\_transpose()

```
void convert_transpose (
    size_t m,
    size_t n,
    integer gamma,
    integer * A,
    size_t lda,
    const double * Arns,
    size_t rda,
    bool RNS_MAJOR = false) const [inline]
```

**12.258.3.7 reduce()**

```
void reduce (
    size_t n,
    double * Arns,
    size_t rda,
    bool RNS_MAJOR = false) const [inline]
```

**12.258.3.8 init() [3/3]**

```
template<size_t K>
void init (
    size_t m,
    size_t n,
    double * Arns,
    size_t rda,
    const RecInt::ruint< K > * A,
    size_t lda,
    size_t k,
    bool RNS_MAJOR = false) const [inline]
```

**12.258.3.9 convert() [2/2]**

```
template<size_t K>
void convert (
    size_t m,
    size_t n,
    integer gamma,
    RecInt::ruint< K > * A,
    size_t lda,
    const double * Arns,
    size_t rda,
    integer p = 0,
    bool RNS_MAJOR = false) const [inline]
```

**12.258.4 Field Documentation****12.258.4.1 \_basis**

```
std::vector<double, AlignedAllocator<double, Alignment::CACHE_LINE> > _basis
```

**12.258.4.2 \_basisMax**

```
std::vector<double, AlignedAllocator<double, Alignment::CACHE_LINE> > _basisMax
```

**12.258.4.3 \_negbasis**

```
std::vector<double, AlignedAllocator<double, Alignment::CACHE_LINE> > _negbasis
```

**12.258.4.4 \_invbasis**

```
std::vector<double, AlignedAllocator<double, Alignment::CACHE_LINE> > _invbasis
```

**12.258.4.5 \_field\_rns**

```
std::vector<ModField> _field_rns
```

**12.258.4.6 \_M**

```
integer _M
```



**12.258.4.7 \_Mi**

```
std::vector<integer> _Mi
```

**12.258.4.8 \_MMi**

```
std::vector<double> _MMi
```

**12.258.4.9 \_crt\_in**

```
std::vector<double> _crt_in
```

**12.258.4.10 \_crt\_out**

```
std::vector<double> _crt_out
```

**12.258.4.11 \_size**

```
size_t _size
```

**12.258.4.12 \_pbits**

```
size_t _pbits
```

**12.258.4.13 \_ldm**

```
size_t _ldm
```

**12.258.4.14 \_mi\_sum**

```
integer _mi_sum
```


The documentation for this struct was generated from the following files:

- [rns-double.h](#)
- [rns-double-recint.inl](#)
- [rns-double.inl](#)

**12.259 rns\_double\_elt Struct Reference**

```
#include <rns-double-elt.h>
```

Inheritance diagram for rns\_double\_elt:

**Public Member Functions**

- [rns\\_double\\_elt](#) ()
- [~rns\\_double\\_elt](#) ()
- [rns\\_double\\_elt](#) (double \*p, size\_t r, size\_t a=false)
- [rns\\_double\\_elt\\_ptr](#) operator& ()
- [rns\\_double\\_elt\\_cstptr](#) operator& () const
- [rns\\_double\\_elt](#) (const [rns\\_double\\_elt](#) &x)

**Data Fields**

- `double * _ptr`
- `size_t _stride`
- `bool _alloc`

**12.259.1 Constructor & Destructor Documentation****12.259.1.1 `rns_double_elt()` [1/3]**

```
rns_double_elt () [inline]
```

**12.259.1.2 `~rns_double_elt()`**

```
~rns_double_elt () [inline]
```

**12.259.1.3 `rns_double_elt()` [2/3]**

```
rns_double_elt (
    double * p,
    size_t r,
    size_t a = false) [inline]
```

**12.259.1.4 `rns_double_elt()` [3/3]**

```
rns_double_elt (
    const rns_double_elt & x) [inline]
```

**12.259.2 Member Function Documentation****12.259.2.1 `operator&()` [1/2]**

```
rns_double_elt_ptr operator& () [inline]
```

**12.259.2.2 `operator&()` [2/2]**

```
rns_double_elt_cstptr operator& () const [inline]
```

**12.259.3 Field Documentation****12.259.3.1 `_ptr`**

```
double* _ptr
```

**12.259.3.2 `_stride`**

```
size_t _stride
```

**12.259.3.3 `_alloc`**

```
bool _alloc
```


The documentation for this struct was generated from the following file:

- [rns-double-elt.h](#)

## 12.260 rns\_double\_elt\_cstptr Struct Reference

```
#include <rns-double-elt.h>
```

Inheritance diagram for rns\_double\_elt\_cstptr:



### Public Member Functions

- [rns\\_double\\_elt\\_cstptr](#) ()
- [rns\\_double\\_elt\\_cstptr](#) (double \*p, size\_t r)
- [rns\\_double\\_elt\\_cstptr](#) (const [rns\\_double\\_elt\\_ptr](#) &x)
- [rns\\_double\\_elt\\_cstptr](#) (const [rns\\_double\\_elt\\_cstptr](#) &x)
- [rns\\_double\\_elt\\_cstptr](#) ([rns\\_double\\_elt\\_cstptr](#) &&)=default
- [rns\\_double\\_elt\\_cstptr \\* operator&](#) ()
- [rns\\_double\\_elt & operator\\*](#) () const
- [rns\\_double\\_elt operator\[\]](#) (size\_t i) const
- [rns\\_double\\_elt & operator\[\]](#) (size\_t i)
- [rns\\_double\\_elt\\_cstptr operator++](#) ()
- [rns\\_double\\_elt\\_cstptr operator--](#) ()
- [rns\\_double\\_elt\\_cstptr operator+](#) (size\_t inc) const
- [rns\\_double\\_elt\\_cstptr operator-](#) (size\_t inc) const
- [rns\\_double\\_elt\\_cstptr & operator+=](#) (size\_t inc)
- [rns\\_double\\_elt\\_cstptr & operator-=](#) (size\_t inc)
- [rns\\_double\\_elt\\_cstptr & operator=](#) (const [rns\\_double\\_elt\\_cstptr](#) &x)
- [bool operator<](#) (const [rns\\_double\\_elt\\_cstptr](#) &x)
- [bool operator!=](#) (const [rns\\_double\\_elt\\_cstptr](#) &x)
- [rns\\_double\\_elt\\_cstptr operator&](#) () const

### Data Fields

- [rns\\_double\\_elt other](#)
- [double \\* \\_ptr](#)
- [size\\_t \\_stride](#)
- [bool \\_alloc](#)

### 12.260.1 Constructor & Destructor Documentation

#### 12.260.1.1 rns\_double\_elt\_cstptr() [1/5]

```
rns\_double\_elt\_cstptr () [inline]
```

#### 12.260.1.2 rns\_double\_elt\_cstptr() [2/5]

```
rns\_double\_elt\_cstptr (
    double * p,
    size_t r) [inline]
```

#### 12.260.1.3 rns\_double\_elt\_cstptr() [3/5]

```
rns\_double\_elt\_cstptr (
    const rns\_double\_elt\_ptr & x) [inline]
```

**12.260.1.4 rns\_double\_elt\_cstptr() [4/5]**

```
rns_double_elt_cstptr (
    const rns_double_elt_cstptr & x) [inline]
```

**12.260.1.5 rns\_double\_elt\_cstptr() [5/5]**

```
rns_double_elt_cstptr (
    rns_double_elt_cstptr && ) [default]
```

**12.260.2 Member Function Documentation****12.260.2.1 operator&() [1/2]**

```
rns_double_elt_cstptr * operator& () [inline]
```

**12.260.2.2 operator\*()**

```
rns_double_elt & operator* () const [inline]
```

**12.260.2.3 operator[]() [1/2]**

```
rns_double_elt operator[] (
    size_t i) const [inline]
```

**12.260.2.4 operator[]() [2/2]**

```
rns_double_elt & operator[] (
    size_t i) [inline]
```

**12.260.2.5 operator++()**

```
rns_double_elt_cstptr operator++ () [inline]
```

**12.260.2.6 operator--()**

```
rns_double_elt_cstptr operator-- () [inline]
```

**12.260.2.7 operator+()**

```
rns_double_elt_cstptr operator+ (
    size_t inc) const [inline]
```

**12.260.2.8 operator-()**

```
rns_double_elt_cstptr operator- (
    size_t inc) const [inline]
```

**12.260.2.9 operator+=()**

```
rns_double_elt_cstptr & operator+= (
    size_t inc) [inline]
```

**12.260.2.10 operator-=()**

```
rns_double_elt_cstptr & operator-= (
    size_t inc) [inline]
```

**12.260.2.11 operator=()**

```
rns_double_elt_cstptr & operator= (
    const rns_double_elt_cstptr & x) [inline]
```

**12.260.2.12 operator<()**

```
bool operator< (
    const rns_double_elt_cstptr & x) [inline]
```

**12.260.2.13 operator"!=()**

```
bool operator!= (
    const rns_double_elt_cstptr & x) [inline]
```

**12.260.2.14 operator&() [2/2]**

```
rns_double_elt_cstptr operator& () const [inline], [inherited]
```

**12.260.3 Field Documentation****12.260.3.1 other**

```
rns_double_elt other
```

**12.260.3.2 \_ptr**

```
double* _ptr [inherited]
```

**12.260.3.3 \_stride**

```
size_t _stride [inherited]
```

**12.260.3.4 \_alloc**

```
bool _alloc [inherited]
```

The documentation for this struct was generated from the following file:

- [rns-double-elt.h](#)

**12.261 rns\_double\_elt\_ptr Struct Reference**

```
#include <rns-double-elt.h>
```

Inheritance diagram for rns\_double\_elt\_ptr:

**Public Member Functions**

- [rns\\_double\\_elt\\_ptr](#) ()
- [rns\\_double\\_elt\\_ptr](#) (double \*p, size\_t r)
- [rns\\_double\\_elt\\_ptr](#) (const [rns\\_double\\_elt\\_ptr](#) &x)
- [rns\\_double\\_elt\\_ptr](#) (const [rns\\_double\\_elt\\_cstptr](#) &x)
- [rns\\_double\\_elt\\_ptr](#) ([rns\\_double\\_elt\\_ptr](#) &&)=default
- [rns\\_double\\_elt\\_ptr](#) \* [operator&](#) ()

- `rns_double_elt & operator* ()`
- `rns_double_elt operator[] (size_t i) const`
- `rns_double_elt & operator[] (size_t i)`
- `rns_double_elt_ptr operator++ ()`
- `rns_double_elt_ptr operator-- ()`
- `rns_double_elt_ptr operator+ (size_t inc)`
- `rns_double_elt_ptr operator- (size_t inc)`
- `rns_double_elt_ptr & operator+= (size_t inc)`
- `rns_double_elt_ptr & operator-= (size_t inc)`
- `rns_double_elt_ptr & operator= (const rns_double_elt_ptr &x)`
- `bool operator< (const rns_double_elt_ptr &x)`
- `bool operator!= (const rns_double_elt_ptr &x)`
- `rns_double_elt_cstptr operator& () const`

### Data Fields

- `rns_double_elt other`
- `double * _ptr`
- `size_t _stride`
- `bool _alloc`

## 12.261.1 Constructor & Destructor Documentation

### 12.261.1.1 `rns_double_elt_ptr()` [1/5]

```
rns_double_elt_ptr () [inline]
```

### 12.261.1.2 `rns_double_elt_ptr()` [2/5]

```
rns_double_elt_ptr (
    double * p,
    size_t r) [inline]
```

### 12.261.1.3 `rns_double_elt_ptr()` [3/5]

```
rns_double_elt_ptr (
    const rns_double_elt_ptr & x) [inline]
```

### 12.261.1.4 `rns_double_elt_ptr()` [4/5]

```
rns_double_elt_ptr (
    const rns_double_elt_cstptr & x) [inline]
```

### 12.261.1.5 `rns_double_elt_ptr()` [5/5]

```
rns_double_elt_ptr (
    rns_double_elt_ptr && ) [default]
```

## 12.261.2 Member Function Documentation

### 12.261.2.1 `operator&()` [1/2]

```
rns_double_elt_ptr * operator& () [inline]
```

### 12.261.2.2 `operator*()`

```
rns_double_elt & operator* () [inline]
```

**12.261.2.3 operator[]()** [1/2]

```
rns_double_elt operator[] (
    size_t i) const [inline]
```

**12.261.2.4 operator[]()** [2/2]

```
rns_double_elt & operator[] (
    size_t i) [inline]
```

**12.261.2.5 operator++()**

```
rns_double_elt_ptr operator++ () [inline]
```

**12.261.2.6 operator--()**

```
rns_double_elt_ptr operator-- () [inline]
```

**12.261.2.7 operator+()**

```
rns_double_elt_ptr operator+ (
    size_t inc) [inline]
```

**12.261.2.8 operator-()**

```
rns_double_elt_ptr operator- (
    size_t inc) [inline]
```

**12.261.2.9 operator+=()**

```
rns_double_elt_ptr & operator+= (
    size_t inc) [inline]
```

**12.261.2.10 operator-=()**

```
rns_double_elt_ptr & operator-= (
    size_t inc) [inline]
```

**12.261.2.11 operator=()**

```
rns_double_elt_ptr & operator= (
    const rns_double_elt_ptr & x) [inline]
```

**12.261.2.12 operator<()**

```
bool operator< (
    const rns_double_elt_ptr & x) [inline]
```

**12.261.2.13 operator"!=()**

```
bool operator!= (
    const rns_double_elt_ptr & x) [inline]
```

**12.261.2.14 operator&()** [2/2]

```
rns_double_elt_cstptr operator& () const [inline], [inherited]
```

### 12.261.3 Field Documentation

#### 12.261.3.1 other

`rns_double_elt` other

#### 12.261.3.2 \_ptr

`double* _ptr` [inherited]

#### 12.261.3.3 \_stride

`size_t _stride` [inherited]

#### 12.261.3.4 \_alloc

`bool _alloc` [inherited]

The documentation for this struct was generated from the following file:

- [rns-double-elt.h](#)

## 12.262 `rns_double_extended` Struct Reference

```
#include <rns-double.h>
```

### Public Types

- typedef Givaro::Integer [integer](#)
- typedef Givaro::ModularExtended< double > [ModField](#)
- typedef double [BasisElement](#)
- typedef [rns\\_double\\_elt](#) [Element](#)
- typedef [rns\\_double\\_elt\\_ptr](#) [Element\\_ptr](#)
- typedef [rns\\_double\\_elt\\_cstptr](#) [ConstElement\\_ptr](#)

### Public Member Functions

- [rns\\_double\\_extended](#) (const [integer](#) &bound, size\_t pbits, bool rnsmod=false, long seed=time(NULL))
- [rns\\_double\\_extended](#) (size\_t pbits, size\_t size, long seed=time(NULL))
- template<typename Vect >  
  [rns\\_double\\_extended](#) (const Vect &basis, bool rnsmod=false, long seed=time(NULL))
- void [precompute\\_cst](#) ()
- void [init](#) (size\_t m, size\_t n, double \*Arns, size\_t rda, const [integer](#) \*A, size\_t lda, const [integer](#) &maxA, bool RNS\_MAJOR=false) const
- void [init](#) (size\_t m, size\_t n, double \*Arns, size\_t rda, const [integer](#) \*A, size\_t lda, size\_t k, bool RNS\_MAJOR=false)
- void [convert](#) (size\_t m, size\_t n, [integer](#) gamma, [integer](#) \*A, size\_t lda, const double \*Arns, size\_t rda, bool RNS\_MAJOR=false)
- void [init](#) (size\_t m, double \*Arns, const [integer](#) \*A, size\_t lda) const
- void [convert](#) (size\_t m, [integer](#) \*A, const double \*Arns) const
- void [reduce](#) (size\_t n, double \*Arns, size\_t rda, bool RNS\_MAJOR=false) const

### Data Fields

- std::vector< double, AlignedAllocator< double, Alignment::CACHE\_LINE > > [\\_basis](#)
- std::vector< double, AlignedAllocator< double, Alignment::CACHE\_LINE > > [\\_basisMax](#)
- std::vector< double, AlignedAllocator< double, Alignment::CACHE\_LINE > > [\\_negbasis](#)
- std::vector< double, AlignedAllocator< double, Alignment::CACHE\_LINE > > [\\_invbasis](#)
- std::vector< [ModField](#) > [\\_field\\_rns](#)



- [integer\\_M](#)
- `std::vector< integer > _Mi`
- `std::vector< double > _MMi`
- `std::vector< double > _crt_in`
- `std::vector< double > _crt_out`
- `size_t _size`
- `size_t _pbits`
- `size_t _ldm`

## 12.262.1 Member Typedef Documentation

### 12.262.1.1 integer

Givaro::Integer [integer](#)

### 12.262.1.2 ModField

Givaro::ModularExtended<double> [ModField](#)

### 12.262.1.3 BasisElement

double [BasisElement](#)

### 12.262.1.4 Element

[rns\\_double\\_elt](#) Element

### 12.262.1.5 Element\_ptr

[rns\\_double\\_elt\\_ptr](#) Element\_ptr

### 12.262.1.6 ConstElement\_ptr

[rns\\_double\\_elt\\_cstptr](#) ConstElement\_ptr

## 12.262.2 Constructor & Destructor Documentation

### 12.262.2.1 rns\_double\_extended() [1/3]

```
rns\_double\_extended (
    const integer & bound,
    size_t pbits,
    bool rnsmod = false,
    long seed = time(NULL)) [inline]
```

### 12.262.2.2 rns\_double\_extended() [2/3]

```
rns\_double\_extended (
    size_t pbits,
    size_t size,
    long seed = time(NULL)) [inline]
```

### 12.262.2.3 rns\_double\_extended() [3/3]

```
template<typename Vect >
rns\_double\_extended (
    const Vect & basis,
    bool rnsmod = false,
    long seed = time(NULL)) [inline]
```

## 12.262.3 Member Function Documentation

### 12.262.3.1 precompute\_cst()

```
void precompute_cst () [inline]
```

### 12.262.3.2 init() [1/3]

```
void init (
    size_t m,
    size_t n,
    double * Arns,
    size_t rda,
    const integer * A,
    size_t lda,
    const integer & maxA,
    bool RNS_MAJOR = false) const [inline]
```

### 12.262.3.3 init() [2/3]

```
void init (
    size_t m,
    size_t n,
    double * Arns,
    size_t rda,
    const integer * A,
    size_t lda,
    size_t k,
    bool RNS_MAJOR = false) [inline]
```

### 12.262.3.4 convert() [1/2]

```
void convert (
    size_t m,
    size_t n,
    integer gamma,
    integer * A,
    size_t lda,
    const double * Arns,
    size_t rda,
    bool RNS_MAJOR = false) [inline]
```

### 12.262.3.5 init() [3/3]

```
void init (
    size_t m,
    double * Arns,
    const integer * A,
    size_t lda) const [inline]
```

### 12.262.3.6 convert() [2/2]

```
void convert (
    size_t m,
    integer * A,
    const double * Arns) const [inline]
```

### 12.262.3.7 reduce()

```
void reduce (
```

```
    size_t n,  
    double * Arns,  
    size_t rda,  
    bool RNS_MAJOR = false) const [inline]
```

## 12.262.4 Field Documentation

### 12.262.4.1 `_basis`

```
std::vector<double, AlignedAllocator<double, Alignment::CACHE_LINE> > _basis
```

### 12.262.4.2 `_basisMax`

```
std::vector<double, AlignedAllocator<double, Alignment::CACHE_LINE> > _basisMax
```

### 12.262.4.3 `_negbasis`

```
std::vector<double, AlignedAllocator<double, Alignment::CACHE_LINE> > _negbasis
```

### 12.262.4.4 `_invbasis`

```
std::vector<double, AlignedAllocator<double, Alignment::CACHE_LINE> > _invbasis
```

### 12.262.4.5 `_field_rns`

```
std::vector<ModField> _field_rns
```

### 12.262.4.6 `_M`

```
integer _M
```

### 12.262.4.7 `_Mi`

```
std::vector<integer> _Mi
```

### 12.262.4.8 `_MMi`

```
std::vector<double> _MMi
```

### 12.262.4.9 `_crt_in`

```
std::vector<double> _crt_in
```

### 12.262.4.10 `_crt_out`

```
std::vector<double> _crt_out
```

### 12.262.4.11 `_size`

```
size_t _size
```

### 12.262.4.12 `_pbits`

```
size_t _pbits
```

### 12.262.4.13 `_ldm`

```
size_t _ldm
```

The documentation for this struct was generated from the following files:

- [rns-double.h](#)
- [rns-double.inl](#)

## 12.263 RNSElementTag Struct Reference

Representation in a Residue Number System.

```
#include <field-traits.h>
```

### 12.263.1 Detailed Description

Representation in a Residue Number System.

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.264 RNSInteger< RNS > Class Template Reference

```
#include <rns-integer.h>
```

### Data Structures

- class [RandIter](#)

### Public Types

- typedef [RNS::Element](#) [Element](#)
- typedef [RNS::Element\\_ptr](#) [Element\\_ptr](#)
- typedef [RNS::ConstElement\\_ptr](#) [ConstElement\\_ptr](#)

### Public Member Functions

- [RNSInteger](#) (const [RNS](#) &myrns)
- template<typename T >  
  [RNSInteger](#) (const T &F)
- const [RNS](#) & [rns](#) () const
- size\_t [size](#) () const
- bool [isOne](#) (const [Element](#) &x) const
- bool [isMOne](#) (const [Element](#) &x) const
- bool [isZero](#) (const [Element](#) &x) const
- [integer characteristic](#) ([integer](#) &p) const
- [integer cardinality](#) ([integer](#) &p) const
- [Element](#) & [init](#) ([Element](#) &x) const
- [Element](#) & [init](#) ([Element](#) &x, const Givaro::Integer &y) const
- [Element](#) & [reduce](#) ([Element](#) &x, const [Element](#) &y) const
- [Element](#) & [reduce](#) ([Element](#) &x) const
- Givaro::Integer [convert](#) (Givaro::Integer &x, const [Element](#) &y) const
- [Element](#) & [assign](#) ([Element](#) &x, const [Element](#) &y) const
- std::ostream & [write](#) (std::ostream &os, const [Element](#) &y) const
- std::ostream & [write](#) (std::ostream &os) const

### Data Fields

- [Element one](#)
- [Element mOne](#)
- [Element zero](#)

### Protected Types

- typedef [RNS::BasisElement](#) [BasisElement](#)
- typedef Givaro::Integer [integer](#)

**Protected Attributes**

- const [RNS](#) \* [\\_rns](#)

**12.264.1 Member Typedef Documentation****12.264.1.1 BasisElement**

```
template<typename RNS >
RNS::BasisElement BasisElement [protected]
```

**12.264.1.2 integer**

```
template<typename RNS >
Givaro::Integer integer [protected]
```

**12.264.1.3 Element**

```
template<typename RNS >
RNS::Element Element
```

**12.264.1.4 Element\_ptr**

```
template<typename RNS >
RNS::Element\_ptr Element\_ptr
```

**12.264.1.5 ConstElement\_ptr**

```
template<typename RNS >
RNS::ConstElement\_ptr ConstElement\_ptr
```

**12.264.2 Constructor & Destructor Documentation****12.264.2.1 RNSInteger() [1/2]**

```
template<typename RNS >
RNSInteger (
    const RNS & myrns) [inline]
```

**12.264.2.2 RNSInteger() [2/2]**

```
template<typename RNS >
template<typename T >
RNSInteger (
    const T & F) [inline]
```

**12.264.3 Member Function Documentation****12.264.3.1 rns()**

```
template<typename RNS >
const RNS & rns () const [inline]
```

**12.264.3.2 size()**

```
template<typename RNS >
size_t size () const [inline]
```

**12.264.3.3 isOne()**

```
template<typename RNS >
bool isOne (
    const Element & x) const [inline]
```

**12.264.3.4 isMOne()**

```
template<typename RNS >
bool isMOne (
    const Element & x) const [inline]
```

**12.264.3.5 isZero()**

```
template<typename RNS >
bool isZero (
    const Element & x) const [inline]
```

**12.264.3.6 characteristic()**

```
template<typename RNS >
integer characteristic (
    integer & p) const [inline]
```

**12.264.3.7 cardinality()**

```
template<typename RNS >
integer cardinality (
    integer & p) const [inline]
```

**12.264.3.8 init() [1/2]**

```
template<typename RNS >
Element & init (
    Element & x) const [inline]
```

**12.264.3.9 init() [2/2]**

```
template<typename RNS >
Element & init (
    Element & x,
    const Givaro::Integer & y) const [inline]
```

**12.264.3.10 reduce() [1/2]**

```
template<typename RNS >
Element & reduce (
    Element & x,
    const Element & y) const [inline]
```

**12.264.3.11 reduce() [2/2]**

```
template<typename RNS >
Element & reduce (
    Element & x) const [inline]
```

**12.264.3.12 convert()**

```
template<typename RNS >
Givaro::Integer convert (
    Givaro::Integer & x,
    const Element & y) const [inline]
```

**12.264.3.13 assign()**

```
template<typename RNS >
Element & assign (
    Element & x,
    const Element & y) const [inline]
```

**12.264.3.14 write() [1/2]**

```
template<typename RNS >
std::ostream & write (
    std::ostream & os,
    const Element & y) const [inline]
```

**12.264.3.15 write() [2/2]**

```
template<typename RNS >
std::ostream & write (
    std::ostream & os) const [inline]
```

**12.264.4 Field Documentation****12.264.4.1 \_rns**

```
template<typename RNS >
const RNS* _rns [protected]
```

**12.264.4.2 one**

```
template<typename RNS >
Element one
```

**12.264.4.3 mOne**

```
template<typename RNS >
Element mOne
```

**12.264.4.4 zero**

```
template<typename RNS >
Element zero
```

The documentation for this class was generated from the following files:

- [field-traits.h](#)
- [rns-integer.h](#)
- [rns.h](#)

**12.265 RNSIntegerMod< RNS > Class Template Reference**

```
#include <rns-integer-mod.h>
```

## Data Structures

- class [RandIter](#)

## Public Types

- typedef [RNS::Element](#) [Element](#)
- typedef [RNS::Element\\_ptr](#) [Element\\_ptr](#)
- typedef [RNS::ConstElement\\_ptr](#) [ConstElement\\_ptr](#)

## Public Member Functions

- [RNSIntegerMod](#) (const [integer](#) &p, const [RNS](#) &myrns)
- const [rns\\_double](#) & [rns](#) () const
- const [RNSInteger](#)< [RNS](#) > & [delayed](#) () const
- [size\\_t](#) [size](#) () const
- bool [isOne](#) (const [Element](#) &x) const
- bool [isMOne](#) (const [Element](#) &x) const
- bool [isZero](#) (const [Element](#) &x) const
- [integer](#) & [characteristic](#) ([integer](#) &p) const
- [integer](#) [characteristic](#) () const
- [integer](#) & [cardinality](#) ([integer](#) &p) const
- [integer](#) [cardinality](#) () const
- [integer](#) [minElement](#) () const
- [integer](#) [maxElement](#) () const
- [Element](#) & [init](#) ([Element](#) &x) const
- [Element](#) & [init](#) ([Element](#) &x, const Givaro::Integer &y) const
- [Element](#) & [reduce](#) ([Element](#) &x, const [Element](#) &y) const
- [Element](#) & [reduce](#) ([Element](#) &x) const
- [Element](#) & [init](#) ([Element](#) &x, const [Element](#) &y) const
- Givaro::Integer [convert](#) (Givaro::Integer &x, const [Element](#) &y) const
- [Element](#) & [assign](#) ([Element](#) &x, const [Element](#) &y) const
- [Element](#) & [add](#) ([Element](#) &x, const [Element](#) &y, const [Element](#) &z) const
- [Element](#) & [sub](#) ([Element](#) &x, const [Element](#) &y, const [Element](#) &z) const
- [Element](#) & [neg](#) ([Element](#) &x, const [Element](#) &y) const
- [Element](#) & [mul](#) ([Element](#) &x, const [Element](#) &y, const [Element](#) &z) const
- [Element](#) & [axpyin](#) ([Element](#) &x, const [Element](#) &y, const [Element](#) &z) const
- [Element](#) & [inv](#) ([Element](#) &x, const [Element](#) &y) const
- bool [areEqual](#) (const [Element](#) &x, const [Element](#) &y) const
- std::ostream & [write](#) (std::ostream &os, const [Element](#) &y) const
- std::ostream & [write](#) (std::ostream &os) const
- void [reduce\\_modp](#) ([size\\_t](#) n, [Element\\_ptr](#) B) const
- std::ostream & [write\\_matrix](#) (std::ostream &c, const double \*E, int n, int m, int lda) const
- std::ostream & [write\\_matrix\\_long](#) (std::ostream &c, const double \*E, int n, int m, int lda) const
- void [reduce\\_modp](#) ([size\\_t](#) m, [size\\_t](#) n, [Element\\_ptr](#) B, [size\\_t](#) lda) const
- void [reduce\\_modp\\_rnsmajor](#) ([size\\_t](#) n, [Element\\_ptr](#) B) const

## Data Fields

- [Element](#) one
- [Element](#) mOne
- [Element](#) zero

## Protected Types

- typedef [RNS::BasisElement](#) [BasisElement](#)
- typedef Givaro::Modular< [BasisElement](#) > [ModField](#)
- typedef Givaro::Integer [integer](#)



**Protected Attributes**

- [integer\\_p](#)
- `std::vector< BasisElement, AlignedAllocator< BasisElement, Alignment::CACHE_LINE > > \_Mi\_modp\_rns`
- `std::vector< BasisElement, AlignedAllocator< BasisElement, Alignment::CACHE_LINE > > \_iM\_modp\_rns`
- `const RNS * \_rns`
- `Givaro::Modular< Givaro::Integer > \_F`
- [RNSInteger](#)< [RNS](#) > [\\_RNSdelayed](#)

**12.265.1 Member Typedef Documentation****12.265.1.1 Element**

```
template<typename RNS >
RNS::Element Element
```

**12.265.1.2 Element\_ptr**

```
template<typename RNS >
RNS::Element\_ptr Element\_ptr
```

**12.265.1.3 ConstElement\_ptr**

```
template<typename RNS >
RNS::ConstElement\_ptr ConstElement\_ptr
```

**12.265.1.4 BasisElement**

```
template<typename RNS >
RNS::BasisElement BasisElement [protected]
```

**12.265.1.5 ModField**

```
template<typename RNS >
Givaro::Modular<BasisElement> ModField [protected]
```

**12.265.1.6 integer**

```
template<typename RNS >
Givaro::Integer integer [protected]
```

**12.265.2 Constructor & Destructor Documentation****12.265.2.1 RNSIntegerMod()**

```
template<typename RNS >
RNSIntegerMod (
    const integer & p,
    const RNS & myrns) [inline]
```

**12.265.3 Member Function Documentation****12.265.3.1 rns()**

```
template<typename RNS >
const rns\_double & rns () const [inline]
```

**12.265.3.2 delayed()**

```
template<typename RNS >
const RNSInteger<RNS> & delayed () const [inline]
```

**12.265.3.3 size()**

```
template<typename RNS >
size_t size () const [inline]
```

**12.265.3.4 isOne()**

```
template<typename RNS >
bool isOne (
    const Element & x) const [inline]
```

**12.265.3.5 isMOne()**

```
template<typename RNS >
bool isMOne (
    const Element & x) const [inline]
```

**12.265.3.6 isZero()**

```
template<typename RNS >
bool isZero (
    const Element & x) const [inline]
```

**12.265.3.7 characteristic() [1/2]**

```
template<typename RNS >
integer & characteristic (
    integer & p) const [inline]
```

**12.265.3.8 characteristic() [2/2]**

```
template<typename RNS >
integer characteristic () const [inline]
```

**12.265.3.9 cardinality() [1/2]**

```
template<typename RNS >
integer & cardinality (
    integer & p) const [inline]
```

**12.265.3.10 cardinality() [2/2]**

```
template<typename RNS >
integer cardinality () const [inline]
```

**12.265.3.11 minElement()**

```
template<typename RNS >
integer minElement () const [inline]
```

**12.265.3.12 maxElement()**

```
template<typename RNS >
integer maxElement () const [inline]
```

**12.265.3.13 init() [1/3]**

```
template<typename RNS >
Element & init (
    Element & x) const [inline]
```

**12.265.3.14 init() [2/3]**

```
template<typename RNS >
Element & init (
    Element & x,
    const Givaro::Integer & y) const [inline]
```

**12.265.3.15 reduce() [1/2]**

```
template<typename RNS >
Element & reduce (
    Element & x,
    const Element & y) const [inline]
```

**12.265.3.16 reduce() [2/2]**

```
template<typename RNS >
Element & reduce (
    Element & x) const [inline]
```

**12.265.3.17 init() [3/3]**

```
template<typename RNS >
Element & init (
    Element & x,
    const Element & y) const [inline]
```

**12.265.3.18 convert()**

```
template<typename RNS >
Givaro::Integer convert (
    Givaro::Integer & x,
    const Element & y) const [inline]
```

**12.265.3.19 assign()**

```
template<typename RNS >
Element & assign (
    Element & x,
    const Element & y) const [inline]
```

**12.265.3.20 add()**

```
template<typename RNS >
Element & add (
    Element & x,
    const Element & y,
    const Element & z) const [inline]
```

**12.265.3.21 sub()**

```
template<typename RNS >
Element & sub (
    Element & x,
    const Element & y,
    const Element & z) const [inline]
```

**12.265.3.22 neg()**

```
template<typename RNS >
Element & neg (
    Element & x,
    const Element & y) const [inline]
```

**12.265.3.23 mul()**

```
template<typename RNS >
Element & mul (
    Element & x,
    const Element & y,
    const Element & z) const [inline]
```

**12.265.3.24 axpyin()**

```
template<typename RNS >
Element & axpyin (
    Element & x,
    const Element & y,
    const Element & z) const [inline]
```

**12.265.3.25 inv()**

```
template<typename RNS >
Element & inv (
    Element & x,
    const Element & y) const [inline]
```

**12.265.3.26 areEqual()**

```
template<typename RNS >
bool areEqual (
    const Element & x,
    const Element & y) const [inline]
```

**12.265.3.27 write() [1/2]**

```
template<typename RNS >
std::ostream & write (
    std::ostream & os,
    const Element & y) const [inline]
```

**12.265.3.28 write() [2/2]**

```
template<typename RNS >
std::ostream & write (
    std::ostream & os) const [inline]
```

**12.265.3.29 reduce\_modp() [1/2]**

```
template<typename RNS >
void reduce_modp (
    size_t n,
    Element_ptr B) const [inline]
```

**12.265.3.30 write\_matrix()**

```
template<typename RNS >
std::ostream & write_matrix (
    std::ostream & c,
    const double * E,
    int n,
    int m,
    int lda) const [inline]
```

**12.265.3.31 write\_matrix\_long()**

```
template<typename RNS >
std::ostream & write_matrix_long (
    std::ostream & c,
    const double * E,
    int n,
    int m,
    int lda) const [inline]
```

**12.265.3.32 reduce\_modp() [2/2]**

```
template<typename RNS >
void reduce_modp (
    size_t m,
    size_t n,
    Element_ptr B,
    size_t lda) const [inline]
```

**12.265.3.33 reduce\_modp\_rnsmajor()**

```
template<typename RNS >
void reduce_modp_rnsmajor (
    size_t n,
    Element_ptr B) const [inline]
```

**12.265.4 Field Documentation****12.265.4.1 \_p**

```
template<typename RNS >
integer _p [protected]
```

**12.265.4.2 \_Mi\_modp\_rns**

```
template<typename RNS >
std::vector<BasisElement, AlignedAllocator<BasisElement, Alignment::CACHE_LINE> > _Mi_modp_↔
rns [protected]
```

**12.265.4.3 \_iM\_modp\_rns**

```
template<typename RNS >
std::vector<BasisElement, AlignedAllocator<BasisElement, Alignment::CACHE_LINE> > _iM_modp_↔
rns [protected]
```

**12.265.4.4 \_rns**

```
template<typename RNS >
const RNS* _rns [protected]
```

**12.265.4.5 \_F**

```
template<typename RNS >
Givaro::Modular<Givaro::Integer> _F [protected]
```

**12.265.4.6 \_RNSdelayed**

```
template<typename RNS >
RNSInteger<RNS> _RNSdelayed [protected]
```

**12.265.4.7 one**

```
template<typename RNS >
Element one
```

**12.265.4.8 mOne**

```
template<typename RNS >
Element mOne
```

**12.265.4.9 zero**

```
template<typename RNS >
Element zero
```


The documentation for this class was generated from the following files:

- [field-traits.h](#)
- [rns-integer-mod.h](#)
- [rns.h](#)

**12.266 rnsRandIter< RNS > Class Template Reference**

```
#include <rns-double.h>
```

Inheritance diagram for rnsRandIter< RNS >:

**Public Member Functions**

- [rnsRandIter](#) (const [RNS](#) &R, uint64\_t seed=0)
- [RNS::Element](#) & [random](#) (typename [RNS::Element](#) &elt) const  
*RNS ring Element random assignement.*
- [RNS::Element](#) & [operator\(\)](#) (typename [RNS::Element](#) &elt) const
- [RNS::Element](#) [operator\(\)](#) () const
- [RNS::Element](#) [random](#) () const
- const [RNS](#) & [ring](#) () const

**12.266.1 Constructor & Destructor Documentation****12.266.1.1 rnsRandIter()**

```
template<typename RNS >
rnsRandIter (
    const RNS & R,
    uint64_t seed = 0) [inline]
```

## 12.266.2 Member Function Documentation

### 12.266.2.1 random() [1/2]

```
template<typename RNS >
RNS::Element & random (
    typename RNS::Element & elt) const [inline]
```

RNS ring Element random assignment.

Element is supposed to be initialized

#### Returns

random ring Element

### 12.266.2.2 operator>() [1/2]

```
template<typename RNS >
RNS::Element & operator() (
    typename RNS::Element & elt) const [inline]
```

### 12.266.2.3 operator>() [2/2]

```
template<typename RNS >
RNS::Element operator() () const [inline]
```

### 12.266.2.4 random() [2/2]

```
template<typename RNS >
RNS::Element random () const [inline]
```

### 12.266.2.5 ring()

```
template<typename RNS >
const RNS & ring () const [inline]
```

The documentation for this class was generated from the following file:

- [rns-double.h](#)

## 12.267 Row Struct Reference

The documentation for this struct was generated from the following file:

- [blockcuts.inl](#)

## 12.268 ruint< K > Class Template Reference

The documentation for this class was generated from the following file:

- [field-traits.h](#)

## 12.269 ScalFunctions< Element > Struct Template Reference

Inheritance diagram for ScalFunctions< Element >:



## Public Types

- using `vectElt` = `vector<Element>`

## Static Public Member Functions

- static void `genInputs` (`vector< vectElt > &inputs`)
- static void `genInputsWithZero` (`vector< vectElt > &inputs`)
- static `Element zero` ()
- static `Element vand` (`Element x1, Element x2`)
- static `Element vor` (`Element x1, Element x2`)
- static `Element vxor` (`Element x1, Element x2`)
- static `Element vandnot` (`Element x1, Element x2`)
- static `Element add` (`Element x1, Element x2`)
- static `Element addin` (`Element &x1, Element x2`)
- static `Element sub` (`Element x1, Element x2`)
- static `Element subin` (`Element &x1, Element x2`)
- static `Element mul` (`Element x1, Element x2`)
- static `Element mulin` (`Element &x1, Element x2`)
- static `Element div` (`Element x1, Element x2`)
- static `Element fmadd` (`Element x1, Element x2, Element x3`)
- static `Element fmaddin` (`Element &x1, Element x2, Element x3`)
- static `Element fmsub` (`Element x1, Element x2, Element x3`)
- static `Element fmsubin` (`Element &x1, Element x2, Element x3`)
- static `Element fnmadd` (`Element x1, Element x2, Element x3`)
- static `Element fnmaddin` (`Element &x1, Element x2, Element x3`)
- static `Element lesser` (`Element x1, Element x2`)
- static `Element lesser_eq` (`Element x1, Element x2`)
- static `Element greater` (`Element x1, Element x2`)
- static `Element greater_eq` (`Element x1, Element x2`)
- static `Element eq` (`Element x1, Element x2`)
- static `vectElt unpacklo` (`vectElt a, vectElt b`)
- static `vectElt unpackhi` (`vectElt a, vectElt b`)
- static void `unpacklohi` (`vectElt &lo, vectElt &hi, vectElt a, vectElt b`)
- static `vectElt pack_even` (`vectElt a, vectElt b`)
- static `vectElt pack_odd` (`vectElt a, vectElt b`)
- static void `pack` (`vectElt &even, vectElt &odd, vectElt a, vectElt b`)
- `template<uint16_t s>`  
static `vectElt blend` (`vectElt a, vectElt b`)

## 12.269.1 Member Typedef Documentation

### 12.269.1.1 vectElt

```
template<typename Element >
using vectElt = vector<Element>
```

## 12.269.2 Member Function Documentation

### 12.269.2.1 genInputs()

```
template<typename Element >
static void genInputs (
    vector< vectElt > & inputs) [inline], [static]
```



### 12.269.2.2 genInputsWithZero()

```
template<typename Element >
static void genInputsWithZero (
    vector< vectElt > & inputs) [inline], [static]
```

### 12.269.2.3 zero()

```
template<typename Element >
static Element zero () [inline], [static]
```

### 12.269.2.4 vand()

```
template<typename Element >
static Element vand (
    Element x1,
    Element x2) [inline], [static]
```

### 12.269.2.5 vor()

```
template<typename Element >
static Element vor (
    Element x1,
    Element x2) [inline], [static]
```

### 12.269.2.6 vxor()

```
template<typename Element >
static Element vxor (
    Element x1,
    Element x2) [inline], [static]
```

### 12.269.2.7 vandnot()

```
template<typename Element >
static Element vandnot (
    Element x1,
    Element x2) [inline], [static]
```

### 12.269.2.8 add()

```
template<typename Element >
static Element add (
    Element x1,
    Element x2) [inline], [static]
```

### 12.269.2.9 addin()

```
template<typename Element >
static Element addin (
    Element & x1,
    Element x2) [inline], [static]
```

### 12.269.2.10 sub()

```
template<typename Element >
static Element sub (
    Element x1,
    Element x2) [inline], [static]
```

**12.269.2.11 subin()**

```
template<typename Element >
static Element subin (
    Element & x1,
    Element x2) [inline], [static]
```

**12.269.2.12 mul()**

```
template<typename Element >
static Element mul (
    Element x1,
    Element x2) [inline], [static]
```

**12.269.2.13 mulin()**

```
template<typename Element >
static Element mulin (
    Element & x1,
    Element x2) [inline], [static]
```

**12.269.2.14 div()**

```
template<typename Element >
static Element div (
    Element x1,
    Element x2) [inline], [static]
```

**12.269.2.15 fmadd()**

```
template<typename Element >
static Element fmadd (
    Element x1,
    Element x2,
    Element x3) [inline], [static]
```

**12.269.2.16 fmaddin()**

```
template<typename Element >
static Element fmaddin (
    Element & x1,
    Element x2,
    Element x3) [inline], [static]
```

**12.269.2.17 fmsub()**

```
template<typename Element >
static Element fmsub (
    Element x1,
    Element x2,
    Element x3) [inline], [static]
```

**12.269.2.18 fmsubin()**

```
template<typename Element >
static Element fmsubin (
    Element & x1,
    Element x2,
    Element x3) [inline], [static]
```

**12.269.2.19 fnmadd()**

```
template<typename Element >
static Element fnmadd (
    Element x1,
    Element x2,
    Element x3) [inline], [static]
```

**12.269.2.20 fnmaddin()**

```
template<typename Element >
static Element fnmaddin (
    Element & x1,
    Element x2,
    Element x3) [inline], [static]
```

**12.269.2.21 lesser()**

```
template<typename Element >
static Element lesser (
    Element x1,
    Element x2) [inline], [static]
```

**12.269.2.22 lesser\_eq()**

```
template<typename Element >
static Element lesser_eq (
    Element x1,
    Element x2) [inline], [static]
```

**12.269.2.23 greater()**

```
template<typename Element >
static Element greater (
    Element x1,
    Element x2) [inline], [static]
```

**12.269.2.24 greater\_eq()**

```
template<typename Element >
static Element greater_eq (
    Element x1,
    Element x2) [inline], [static]
```

**12.269.2.25 eq()**

```
template<typename Element >
static Element eq (
    Element x1,
    Element x2) [inline], [static]
```

**12.269.2.26 unpacklo()**

```
template<typename Element >
static vectElt unpacklo (
    vectElt a,
    vectElt b) [inline], [static]
```

**12.269.2.27 unpackhi()**

```
template<typename Element >
static vectElt unpackhi (
    vectElt a,
    vectElt b) [inline], [static]
```

**12.269.2.28 unpacklohi()**

```
template<typename Element >
static void unpacklohi (
    vectElt & lo,
    vectElt & hi,
    vectElt a,
    vectElt b) [inline], [static]
```

**12.269.2.29 pack\_even()**

```
template<typename Element >
static vectElt pack_even (
    vectElt a,
    vectElt b) [inline], [static]
```

**12.269.2.30 pack\_odd()**

```
template<typename Element >
static vectElt pack_odd (
    vectElt a,
    vectElt b) [inline], [static]
```

**12.269.2.31 pack()**

```
template<typename Element >
static void pack (
    vectElt & even,
    vectElt & odd,
    vectElt a,
    vectElt b) [inline], [static]
```

**12.269.2.32 blend()**

```
template<typename Element >
template<uint16_t s>
static vectElt blend (
    vectElt a,
    vectElt b) [inline], [static]
```

The documentation for this struct was generated from the following file:

- [test-simd.C](#)

## 12.270 ScalFunctionsBase< Element, Enable > Struct Template Reference

Inheritance diagram for ScalFunctionsBase< Element, Enable >:



The documentation for this struct was generated from the following file:

- [test-simd.C](#)

## 12.271 **ScalFunctionsBase< Element, typename enable\_if< is\_floating\_point< Element >::value >::type > Struct Template Reference**

### Data Structures

- class [FloatingPointTestDistribution](#)

### Static Public Member Functions

- static [FloatingPointTestDistribution](#) [get\\_default\\_random\\_generator](#) ()
- static Element [ceil](#) (Element x)
- static Element [floor](#) (Element x)
- static Element [round](#) (Element x)
- static Element [blendv](#) (Element a, Element b, Element mask)
- static Element [fma](#) (Element x, Element y, Element z)

### Static Public Attributes

- static constexpr Element [\\_zero](#) = 0.0
- static constexpr Element [cmp\\_true](#) = NAN
- static constexpr Element [cmp\\_false](#) = [\\_zero](#)

## 12.271.1 Member Function Documentation

### 12.271.1.1 [get\\_default\\_random\\_generator\(\)](#)

```

template<typename Element >
static FloatingPointTestDistribution get_default_random_generator () [inline], [static]
    
```

### 12.271.1.2 [ceil\(\)](#)

```

template<typename Element >
static Element ceil (
    Element x) [inline], [static]
    
```

### 12.271.1.3 [floor\(\)](#)

```

template<typename Element >
static Element floor (
    Element x) [inline], [static]
    
```

### 12.271.1.4 [round\(\)](#)

```

template<typename Element >
static Element round (
    Element x) [inline], [static]
    
```

**12.271.1.5 blendv()**

```
template<typename Element >
static Element blendv (
    Element a,
    Element b,
    Element mask) [inline], [static]
```

**12.271.1.6 fma()**

```
template<typename Element >
static Element fma (
    Element x,
    Element y,
    Element z) [inline], [static]
```

**12.271.2 Field Documentation****12.271.2.1 \_zero**

```
template<typename Element >
Element _zero = 0.0 [static], [constexpr]
```

**12.271.2.2 cmp\_true**

```
template<typename Element >
Element cmp_true = NAN [static], [constexpr]
```

**12.271.2.3 cmp\_false**

```
template<typename Element >
Element cmp_false = _zero [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [test-simd.C](#)

## 12.272 ScalFunctionsBase< Element, typename enable\_if< is\_integral< Element >::value >::type > Struct Template Reference

**Static Public Member Functions**

- static uniform\_int\_distribution< Element > [get\\_default\\_random\\_generator](#) ()
- static Element [round](#) (Element x)
- static Element [fma](#) (Element x, Element y, Element z)
- static Element [mullo](#) (Element x1, Element x2)
- static Element [mulhi](#) (Element x1, Element x2)
- static Element [mulx](#) (Element x1, Element x2)
- static Element [fmaddx](#) (Element x1, Element x2, Element x3)
- static Element [fmaddxin](#) (Element &x1, Element x2, Element x3)
- static Element [fmsubx](#) (Element x1, Element x2, Element x3)
- static Element [fmsubxin](#) (Element &x1, Element x2, Element x3)
- static Element [fnmaddx](#) (Element x1, Element x2, Element x3)
- static Element [fnmaddxin](#) (Element &x1, Element x2, Element x3)
- template<int s>  
static Element [sra](#) (Element x1)
- template<int s>  
static Element [srl](#) (Element x1)
- template<int s>  
static Element [sll](#) (Element x1)

### Static Public Attributes

- static constexpr Element [\\_zero](#) = 0
- static constexpr Element [cmp\\_true](#) = -1
- static constexpr Element [cmp\\_false](#) = [\\_zero](#)

## 12.272.1 Member Function Documentation

### 12.272.1.1 [get\\_default\\_random\\_generator\(\)](#)

```
template<typename Element >  
static uniform_int_distribution< Element > get_default_random_generator () [inline], [static]
```

### 12.272.1.2 [round\(\)](#)

```
template<typename Element >  
static Element round (  
    Element x) [inline], [static]
```

### 12.272.1.3 [fma\(\)](#)

```
template<typename Element >  
static Element fma (  
    Element x,  
    Element y,  
    Element z) [inline], [static]
```

### 12.272.1.4 [mullo\(\)](#)

```
template<typename Element >  
static Element mullo (  
    Element x1,  
    Element x2) [inline], [static]
```

### 12.272.1.5 [mulhi\(\)](#)

```
template<typename Element >  
static Element mulhi (  
    Element x1,  
    Element x2) [inline], [static]
```

### 12.272.1.6 [mulx\(\)](#)

```
template<typename Element >  
static Element mulx (  
    Element x1,  
    Element x2) [inline], [static]
```

### 12.272.1.7 [fmaddx\(\)](#)

```
template<typename Element >  
static Element fmaddx (  
    Element x1,  
    Element x2,  
    Element x3) [inline], [static]
```

**12.272.1.8 fmaddxin()**

```
template<typename Element >
static Element fmaddxin (
    Element & x1,
    Element x2,
    Element x3) [inline], [static]
```

**12.272.1.9 fmsubx()**

```
template<typename Element >
static Element fmsubx (
    Element x1,
    Element x2,
    Element x3) [inline], [static]
```

**12.272.1.10 fmsubxin()**

```
template<typename Element >
static Element fmsubxin (
    Element & x1,
    Element x2,
    Element x3) [inline], [static]
```

**12.272.1.11 fnmaddx()**

```
template<typename Element >
static Element fnmaddx (
    Element x1,
    Element x2,
    Element x3) [inline], [static]
```

**12.272.1.12 fnmaddxin()**

```
template<typename Element >
static Element fnmaddxin (
    Element & x1,
    Element x2,
    Element x3) [inline], [static]
```

**12.272.1.13 sra()**

```
template<typename Element >
template<int s>
static Element sra (
    Element x1) [inline], [static]
```

**12.272.1.14 srl()**

```
template<typename Element >
template<int s>
static Element srl (
    Element x1) [inline], [static]
```

**12.272.1.15 sll()**

```
template<typename Element >
template<int s>
static Element sll (
    Element x1) [inline], [static]
```



## 12.272.2 Field Documentation

### 12.272.2.1 `_zero`

```
template<typename Element >
Element _zero = 0 [static], [constexpr]
```

### 12.272.2.2 `cmp_true`

```
template<typename Element >
Element cmp_true = -1 [static], [constexpr]
```

### 12.272.2.3 `cmp_false`

```
template<typename Element >
Element cmp_false = _zero [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [test-simd.C](#)

## 12.273 Sequential Struct Reference

### Public Member Functions

- [Sequential](#) ()
- [Sequential](#) (size\_t nth)
- template<class Cut , class Param >  
[Sequential](#) ([Parallel](#)< Cut, Param > &)
- size\_t [numthreads](#) () const

### Friends

- std::ostream & [operator<<](#) (std::ostream &out, const [Sequential](#) &)

## 12.273.1 Constructor & Destructor Documentation

### 12.273.1.1 `Sequential()` [1/3]

```
Sequential () [inline]
```

### 12.273.1.2 `Sequential()` [2/3]

```
Sequential (
    size_t nth) [inline]
```

### 12.273.1.3 `Sequential()` [3/3]

```
template<class Cut , class Param >
Sequential (
    Parallel< Cut, Param > & ) [inline]
```

## 12.273.2 Member Function Documentation

### 12.273.2.1 `numthreads()`

```
size_t numthreads () const [inline]
```

### 12.273.3 Friends And Related Symbol Documentation

#### 12.273.3.1 operator<<

```
std::ostream & operator<< (
    std::ostream & out,
    const Sequential & ) [friend]
```

The documentation for this struct was generated from the following file:

- [blockcuts.inl](#)

### 12.274 Simd128\_impl< ArithType, Int, Signed, Size > Struct Template Reference

The documentation for this struct was generated from the following file:

- [simd128.inl](#)

### 12.275 Simd128\_impl< true, false, true, 4 > Struct Reference

The documentation for this struct was generated from the following file:

- [simd128\\_float.inl](#)

### 12.276 Simd128\_impl< true, false, true, 8 > Struct Reference

The documentation for this struct was generated from the following file:

- [simd128\\_double.inl](#)

### 12.277 Simd128\_impl< true, true, false, 2 > Struct Reference

Inheritance diagram for Simd128\_impl< true, true, false, 2 >:



#### Data Structures

- union [Converter](#)

#### Public Types

- using [scalar\\_t](#) = uint16\_t
- using [aligned\\_allocator](#) = AlignedAllocator<[scalar\\_t](#), Alignment([alignment](#))>
- using [aligned\\_vector](#) = std::vector<[scalar\\_t](#), [aligned\\_allocator](#)>
- template<class [Field](#) >  
using [is\\_same\\_element](#) = std::is\_same<typename [Field::Element](#), [scalar\\_t](#)>
- using [vect\\_t](#) = \_\_m128i

## Static Public Member Functions

- static const std::string [type\\_string](#) ()
- static [INLINE CONST vect\\_t set1](#) (const [scalar\\_t](#) x)
- static [INLINE CONST vect\\_t set](#) (const [scalar\\_t](#) x0, const [scalar\\_t](#) x1, const [scalar\\_t](#) x2, const [scalar\\_t](#) x3, const [scalar\\_t](#) x4, const [scalar\\_t](#) x5, const [scalar\\_t](#) x6, const [scalar\\_t](#) x7)
- template<class T >  
static [INLINE PURE vect\\_t gather](#) (const [scalar\\_t](#) \*const p, const T \*const idx)
- static [INLINE PURE vect\\_t load](#) (const [scalar\\_t](#) \*const p)
- static [INLINE PURE vect\\_t loadu](#) (const [scalar\\_t](#) \*const p)
- static [INLINE](#) void [store](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE](#) void [storeu](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE](#) void [stream](#) ([scalar\\_t](#) \*p, const [vect\\_t](#) v)
- template<int s>  
static [INLINE CONST vect\\_t sra](#) (const [vect\\_t](#) a)
- static [INLINE CONST vect\\_t greater](#) ([vect\\_t](#) a, [vect\\_t](#) b)
- static [INLINE CONST vect\\_t lesser](#) ([vect\\_t](#) a, [vect\\_t](#) b)
- static [INLINE CONST vect\\_t greater\\_eq](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t lesser\\_eq](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t mulhi](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t mulx](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t fmaddx](#) (const [vect\\_t](#) c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE vect\\_t fmaddxin](#) ([vect\\_t](#) &c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t fnmaddx](#) (const [vect\\_t](#) c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE vect\\_t fnmaddxin](#) ([vect\\_t](#) &c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t fmsubx](#) (const [vect\\_t](#) c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE vect\\_t fmsubxin](#) ([vect\\_t](#) &c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST scalar\\_t hadd\\_to\\_scal](#) (const [vect\\_t](#) a)
- template<class T >  
static constexpr bool [valid](#) (T \*p)
- template<class T >  
static constexpr bool [compliant](#) (T n)
- static [INLINE CONST vect\\_t set1](#) (const [scalar\\_t](#) x)
- static [INLINE CONST vect\\_t set](#) (const [scalar\\_t](#) x0, const [scalar\\_t](#) x1, const [scalar\\_t](#) x2, const [scalar\\_t](#) x3, const [scalar\\_t](#) x4, const [scalar\\_t](#) x5, const [scalar\\_t](#) x6, const [scalar\\_t](#) x7)
- template<class T >  
static [INLINE PURE vect\\_t gather](#) (const [scalar\\_t](#) \*const p, const T \*const idx)
- static [INLINE PURE vect\\_t load](#) (const [scalar\\_t](#) \*const p)
- static [INLINE PURE vect\\_t loadu](#) (const [scalar\\_t](#) \*const p)
- static [INLINE](#) void [store](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE](#) void [storeu](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE](#) void [stream](#) ([scalar\\_t](#) \*p, const [vect\\_t](#) v)
- template<int s>  
static [INLINE CONST vect\\_t sll](#) (const [vect\\_t](#) a)
- template<int s>  
static [INLINE CONST vect\\_t srl](#) (const [vect\\_t](#) a)
- template<uint32\_t s>  
static [INLINE CONST vect\\_t shuffle](#) (const [vect\\_t](#) a)
- static [INLINE CONST vect\\_t unpacklo\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpackhi\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpacklo](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpackhi](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE](#) void [unpacklohi](#) ([vect\\_t](#) &lo, [vect\\_t](#) &hi, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t pack\\_even](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t pack\\_odd](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE](#) void [pack](#) ([vect\\_t](#) &even, [vect\\_t](#) &odd, const [vect\\_t](#) a, const [vect\\_t](#) b)

- static `INLINE` void `transpose` (`vect_t` &r0, `vect_t` &r1, `vect_t` &r2, `vect_t` &r3, `vect_t` &r4, `vect_t` &r5, `vect_t` &r6, `vect_t` &r7)
- template<uint8\_t s>  
static `INLINE` `CONST` `vect_t` `blend` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `add` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `addin` (`vect_t` &a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `sub` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `subin` (`vect_t` &a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `mullo` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `mul` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fmadd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fmaddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fnmadd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fnmaddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fmsub` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fmsubin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `round` (const `vect_t` a)
- static `INLINE` `vect_t` `mod` (`vect_t` &C, const `vect_t` &P, const `__m64` &INVP, const `vect_t` &NEGP, const `vect_t` &MIN, const `vect_t` &MAX, `vect_t` &Q, `vect_t` &T)
- static `INLINE` `CONST` `vect_t` `zero` ()
- template<uint8\_t s>  
static `INLINE` `CONST` `vect_t` `sll128` (const `vect_t` a)
- template<uint8\_t s>  
static `INLINE` `CONST` `vect_t` `srl128` (const `vect_t` a)
- static `INLINE` `CONST` `vect_t` `vand` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `vor` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `vxor` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `vandnot` (const `vect_t` a, const `vect_t` b)

### Static Public Attributes

- static const constexpr size\_t `vect_size` = 8
- static const constexpr size\_t `alignment` = 16

## 12.277.1 Member Typedef Documentation

### 12.277.1.1 scalar\_t

```
using scalar_t = uint16_t
```

### 12.277.1.2 aligned\_allocator

```
using aligned_allocator = AlignedAllocator<scalar_t, Alignment(alignment)>
```

### 12.277.1.3 aligned\_vector

```
using aligned_vector = std::vector<scalar_t, aligned_allocator>
```

### 12.277.1.4 is\_same\_element

```
template<class Field >
using is_same_element = std::is_same<typename Field::Element, scalar_t>
```

### 12.277.1.5 vect\_t

```
using vect_t = __m128i [inherited]
```

## 12.277.2 Member Function Documentation

### 12.277.2.1 type\_string()

```
static const std::string type_string () [inline], [static]
```

### 12.277.2.2 set1() [1/2]

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static]
```

### 12.277.2.3 set() [1/2]

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3,
    const scalar_t x4,
    const scalar_t x5,
    const scalar_t x6,
    const scalar_t x7) [inline], [static]
```

### 12.277.2.4 gather() [1/2]

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static]
```

### 12.277.2.5 load() [1/2]

```
static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static]
```

### 12.277.2.6 loadu() [1/2]

```
static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static]
```

### 12.277.2.7 store() [1/2]

```
static INLINE void store (
    scalar_t * p,
    vect_t v) [inline], [static]
```

### 12.277.2.8 storeu() [1/2]

```
static INLINE void storeu (
    scalar_t * p,
    vect_t v) [inline], [static]
```

### 12.277.2.9 stream() [1/2]

```
static INLINE void stream (
    scalar_t * p,
    const vect_t v) [inline], [static]
```

**12.277.2.10 sra()**

```
template<int s>
static INLINE CONST vect_t sra (
    const vect_t a) [inline], [static]
```

**12.277.2.11 greater()**

```
static INLINE CONST vect_t greater (
    vect_t a,
    vect_t b) [inline], [static]
```

**12.277.2.12 lesser()**

```
static INLINE CONST vect_t lesser (
    vect_t a,
    vect_t b) [inline], [static]
```

**12.277.2.13 greater\_eq()**

```
static INLINE CONST vect_t greater_eq (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.277.2.14 lesser\_eq()**

```
static INLINE CONST vect_t lesser_eq (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.277.2.15 mulhi()**

```
static INLINE CONST vect_t mulhi (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.277.2.16 mulx()**

```
static INLINE CONST vect_t mulx (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.277.2.17 fmaddx()**

```
static INLINE CONST vect_t fmaddx (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.277.2.18 fmaddxin()**

```
static INLINE vect_t fmaddxin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.277.2.19 fnmaddx()**

```
static INLINE CONST vect_t fnmaddx (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.277.2.20 fnmaddxin()**

```
static INLINE vect_t fnmaddxin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.277.2.21 fmsubx()**

```
static INLINE CONST vect_t fmsubx (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.277.2.22 fmsubxin()**

```
static INLINE vect_t fmsubxin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.277.2.23 hadd\_to\_scal()**

```
static INLINE CONST scalar_t hadd_to_scal (
    const vect_t a) [inline], [static]
```

**12.277.2.24 valid()**

```
template<class T >
static constexpr bool valid (
    T * p) [inline], [static], [constexpr], [inherited]
```

**12.277.2.25 compliant()**

```
template<class T >
static constexpr bool compliant (
    T n) [inline], [static], [constexpr], [inherited]
```

**12.277.2.26 set1() [2/2]**

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static], [inherited]
```

**12.277.2.27 set() [2/2]**

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3,
    const scalar_t x4,
    const scalar_t x5,
```

```

    const scalar_t x6,
    const scalar_t x7) [inline], [static], [inherited]

```

#### 12.277.2.28 gather() [2/2]

```

template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static], [inherited]

```

#### 12.277.2.29 load() [2/2]

```

static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static], [inherited]

```

#### 12.277.2.30 loadu() [2/2]

```

static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static], [inherited]

```

#### 12.277.2.31 store() [2/2]

```

static INLINE void store (
    scalar_t * p,
    vect_t v) [inline], [static], [inherited]

```

#### 12.277.2.32 storeu() [2/2]

```

static INLINE void storeu (
    scalar_t * p,
    vect_t v) [inline], [static], [inherited]

```

#### 12.277.2.33 stream() [2/2]

```

static INLINE void stream (
    scalar_t * p,
    const vect_t v) [inline], [static], [inherited]

```

#### 12.277.2.34 sll()

```

template<int s>
static INLINE CONST vect_t sll (
    const vect_t a) [inline], [static], [inherited]

```

#### 12.277.2.35 srl()

```

template<int s>
static INLINE CONST vect_t srl (
    const vect_t a) [inline], [static], [inherited]

```

#### 12.277.2.36 shuffle()

```

template<uint32_t s>
static INLINE CONST vect_t shuffle (
    const vect_t a) [inline], [static], [inherited]

```



**12.277.2.37 unpacklo\_intrinsic()**

```
static INLINE CONST vect_t unpacklo_intrinsic (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.277.2.38 unpackhi\_intrinsic()**

```
static INLINE CONST vect_t unpackhi_intrinsic (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.277.2.39 unpacklo()**

```
static INLINE CONST vect_t unpacklo (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.277.2.40 unpackhi()**

```
static INLINE CONST vect_t unpackhi (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.277.2.41 unpacklohi()**

```
static INLINE void unpacklohi (  
    vect_t & lo,  
    vect_t & hi,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.277.2.42 pack\_even()**

```
static INLINE CONST vect_t pack_even (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.277.2.43 pack\_odd()**

```
static INLINE CONST vect_t pack_odd (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.277.2.44 pack()**

```
static INLINE void pack (  
    vect_t & even,  
    vect_t & odd,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.277.2.45 transpose()**

```
static INLINE void transpose (  
    vect_t & r0,  
    vect_t & r1,  
    vect_t & r2,  
    vect_t & r3,  
    vect_t & r4,
```

```
    vect_t & r5,  
    vect_t & r6,  
    vect_t & r7) [inline], [static], [inherited]
```

#### 12.277.2.46 blend()

```
template<uint8_t s>  
static INLINE CONST vect_t blend (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

#### 12.277.2.47 add()

```
static INLINE CONST vect_t add (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

#### 12.277.2.48 addin()

```
static INLINE vect_t addin (  
    vect_t & a,  
    const vect_t b) [inline], [static], [inherited]
```

#### 12.277.2.49 sub()

```
static INLINE CONST vect_t sub (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

#### 12.277.2.50 subin()

```
static INLINE vect_t subin (  
    vect_t & a,  
    const vect_t b) [inline], [static], [inherited]
```

#### 12.277.2.51 mullo()

```
static INLINE CONST vect_t mullo (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

#### 12.277.2.52 mul()

```
static INLINE CONST vect_t mul (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

#### 12.277.2.53 fmadd()

```
static INLINE CONST vect_t fmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

#### 12.277.2.54 fmaddin()

```
static INLINE vect_t fmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.277.2.55 fnmadd()**

```
static INLINE CONST vect_t fnmadd (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.277.2.56 fnmaddin()**

```
static INLINE vect_t fnmaddin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.277.2.57 fmsub()**

```
static INLINE CONST vect_t fmsub (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.277.2.58 fmsubin()**

```
static INLINE vect_t fmsubin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.277.2.59 eq()**

```
static INLINE CONST vect_t eq (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.277.2.60 round()**

```
static INLINE CONST vect_t round (
    const vect_t a) [inline], [static], [inherited]
```

**12.277.2.61 mod()**

```
static INLINE vect_t mod (
    vect_t & C,
    const vect_t & P,
    const __m64 & INVP,
    const vect_t & NEGP,
    const vect_t & MIN,
    const vect_t & MAX,
    vect_t & Q,
    vect_t & T) [inline], [static], [inherited]
```

**12.277.2.62 zero()**

```
static INLINE CONST vect_t zero () [inline], [static], [inherited]
```

**12.277.2.63 sll128()**

```
template<uint8_t s>
static INLINE CONST vect_t sll128 (
    const vect_t a) [inline], [static], [inherited]
```

**12.277.2.64 srl128()**

```
template<uint8_t s>
static INLINE CONST vect_t srl128 (
    const vect_t a) [inline], [static], [inherited]
```

**12.277.2.65 vand()**

```
static INLINE CONST vect_t vand (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.277.2.66 vor()**

```
static INLINE CONST vect_t vor (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.277.2.67 vxor()**

```
static INLINE CONST vect_t vxor (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.277.2.68 vandnot()**

```
static INLINE CONST vect_t vandnot (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.277.3 Field Documentation****12.277.3.1 vect\_size**

```
const constexpr size_t vect_size = 8 [static], [constexpr], [inherited]
```

**12.277.3.2 alignment**

```
const constexpr size_t alignment = 16 [static], [constexpr], [inherited]
```

The documentation for this struct was generated from the following file:

- [simd128\\_int16.inl](#)

**12.278 Simd128\_impl< true, true, false, 4 > Struct Reference**

Inheritance diagram for Simd128\_impl< true, true, false, 4 >:

**Data Structures**

- union [Converter](#)

## Public Types

- using `scalar_t` = `uint32_t`
- using `aligned_allocator` = `AlignedAllocator<scalar_t, Alignment(alignment)>`
- using `aligned_vector` = `std::vector<scalar_t, aligned_allocator>`
- template<class `Field` >  
using `is_same_element` = `std::is_same<typename Field::Element, scalar_t>`
- using `vect_t` = `__m128i`

## Static Public Member Functions

- static const std::string `type_string` ()
- static `INLINE CONST vect_t set1` (const `scalar_t` x)
- static `INLINE CONST vect_t set` (const `scalar_t` x0, const `scalar_t` x1, const `scalar_t` x2, const `scalar_t` x3)
- template<class `T` >  
static `INLINE PURE vect_t gather` (const `scalar_t` \*const p, const `T` \*const idx)
- static `INLINE PURE vect_t load` (const `scalar_t` \*const p)
- static `INLINE PURE vect_t loadu` (const `scalar_t` \*const p)
- static `INLINE void store` (`scalar_t` \*p, `vect_t` v)
- static `INLINE void storeu` (`scalar_t` \*p, `vect_t` v)
- static `INLINE void stream` (`scalar_t` \*p, const `vect_t` v)
- template<int `s`>  
static `INLINE CONST vect_t sra` (const `vect_t` a)
- static `INLINE CONST vect_t greater` (`vect_t` a, `vect_t` b)
- static `INLINE CONST vect_t lesser` (`vect_t` a, `vect_t` b)
- static `INLINE CONST vect_t greater_eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t lesser_eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t mulhi` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t mulx` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fmaddx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fmaddxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fnmaddx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fnmaddxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fmsubx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fmsubxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST scalar_t hadd_to_scal` (const `vect_t` a)
- template<class `T` >  
static constexpr bool `valid` (`T` \*p)
- template<class `T` >  
static constexpr bool `compliant` (`T` n)
- static `INLINE CONST vect_t set1` (const `scalar_t` x)
- static `INLINE CONST vect_t set` (const `scalar_t` x0, const `scalar_t` x1, const `scalar_t` x2, const `scalar_t` x3)
- template<class `T` >  
static `INLINE PURE vect_t gather` (const `scalar_t` \*const p, const `T` \*const idx)
- static `INLINE PURE vect_t load` (const `scalar_t` \*const p)
- static `INLINE PURE vect_t loadu` (const `scalar_t` \*const p)
- static `INLINE void store` (`scalar_t` \*p, `vect_t` v)
- static `INLINE void storeu` (`scalar_t` \*p, `vect_t` v)
- static `INLINE void stream` (`scalar_t` \*p, const `vect_t` v)
- template<int `s`>  
static `INLINE CONST vect_t sll` (const `vect_t` a)
- template<int `s`>  
static `INLINE CONST vect_t srl` (const `vect_t` a)
- template<uint8\_t `s`>  
static `INLINE CONST vect_t shuffle` (const `vect_t` a)
- static `INLINE CONST vect_t unpacklo_intrinsic` (const `vect_t` a, const `vect_t` b)

- static `INLINE CONST vect_t unpackhi_intrinsic` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t unpacklo` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t unpackhi` (const `vect_t` a, const `vect_t` b)
- static `INLINE void unpacklohi` (`vect_t` &lo, `vect_t` &hi, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t pack_even` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t pack_odd` (const `vect_t` a, const `vect_t` b)
- static `INLINE void pack` (`vect_t` &even, `vect_t` &odd, const `vect_t` a, const `vect_t` b)
- static `INLINE void transpose` (`vect_t` &r0, `vect_t` &r1, `vect_t` &r2, `vect_t` &r3)
- template<uint8\_t s>
  - static `INLINE CONST vect_t blend` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t add` (const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t addin` (`vect_t` &a, const `vect_t` b)
- static `INLINE CONST vect_t sub` (const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t subin` (`vect_t` &a, const `vect_t` b)
- static `INLINE CONST vect_t mullo` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t mul` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fmadd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fmaddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fnmadd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fnmaddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fmsub` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fmsubin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t round` (const `vect_t` a)
- static `INLINE vect_t mod` (`vect_t` &C, const `vect_t` &P, const `vect_t` &INVP, const `vect_t` &NEGP, const `vect_t` &MIN, const `vect_t` &MAX, `vect_t` &Q, `vect_t` &T)
- static `INLINE CONST vect_t zero` ()
- template<uint8\_t s>
  - static `INLINE CONST vect_t sll128` (const `vect_t` a)
- template<uint8\_t s>
  - static `INLINE CONST vect_t srl128` (const `vect_t` a)
- static `INLINE CONST vect_t vand` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t vor` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t vxor` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t vandnot` (const `vect_t` a, const `vect_t` b)

## Static Public Attributes

- static const constexpr size\_t `vect_size` = 4
- static const constexpr size\_t `alignment` = 16

## 12.278.1 Member Typedef Documentation

### 12.278.1.1 scalar\_t

```
using scalar_t = uint32_t
```

### 12.278.1.2 aligned\_allocator

```
using aligned_allocator = AlignedAllocator<scalar_t, Alignment(alignment)>
```

### 12.278.1.3 aligned\_vector

```
using aligned_vector = std::vector<scalar_t, aligned_allocator>
```

#### 12.278.1.4 is\_same\_element

```
template<class Field >
using is_same_element = std::is_same<typename Field::Element, scalar_t>
```

#### 12.278.1.5 vect\_t

```
using vect_t = __m128i [inherited]
```

### 12.278.2 Member Function Documentation

#### 12.278.2.1 type\_string()

```
static const std::string type_string () [inline], [static]
```

#### 12.278.2.2 set1() [1/2]

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static]
```

#### 12.278.2.3 set() [1/2]

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3) [inline], [static]
```

#### 12.278.2.4 gather() [1/2]

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static]
```

#### 12.278.2.5 load() [1/2]

```
static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static]
```

#### 12.278.2.6 loadu() [1/2]

```
static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static]
```

#### 12.278.2.7 store() [1/2]

```
static INLINE void store (
    scalar_t * p,
    vect_t v) [inline], [static]
```

#### 12.278.2.8 storeu() [1/2]

```
static INLINE void storeu (
    scalar_t * p,
    vect_t v) [inline], [static]
```

**12.278.2.9 stream() [1/2]**

```
static INLINE void stream (  
    scalar_t * p,  
    const vect_t v) [inline], [static]
```

**12.278.2.10 sra()**

```
template<int s>  
static INLINE CONST vect_t sra (  
    const vect_t a) [inline], [static]
```

**12.278.2.11 greater()**

```
static INLINE CONST vect_t greater (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.278.2.12 lesser()**

```
static INLINE CONST vect_t lesser (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.278.2.13 greater\_eq()**

```
static INLINE CONST vect_t greater_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.278.2.14 lesser\_eq()**

```
static INLINE CONST vect_t lesser_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.278.2.15 mulhi()**

```
static INLINE CONST vect_t mulhi (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.278.2.16 mulx()**

```
static INLINE CONST vect_t mulx (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.278.2.17 fmaddx()**

```
static INLINE CONST vect_t fmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.278.2.18 fmaddxin()**

```
static INLINE vect_t fmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```



**12.278.2.19 fnmaddx()**

```
static INLINE CONST vect_t fnmaddx (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.278.2.20 fnmaddxin()**

```
static INLINE vect_t fnmaddxin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.278.2.21 fmsubx()**

```
static INLINE CONST vect_t fmsubx (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.278.2.22 fmsubxin()**

```
static INLINE vect_t fmsubxin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.278.2.23 hadd\_to\_scal()**

```
static INLINE CONST scalar_t hadd_to_scal (
    const vect_t a) [inline], [static]
```

**12.278.2.24 valid()**

```
template<class T >
static constexpr bool valid (
    T * p) [inline], [static], [constexpr], [inherited]
```

**12.278.2.25 compliant()**

```
template<class T >
static constexpr bool compliant (
    T n) [inline], [static], [constexpr], [inherited]
```

**12.278.2.26 set1() [2/2]**

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static], [inherited]
```

**12.278.2.27 set() [2/2]**

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3) [inline], [static], [inherited]
```

**12.278.2.28 gather()** [2/2]

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static], [inherited]
```

**12.278.2.29 load()** [2/2]

```
static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static], [inherited]
```

**12.278.2.30 loadu()** [2/2]

```
static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static], [inherited]
```

**12.278.2.31 store()** [2/2]

```
static INLINE void store (
    scalar_t * p,
    vect_t v) [inline], [static], [inherited]
```

**12.278.2.32 storeu()** [2/2]

```
static INLINE void storeu (
    scalar_t * p,
    vect_t v) [inline], [static], [inherited]
```

**12.278.2.33 stream()** [2/2]

```
static INLINE void stream (
    scalar_t * p,
    const vect_t v) [inline], [static], [inherited]
```

**12.278.2.34 sll()**

```
template<int s>
static INLINE CONST vect_t sll (
    const vect_t a) [inline], [static], [inherited]
```

**12.278.2.35 srl()**

```
template<int s>
static INLINE CONST vect_t srl (
    const vect_t a) [inline], [static], [inherited]
```

**12.278.2.36 shuffle()**

```
template<uint8_t s>
static INLINE CONST vect_t shuffle (
    const vect_t a) [inline], [static], [inherited]
```

**12.278.2.37 unpacklo\_intrinsic()**

```
static INLINE CONST vect_t unpacklo_intrinsic (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.38 unpackhi\_intrinsic()**

```
static INLINE CONST vect_t unpackhi_intrinsic (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.39 unpacklo()**

```
static INLINE CONST vect_t unpacklo (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.40 unpackhi()**

```
static INLINE CONST vect_t unpackhi (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.41 unpacklohi()**

```
static INLINE void unpacklohi (
    vect_t & lo,
    vect_t & hi,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.42 pack\_even()**

```
static INLINE CONST vect_t pack_even (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.43 pack\_odd()**

```
static INLINE CONST vect_t pack_odd (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.44 pack()**

```
static INLINE void pack (
    vect_t & even,
    vect_t & odd,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.45 transpose()**

```
static INLINE void transpose (
    vect_t & r0,
    vect_t & r1,
    vect_t & r2,
    vect_t & r3) [inline], [static], [inherited]
```

**12.278.2.46 blend()**

```
template<uint8_t s>
static INLINE CONST vect_t blend (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.47 add()**

```
static INLINE CONST vect_t add (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.48 addin()**

```
static INLINE vect_t addin (  
    vect_t & a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.49 sub()**

```
static INLINE CONST vect_t sub (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.50 subin()**

```
static INLINE vect_t subin (  
    vect_t & a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.51 mullo()**

```
static INLINE CONST vect_t mullo (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.52 mul()**

```
static INLINE CONST vect_t mul (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.53 fmadd()**

```
static INLINE CONST vect_t fmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.54 fmaddin()**

```
static INLINE vect_t fmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.55 fnmadd()**

```
static INLINE CONST vect_t fnmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.56 fnmaddin()**

```
static INLINE vect_t fnmaddin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.57 fmsub()**

```
static INLINE CONST vect_t fmsub (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.58 fmsubin()**

```
static INLINE vect_t fmsubin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.59 eq()**

```
static INLINE CONST vect_t eq (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.60 round()**

```
static INLINE CONST vect_t round (
    const vect_t a) [inline], [static], [inherited]
```

**12.278.2.61 mod()**

```
static INLINE vect_t mod (
    vect_t & C,
    const vect_t & P,
    const vect_t & INVP,
    const vect_t & NEGP,
    const vect_t & MIN,
    const vect_t & MAX,
    vect_t & Q,
    vect_t & T) [inline], [static], [inherited]
```

**12.278.2.62 zero()**

```
static INLINE CONST vect_t zero () [inline], [static], [inherited]
```

**12.278.2.63 sll128()**

```
template<uint8_t s>
static INLINE CONST vect_t sll128 (
    const vect_t a) [inline], [static], [inherited]
```

**12.278.2.64 srl128()**

```
template<uint8_t s>
static INLINE CONST vect_t srl128 (
    const vect_t a) [inline], [static], [inherited]
```

**12.278.2.65 vand()**

```
static INLINE CONST vect_t vand (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.66 vor()**

```
static INLINE CONST vect_t vor (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.67 vxor()**

```
static INLINE CONST vect_t vxor (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.278.2.68 vandnot()**

```
static INLINE CONST vect_t vandnot (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.278.3 Field Documentation****12.278.3.1 vect\_size**

```
const constexpr size_t vect_size = 4 [static], [constexpr], [inherited]
```

**12.278.3.2 alignment**


```
const constexpr size_t alignment = 16 [static], [constexpr], [inherited]
```

The documentation for this struct was generated from the following file:

- [simd128\\_int32.inl](#)

**12.279 Simd128\_impl< true, true, false, 8 > Struct Reference**

Inheritance diagram for Simd128\_impl< true, true, false, 8 >:

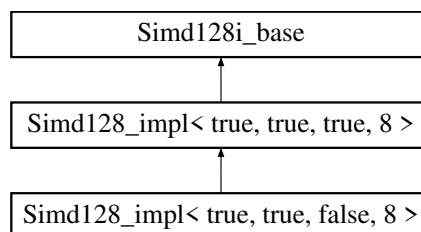**Data Structures**

- union [Converter](#)

**Public Types**

- using [scalar\\_t](#) = uint64\_t
- using [aligned\\_allocator](#) = AlignedAllocator<[scalar\\_t](#), Alignment([alignment](#))>
- using [aligned\\_vector](#) = std::vector<[scalar\\_t](#), [aligned\\_allocator](#)>

- template<class Field >  
using is\_same\_element = std::is\_same<typename Field::Element, scalar\_t>
- using vect\_t = \_\_m128i

### Static Public Member Functions

- static const std::string type\_string ()
- static INLINE CONST vect\_t set1 (const scalar\_t x)
- static INLINE CONST vect\_t set (const scalar\_t x0, const scalar\_t x1)
- template<class T >  
static INLINE PURE vect\_t gather (const scalar\_t \*const p, const T \*const idx)
- static INLINE PURE vect\_t load (const scalar\_t \*const p)
- static INLINE PURE vect\_t loadu (const scalar\_t \*const p)
- static INLINE void store (scalar\_t \*p, vect\_t v)
- static INLINE void storeu (scalar\_t \*p, vect\_t v)
- static INLINE void stream (scalar\_t \*p, const vect\_t v)
- template<int s>  
static INLINE CONST vect\_t sra (const vect\_t a)
- static INLINE CONST vect\_t greater (vect\_t a, vect\_t b)
- static INLINE CONST vect\_t lesser (vect\_t a, vect\_t b)
- static INLINE CONST vect\_t greater\_eq (const vect\_t a, const vect\_t b)
- static INLINE CONST vect\_t lesser\_eq (const vect\_t a, const vect\_t b)
- static INLINE CONST vect\_t mullo (const vect\_t x0, const vect\_t x1)
- static INLINE CONST vect\_t mulhi (const vect\_t a, const vect\_t b)
- static INLINE CONST vect\_t mulx (const vect\_t a, const vect\_t b)
- static INLINE CONST vect\_t fmaddx (const vect\_t c, const vect\_t a, const vect\_t b)
- static INLINE vect\_t fmaddxin (vect\_t &c, const vect\_t a, const vect\_t b)
- static INLINE CONST vect\_t fnmaddx (const vect\_t c, const vect\_t a, const vect\_t b)
- static INLINE vect\_t fnmaddxin (vect\_t &c, const vect\_t a, const vect\_t b)
- static INLINE CONST vect\_t fmsubx (const vect\_t c, const vect\_t a, const vect\_t b)
- static INLINE vect\_t fmsubxin (vect\_t &c, const vect\_t a, const vect\_t b)
- static INLINE CONST scalar\_t hadd\_to\_scal (const vect\_t a)
- template<class T >  
static constexpr bool valid (T \*p)
- template<class T >  
static constexpr bool compliant (T n)
- static INLINE CONST vect\_t set1 (const scalar\_t x)
- static INLINE CONST vect\_t set (const scalar\_t x0, const scalar\_t x1)
- template<class T >  
static INLINE PURE vect\_t gather (const scalar\_t \*const p, const T \*const idx)
- template<int idx>  
static INLINE CONST scalar\_t get (vect\_t v)
- static INLINE PURE vect\_t load (const scalar\_t \*const p)
- static INLINE PURE vect\_t loadu (const scalar\_t \*const p)
- static INLINE void store (scalar\_t \*p, vect\_t v)
- static INLINE void storeu (scalar\_t \*p, vect\_t v)
- static INLINE void stream (scalar\_t \*p, const vect\_t v)
- template<int s>  
static INLINE CONST vect\_t sll (const vect\_t a)
- template<int s>  
static INLINE CONST vect\_t srl (const vect\_t a)
- template<uint8\_t s>  
static INLINE CONST vect\_t shuffle (const vect\_t a)
- static INLINE CONST vect\_t unpacklo\_intrinsic (const vect\_t a, const vect\_t b)
- static INLINE CONST vect\_t unpackhi\_intrinsic (const vect\_t a, const vect\_t b)
- static INLINE CONST vect\_t unpacklo (const vect\_t a, const vect\_t b)

- static `INLINE CONST vect_t unpackhi` (const `vect_t` a, const `vect_t` b)
- static `INLINE void unpacklohi` (`vect_t` &lo, `vect_t` &hi, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t pack_even` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t pack_odd` (const `vect_t` a, const `vect_t` b)
- static `INLINE void pack` (`vect_t` &even, `vect_t` &odd, const `vect_t` a, const `vect_t` b)
- static `INLINE void transpose` (`vect_t` &r0, `vect_t` &r1)
- template<uint8\_t s>
  - static `INLINE CONST vect_t blend` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t add` (const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t addin` (`vect_t` &a, const `vect_t` b)
- static `INLINE CONST vect_t sub` (const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t subin` (`vect_t` &a, const `vect_t` b)
- static `INLINE CONST vect_t mul` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fmadd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fmaddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fnmadd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fnmaddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fmsub` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fmsubin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t round` (const `vect_t` a)
- static `INLINE CONST vect_t mask_high` ()
- static `INLINE CONST vect_t mulhi_fast` (`vect_t` x, `vect_t` y)
- static `INLINE vect_t mod` (`vect_t` &C, const \_\_m128d &P, const \_\_m128d &INVP, const \_\_m128d &NEGP, const `vect_t` &POW50REM, const \_\_m128d &MIN, const \_\_m128d &MAX, \_\_m128d &Q, \_\_m128d &T)
- static `INLINE CONST vect_t zero` ()
- template<uint8\_t s>
  - static `INLINE CONST vect_t sll128` (const `vect_t` a)
- template<uint8\_t s>
  - static `INLINE CONST vect_t srl128` (const `vect_t` a)
- static `INLINE CONST vect_t vand` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t vor` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t vxor` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t vandnot` (const `vect_t` a, const `vect_t` b)

### Static Public Attributes

- static const constexpr size\_t `vect_size` = 2
- static const constexpr size\_t `alignment` = 16

### Static Protected Member Functions

- static `INLINE CONST vect_t signbits` (const `vect_t` x)

## 12.279.1 Member Typedef Documentation

### 12.279.1.1 scalar\_t

```
using scalar_t = uint64_t
```

### 12.279.1.2 aligned\_allocator

```
using aligned_allocator = AlignedAllocator<scalar_t, Alignment(alignment)>
```

### 12.279.1.3 aligned\_vector

```
using aligned_vector = std::vector<scalar_t, aligned_allocator>
```



#### 12.279.1.4 is\_same\_element

```
template<class Field >
using is_same_element = std::is_same<typename Field::Element, scalar_t>
```

#### 12.279.1.5 vect\_t

```
using vect_t = __m128i [inherited]
```

### 12.279.2 Member Function Documentation

#### 12.279.2.1 type\_string()

```
static const std::string type_string () [inline], [static]
```

#### 12.279.2.2 set1() [1/2]

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static]
```

#### 12.279.2.3 set() [1/2]

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1) [inline], [static]
```

#### 12.279.2.4 gather() [1/2]

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static]
```

#### 12.279.2.5 load() [1/2]

```
static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static]
```

#### 12.279.2.6 loadu() [1/2]

```
static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static]
```

#### 12.279.2.7 store() [1/2]

```
static INLINE void store (
    scalar_t * p,
    vect_t v) [inline], [static]
```

#### 12.279.2.8 storeu() [1/2]

```
static INLINE void storeu (
    scalar_t * p,
    vect_t v) [inline], [static]
```

#### 12.279.2.9 stream() [1/2]

```
static INLINE void stream (
    scalar_t * p,
    const vect_t v) [inline], [static]
```

**12.279.2.10 sra()**

```
template<int s>
static INLINE CONST vect_t sra (
    const vect_t a) [inline], [static]
```

**12.279.2.11 greater()**

```
static INLINE CONST vect_t greater (
    vect_t a,
    vect_t b) [inline], [static]
```

**12.279.2.12 lesser()**

```
static INLINE CONST vect_t lesser (
    vect_t a,
    vect_t b) [inline], [static]
```

**12.279.2.13 greater\_eq()**

```
static INLINE CONST vect_t greater_eq (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.279.2.14 lesser\_eq()**

```
static INLINE CONST vect_t lesser_eq (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.279.2.15 mullo()**

```
static INLINE CONST vect_t mullo (
    const vect_t x0,
    const vect_t x1) [inline], [static]
```

**12.279.2.16 mulhi()**

```
static INLINE CONST vect_t mulhi (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.279.2.17 mulx()**

```
static INLINE CONST vect_t mulx (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.279.2.18 fmaddx()**

```
static INLINE CONST vect_t fmaddx (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.279.2.19 fmaddxin()**

```
static INLINE vect_t fmaddxin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.279.2.20 fnmaddx()**

```
static INLINE CONST vect_t fnmaddx (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.279.2.21 fnmaddxin()**

```
static INLINE vect_t fnmaddxin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.279.2.22 fmsubx()**

```
static INLINE CONST vect_t fmsubx (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.279.2.23 fmsubxin()**

```
static INLINE vect_t fmsubxin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.279.2.24 hadd\_to\_scal()**

```
static INLINE CONST scalar_t hadd_to_scal (
    const vect_t a) [inline], [static]
```

**12.279.2.25 valid()**

```
template<class T >
static constexpr bool valid (
    T * p) [inline], [static], [constexpr], [inherited]
```

**12.279.2.26 compliant()**

```
template<class T >
static constexpr bool compliant (
    T n) [inline], [static], [constexpr], [inherited]
```

**12.279.2.27 set1() [2/2]**

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static], [inherited]
```

**12.279.2.28 set() [2/2]**

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1) [inline], [static], [inherited]
```

**12.279.2.29 gather()** [2/2]

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static], [inherited]
```

**12.279.2.30 get()**

```
template<int idx>
static INLINE CONST scalar_t get (
    vect_t v) [inline], [static], [inherited]
```

**12.279.2.31 load()** [2/2]

```
static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static], [inherited]
```

**12.279.2.32 loadu()** [2/2]

```
static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static], [inherited]
```

**12.279.2.33 store()** [2/2]

```
static INLINE void store (
    scalar_t * p,
    vect_t v) [inline], [static], [inherited]
```

**12.279.2.34 storeu()** [2/2]

```
static INLINE void storeu (
    scalar_t * p,
    vect_t v) [inline], [static], [inherited]
```

**12.279.2.35 stream()** [2/2]

```
static INLINE void stream (
    scalar_t * p,
    const vect_t v) [inline], [static], [inherited]
```

**12.279.2.36 sll()**

```
template<int s>
static INLINE CONST vect_t sll (
    const vect_t a) [inline], [static], [inherited]
```

**12.279.2.37 srl()**

```
template<int s>
static INLINE CONST vect_t srl (
    const vect_t a) [inline], [static], [inherited]
```

**12.279.2.38 shuffle()**

```
template<uint8_t s>
static INLINE CONST vect_t shuffle (
    const vect_t a) [inline], [static], [inherited]
```

**12.279.2.39 unpacklo\_intrinsic()**

```
static INLINE CONST vect_t unpacklo_intrinsic (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.279.2.40 unpackhi\_intrinsic()**

```
static INLINE CONST vect_t unpackhi_intrinsic (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.279.2.41 unpacklo()**

```
static INLINE CONST vect_t unpacklo (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.279.2.42 unpackhi()**

```
static INLINE CONST vect_t unpackhi (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.279.2.43 unpacklohi()**

```
static INLINE void unpacklohi (  
    vect_t & lo,  
    vect_t & hi,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.279.2.44 pack\_even()**

```
static INLINE CONST vect_t pack_even (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.279.2.45 pack\_odd()**

```
static INLINE CONST vect_t pack_odd (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.279.2.46 pack()**

```
static INLINE void pack (  
    vect_t & even,  
    vect_t & odd,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.279.2.47 transpose()**

```
static INLINE void transpose (  
    vect_t & r0,  
    vect_t & r1) [inline], [static], [inherited]
```

**12.279.2.48 blend()**

```
template<uint8_t s>
static INLINE CONST vect_t blend (
    const vect_t a,
    const vect_t b)  [inline], [static], [inherited]
```

**12.279.2.49 add()**

```
static INLINE CONST vect_t add (
    const vect_t a,
    const vect_t b)  [inline], [static], [inherited]
```

**12.279.2.50 addin()**

```
static INLINE vect_t addin (
    vect_t & a,
    const vect_t b)  [inline], [static], [inherited]
```

**12.279.2.51 sub()**

```
static INLINE CONST vect_t sub (
    const vect_t a,
    const vect_t b)  [inline], [static], [inherited]
```

**12.279.2.52 subin()**

```
static INLINE vect_t subin (
    vect_t & a,
    const vect_t b)  [inline], [static], [inherited]
```

**12.279.2.53 mul()**

```
static INLINE CONST vect_t mul (
    const vect_t a,
    const vect_t b)  [inline], [static], [inherited]
```

**12.279.2.54 fmadd()**

```
static INLINE CONST vect_t fmadd (
    const vect_t c,
    const vect_t a,
    const vect_t b)  [inline], [static], [inherited]
```

**12.279.2.55 fmaddin()**

```
static INLINE vect_t fmaddin (
    vect_t & c,
    const vect_t a,
    const vect_t b)  [inline], [static], [inherited]
```

**12.279.2.56 fnmadd()**

```
static INLINE CONST vect_t fnmadd (
    const vect_t c,
    const vect_t a,
    const vect_t b)  [inline], [static], [inherited]
```

**12.279.2.57 fnmaddin()**

```
static INLINE vect_t fnmaddin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.279.2.58 fmsub()**

```
static INLINE CONST vect_t fmsub (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.279.2.59 fmsubin()**

```
static INLINE vect_t fmsubin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.279.2.60 eq()**

```
static INLINE CONST vect_t eq (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.279.2.61 round()**

```
static INLINE CONST vect_t round (
    const vect_t a) [inline], [static], [inherited]
```

**12.279.2.62 mask\_high()**

```
static INLINE CONST vect_t mask_high () [inline], [static], [inherited]
```

**12.279.2.63 mulhi\_fast()**

```
INLINE CONST vect_t mulhi_fast (
    vect_t x,
    vect_t y) [static], [inherited]
```

**12.279.2.64 mod()**

```
INLINE vect_t mod (
    vect_t & C,
    const __m128d & P,
    const __m128d & INVP,
    const __m128d & NEGP,
    const vect_t & POW50REM,
    const __m128d & MIN,
    const __m128d & MAX,
    __m128d & Q,
    __m128d & T) [static], [inherited]
```

**12.279.2.65 signbits()**

```
static INLINE CONST vect_t signbits (
    const vect_t x) [inline], [static], [protected], [inherited]
```

**12.279.2.66 zero()**

```
static INLINE CONST vect_t zero () [inline], [static], [inherited]
```

**12.279.2.67 sll128()**

```
template<uint8_t s>
static INLINE CONST vect_t sll128 (
    const vect_t a) [inline], [static], [inherited]
```

**12.279.2.68 srl128()**

```
template<uint8_t s>
static INLINE CONST vect_t srl128 (
    const vect_t a) [inline], [static], [inherited]
```

**12.279.2.69 vand()**

```
static INLINE CONST vect_t vand (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.279.2.70 vor()**

```
static INLINE CONST vect_t vor (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.279.2.71 vxor()**

```
static INLINE CONST vect_t vxor (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.279.2.72 vandnot()**

```
static INLINE CONST vect_t vandnot (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.279.3 Field Documentation****12.279.3.1 vect\_size**

```
const constexpr size_t vect_size = 2 [static], [constexpr], [inherited]
```

**12.279.3.2 alignment**

```
const constexpr size_t alignment = 16 [static], [constexpr], [inherited]
```

The documentation for this struct was generated from the following file:

- [simd128\\_int64.inl](#)

**12.280 Simd128\_impl< true, true, true, 2 > Struct Reference**

Inheritance diagram for Simd128\_impl< true, true, true, 2 >:





## Data Structures

- union [Converter](#)

## Public Types

- using [vect\\_t](#) = \_\_m128i
- using [scalar\\_t](#) = int16\_t
- using [aligned\\_allocator](#) = AlignedAllocator<[scalar\\_t](#), Alignment([alignment](#))>
- using [aligned\\_vector](#) = std::vector<[scalar\\_t](#), [aligned\\_allocator](#)>
- template<class [Field](#) >  
using [is\\_same\\_element](#) = std::is\_same<typename [Field::Element](#), [scalar\\_t](#)>

## Static Public Member Functions

- static const std::string [type\\_string](#) ()
- template<class T >  
static constexpr bool [valid](#) (T \*p)
- template<class T >  
static constexpr bool [compliant](#) (T n)
- static [INLINE CONST vect\\_t set1](#) (const [scalar\\_t](#) x)
- static [INLINE CONST vect\\_t set](#) (const [scalar\\_t](#) x0, const [scalar\\_t](#) x1, const [scalar\\_t](#) x2, const [scalar\\_t](#) x3, const [scalar\\_t](#) x4, const [scalar\\_t](#) x5, const [scalar\\_t](#) x6, const [scalar\\_t](#) x7)
- template<class T >  
static [INLINE PURE vect\\_t gather](#) (const [scalar\\_t](#) \*const p, const T \*const idx)
- static [INLINE PURE vect\\_t load](#) (const [scalar\\_t](#) \*const p)
- static [INLINE PURE vect\\_t loadu](#) (const [scalar\\_t](#) \*const p)
- static [INLINE void store](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE void storeu](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE void stream](#) ([scalar\\_t](#) \*p, const [vect\\_t](#) v)
- template<int s>  
static [INLINE CONST vect\\_t sll](#) (const [vect\\_t](#) a)
- template<int s>  
static [INLINE CONST vect\\_t srl](#) (const [vect\\_t](#) a)
- template<int s>  
static [INLINE CONST vect\\_t sra](#) (const [vect\\_t](#) a)
- template<uint32\_t s>  
static [INLINE CONST vect\\_t shuffle](#) (const [vect\\_t](#) a)
- static [INLINE CONST vect\\_t unpacklo\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpackhi\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpacklo](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpackhi](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE void unpacklohi](#) ([vect\\_t](#) &lo, [vect\\_t](#) &hi, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t pack\\_even](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t pack\\_odd](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE void pack](#) ([vect\\_t](#) &even, [vect\\_t](#) &odd, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE void transpose](#) ([vect\\_t](#) &r0, [vect\\_t](#) &r1, [vect\\_t](#) &r2, [vect\\_t](#) &r3, [vect\\_t](#) &r4, [vect\\_t](#) &r5, [vect\\_t](#) &r6, [vect\\_t](#) &r7)

- `template<uint8_t s>`  
`static INLINE CONST vect_t blend (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t add (const vect_t a, const vect_t b)`
- `static INLINE vect_t addin (vect_t &a, const vect_t b)`
- `static INLINE CONST vect_t sub (const vect_t a, const vect_t b)`
- `static INLINE vect_t subin (vect_t &a, const vect_t b)`
- `static INLINE CONST vect_t mullo (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t mul (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t mulhi (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t mulx (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fmadd (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fmaddin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fmadddx (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fmadddxin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fnmadd (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fnmaddin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fnmaddx (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fnmaddxin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fmsub (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fmsubin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fmsubx (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fmsubxin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t eq (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t greater (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t lesser (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t greater_eq (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t lesser_eq (const vect_t a, const vect_t b)`
- `static INLINE CONST scalar_t hadd_to_scal (const vect_t a)`
- `static INLINE CONST vect_t round (const vect_t a)`
- `static INLINE vect_t mod (vect_t &C, const vect_t &P, const __m64 &INVP, const vect_t &NEGP, const vect_t &MIN, const vect_t &MAX, vect_t &Q, vect_t &T)`
- `static INLINE CONST vect_t zero ()`
- `template<uint8_t s>`  
`static INLINE CONST vect_t sll128 (const vect_t a)`
- `template<uint8_t s>`  
`static INLINE CONST vect_t srl128 (const vect_t a)`
- `static INLINE CONST vect_t vand (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t vor (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t vxor (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t vandnot (const vect_t a, const vect_t b)`

### Static Public Attributes

- `static const constexpr size_t vect_size = 8`
- `static const constexpr size_t alignment = 16`

## 12.280.1 Member Typedef Documentation

### 12.280.1.1 vect\_t

```
using vect_t = __m128i
```

### 12.280.1.2 scalar\_t

```
using scalar_t = int16_t
```

**12.280.1.3 aligned\_allocator**

```
using aligned_allocator = AlignedAllocator<scalar_t, Alignment(alignment)>
```

**12.280.1.4 aligned\_vector**

```
using aligned_vector = std::vector<scalar_t, aligned_allocator>
```

**12.280.1.5 is\_same\_element**

```
template<class Field >
using is_same_element = std::is_same<typename Field::Element, scalar_t>
```

**12.280.2 Member Function Documentation****12.280.2.1 type\_string()**

```
static const std::string type_string () [inline], [static]
```

**12.280.2.2 valid()**

```
template<class T >
static constexpr bool valid (
    T * p) [inline], [static], [constexpr]
```

**12.280.2.3 compliant()**

```
template<class T >
static constexpr bool compliant (
    T n) [inline], [static], [constexpr]
```

**12.280.2.4 set1()**

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static]
```

**12.280.2.5 set()**

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3,
    const scalar_t x4,
    const scalar_t x5,
    const scalar_t x6,
    const scalar_t x7) [inline], [static]
```

**12.280.2.6 gather()**

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static]
```

**12.280.2.7 load()**

```
static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static]
```

**12.280.2.8 loadu()**

```
static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static]
```

**12.280.2.9 store()**

```
static INLINE void store (
    scalar_t * p,
    vect_t v) [inline], [static]
```

**12.280.2.10 storeu()**

```
static INLINE void storeu (
    scalar_t * p,
    vect_t v) [inline], [static]
```

**12.280.2.11 stream()**

```
static INLINE void stream (
    scalar_t * p,
    const vect_t v) [inline], [static]
```

**12.280.2.12 sll()**

```
template<int s>
static INLINE CONST vect_t sll (
    const vect_t a) [inline], [static]
```

**12.280.2.13 srl()**

```
template<int s>
static INLINE CONST vect_t srl (
    const vect_t a) [inline], [static]
```

**12.280.2.14 sra()**

```
template<int s>
static INLINE CONST vect_t sra (
    const vect_t a) [inline], [static]
```

**12.280.2.15 shuffle()**

```
template<uint32_t s>
static INLINE CONST vect_t shuffle (
    const vect_t a) [inline], [static]
```

**12.280.2.16 unpacklo\_intrinsic()**

```
static INLINE CONST vect_t unpacklo_intrinsic (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.280.2.17 unpackhi\_intrinsic()**

```
static INLINE CONST vect_t unpackhi_intrinsic (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.280.2.18 unpacklo()**

```
static INLINE CONST vect_t unpacklo (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.19 unpackhi()**

```
static INLINE CONST vect_t unpackhi (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.20 unpacklohi()**

```
static INLINE void unpacklohi (  
    vect_t & lo,  
    vect_t & hi,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.21 pack\_even()**

```
static INLINE CONST vect_t pack_even (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.22 pack\_odd()**

```
static INLINE CONST vect_t pack_odd (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.23 pack()**

```
static INLINE void pack (  
    vect_t & even,  
    vect_t & odd,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.24 transpose()**

```
static INLINE void transpose (  
    vect_t & r0,  
    vect_t & r1,  
    vect_t & r2,  
    vect_t & r3,  
    vect_t & r4,  
    vect_t & r5,  
    vect_t & r6,  
    vect_t & r7) [inline], [static]
```

**12.280.2.25 blend()**

```
template<uint8_t s>  
static INLINE CONST vect_t blend (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.26 add()**

```
static INLINE CONST vect_t add (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.27 addin()**

```
static INLINE vect_t addin (  
    vect_t & a,  
    const vect_t b) [inline], [static]
```

**12.280.2.28 sub()**

```
static INLINE CONST vect_t sub (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.29 subin()**

```
static INLINE vect_t subin (  
    vect_t & a,  
    const vect_t b) [inline], [static]
```

**12.280.2.30 mullo()**

```
static INLINE CONST vect_t mullo (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.31 mul()**

```
static INLINE CONST vect_t mul (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.32 mulhi()**

```
static INLINE CONST vect_t mulhi (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.33 mulx()**

```
static INLINE CONST vect_t mulx (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.34 fmadd()**

```
static INLINE CONST vect_t fmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.35 fmaddin()**

```
static INLINE vect_t fmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.36 fmaddx()**

```
static INLINE CONST vect_t fmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.37 fmaddxin()**

```
static INLINE vect_t fmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.38 fnmadd()**

```
static INLINE CONST vect_t fnmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.39 fnmaddin()**

```
static INLINE vect_t fnmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.40 fnmaddx()**

```
static INLINE CONST vect_t fnmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.41 fnmaddxin()**

```
static INLINE vect_t fnmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.42 fmsub()**

```
static INLINE CONST vect_t fmsub (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.43 fmsubin()**

```
static INLINE vect_t fmsubin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.280.2.44 fmsubx()**

```
static INLINE CONST vect_t fmsubx (  
    const vect_t c,
```

```
const vect_t a,
const vect_t b) [inline], [static]
```

#### 12.280.2.45 fmsubxin()

```
static INLINE vect_t fmsubxin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

#### 12.280.2.46 eq()

```
static INLINE CONST vect_t eq (
    const vect_t a,
    const vect_t b) [inline], [static]
```

#### 12.280.2.47 greater()

```
static INLINE CONST vect_t greater (
    const vect_t a,
    const vect_t b) [inline], [static]
```

#### 12.280.2.48 lesser()

```
static INLINE CONST vect_t lesser (
    const vect_t a,
    const vect_t b) [inline], [static]
```

#### 12.280.2.49 greater\_eq()

```
static INLINE CONST vect_t greater_eq (
    const vect_t a,
    const vect_t b) [inline], [static]
```

#### 12.280.2.50 lesser\_eq()

```
static INLINE CONST vect_t lesser_eq (
    const vect_t a,
    const vect_t b) [inline], [static]
```

#### 12.280.2.51 hadd\_to\_scal()

```
static INLINE CONST scalar_t hadd_to_scal (
    const vect_t a) [inline], [static]
```

#### 12.280.2.52 round()

```
static INLINE CONST vect_t round (
    const vect_t a) [inline], [static]
```

#### 12.280.2.53 mod()

```
static INLINE vect_t mod (
    vect_t & C,
    const vect_t & P,
    const __m64 & INVP,
    const vect_t & NEGP,
    const vect_t & MIN,
    const vect_t & MAX,
```



```

    vect_t & Q,
    vect_t & T) [inline], [static]

```

#### 12.280.2.54 zero()

```
static INLINE CONST vect_t zero () [inline], [static], [inherited]
```

#### 12.280.2.55 sll128()

```

template<uint8_t s>
static INLINE CONST vect_t sll128 (
    const vect_t a) [inline], [static], [inherited]

```

#### 12.280.2.56 srl128()

```

template<uint8_t s>
static INLINE CONST vect_t srl128 (
    const vect_t a) [inline], [static], [inherited]

```

#### 12.280.2.57 vand()

```

static INLINE CONST vect_t vand (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]

```

#### 12.280.2.58 vor()

```

static INLINE CONST vect_t vor (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]

```

#### 12.280.2.59 vxor()

```

static INLINE CONST vect_t vxor (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]

```

#### 12.280.2.60 vandnot()

```

static INLINE CONST vect_t vandnot (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]

```

### 12.280.3 Field Documentation

#### 12.280.3.1 vect\_size

```
const constexpr size_t vect_size = 8 [static], [constexpr]
```

#### 12.280.3.2 alignment


```
const constexpr size_t alignment = 16 [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [simd128\\_int16.inl](#)

## 12.281 Simd128\_impl< true, true, true, 4 > Struct Reference

Inheritance diagram for Simd128\_impl< true, true, true, 4 >:

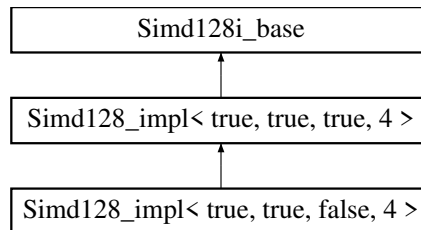

### Data Structures

- union [Converter](#)

### Public Types

- using [vect\\_t](#) = \_\_m128i
- using [scalar\\_t](#) = int32\_t
- using [aligned\\_allocator](#) = AlignedAllocator<[scalar\\_t](#), Alignment([alignment](#))>
- using [aligned\\_vector](#) = std::vector<[scalar\\_t](#), [aligned\\_allocator](#)>
- template<class [Field](#) >  
using [is\\_same\\_element](#) = std::is\_same<typename [Field::Element](#), [scalar\\_t](#)>

### Static Public Member Functions

- static const std::string [type\\_string](#) ()
- template<class T >  
static constexpr bool [valid](#) (T \*p)
- template<class T >  
static constexpr bool [compliant](#) (T n)
- static [INLINE CONST vect\\_t set1](#) (const [scalar\\_t](#) x)
- static [INLINE CONST vect\\_t set](#) (const [scalar\\_t](#) x0, const [scalar\\_t](#) x1, const [scalar\\_t](#) x2, const [scalar\\_t](#) x3)
- template<class T >  
static [INLINE PURE vect\\_t gather](#) (const [scalar\\_t](#) \*const p, const T \*const idx)
- static [INLINE PURE vect\\_t load](#) (const [scalar\\_t](#) \*const p)
- static [INLINE PURE vect\\_t loadu](#) (const [scalar\\_t](#) \*const p)
- static [INLINE](#) void [store](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE](#) void [storeu](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE](#) void [stream](#) ([scalar\\_t](#) \*p, const [vect\\_t](#) v)
- template<int s>  
static [INLINE CONST vect\\_t sll](#) (const [vect\\_t](#) a)
- template<int s>  
static [INLINE CONST vect\\_t srl](#) (const [vect\\_t](#) a)
- template<int s>  
static [INLINE CONST vect\\_t sra](#) (const [vect\\_t](#) a)
- template<uint8\_t s>  
static [INLINE CONST vect\\_t shuffle](#) (const [vect\\_t](#) a)
- static [INLINE CONST vect\\_t unpacklo\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpackhi\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpacklo](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpackhi](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE](#) void [unpacklohi](#) ([vect\\_t](#) &lo, [vect\\_t](#) &hi, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t pack\\_even](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t pack\\_odd](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)

- static `INLINE` void `pack` (`vect_t` &even, `vect_t` &odd, const `vect_t` a, const `vect_t` b)
- static `INLINE` void `transpose` (`vect_t` &r0, `vect_t` &r1, `vect_t` &r2, `vect_t` &r3)
- template<uint8\_t s>
  - static `INLINE` `CONST` `vect_t` `blend` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `add` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `addin` (`vect_t` &a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `sub` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `subin` (`vect_t` &a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `mullo` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `mul` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `mulhi` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `mulx` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fmadd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fmaddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fmaddx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fmaddxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fnmadd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fnmaddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fnmaddx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fnmaddxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fmsub` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fmsubin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fmsubx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fmsubxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `greater` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `lesser` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `greater_eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `lesser_eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `scalar_t` `hadd_to_scal` (const `vect_t` a)
- static `INLINE` `CONST` `vect_t` `round` (const `vect_t` a)
- static `INLINE` `vect_t` `mod` (`vect_t` &C, const `vect_t` &P, const `vect_t` &INVP, const `vect_t` &NEGP, const `vect_t` &MIN, const `vect_t` &MAX, `vect_t` &Q, `vect_t` &T)
- static `INLINE` `CONST` `vect_t` `zero` ()
- template<uint8\_t s>
  - static `INLINE` `CONST` `vect_t` `sll128` (const `vect_t` a)
- template<uint8\_t s>
  - static `INLINE` `CONST` `vect_t` `srl128` (const `vect_t` a)
- static `INLINE` `CONST` `vect_t` `vand` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `vor` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `vxor` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `vandnot` (const `vect_t` a, const `vect_t` b)

### Static Public Attributes

- static const constexpr size\_t `vect_size` = 4
- static const constexpr size\_t `alignment` = 16

## 12.281.1 Member Typedef Documentation

### 12.281.1.1 `vect_t`

```
using vect_t = __m128i
```

### 12.281.1.2 `scalar_t`

```
using scalar_t = int32_t
```

**12.281.1.3 aligned\_allocator**

```
using aligned_allocator = AlignedAllocator<scalar_t, Alignment(alignment)>
```

**12.281.1.4 aligned\_vector**

```
using aligned_vector = std::vector<scalar_t, aligned_allocator>
```

**12.281.1.5 is\_same\_element**

```
template<class Field >
using is_same_element = std::is_same<typename Field::Element, scalar_t>
```

**12.281.2 Member Function Documentation****12.281.2.1 type\_string()**

```
static const std::string type_string () [inline], [static]
```

**12.281.2.2 valid()**

```
template<class T >
static constexpr bool valid (
    T * p) [inline], [static], [constexpr]
```

**12.281.2.3 compliant()**

```
template<class T >
static constexpr bool compliant (
    T n) [inline], [static], [constexpr]
```

**12.281.2.4 set1()**

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static]
```

**12.281.2.5 set()**

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3) [inline], [static]
```

**12.281.2.6 gather()**

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static]
```

**12.281.2.7 load()**

```
static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static]
```

**12.281.2.8 loadu()**

```
static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static]
```

**12.281.2.9 store()**

```
static INLINE void store (  
    scalar_t * p,  
    vect_t v) [inline], [static]
```

**12.281.2.10 storeu()**

```
static INLINE void storeu (  
    scalar_t * p,  
    vect_t v) [inline], [static]
```

**12.281.2.11 stream()**

```
static INLINE void stream (  
    scalar_t * p,  
    const vect_t v) [inline], [static]
```

**12.281.2.12 sll()**

```
template<int s>  
static INLINE CONST vect_t sll (  
    const vect_t a) [inline], [static]
```

**12.281.2.13 srl()**

```
template<int s>  
static INLINE CONST vect_t srl (  
    const vect_t a) [inline], [static]
```

**12.281.2.14 sra()**

```
template<int s>  
static INLINE CONST vect_t sra (  
    const vect_t a) [inline], [static]
```

**12.281.2.15 shuffle()**

```
template<uint8_t s>  
static INLINE CONST vect_t shuffle (  
    const vect_t a) [inline], [static]
```

**12.281.2.16 unpacklo\_intrinsic()**

```
static INLINE CONST vect_t unpacklo_intrinsic (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.17 unpackhi\_intrinsic()**

```
static INLINE CONST vect_t unpackhi_intrinsic (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.18 unpacklo()**

```
static INLINE CONST vect_t unpacklo (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.19 unpackhi()**

```
static INLINE CONST vect_t unpackhi (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.20 unpacklohi()**

```
static INLINE void unpacklohi (  
    vect_t & lo,  
    vect_t & hi,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.21 pack\_even()**

```
static INLINE CONST vect_t pack_even (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.22 pack\_odd()**

```
static INLINE CONST vect_t pack_odd (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.23 pack()**

```
static INLINE void pack (  
    vect_t & even,  
    vect_t & odd,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.24 transpose()**

```
static INLINE void transpose (  
    vect_t & r0,  
    vect_t & r1,  
    vect_t & r2,  
    vect_t & r3) [inline], [static]
```

**12.281.2.25 blend()**

```
template<uint8_t s>  
static INLINE CONST vect_t blend (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.26 add()**

```
static INLINE CONST vect_t add (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.27 addin()**

```
static INLINE vect_t addin (  
    vect_t & a,  
    const vect_t b) [inline], [static]
```

**12.281.2.28 sub()**

```
static INLINE CONST vect_t sub (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.29 subin()**

```
static INLINE vect_t subin (  
    vect_t & a,  
    const vect_t b) [inline], [static]
```

**12.281.2.30 mullo()**

```
static INLINE CONST vect_t mullo (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.31 mul()**

```
static INLINE CONST vect_t mul (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.32 mulhi()**

```
static INLINE CONST vect_t mulhi (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.33 mulx()**

```
static INLINE CONST vect_t mulx (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.34 fmadd()**

```
static INLINE CONST vect_t fmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.35 fmaddin()**

```
static INLINE vect_t fmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.36 fmaddx()**

```
static INLINE CONST vect_t fmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.37 fmaddxin()**

```
static INLINE vect_t fmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.38 fnmadd()**

```
static INLINE CONST vect_t fnmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.39 fnmaddin()**

```
static INLINE vect_t fnmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.40 fnmaddx()**

```
static INLINE CONST vect_t fnmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.41 fnmaddxin()**

```
static INLINE vect_t fnmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.42 fmsub()**

```
static INLINE CONST vect_t fmsub (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.43 fmsubin()**

```
static INLINE vect_t fmsubin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.44 fmsubx()**

```
static INLINE CONST vect_t fmsubx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.281.2.45 fmsubxin()**

```
static INLINE vect_t fmsubxin (  
    vect_t & c,
```



```
const vect_t a,
const vect_t b) [inline], [static]
```

**12.281.2.46 eq()**

```
static INLINE CONST vect_t eq (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.281.2.47 greater()**

```
static INLINE CONST vect_t greater (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.281.2.48 lesser()**

```
static INLINE CONST vect_t lesser (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.281.2.49 greater\_eq()**

```
static INLINE CONST vect_t greater_eq (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.281.2.50 lesser\_eq()**

```
static INLINE CONST vect_t lesser_eq (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.281.2.51 hadd\_to\_scal()**

```
static INLINE CONST scalar_t hadd_to_scal (
    const vect_t a) [inline], [static]
```

**12.281.2.52 round()**

```
static INLINE CONST vect_t round (
    const vect_t a) [inline], [static]
```

**12.281.2.53 mod()**

```
static INLINE vect_t mod (
    vect_t & C,
    const vect_t & P,
    const vect_t & INVP,
    const vect_t & NEGP,
    const vect_t & MIN,
    const vect_t & MAX,
    vect_t & Q,
    vect_t & T) [inline], [static]
```

**12.281.2.54 zero()**

```
static INLINE CONST vect_t zero () [inline], [static], [inherited]
```

**12.281.2.55 sll128()**

```
template<uint8_t s>
static INLINE CONST vect_t sll128 (
    const vect_t a) [inline], [static], [inherited]
```

**12.281.2.56 srl128()**

```
template<uint8_t s>
static INLINE CONST vect_t srl128 (
    const vect_t a) [inline], [static], [inherited]
```

**12.281.2.57 vand()**

```
static INLINE CONST vect_t vand (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.281.2.58 vor()**

```
static INLINE CONST vect_t vor (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.281.2.59 vxor()**

```
static INLINE CONST vect_t vxor (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.281.2.60 vandnot()**

```
static INLINE CONST vect_t vandnot (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.281.3 Field Documentation****12.281.3.1 vect\_size**

```
const constexpr size_t vect_size = 4 [static], [constexpr]
```

**12.281.3.2 alignment**

```
const constexpr size_t alignment = 16 [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [simd128\\_int32.inl](#)

**12.282 Simd128\_impl< true, true, true, 8 > Struct Reference**

Inheritance diagram for Simd128\_impl< true, true, true, 8 >:



## Data Structures

- union [Converter](#)

## Public Types

- using [vect\\_t](#) = \_\_m128i
- using [scalar\\_t](#) = int64\_t
- using [aligned\\_allocator](#) = AlignedAllocator<[scalar\\_t](#), Alignment([alignment](#))>
- using [aligned\\_vector](#) = std::vector<[scalar\\_t](#), [aligned\\_allocator](#)>
- template<class [Field](#) >  
using [is\\_same\\_element](#) = std::is\_same<typename [Field::Element](#), [scalar\\_t](#)>

## Static Public Member Functions

- static const std::string [type\\_string](#) ()
- template<class T >  
static constexpr bool [valid](#) (T \*p)
- template<class T >  
static constexpr bool [compliant](#) (T n)
- static [INLINE CONST vect\\_t set1](#) (const [scalar\\_t](#) x)
- static [INLINE CONST vect\\_t set](#) (const [scalar\\_t](#) x0, const [scalar\\_t](#) x1)
- template<class T >  
static [INLINE PURE vect\\_t gather](#) (const [scalar\\_t](#) \*const p, const T \*const idx)
- template<int idx>  
static [INLINE CONST scalar\\_t get](#) ([vect\\_t](#) v)
- static [INLINE PURE vect\\_t load](#) (const [scalar\\_t](#) \*const p)
- static [INLINE PURE vect\\_t loadu](#) (const [scalar\\_t](#) \*const p)
- static [INLINE void store](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE void storeu](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE void stream](#) ([scalar\\_t](#) \*p, const [vect\\_t](#) v)
- template<int s>  
static [INLINE CONST vect\\_t sll](#) (const [vect\\_t](#) a)
- template<int s>  
static [INLINE CONST vect\\_t srl](#) (const [vect\\_t](#) a)
- template<int s>  
static [INLINE CONST vect\\_t sra](#) (const [vect\\_t](#) a)
- template<uint8\_t s>  
static [INLINE CONST vect\\_t shuffle](#) (const [vect\\_t](#) a)
- static [INLINE CONST vect\\_t unpacklo\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpackhi\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpacklo](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpackhi](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE void unpacklohi](#) ([vect\\_t](#) &lo, [vect\\_t](#) &hi, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t pack\\_even](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t pack\\_odd](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE void pack](#) ([vect\\_t](#) &even, [vect\\_t](#) &odd, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE void transpose](#) ([vect\\_t](#) &r0, [vect\\_t](#) &r1)

- `template<uint8_t s>`  
`static INLINE CONST vect_t blend (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t add (const vect_t a, const vect_t b)`
- `static INLINE vect_t addin (vect_t &a, const vect_t b)`
- `static INLINE CONST vect_t sub (const vect_t a, const vect_t b)`
- `static INLINE vect_t subin (vect_t &a, const vect_t b)`
- `static INLINE CONST vect_t mullo (const vect_t x0, const vect_t x1)`
- `static INLINE CONST vect_t mul (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t mulhi (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t mulx (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fmadd (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fmaddin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fmaddx (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fmaddxin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fnmadd (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fnmaddin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fnmaddx (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fnmaddxin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fmsub (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fmsubin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fmsubx (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fmsubxin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t eq (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t greater (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t lesser (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t greater_eq (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t lesser_eq (const vect_t a, const vect_t b)`
- `static INLINE CONST scalar_t hadd_to_scal (const vect_t a)`
- `static INLINE CONST vect_t round (const vect_t a)`
- `static INLINE CONST vect_t mask_high ()`
- `static INLINE CONST vect_t mulhi_fast (vect_t x, vect_t y)`
- `static INLINE vect_t mod (vect_t &C, const __m128d &P, const __m128d &INVP, const __m128d &NEGP, const vect_t &POW50REM, const __m128d &MIN, const __m128d &MAX, __m128d &Q, __m128d &T)`
- `static INLINE CONST vect_t zero ()`
- `template<uint8_t s>`  
`static INLINE CONST vect_t sll128 (const vect_t a)`
- `template<uint8_t s>`  
`static INLINE CONST vect_t srl128 (const vect_t a)`
- `static INLINE CONST vect_t vand (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t vor (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t vxor (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t vandnot (const vect_t a, const vect_t b)`

### Static Public Attributes

- `static const constexpr size_t vect_size = 2`
- `static const constexpr size_t alignment = 16`

### Static Protected Member Functions

- `static INLINE CONST vect_t signbits (const vect_t x)`

## 12.282.1 Member Typedef Documentation

### 12.282.1.1 vect\_t

```
using vect_t = __m128i
```

### 12.282.1.2 scalar\_t

```
using scalar_t = int64_t
```

### 12.282.1.3 aligned\_allocator

```
using aligned_allocator = AlignedAllocator<scalar_t, Alignment(alignment)>
```

### 12.282.1.4 aligned\_vector

```
using aligned_vector = std::vector<scalar_t, aligned_allocator>
```

### 12.282.1.5 is\_same\_element

```
template<class Field >
using is_same_element = std::is_same<typename Field::Element, scalar_t>
```

## 12.282.2 Member Function Documentation

### 12.282.2.1 type\_string()

```
static const std::string type_string () [inline], [static]
```

### 12.282.2.2 valid()

```
template<class T >
static constexpr bool valid (
    T * p) [inline], [static], [constexpr]
```

### 12.282.2.3 compliant()

```
template<class T >
static constexpr bool compliant (
    T n) [inline], [static], [constexpr]
```

### 12.282.2.4 set1()

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static]
```

### 12.282.2.5 set()

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1) [inline], [static]
```

### 12.282.2.6 gather()

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static]
```

### 12.282.2.7 get()

```
template<int idx>
static INLINE CONST scalar_t get (
    vect_t v) [inline], [static]
```

**12.282.2.8 load()**

```
static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static]
```

**12.282.2.9 loadu()**

```
static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static]
```

**12.282.2.10 store()**

```
static INLINE void store (
    scalar_t * p,
    vect_t v) [inline], [static]
```

**12.282.2.11 storeu()**

```
static INLINE void storeu (
    scalar_t * p,
    vect_t v) [inline], [static]
```

**12.282.2.12 stream()**

```
static INLINE void stream (
    scalar_t * p,
    const vect_t v) [inline], [static]
```

**12.282.2.13 sll()**

```
template<int s>
static INLINE CONST vect_t sll (
    const vect_t a) [inline], [static]
```

**12.282.2.14 srl()**

```
template<int s>
static INLINE CONST vect_t srl (
    const vect_t a) [inline], [static]
```

**12.282.2.15 sra()**

```
template<int s>
static INLINE CONST vect_t sra (
    const vect_t a) [inline], [static]
```

**12.282.2.16 shuffle()**

```
template<uint8_t s>
static INLINE CONST vect_t shuffle (
    const vect_t a) [inline], [static]
```

**12.282.2.17 unpacklo\_intrinsic()**

```
static INLINE CONST vect_t unpacklo_intrinsic (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.282.2.18 unpackhi\_intrinsic()**

```
static INLINE CONST vect_t unpackhi_intrinsic (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.19 unpacklo()**

```
static INLINE CONST vect_t unpacklo (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.20 unpackhi()**

```
static INLINE CONST vect_t unpackhi (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.21 unpacklohi()**

```
static INLINE void unpacklohi (  
    vect_t & lo,  
    vect_t & hi,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.22 pack\_even()**

```
static INLINE CONST vect_t pack_even (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.23 pack\_odd()**

```
static INLINE CONST vect_t pack_odd (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.24 pack()**

```
static INLINE void pack (  
    vect_t & even,  
    vect_t & odd,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.25 transpose()**

```
static INLINE void transpose (  
    vect_t & r0,  
    vect_t & r1) [inline], [static]
```

**12.282.2.26 blend()**

```
template<uint8_t s>  
static INLINE CONST vect_t blend (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.27 add()**

```
static INLINE CONST vect_t add (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.28 addin()**

```
static INLINE vect_t addin (  
    vect_t & a,  
    const vect_t b) [inline], [static]
```

**12.282.2.29 sub()**

```
static INLINE CONST vect_t sub (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.30 subin()**

```
static INLINE vect_t subin (  
    vect_t & a,  
    const vect_t b) [inline], [static]
```

**12.282.2.31 mullo()**

```
static INLINE CONST vect_t mullo (  
    const vect_t x0,  
    const vect_t x1) [inline], [static]
```

**12.282.2.32 mul()**

```
static INLINE CONST vect_t mul (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.33 mulhi()**

```
static INLINE CONST vect_t mulhi (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.34 mulx()**

```
static INLINE CONST vect_t mulx (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.35 fmadd()**

```
static INLINE CONST vect_t fmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.36 fmaddin()**

```
static INLINE vect_t fmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```



**12.282.2.37 fmaddx()**

```
static INLINE CONST vect_t fmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.38 fmaddxin()**

```
static INLINE vect_t fmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.39 fnmadd()**

```
static INLINE CONST vect_t fnmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.40 fnmaddin()**

```
static INLINE vect_t fnmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.41 fnmaddx()**

```
static INLINE CONST vect_t fnmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.42 fnmaddxin()**

```
static INLINE vect_t fnmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.43 fmsub()**

```
static INLINE CONST vect_t fmsub (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.44 fmsubin()**

```
static INLINE vect_t fmsubin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.282.2.45 fmsubx()**

```
static INLINE CONST vect_t fmsubx (  
    const vect_t c,
```

```
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.282.2.46 fmsubxin()

```
static INLINE vect_t fmsubxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.282.2.47 eq()

```
static INLINE CONST vect_t eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.282.2.48 greater()

```
static INLINE CONST vect_t greater (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.282.2.49 lesser()

```
static INLINE CONST vect_t lesser (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.282.2.50 greater\_eq()

```
static INLINE CONST vect_t greater_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.282.2.51 lesser\_eq()

```
static INLINE CONST vect_t lesser_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.282.2.52 hadd\_to\_scal()

```
static INLINE CONST scalar_t hadd_to_scal (  
    const vect_t a) [inline], [static]
```

#### 12.282.2.53 round()

```
static INLINE CONST vect_t round (  
    const vect_t a) [inline], [static]
```

#### 12.282.2.54 mask\_high()

```
static INLINE CONST vect_t mask_high () [inline], [static]
```

#### 12.282.2.55 mulhi\_fast()

```
INLINE CONST vect_t mulhi_fast (  
    vect_t x,  
    vect_t y) [static]
```

**12.282.2.56 mod()**

```

INLINE vect_t mod (
    vect_t & C,
    const __m128d & P,
    const __m128d & INVP,
    const __m128d & NEGP,
    const vect_t & POW50REM,
    const __m128d & MIN,
    const __m128d & MAX,
    __m128d & Q,
    __m128d & T) [static]

```

**12.282.2.57 signbits()**

```

static INLINE CONST vect_t signbits (
    const vect_t x) [inline], [static], [protected]

```

**12.282.2.58 zero()**

```

static INLINE CONST vect_t zero () [inline], [static], [inherited]

```

**12.282.2.59 sll128()**

```

template<uint8_t s>
static INLINE CONST vect_t sll128 (
    const vect_t a) [inline], [static], [inherited]

```

**12.282.2.60 srl128()**

```

template<uint8_t s>
static INLINE CONST vect_t srl128 (
    const vect_t a) [inline], [static], [inherited]

```

**12.282.2.61 vand()**

```

static INLINE CONST vect_t vand (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]

```

**12.282.2.62 vor()**

```

static INLINE CONST vect_t vor (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]

```

**12.282.2.63 vxor()**

```

static INLINE CONST vect_t vxor (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]

```

**12.282.2.64 vandnot()**

```

static INLINE CONST vect_t vandnot (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]

```

### 12.282.3 Field Documentation

#### 12.282.3.1 vect\_size

```
const constexpr size_t vect_size = 2 [static], [constexpr]
```

#### 12.282.3.2 alignment

```
const constexpr size_t alignment = 16 [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [simd128\\_int64.inl](#)

## 12.283 Simd128i\_base Struct Reference

Inheritance diagram for Simd128i\_base:



### Public Types

- using [vect\\_t](#) = \_\_m128i

### Static Public Member Functions

- static [INLINE CONST vect\\_t zero](#) ()
- [template<uint8\\_t s>](#)  
static [INLINE CONST vect\\_t sll128](#) (const [vect\\_t](#) a)
- [template<uint8\\_t s>](#)  
static [INLINE CONST vect\\_t srl128](#) (const [vect\\_t](#) a)
- static [INLINE CONST vect\\_t vand](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t vor](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t vxor](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t vandnot](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)

### 12.283.1 Member Typedef Documentation

#### 12.283.1.1 vect\_t

```
using vect\_t = __m128i
```

### 12.283.2 Member Function Documentation

#### 12.283.2.1 zero()

```
static INLINE CONST vect\_t zero () [inline], [static]
```

#### 12.283.2.2 sll128()

```
template<uint8\_t s>
static INLINE CONST vect\_t sll128 (
    const vect\_t a) [inline], [static]
```

**12.283.2.3 srl128()**

```
template<uint8_t s>
static INLINE CONST vect_t srl128 (
    const vect_t a) [inline], [static]
```

**12.283.2.4 vand()**

```
static INLINE CONST vect_t vand (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.283.2.5 vor()**

```
static INLINE CONST vect_t vor (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.283.2.6 vxor()**

```
static INLINE CONST vect_t vxor (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.283.2.7 vandnot()**

```
static INLINE CONST vect_t vandnot (
    const vect_t a,
    const vect_t b) [inline], [static]
```

The documentation for this struct was generated from the following file:

- [simd128.inl](#)


**12.284 Simd256\_impl< ArithType, Int, Signed, Size > Struct Template Reference**

The documentation for this struct was generated from the following file:

- [simd256.inl](#)

**12.285 Simd256\_impl< true, false, true, 4 > Struct Reference**

Inheritance diagram for Simd256\_impl< true, false, true, 4 >:



The documentation for this struct was generated from the following file:

- [simd256\\_float.inl](#)

## 12.286 Simd256\_impl< true, false, true, 8 > Struct Reference

Inheritance diagram for Simd256\_impl< true, false, true, 8 >:



### Data Structures

- union [Converter](#)

### Public Types

- using [vect\\_t](#) = \_\_m256d
- using [scalar\\_t](#) = double
- using [aligned\\_allocator](#) = AlignedAllocator<[scalar\\_t](#), Alignment([alignment](#))>
- using [aligned\\_vector](#) = std::vector<[scalar\\_t](#), [aligned\\_allocator](#)>
- template<class [Field](#) >  
using [is\\_same\\_element](#) = std::is\_same<typename [Field::Element](#), [scalar\\_t](#)>

### Static Public Member Functions

- static const std::string [type\\_string](#) ()
- template<class T >  
static constexpr bool [valid](#) (T \*p)
- template<class T >  
static constexpr bool [compliant](#) (T n)
- static [INLINE CONST vect\\_t zero](#) ()
- static [INLINE CONST vect\\_t set1](#) (const [scalar\\_t](#) x)
- static [INLINE CONST vect\\_t set](#) (const [scalar\\_t](#) x1, const [scalar\\_t](#) x2, const [scalar\\_t](#) x3, const [scalar\\_t](#) x4)
- template<class T >  
static [INLINE PURE vect\\_t gather](#) (const [scalar\\_t](#) \*const p, const T \*const idx)
- static [INLINE PURE vect\\_t load](#) (const [scalar\\_t](#) \*const p)
- static [INLINE PURE vect\\_t loadu](#) (const [scalar\\_t](#) \*const p)
- static [INLINE void store](#) (const [scalar\\_t](#) \*p, const [vect\\_t](#) v)
- static [INLINE void storeu](#) (const [scalar\\_t](#) \*p, const [vect\\_t](#) v)
- static [INLINE void stream](#) (const [scalar\\_t](#) \*p, const [vect\\_t](#) v)
- static [INLINE CONST vect\\_t unpacklo\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpackhi\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpacklo](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpackhi](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE void unpacklohi](#) ([vect\\_t](#) &lo, [vect\\_t](#) &hi, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t pack\\_even](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t pack\\_odd](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE void pack](#) ([vect\\_t](#) &even, [vect\\_t](#) &odd, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE void transpose](#) ([vect\\_t](#) &r0, [vect\\_t](#) &r1, [vect\\_t](#) &r2, [vect\\_t](#) &r3)
- template<uint8\_t s>  
static [INLINE CONST vect\\_t blend](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t blendv](#) (const [vect\\_t](#) a, const [vect\\_t](#) b, const [vect\\_t](#) mask)
- static [INLINE CONST vect\\_t add](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE vect\\_t addin](#) ([vect\\_t](#) &a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t sub](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t subin](#) ([vect\\_t](#) &a, const [vect\\_t](#) b)

- static `INLINE CONST vect_t mul` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t mulin` (`vect_t` &a, const `vect_t` b)
- static `INLINE CONST vect_t div` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fmadd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fmaddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fnmadd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fnmaddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fmsub` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fmsubin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t lesser` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t lesser_eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t greater` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t greater_eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t vand` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t vor` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t vxor` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t vandnot` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t floor` (const `vect_t` a)
- static `INLINE CONST vect_t ceil` (const `vect_t` a)
- static `INLINE CONST vect_t round` (const `vect_t` a)
- static `INLINE CONST vect_t hadd` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST scalar_t hadd_to_scal` (const `vect_t` a)
- static `INLINE vect_t mod` (`vect_t` &C, const `vect_t` &P, const `vect_t` &INVP, const `vect_t` &NEGP, const `vect_t` &MIN, const `vect_t` &MAX, `vect_t` &Q, `vect_t` &T)

### Static Public Attributes

- static const constexpr size\_t `vect_size` = 4
- static const constexpr size\_t `alignment` = 32

## 12.286.1 Member Typedef Documentation

### 12.286.1.1 vect\_t

```
using vect_t = __m256d
```

### 12.286.1.2 scalar\_t

```
using scalar_t = double
```

### 12.286.1.3 aligned\_allocator

```
using aligned_allocator = AlignedAllocator<scalar_t, Alignment(alignment)>
```

### 12.286.1.4 aligned\_vector

```
using aligned_vector = std::vector<scalar_t, aligned_allocator>
```

### 12.286.1.5 is\_same\_element

```
template<class Field >
using is_same_element = std::is_same<typename Field::Element, scalar_t>
```

## 12.286.2 Member Function Documentation

### 12.286.2.1 type\_string()

```
static const std::string type_string () [inline], [static]
```

### 12.286.2.2 valid()

```
template<class T >
static constexpr bool valid (
    T * p) [inline], [static], [constexpr]
```

### 12.286.2.3 compliant()

```
template<class T >
static constexpr bool compliant (
    T n) [inline], [static], [constexpr]
```

### 12.286.2.4 zero()

```
static INLINE CONST vect_t zero () [inline], [static]
```

### 12.286.2.5 set1()

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static]
```

### 12.286.2.6 set()

```
static INLINE CONST vect_t set (
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3,
    const scalar_t x4) [inline], [static]
```

### 12.286.2.7 gather()

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static]
```

### 12.286.2.8 load()

```
static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static]
```

### 12.286.2.9 loadu()

```
static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static]
```

### 12.286.2.10 store()

```
static INLINE void store (
    const scalar_t * p,
    const vect_t v) [inline], [static]
```

### 12.286.2.11 storeu()

```
static INLINE void storeu (
    const scalar_t * p,
    const vect_t v) [inline], [static]
```



**12.286.2.12 stream()**

```
static INLINE void stream (  
    const scalar_t * p,  
    const vect_t v) [inline], [static]
```

**12.286.2.13 unpacklo\_intrinsic()**

```
static INLINE CONST vect_t unpacklo_intrinsic (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.14 unpackhi\_intrinsic()**

```
static INLINE CONST vect_t unpackhi_intrinsic (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.15 unpacklo()**

```
static INLINE CONST vect_t unpacklo (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.16 unpackhi()**

```
static INLINE CONST vect_t unpackhi (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.17 unpacklohi()**

```
static INLINE void unpacklohi (  
    vect_t & lo,  
    vect_t & hi,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.18 pack\_even()**

```
static INLINE CONST vect_t pack_even (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.19 pack\_odd()**

```
static INLINE CONST vect_t pack_odd (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.20 pack()**

```
static INLINE void pack (  
    vect_t & even,  
    vect_t & odd,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.286.2.21 transpose()

```
static INLINE void transpose (  
    vect_t & r0,  
    vect_t & r1,  
    vect_t & r2,  
    vect_t & r3) [inline], [static]
```

#### 12.286.2.22 blend()

```
template<uint8_t s>  
static INLINE CONST vect_t blend (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.286.2.23 blendv()

```
static INLINE CONST vect_t blendv (  
    const vect_t a,  
    const vect_t b,  
    const vect_t mask) [inline], [static]
```

#### 12.286.2.24 add()

```
static INLINE CONST vect_t add (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.286.2.25 addin()

```
static INLINE vect_t addin (  
    vect_t & a,  
    const vect_t b) [inline], [static]
```

#### 12.286.2.26 sub()

```
static INLINE CONST vect_t sub (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.286.2.27 subin()

```
static INLINE CONST vect_t subin (  
    vect_t & a,  
    const vect_t b) [inline], [static]
```

#### 12.286.2.28 mul()

```
static INLINE CONST vect_t mul (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.286.2.29 mulin()

```
static INLINE CONST vect_t mulin (  
    vect_t & a,  
    const vect_t b) [inline], [static]
```

**12.286.2.30 div()**

```
static INLINE CONST vect_t div (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.31 fmadd()**

```
static INLINE CONST vect_t fmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.32 fmaddin()**

```
static INLINE CONST vect_t fmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.33 fnmadd()**

```
static INLINE CONST vect_t fnmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.34 fnmaddin()**

```
static INLINE CONST vect_t fnmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.35 fmsub()**

```
static INLINE CONST vect_t fmsub (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.36 fmsubin()**

```
static INLINE CONST vect_t fmsubin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.37 eq()**

```
static INLINE CONST vect_t eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.38 lesser()**

```
static INLINE CONST vect_t lesser (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.39 lesser\_eq()**

```
static INLINE CONST vect_t lesser_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.40 greater()**

```
static INLINE CONST vect_t greater (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.41 greater\_eq()**

```
static INLINE CONST vect_t greater_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.42 vand()**

```
static INLINE CONST vect_t vand (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.43 vor()**

```
static INLINE CONST vect_t vor (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.44 vxor()**

```
static INLINE CONST vect_t vxor (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.45 vandnot()**

```
static INLINE CONST vect_t vandnot (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.286.2.46 floor()**

```
static INLINE CONST vect_t floor (  
    const vect_t a) [inline], [static]
```

**12.286.2.47 ceil()**

```
static INLINE CONST vect_t ceil (  
    const vect_t a) [inline], [static]
```

**12.286.2.48 round()**

```
static INLINE CONST vect_t round (  
    const vect_t a) [inline], [static]
```

**12.286.2.49 hadd()**

```
static INLINE CONST vect_t hadd (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.286.2.50 hadd\_to\_scal()**

```
static INLINE CONST scalar_t hadd_to_scal (
    const vect_t a) [inline], [static]
```

**12.286.2.51 mod()**

```
static INLINE vect_t mod (
    vect_t & C,
    const vect_t & P,
    const vect_t & INVP,
    const vect_t & NEGP,
    const vect_t & MIN,
    const vect_t & MAX,
    vect_t & Q,
    vect_t & T) [inline], [static]
```

**12.286.3 Field Documentation****12.286.3.1 vect\_size**

```
const constexpr size_t vect_size = 4 [static], [constexpr]
```

**12.286.3.2 alignment**

```
const constexpr size_t alignment = 32 [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [simd256\\_double.inl](#)

**12.287 Simd256\_impl< true, true, false, 2 > Struct Reference**

Inheritance diagram for Simd256\_impl< true, true, false, 2 >:

**Data Structures**

- union [Converter](#)

**Public Types**

- using [scalar\\_t](#) = uint16\_t
- using [aligned\\_allocator](#) = AlignedAllocator<[scalar\\_t](#), Alignment([alignment](#))>
- using [aligned\\_vector](#) = std::vector<[scalar\\_t](#), [aligned\\_allocator](#)>

- `template<class Field >`  
`using is_same_element = std::is_same<typename Field::Element, scalar_t>`
- `using simdHalf = Simd128<scalar_t>`
- `using vect_t = __m256i`
- `using half_t = __m128i`

### Static Public Member Functions

- `static const std::string type_string ()`
- `static INLINE CONST vect_t set1 (const scalar_t x)`
- `static INLINE CONST vect_t set (const scalar_t x0, const scalar_t x1, const scalar_t x2, const scalar_t x3, const scalar_t x4, const scalar_t x5, const scalar_t x6, const scalar_t x7, const scalar_t x8, const scalar_t x9, const scalar_t x10, const scalar_t x11, const scalar_t x12, const scalar_t x13, const scalar_t x14, const scalar_t x15)`
- `template<class T >`  
`static INLINE PURE vect_t gather (const scalar_t *const p, const T *const idx)`
- `static INLINE PURE vect_t load (const scalar_t *const p)`
- `static INLINE PURE vect_t loadu (const scalar_t *const p)`
- `static INLINE void store (scalar_t *p, vect_t v)`
- `static INLINE void storeu (scalar_t *p, vect_t v)`
- `static INLINE void stream (scalar_t *p, const vect_t v)`
- `template<int s>`  
`static INLINE CONST vect_t sra (const vect_t a)`
- `static INLINE CONST vect_t greater (vect_t a, vect_t b)`
- `static INLINE CONST vect_t lesser (vect_t a, vect_t b)`
- `static INLINE CONST vect_t greater_eq (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t lesser_eq (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t mulhi (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t mulx (vect_t a, vect_t b)`
- `static INLINE CONST vect_t fmaddx (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fmaddxin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fnmaddx (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fnmaddxin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fmsubx (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fmsubxin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST scalar_t hadd_to_scal (const vect_t a)`
- `template<class T >`  
`static constexpr bool valid (T *p)`
- `template<class T >`  
`static constexpr bool compliant (T n)`
- `static INLINE CONST vect_t set1 (const scalar_t x)`
- `static INLINE CONST vect_t set (const scalar_t x0, const scalar_t x1, const scalar_t x2, const scalar_t x3, const scalar_t x4, const scalar_t x5, const scalar_t x6, const scalar_t x7, const scalar_t x8, const scalar_t x9, const scalar_t x10, const scalar_t x11, const scalar_t x12, const scalar_t x13, const scalar_t x14, const scalar_t x15)`
- `template<class T >`  
`static INLINE PURE vect_t gather (const scalar_t *const p, const T *const idx)`
- `static INLINE PURE vect_t load (const scalar_t *const p)`
- `static INLINE PURE vect_t loadu (const scalar_t *const p)`
- `static INLINE void store (scalar_t *p, vect_t v)`
- `static INLINE void storeu (scalar_t *p, vect_t v)`
- `static INLINE void stream (scalar_t *p, const vect_t v)`
- `template<int s>`  
`static INLINE CONST vect_t sll (const vect_t a)`
- `template<int s>`  
`static INLINE CONST vect_t srl (const vect_t a)`

- `template<uint64_t s>`  
`static INLINE CONST vect_t shuffle (const vect_t a)`
- `static INLINE CONST vect_t unpacklo_intrinsic (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t unpackhi_intrinsic (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t unpacklo (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t unpackhi (const vect_t a, const vect_t b)`
- `static INLINE void unpacklohi (vect_t &lo, vect_t &hi, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t pack_even (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t pack_odd (const vect_t a, const vect_t b)`
- `static INLINE void pack (vect_t &even, vect_t &odd, const vect_t a, const vect_t b)`
- `static INLINE void transpose (vect_t &r0, vect_t &r1, vect_t &r2, vect_t &r3, vect_t &r4, vect_t &r5, vect_t &r6, vect_t &r7, vect_t &r8, vect_t &r9, vect_t &r10, vect_t &r11, vect_t &r12, vect_t &r13, vect_t &r14, vect_t &r15)`
- `template<uint16_t s, typename std::enable_if<(s & 0x00ff) == (s > > 8)>::type * = nullptr>`  
`static INLINE vect_t blend (const vect_t a, const vect_t b)`
- `template<uint16_t s, typename std::enable_if<(s & 0x00ff) != (s > > 8)>::type * = nullptr>`  
`static INLINE vect_t blend (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t add (const vect_t a, const vect_t b)`
- `static INLINE vect_t addin (vect_t &a, const vect_t b)`
- `static INLINE CONST vect_t sub (const vect_t a, const vect_t b)`
- `static INLINE vect_t subin (vect_t &a, const vect_t b)`
- `static INLINE CONST vect_t mullo (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t mul (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fmadd (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fmadin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fnmadd (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fnmadin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fmsub (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fmsubin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t eq (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t round (const vect_t a)`
- `static INLINE vect_t mod (vect_t &C, const vect_t &P, const vect_t &INVP, const vect_t &NEGP, const vect_t &MIN, const vect_t &MAX, vect_t &Q, vect_t &T)`
- `static INLINE CONST vect_t zero ()`

### Static Public Attributes

- `static const constexpr size_t vect_size = 16`
- `static const constexpr size_t alignment = 32`

## 12.287.1 Member Typedef Documentation

### 12.287.1.1 scalar\_t

```
using scalar_t = uint16_t
```

### 12.287.1.2 aligned\_allocator

```
using aligned_allocator = AlignedAllocator<scalar_t, Alignment(alignment)>
```

### 12.287.1.3 aligned\_vector

```
using aligned_vector = std::vector<scalar_t, aligned_allocator>
```

### 12.287.1.4 is\_same\_element

```
template<class Field >
using is_same_element = std::is_same<typename Field::Element, scalar_t>
```

**12.287.1.5 simdHalf**

```
using simdHalf = Simd128<scalar_t>
```

**12.287.1.6 vect\_t**

```
using vect_t = __m256i [inherited]
```

**12.287.1.7 half\_t**

```
using half_t = __m128i [inherited]
```

**12.287.2 Member Function Documentation****12.287.2.1 type\_string()**

```
static const std::string type_string () [inline], [static]
```

**12.287.2.2 set1() [1/2]**

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static]
```

**12.287.2.3 set() [1/2]**

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3,
    const scalar_t x4,
    const scalar_t x5,
    const scalar_t x6,
    const scalar_t x7,
    const scalar_t x8,
    const scalar_t x9,
    const scalar_t x10,
    const scalar_t x11,
    const scalar_t x12,
    const scalar_t x13,
    const scalar_t x14,
    const scalar_t x15) [inline], [static]
```

**12.287.2.4 gather() [1/2]**

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static]
```

**12.287.2.5 load() [1/2]**

```
static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static]
```

**12.287.2.6 loadu() [1/2]**

```
static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static]
```



**12.287.2.7 store()** [1/2]

```
static INLINE void store (  
    scalar_t * p,  
    vect_t v) [inline], [static]
```

**12.287.2.8 storeu()** [1/2]

```
static INLINE void storeu (  
    scalar_t * p,  
    vect_t v) [inline], [static]
```

**12.287.2.9 stream()** [1/2]

```
static INLINE void stream (  
    scalar_t * p,  
    const vect_t v) [inline], [static]
```

**12.287.2.10 sra()**

```
template<int s>  
static INLINE CONST vect_t sra (  
    const vect_t a) [inline], [static]
```

**12.287.2.11 greater()**

```
static INLINE CONST vect_t greater (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.287.2.12 lesser()**

```
static INLINE CONST vect_t lesser (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.287.2.13 greater\_eq()**

```
static INLINE CONST vect_t greater_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.287.2.14 lesser\_eq()**

```
static INLINE CONST vect_t lesser_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.287.2.15 mulhi()**

```
static INLINE CONST vect_t mulhi (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.287.2.16 mulx()**

```
static INLINE CONST vect_t mulx (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.287.2.17 fmaddx()**

```
static INLINE CONST vect_t fmaddx (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.287.2.18 fmaddxin()**

```
static INLINE vect_t fmaddxin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.287.2.19 fnmaddx()**

```
static INLINE CONST vect_t fnmaddx (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.287.2.20 fnmaddxin()**

```
static INLINE vect_t fnmaddxin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.287.2.21 fmsubx()**

```
static INLINE CONST vect_t fmsubx (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.287.2.22 fmsubxin()**

```
static INLINE vect_t fmsubxin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.287.2.23 hadd\_to\_scal()**

```
static INLINE CONST scalar_t hadd_to_scal (
    const vect_t a) [inline], [static]
```

**12.287.2.24 valid()**

```
template<class T >
static constexpr bool valid (
    T * p) [inline], [static], [constexpr], [inherited]
```

**12.287.2.25 compliant()**

```
template<class T >
static constexpr bool compliant (
    T n) [inline], [static], [constexpr], [inherited]
```

**12.287.2.26 set1() [2/2]**

```
static INLINE CONST vect_t set1 (  
    const scalar_t x) [inline], [static], [inherited]
```

**12.287.2.27 set() [2/2]**

```
static INLINE CONST vect_t set (  
    const scalar_t x0,  
    const scalar_t x1,  
    const scalar_t x2,  
    const scalar_t x3,  
    const scalar_t x4,  
    const scalar_t x5,  
    const scalar_t x6,  
    const scalar_t x7,  
    const scalar_t x8,  
    const scalar_t x9,  
    const scalar_t x10,  
    const scalar_t x11,  
    const scalar_t x12,  
    const scalar_t x13,  
    const scalar_t x14,  
    const scalar_t x15) [inline], [static], [inherited]
```

**12.287.2.28 gather() [2/2]**

```
template<class T >  
static INLINE PURE vect_t gather (  
    const scalar_t *const p,  
    const T *const idx) [inline], [static], [inherited]
```

**12.287.2.29 load() [2/2]**

```
static INLINE PURE vect_t load (  
    const scalar_t *const p) [inline], [static], [inherited]
```

**12.287.2.30 loadu() [2/2]**

```
static INLINE PURE vect_t loadu (  
    const scalar_t *const p) [inline], [static], [inherited]
```

**12.287.2.31 store() [2/2]**

```
static INLINE void store (  
    scalar_t * p,  
    vect_t v) [inline], [static], [inherited]
```

**12.287.2.32 storeu() [2/2]**

```
static INLINE void storeu (  
    scalar_t * p,  
    vect_t v) [inline], [static], [inherited]
```

**12.287.2.33 stream() [2/2]**

```
static INLINE void stream (  
    scalar_t * p,  
    const vect_t v) [inline], [static], [inherited]
```

**12.287.2.34 sll()**

```
template<int s>
static INLINE CONST vect_t sll (
    const vect_t a) [inline], [static], [inherited]
```

**12.287.2.35 srl()**

```
template<int s>
static INLINE CONST vect_t srl (
    const vect_t a) [inline], [static], [inherited]
```

**12.287.2.36 shuffle()**

```
template<uint64_t s>
static INLINE CONST vect_t shuffle (
    const vect_t a) [inline], [static], [inherited]
```

**12.287.2.37 unpacklo\_intrinsic()**

```
static INLINE CONST vect_t unpacklo_intrinsic (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.38 unpackhi\_intrinsic()**

```
static INLINE CONST vect_t unpackhi_intrinsic (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.39 unpacklo()**

```
static INLINE CONST vect_t unpacklo (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.40 unpackhi()**

```
static INLINE CONST vect_t unpackhi (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.41 unpacklohi()**

```
static INLINE void unpacklohi (
    vect_t & lo,
    vect_t & hi,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.42 pack\_even()**

```
static INLINE CONST vect_t pack_even (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.43 pack\_odd()**

```
static INLINE CONST vect_t pack_odd (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.44 pack()**

```
static INLINE void pack (
    vect_t & even,
    vect_t & odd,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.45 transpose()**

```
static INLINE void transpose (
    vect_t & r0,
    vect_t & r1,
    vect_t & r2,
    vect_t & r3,
    vect_t & r4,
    vect_t & r5,
    vect_t & r6,
    vect_t & r7,
    vect_t & r8,
    vect_t & r9,
    vect_t & r10,
    vect_t & r11,
    vect_t & r12,
    vect_t & r13,
    vect_t & r14,
    vect_t & r15) [inline], [static], [inherited]
```

**12.287.2.46 blend() [1/2]**

```
template<uint16_t s, typename std::enable_if<(s &0x00ff)==(s > > 8)>::type * = nullptr>
static INLINE vect_t blend (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.47 blend() [2/2]**

```
template<uint16_t s, typename std::enable_if<(s &0x00ff) !=(s > > 8)>::type * = nullptr>
static INLINE vect_t blend (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.48 add()**

```
static INLINE CONST vect_t add (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.49 addin()**

```
static INLINE vect_t addin (
    vect_t & a,
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.50 sub()**

```
static INLINE CONST vect_t sub (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.51 subin()**

```
static INLINE vect_t subin (  
    vect_t & a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.52 mullo()**

```
static INLINE CONST vect_t mullo (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.53 mul()**

```
static INLINE CONST vect_t mul (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.54 fmadd()**

```
static INLINE CONST vect_t fmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.55 fmaddin()**

```
static INLINE vect_t fmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.56 fnmadd()**

```
static INLINE CONST vect_t fnmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.57 fnmaddin()**

```
static INLINE vect_t fnmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.58 fmsub()**

```
static INLINE CONST vect_t fmsub (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.59 fmsubin()**

```
static INLINE vect_t fmsubin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.60 eq()**

```
static INLINE CONST vect_t eq (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.287.2.61 round()**

```
static INLINE CONST vect_t round (
    const vect_t a) [inline], [static], [inherited]
```

**12.287.2.62 mod()**

```
static INLINE vect_t mod (
    vect_t & C,
    const vect_t & P,
    const vect_t & INVP,
    const vect_t & NEGP,
    const vect_t & MIN,
    const vect_t & MAX,
    vect_t & Q,
    vect_t & T) [inline], [static], [inherited]
```

**12.287.2.63 zero()**

```
static INLINE CONST vect_t zero () [inline], [static], [inherited]
```

**12.287.3 Field Documentation****12.287.3.1 vect\_size**

```
const constexpr size_t vect_size = 16 [static], [constexpr], [inherited]
```

**12.287.3.2 alignment**


```
const constexpr size_t alignment = 32 [static], [constexpr], [inherited]
```

The documentation for this struct was generated from the following file:

- [simd256\\_int16.inl](#)

**12.288 Simd256\_impl< true, true, false, 4 > Struct Reference**

Inheritance diagram for Simd256\_impl< true, true, false, 4 >:

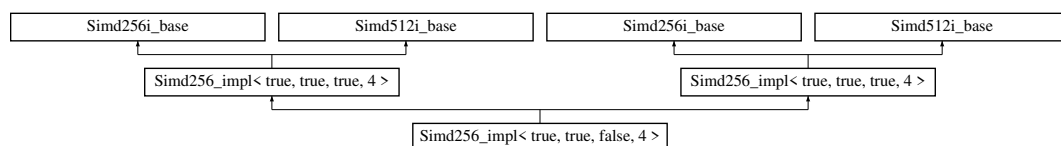**Data Structures**

- union [Converter](#)

**Public Types**

- using `scalar_t` = `uint32_t`
- using `aligned_allocator` = `AlignedAllocator<scalar_t, Alignment(alignment)>`
- using `aligned_vector` = `std::vector<scalar_t, aligned_allocator>`

- `template<class Field >`  
  using `is_same_element` = `std::is_same<typename Field::Element, scalar_t>`
- using `simdHalf` = `Simd128<scalar_t>`
- using `vect_t` = `__m256i`
- using `vect_t` = `__m512i`
- using `half_t` = `__m128i`
- using `half_t` = `__m256i`

## Public Member Functions

- `template<class Field >`  
  using `is_same_element`

## Static Public Member Functions

- static const `std::string` `type_string` ()
- static `INLINE CONST vect_t` `set1` (const `scalar_t` x)
- static `INLINE CONST vect_t` `set` (const `scalar_t` x0, const `scalar_t` x1, const `scalar_t` x2, const `scalar_t` x3, const `scalar_t` x4, const `scalar_t` x5, const `scalar_t` x6, const `scalar_t` x7)
- `template<class T >`  
  static `INLINE PURE vect_t` `gather` (const `scalar_t` \*const p, const T \*const idx)
- static `INLINE PURE vect_t` `load` (const `scalar_t` \*const p)
- static `INLINE PURE vect_t` `loadu` (const `scalar_t` \*const p)
- static `INLINE` void `store` (`scalar_t` \*p, `vect_t` v)
- static `INLINE` void `storeu` (`scalar_t` \*p, `vect_t` v)
- static `INLINE` void `stream` (`scalar_t` \*p, const `vect_t` v)
- `template<int s>`  
  static `INLINE CONST vect_t` `sra` (const `vect_t` a)
- static `INLINE CONST vect_t` `greater` (`vect_t` a, `vect_t` b)
- static `INLINE CONST vect_t` `lesser` (`vect_t` a, `vect_t` b)
- static `INLINE CONST vect_t` `greater_eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t` `lesser_eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t` `mulhi` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t` `mulx` (`vect_t` a, `vect_t` b)
- static `INLINE CONST vect_t` `fmaddx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t` `fmaddxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t` `fnmaddx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t` `fnmaddxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t` `fmsubx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t` `fmsubxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST scalar_t` `hadd_to_scal` (const `vect_t` a)
- static const `std::string` `type_string` ()
- static `INLINE CONST vect_t` `set1` (const `scalar_t` x)
- static `INLINE CONST vect_t` `set` (const `scalar_t` x0, const `scalar_t` x1, const `scalar_t` x2, const `scalar_t` x3, const `scalar_t` x4, const `scalar_t` x5, const `scalar_t` x6, const `scalar_t` x7)
- `template<class T >`  
  static `INLINE PURE vect_t` `gather` (const `scalar_t` \*const p, const T \*const idx)
- static `INLINE PURE vect_t` `load` (const `scalar_t` \*const p)
- static `INLINE PURE vect_t` `loadu` (const `scalar_t` \*const p)
- static `INLINE` void `store` (`scalar_t` \*p, `vect_t` v)
- static `INLINE` void `storeu` (`scalar_t` \*p, `vect_t` v)
- static `INLINE` void `stream` (`scalar_t` \*p, const `vect_t` v)
- `template<int s>`  
  static `INLINE CONST vect_t` `sra` (const `vect_t` a)
- static `INLINE CONST vect_t` `greater` (`vect_t` a, `vect_t` b)
- static `INLINE CONST vect_t` `lesser` (`vect_t` a, `vect_t` b)



- static `INLINE CONST vect_t greater_eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t lesser_eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t mulhi` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t mulx` (`vect_t` a, `vect_t` b)
- static `INLINE CONST vect_t fmaddx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fmaddxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fnmaddx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fnmaddxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fmsubx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fmsubxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST scalar_t hadd_to_scal` (const `vect_t` a)
- template<class T >  
static constexpr bool `valid` (T \*p)
- template<class T >  
static constexpr bool `valid` (T \*p)
- template<class T >  
static constexpr bool `compliant` (T n)
- template<class T >  
static constexpr bool `compliant` (T n)
- static `INLINE CONST vect_t set1` (const `scalar_t` x)
- static `INLINE CONST vect_t set` (const `scalar_t` x0, const `scalar_t` x1, const `scalar_t` x2, const `scalar_t` x3, const `scalar_t` x4, const `scalar_t` x5, const `scalar_t` x6, const `scalar_t` x7)
- static `INLINE CONST vect_t set` (const `scalar_t` x0, const `scalar_t` x1, const `scalar_t` x2, const `scalar_t` x3, const `scalar_t` x4, const `scalar_t` x5, const `scalar_t` x6, const `scalar_t` x7, const `scalar_t` x8, const `scalar_t` x9, const `scalar_t` x10, const `scalar_t` x11, const `scalar_t` x12, const `scalar_t` x13, const `scalar_t` x14, const `scalar_t` x15)
- template<class T >  
static `INLINE PURE vect_t gather` (const `scalar_t` \*const p, const T \*const idx)
- static `INLINE PURE vect_t load` (const `scalar_t` \*const p)
- static `INLINE PURE vect_t loadu` (const `scalar_t` \*const p)
- static `INLINE void store` (`scalar_t` \*p, `vect_t` v)
- static `INLINE void storeu` (`scalar_t` \*p, `vect_t` v)
- static `INLINE void stream` (`scalar_t` \*p, const `vect_t` v)
- template<int s>  
static `INLINE CONST vect_t sll` (const `vect_t` a)
- template<int s>  
static `INLINE CONST vect_t sll` (const `vect_t` a)
- template<int s>  
static `INLINE CONST vect_t srl` (const `vect_t` a)
- template<int s>  
static `INLINE CONST vect_t srl` (const `vect_t` a)
- template<uint8\_t s>  
static `INLINE CONST vect_t shuffle_twice` (const `vect_t` a)
- template<uint8\_t s>  
static `INLINE CONST vect_t shuffle_twice` (const `vect_t` a)
- template<uint32\_t s>  
static `INLINE CONST vect_t shuffle` (const `vect_t` a)
- template<uint64\_t s>  
static `INLINE CONST vect_t shuffle` (const `vect_t` a)
- static `INLINE CONST vect_t unpacklo_intrinsic` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t unpacklo_intrinsic` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t unpackhi_intrinsic` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t unpackhi_intrinsic` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t unpacklo` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t unpacklo` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t unpackhi` (const `vect_t` a, const `vect_t` b)

- static `INLINE CONST vect_t unpackhi` (const `vect_t` a, const `vect_t` b)
- static `INLINE void unpacklohi` (`vect_t` &lo, `vect_t` &hi, const `vect_t` a, const `vect_t` b)
- static `INLINE void unpacklohi` (`vect_t` &lo, `vect_t` &hi, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t pack_even` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t pack_even` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t pack_odd` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t pack_odd` (const `vect_t` a, const `vect_t` b)
- static `INLINE void pack` (`vect_t` &even, `vect_t` &odd, const `vect_t` a, const `vect_t` b)
- static `INLINE void pack` (`vect_t` &even, `vect_t` &odd, const `vect_t` a, const `vect_t` b)
- static `INLINE void transpose` (`vect_t` &r0, `vect_t` &r1, `vect_t` &r2, `vect_t` &r3, `vect_t` &r4, `vect_t` &r5, `vect_t` &r6, `vect_t` &r7)
- static `INLINE void transpose` (`vect_t` &r0, `vect_t` &r1, `vect_t` &r2, `vect_t` &r3, `vect_t` &r4, `vect_t` &r5, `vect_t` &r6, `vect_t` &r7, `vect_t` &r8, `vect_t` &r9, `vect_t` &r10, `vect_t` &r11, `vect_t` &r12, `vect_t` &r13, `vect_t` &r14, `vect_t` &r15)
- `template<uint8_t s>`  
static `INLINE CONST vect_t blend` (const `vect_t` a, const `vect_t` b)
- `template<uint16_t s>`  
static `INLINE CONST vect_t blend` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t add` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t add` (const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t addin` (`vect_t` &a, const `vect_t` b)
- static `INLINE vect_t addin` (`vect_t` &a, const `vect_t` b)
- static `INLINE CONST vect_t sub` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t sub` (const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t subin` (`vect_t` &a, const `vect_t` b)
- static `INLINE vect_t subin` (`vect_t` &a, const `vect_t` b)
- static `INLINE CONST vect_t mullo` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t mullo` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t mul` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t mul` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fmaddd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fmaddd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fmadddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fmadddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fnmadd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fnmadd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fnmaddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fnmaddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fmsub` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fmsub` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fmsubin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fmsubin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t round` (const `vect_t` a)
- static `INLINE CONST vect_t round` (const `vect_t` a)
- static `INLINE vect_t mod` (`vect_t` &C, const `vect_t` &P, const `vect_t` &INVP, const `vect_t` &NEGP, const `vect_t` &MIN, const `vect_t` &MAX, `vect_t` &Q, `vect_t` &T)
- static `INLINE vect_t mod` (`vect_t` &C, const `vect_t` &P, const `vect_t` &INVP, const `vect_t` &NEGP, const `vect_t` &MIN, const `vect_t` &MAX, `vect_t` &Q, `vect_t` &T)
- static `INLINE CONST vect_t zero` ()
- static `INLINE CONST vect_t zero` ()
- static `INLINE CONST vect_t vor` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t vxor` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t vand` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t vandnot` (const `vect_t` a, const `vect_t` b)

**Static Public Attributes**

- static const constexpr size\_t `vect_size` = 8
- static const constexpr size\_t `alignment` = 32

**12.288.1 Member Typedef Documentation****12.288.1.1 scalar\_t**

```
typedef uint32_t scalar_t = uint32_t
```

**12.288.1.2 aligned\_allocator**

```
typedef AlignedAllocator< scalar_t, Alignment(alignment)> aligned_allocator = AlignedAllocator<scalar_t,
Alignment(alignment)>
```

**12.288.1.3 aligned\_vector**

```
typedef std::vector< scalar_t, aligned_allocator > aligned_vector = std::vector<scalar_t,
aligned_allocator>
```

**12.288.1.4 is\_same\_element**

```
template<class Field >
using is_same_element = std::is_same<typename Field::Element, scalar_t>
```

**12.288.1.5 simdHalf**

```
typedef Simd128< scalar_t > simdHalf = Simd128<scalar_t>
```

**12.288.1.6 vect\_t [1/2]**

```
using vect_t = __m256i [inherited]
```

**12.288.1.7 vect\_t [2/2]**

```
using vect_t = __m512i [inherited]
```

**12.288.1.8 half\_t [1/2]**

```
using half_t = __m128i [inherited]
```

**12.288.1.9 half\_t [2/2]**

```
using half_t = __m256i [inherited]
```

**12.288.2 Member Function Documentation****12.288.2.1 type\_string() [1/2]**

```
static const std::string type_string () [inline], [static]
```

**12.288.2.2 set1() [1/3]**

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static]
```

**12.288.2.3 set()** [1/4]

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3,
    const scalar_t x4,
    const scalar_t x5,
    const scalar_t x6,
    const scalar_t x7) [inline], [static]
```

**12.288.2.4 gather()** [1/3]

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static]
```

**12.288.2.5 load()** [1/3]

```
static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static]
```

**12.288.2.6 loadu()** [1/3]

```
static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static]
```

**12.288.2.7 store()** [1/3]

```
static INLINE void store (
    scalar_t * p,
    vect_t v) [inline], [static]
```

**12.288.2.8 storeu()** [1/3]

```
static INLINE void storeu (
    scalar_t * p,
    vect_t v) [inline], [static]
```

**12.288.2.9 stream()** [1/3]

```
static INLINE void stream (
    scalar_t * p,
    const vect_t v) [inline], [static]
```

**12.288.2.10 sra()** [1/2]

```
template<int s>
static INLINE CONST vect_t sra (
    const vect_t a) [inline], [static]
```

**12.288.2.11 greater()** [1/2]

```
static INLINE CONST vect_t greater (
    vect_t a,
    vect_t b) [inline], [static]
```

**12.288.2.12 lesser()** [1/2]

```
static INLINE CONST vect_t lesser (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.288.2.13 greater\_eq()** [1/2]

```
static INLINE CONST vect_t greater_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.288.2.14 lesser\_eq()** [1/2]

```
static INLINE CONST vect_t lesser_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.288.2.15 mulhi()** [1/2]

```
static INLINE CONST vect_t mulhi (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.288.2.16 mulx()** [1/2]

```
static INLINE CONST vect_t mulx (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.288.2.17 fmaddx()** [1/2]

```
static INLINE CONST vect_t fmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.288.2.18 fmaddxin()** [1/2]

```
static INLINE vect_t fmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.288.2.19 fnmaddx()** [1/2]

```
static INLINE CONST vect_t fnmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.288.2.20 fnmaddxin()** [1/2]

```
static INLINE vect_t fnmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.288.2.21 fmsubx()** [1/2]

```
static INLINE CONST vect_t fmsubx (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.288.2.22 fmsubxin()** [1/2]

```
static INLINE vect_t fmsubxin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.288.2.23 hadd\_to\_scal()** [1/2]

```
static INLINE CONST scalar_t hadd_to_scal (
    const vect_t a) [inline], [static]
```

**12.288.2.24 type\_string()** [2/2]

```
static const std::string type_string () [inline], [static]
```

**12.288.2.25 set1()** [2/3]

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static]
```

**12.288.2.26 set()** [2/4]

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3,
    const scalar_t x4,
    const scalar_t x5,
    const scalar_t x6,
    const scalar_t x7) [inline], [static]
```

**12.288.2.27 gather()** [2/3]

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static]
```

**12.288.2.28 load()** [2/3]

```
static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static]
```

**12.288.2.29 loadu()** [2/3]

```
static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static]
```

**12.288.2.30 store()** [2/3]

```
static INLINE void store (  
    scalar_t * p,  
    vect_t v) [inline], [static]
```

**12.288.2.31 storeu()** [2/3]

```
static INLINE void storeu (  
    scalar_t * p,  
    vect_t v) [inline], [static]
```

**12.288.2.32 stream()** [2/3]

```
static INLINE void stream (  
    scalar_t * p,  
    const vect_t v) [inline], [static]
```

**12.288.2.33 sra()** [2/2]

```
template<int s>  
static INLINE CONST vect_t sra (  
    const vect_t a) [inline], [static]
```

**12.288.2.34 greater()** [2/2]

```
static INLINE CONST vect_t greater (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.288.2.35 lesser()** [2/2]

```
static INLINE CONST vect_t lesser (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.288.2.36 greater\_eq()** [2/2]

```
static INLINE CONST vect_t greater_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.288.2.37 lesser\_eq()** [2/2]

```
static INLINE CONST vect_t lesser_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.288.2.38 mulhi()** [2/2]

```
static INLINE CONST vect_t mulhi (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.288.2.39 mulx()** [2/2]

```
static INLINE CONST vect_t mulx (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.288.2.40 fmaddx() [2/2]**

```
static INLINE CONST vect_t fmaddx (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.288.2.41 fmaddxin() [2/2]**

```
static INLINE vect_t fmaddxin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.288.2.42 fnmaddx() [2/2]**

```
static INLINE CONST vect_t fnmaddx (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.288.2.43 fnmaddxin() [2/2]**

```
static INLINE vect_t fnmaddxin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.288.2.44 fmsubx() [2/2]**

```
static INLINE CONST vect_t fmsubx (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.288.2.45 fmsubxin() [2/2]**

```
static INLINE vect_t fmsubxin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.288.2.46 hadd\_to\_scal() [2/2]**

```
static INLINE CONST scalar_t hadd_to_scal (
    const vect_t a) [inline], [static]
```

**12.288.2.47 is\_same\_element()**

```
template<class Field >
typedef std::is_same<typename Field::Element, scalar_t> is_same_element
```

**12.288.2.48 valid() [1/2]**

```
template<class T >
static constexpr bool valid (
    T * p) [inline], [static], [constexpr], [inherited]
```



**12.288.2.49 valid()** [2/2]

```
template<class T >
static constexpr bool valid (
    T * p) [inline], [static], [constexpr], [inherited]
```

**12.288.2.50 compliant()** [1/2]

```
template<class T >
static constexpr bool compliant (
    T n) [inline], [static], [constexpr], [inherited]
```

**12.288.2.51 compliant()** [2/2]

```
template<class T >
static constexpr bool compliant (
    T n) [inline], [static], [constexpr], [inherited]
```

**12.288.2.52 set1()** [3/3]

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static], [inherited]
```

**12.288.2.53 set()** [3/4]

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3,
    const scalar_t x4,
    const scalar_t x5,
    const scalar_t x6,
    const scalar_t x7) [inline], [static], [inherited]
```

**12.288.2.54 set()** [4/4]

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3,
    const scalar_t x4,
    const scalar_t x5,
    const scalar_t x6,
    const scalar_t x7,
    const scalar_t x8,
    const scalar_t x9,
    const scalar_t x10,
    const scalar_t x11,
    const scalar_t x12,
    const scalar_t x13,
    const scalar_t x14,
    const scalar_t x15) [inline], [static], [inherited]
```

**12.288.2.55 gather()** [3/3]

```
template<class T >
static INLINE PURE vect_t gather (
```

```
const scalar_t *const p,
const T *const idx) [inline], [static], [inherited]
```

#### 12.288.2.56 load() [3/3]

```
static INLINE PURE vect_t load (
const scalar_t *const p) [inline], [static], [inherited]
```

#### 12.288.2.57 loadu() [3/3]

```
static INLINE PURE vect_t loadu (
const scalar_t *const p) [inline], [static], [inherited]
```

#### 12.288.2.58 store() [3/3]

```
static INLINE void store (
scalar_t * p,
vect_t v) [inline], [static], [inherited]
```

#### 12.288.2.59 storeu() [3/3]

```
static INLINE void storeu (
scalar_t * p,
vect_t v) [inline], [static], [inherited]
```

#### 12.288.2.60 stream() [3/3]

```
static INLINE void stream (
scalar_t * p,
const vect_t v) [inline], [static], [inherited]
```

#### 12.288.2.61 sll() [1/2]

```
template<int s>
static INLINE CONST vect_t sll (
const vect_t a) [inline], [static], [inherited]
```

#### 12.288.2.62 sll() [2/2]

```
template<int s>
static INLINE CONST vect_t sll (
const vect_t a) [inline], [static], [inherited]
```

#### 12.288.2.63 srl() [1/2]

```
template<int s>
static INLINE CONST vect_t srl (
const vect_t a) [inline], [static], [inherited]
```

#### 12.288.2.64 srl() [2/2]

```
template<int s>
static INLINE CONST vect_t srl (
const vect_t a) [inline], [static], [inherited]
```

#### 12.288.2.65 shuffle\_twice() [1/2]

```
template<uint8_t s>
static INLINE CONST vect_t shuffle_twice (
const vect_t a) [inline], [static], [inherited]
```

**12.288.2.66 shuffle\_twice()** [2/2]

```
template<uint8_t s>
static INLINE CONST vect_t shuffle_twice (
    const vect_t a) [inline], [static], [inherited]
```

**12.288.2.67 shuffle()** [1/2]

```
template<uint32_t s>
static INLINE CONST vect_t shuffle (
    const vect_t a) [inline], [static], [inherited]
```

**12.288.2.68 shuffle()** [2/2]

```
template<uint64_t s>
static INLINE CONST vect_t shuffle (
    const vect_t a) [inline], [static], [inherited]
```

**12.288.2.69 unpacklo\_intrinsic()** [1/2]

```
static INLINE CONST vect_t unpacklo_intrinsic (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.70 unpacklo\_intrinsic()** [2/2]

```
static INLINE CONST vect_t unpacklo_intrinsic (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.71 unpackhi\_intrinsic()** [1/2]

```
static INLINE CONST vect_t unpackhi_intrinsic (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.72 unpackhi\_intrinsic()** [2/2]

```
static INLINE CONST vect_t unpackhi_intrinsic (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.73 unpacklo()** [1/2]

```
static INLINE CONST vect_t unpacklo (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.74 unpacklo()** [2/2]

```
static INLINE CONST vect_t unpacklo (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.75 unpackhi()** [1/2]

```
static INLINE CONST vect_t unpackhi (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.76 unpackhi() [2/2]**

```
static INLINE CONST vect_t unpackhi (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.77 unpacklohi() [1/2]**

```
static INLINE void unpacklohi (  
    vect_t & lo,  
    vect_t & hi,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.78 unpacklohi() [2/2]**

```
static INLINE void unpacklohi (  
    vect_t & lo,  
    vect_t & hi,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.79 pack\_even() [1/2]**

```
static INLINE CONST vect_t pack_even (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.80 pack\_even() [2/2]**

```
static INLINE CONST vect_t pack_even (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.81 pack\_odd() [1/2]**

```
static INLINE CONST vect_t pack_odd (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.82 pack\_odd() [2/2]**

```
static INLINE CONST vect_t pack_odd (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.83 pack() [1/2]**

```
static INLINE void pack (  
    vect_t & even,  
    vect_t & odd,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.84 pack() [2/2]**

```
static INLINE void pack (  
    vect_t & even,  
    vect_t & odd,
```

```
const vect_t a,
const vect_t b) [inline], [static], [inherited]
```

**12.288.2.85 transpose() [1/2]**

```
static INLINE void transpose (
    vect_t & r0,
    vect_t & r1,
    vect_t & r2,
    vect_t & r3,
    vect_t & r4,
    vect_t & r5,
    vect_t & r6,
    vect_t & r7) [inline], [static], [inherited]
```

**12.288.2.86 transpose() [2/2]**

```
static INLINE void transpose (
    vect_t & r0,
    vect_t & r1,
    vect_t & r2,
    vect_t & r3,
    vect_t & r4,
    vect_t & r5,
    vect_t & r6,
    vect_t & r7,
    vect_t & r8,
    vect_t & r9,
    vect_t & r10,
    vect_t & r11,
    vect_t & r12,
    vect_t & r13,
    vect_t & r14,
    vect_t & r15) [inline], [static], [inherited]
```

**12.288.2.87 blend() [1/2]**

```
template<uint8_t s>
static INLINE CONST vect_t blend (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.88 blend() [2/2]**

```
template<uint16_t s>
static INLINE CONST vect_t blend (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.89 add() [1/2]**

```
static INLINE CONST vect_t add (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.90 add() [2/2]**

```
static INLINE CONST vect_t add (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.91 addin() [1/2]**

```
static INLINE vect_t addin (  
    vect_t & a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.92 addin() [2/2]**

```
static INLINE vect_t addin (  
    vect_t & a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.93 sub() [1/2]**

```
static INLINE CONST vect_t sub (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.94 sub() [2/2]**

```
static INLINE CONST vect_t sub (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.95 subin() [1/2]**

```
static INLINE vect_t subin (  
    vect_t & a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.96 subin() [2/2]**

```
static INLINE vect_t subin (  
    vect_t & a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.97 mullo() [1/2]**

```
static INLINE CONST vect_t mullo (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.98 mullo() [2/2]**

```
static INLINE CONST vect_t mullo (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.99 mul() [1/2]**

```
static INLINE CONST vect_t mul (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.100 mul() [2/2]**

```
static INLINE CONST vect_t mul (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.101 fmadd()** [1/2]

```
static INLINE CONST vect_t fmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.102 fmadd()** [2/2]

```
static INLINE CONST vect_t fmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.103 fmaddin()** [1/2]

```
static INLINE vect_t fmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.104 fmaddin()** [2/2]

```
static INLINE vect_t fmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.105 fnmadd()** [1/2]

```
static INLINE CONST vect_t fnmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.106 fnmadd()** [2/2]

```
static INLINE CONST vect_t fnmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.107 fnmaddin()** [1/2]

```
static INLINE vect_t fnmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.108 fnmaddin()** [2/2]

```
static INLINE vect_t fnmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.109 fmsub()** [1/2]

```
static INLINE CONST vect_t fmsub (  
    const vect_t c,
```

```

    const vect_t a,
    const vect_t b) [inline], [static], [inherited]

```

#### 12.288.2.110 fmsub() [2/2]

```

static INLINE CONST vect_t fmsub (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]

```

#### 12.288.2.111 fmsubin() [1/2]

```

static INLINE vect_t fmsubin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]

```

#### 12.288.2.112 fmsubin() [2/2]

```

static INLINE vect_t fmsubin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]

```

#### 12.288.2.113 eq() [1/2]

```

static INLINE CONST vect_t eq (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]

```

#### 12.288.2.114 eq() [2/2]

```

static INLINE CONST vect_t eq (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]

```

#### 12.288.2.115 round() [1/2]

```

static INLINE CONST vect_t round (
    const vect_t a) [inline], [static], [inherited]

```

#### 12.288.2.116 round() [2/2]

```

static INLINE CONST vect_t round (
    const vect_t a) [inline], [static], [inherited]

```

#### 12.288.2.117 mod() [1/2]

```

static INLINE vect_t mod (
    vect_t & C,
    const vect_t & P,
    const vect_t & INVP,
    const vect_t & NEGP,
    const vect_t & MIN,
    const vect_t & MAX,
    vect_t & Q,
    vect_t & T) [inline], [static], [inherited]

```



**12.288.2.118 mod()** [2/2]

```
static INLINE vect_t mod (
    vect_t & C,
    const vect_t & P,
    const vect_t & INVP,
    const vect_t & NEGP,
    const vect_t & MIN,
    const vect_t & MAX,
    vect_t & Q,
    vect_t & T) [inline], [static], [inherited]
```

**12.288.2.119 zero()** [1/2]

```
static INLINE CONST vect_t zero () [inline], [static], [inherited]
```

**12.288.2.120 zero()** [2/2]

```
static INLINE CONST vect_t zero () [inline], [static], [inherited]
```

**12.288.2.121 vor()**

```
static INLINE CONST vect_t vor (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.122 vxor()**

```
static INLINE CONST vect_t vxor (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.123 vand()**

```
static INLINE CONST vect_t vand (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.288.2.124 vandnot()**

```
static INLINE CONST vect_t vandnot (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.288.3 Field Documentation****12.288.3.1 vect\_size**

```
static const constexpr size_t vect_size = 8 [static], [constexpr], [inherited]
```

**12.288.3.2 alignment**


```
static const constexpr size_t alignment = 32 [static], [constexpr], [inherited]
```

The documentation for this struct was generated from the following files:

- [simd256\\_int32.inl](#)
- [simd512\\_int32.inl](#)

## 12.289 Simd256\_impl< true, true, false, 8 > Struct Reference

Inheritance diagram for Simd256\_impl< true, true, false, 8 >:

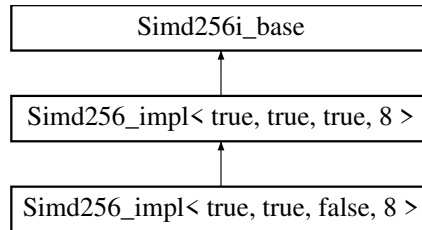

### Data Structures

- union [Converter](#)

### Public Types

- using [scalar\\_t](#) = uint64\_t
- using [aligned\\_allocator](#) = AlignedAllocator<[scalar\\_t](#), Alignment([alignment](#))>
- using [aligned\\_vector](#) = std::vector<[scalar\\_t](#), [aligned\\_allocator](#)>
- template<class [Field](#) >  
using [is\\_same\\_element](#) = std::is\_same<typename [Field::Element](#), [scalar\\_t](#)>
- using [simdHalf](#) = [Simd128](#)<[scalar\\_t](#)>
- using [vect\\_t](#) = \_\_m256i
- using [half\\_t](#) = \_\_m128i

### Static Public Member Functions

- static const std::string [type\\_string](#) ()
- static [INLINE CONST vect\\_t set1](#) (const [scalar\\_t](#) x)
- static [INLINE CONST vect\\_t set](#) (const [scalar\\_t](#) x0, const [scalar\\_t](#) x1, const [scalar\\_t](#) x2, const [scalar\\_t](#) x3)
- template<class T >  
static [INLINE PURE vect\\_t gather](#) (const [scalar\\_t](#) \*const p, const T \*const idx)
- static [INLINE PURE vect\\_t load](#) (const [scalar\\_t](#) \*const p)
- static [INLINE PURE vect\\_t loadu](#) (const [scalar\\_t](#) \*const p)
- static [INLINE void store](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE void storeu](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE void stream](#) ([scalar\\_t](#) \*p, const [vect\\_t](#) v)
- template<int s>  
static [INLINE CONST vect\\_t sra](#) (const [vect\\_t](#) a)
- static [INLINE CONST vect\\_t greater](#) ([vect\\_t](#) a, [vect\\_t](#) b)
- static [INLINE CONST vect\\_t lesser](#) ([vect\\_t](#) a, [vect\\_t](#) b)
- static [INLINE CONST vect\\_t greater\\_eq](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t lesser\\_eq](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t mullo](#) ([vect\\_t](#) a, [vect\\_t](#) b)
- static [INLINE CONST vect\\_t mulhi](#) ([vect\\_t](#) a, [vect\\_t](#) b)
- static [INLINE CONST vect\\_t mulx](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t fmaddx](#) (const [vect\\_t](#) c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE vect\\_t fmaddxin](#) ([vect\\_t](#) &c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t fnmaddx](#) (const [vect\\_t](#) c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE vect\\_t fnmaddxin](#) ([vect\\_t](#) &c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t fmsubx](#) (const [vect\\_t](#) c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE vect\\_t fmsubxin](#) ([vect\\_t](#) &c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST scalar\\_t hadd\\_to\\_scal](#) (const [vect\\_t](#) a)

- template<class T >  
static constexpr bool [valid](#) (T \*p)
- template<class T >  
static constexpr bool [compliant](#) (T n)
- static [INLINE CONST vect\\_t set1](#) (const [scalar\\_t](#) x)
- static [INLINE CONST vect\\_t set](#) (const [scalar\\_t](#) x0, const [scalar\\_t](#) x1, const [scalar\\_t](#) x2, const [scalar\\_t](#) x3)
- template<class T >  
static [INLINE PURE vect\\_t gather](#) (const [scalar\\_t](#) \*const p, const T \*const idx)
- template<int idx>  
static [INLINE CONST scalar\\_t get](#) (vect\_t v)
- static [INLINE PURE vect\\_t load](#) (const [scalar\\_t](#) \*const p)
- static [INLINE PURE vect\\_t loadu](#) (const [scalar\\_t](#) \*const p)
- static [INLINE void store](#) ([scalar\\_t](#) \*p, vect\_t v)
- static [INLINE void storeu](#) ([scalar\\_t](#) \*p, vect\_t v)
- static [INLINE void stream](#) ([scalar\\_t](#) \*p, const vect\_t v)
- template<int s>  
static [INLINE CONST vect\\_t sll](#) (const vect\_t a)
- template<int s>  
static [INLINE CONST vect\\_t srl](#) (const vect\_t a)
- template<uint8\_t s>  
static [INLINE CONST vect\\_t shuffle](#) (const vect\_t a)
- static [INLINE CONST vect\\_t unpacklo\\_intrinsic](#) (const vect\_t a, const vect\_t b)
- static [INLINE CONST vect\\_t unpackhi\\_intrinsic](#) (const vect\_t a, const vect\_t b)
- static [INLINE CONST vect\\_t unpacklo](#) (const vect\_t a, const vect\_t b)
- static [INLINE CONST vect\\_t unpackhi](#) (const vect\_t a, const vect\_t b)
- static [INLINE void unpacklohi](#) (vect\_t &lo, vect\_t &hi, const vect\_t a, const vect\_t b)
- static [INLINE CONST vect\\_t pack\\_even](#) (const vect\_t a, const vect\_t b)
- static [INLINE CONST vect\\_t pack\\_odd](#) (const vect\_t a, const vect\_t b)
- static [INLINE void pack](#) (vect\_t &even, vect\_t &odd, const vect\_t a, const vect\_t b)
- static [INLINE void transpose](#) (vect\_t &r0, vect\_t &r1, vect\_t &r2, vect\_t &r3)
- template<uint8\_t s>  
static [INLINE CONST vect\\_t blend](#) (const vect\_t a, const vect\_t b)
- static [INLINE CONST vect\\_t add](#) (const vect\_t a, const vect\_t b)
- static [INLINE vect\\_t addin](#) (vect\_t &a, const vect\_t b)
- static [INLINE CONST vect\\_t sub](#) (const vect\_t a, const vect\_t b)
- static [INLINE vect\\_t subin](#) (vect\_t &a, const vect\_t b)
- static [INLINE CONST vect\\_t mul](#) (const vect\_t a, const vect\_t b)
- static [INLINE CONST vect\\_t fmadd](#) (const vect\_t c, const vect\_t a, const vect\_t b)
- static [INLINE vect\\_t fmaddin](#) (vect\_t &c, const vect\_t a, const vect\_t b)
- static [INLINE CONST vect\\_t fnmadd](#) (const vect\_t c, const vect\_t a, const vect\_t b)
- static [INLINE vect\\_t fnmaddin](#) (vect\_t &c, const vect\_t a, const vect\_t b)
- static [INLINE CONST vect\\_t fmsub](#) (const vect\_t c, const vect\_t a, const vect\_t b)
- static [INLINE vect\\_t fmsubin](#) (vect\_t &c, const vect\_t a, const vect\_t b)
- static [INLINE CONST vect\\_t eq](#) (const vect\_t a, const vect\_t b)
- static [INLINE CONST vect\\_t round](#) (const vect\_t a)
- static [INLINE CONST vect\\_t mask\\_high](#) ()
- static [INLINE CONST vect\\_t mulhi\\_fast](#) (vect\_t x, vect\_t y)
- static [INLINE vect\\_t mod](#) (vect\_t &C, const \_\_m256d &P, const \_\_m256d &INVP, const \_\_m256d &NEGP, const vect\_t &POW50REM, const \_\_m256d &MIN, const \_\_m256d &MAX, \_\_m256d &Q, \_\_m256d &T)
- static [INLINE CONST vect\\_t zero](#) ()

### Static Public Attributes

- static const constexpr size\_t [vect\\_size](#) = 4
- static const constexpr size\_t [alignment](#) = 32

## Static Protected Member Functions

- static `INLINE CONST vect_t signbits` (const `vect_t` x)

## 12.289.1 Member Typedef Documentation

### 12.289.1.1 scalar\_t

```
using scalar_t = uint64_t
```

### 12.289.1.2 aligned\_allocator

```
using aligned_allocator = AlignedAllocator<scalar_t, Alignment(alignment)>
```

### 12.289.1.3 aligned\_vector

```
using aligned_vector = std::vector<scalar_t, aligned_allocator>
```

### 12.289.1.4 is\_same\_element

```
template<class Field >
using is_same_element = std::is_same<typename Field::Element, scalar_t>
```

### 12.289.1.5 simdHalf

```
using simdHalf = Simd128<scalar_t>
```

### 12.289.1.6 vect\_t

```
using vect_t = __m256i [inherited]
```

### 12.289.1.7 half\_t

```
using half_t = __m128i [inherited]
```

## 12.289.2 Member Function Documentation

### 12.289.2.1 type\_string()

```
static const std::string type_string () [inline], [static]
```

### 12.289.2.2 set1() [1/2]

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static]
```

### 12.289.2.3 set() [1/2]

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3) [inline], [static]
```

### 12.289.2.4 gather() [1/2]

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static]
```

**12.289.2.5 load()** [1/2]

```
static INLINE PURE vect_t load (  
    const scalar_t *const p) [inline], [static]
```

**12.289.2.6 loadu()** [1/2]

```
static INLINE PURE vect_t loadu (  
    const scalar_t *const p) [inline], [static]
```

**12.289.2.7 store()** [1/2]

```
static INLINE void store (  
    scalar_t * p,  
    vect_t v) [inline], [static]
```

**12.289.2.8 storeu()** [1/2]

```
static INLINE void storeu (  
    scalar_t * p,  
    vect_t v) [inline], [static]
```

**12.289.2.9 stream()** [1/2]

```
static INLINE void stream (  
    scalar_t * p,  
    const vect_t v) [inline], [static]
```

**12.289.2.10 sra()**

```
template<int s>  
static INLINE CONST vect_t sra (  
    const vect_t a) [inline], [static]
```

**12.289.2.11 greater()**

```
static INLINE CONST vect_t greater (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.289.2.12 lesser()**

```
static INLINE CONST vect_t lesser (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.289.2.13 greater\_eq()**

```
static INLINE CONST vect_t greater_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.289.2.14 lesser\_eq()**

```
static INLINE CONST vect_t lesser_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.289.2.15 mullo()**

```
static INLINE CONST vect_t mullo (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.289.2.16 mulhi()**

```
static INLINE CONST vect_t mulhi (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.289.2.17 mulx()**

```
static INLINE CONST vect_t mulx (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.289.2.18 fmaddx()**

```
static INLINE CONST vect_t fmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.289.2.19 fmaddxin()**

```
static INLINE vect_t fmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.289.2.20 fnmaddx()**

```
static INLINE CONST vect_t fnmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.289.2.21 fnmaddxin()**

```
static INLINE vect_t fnmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.289.2.22 fmsubx()**

```
static INLINE CONST vect_t fmsubx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.289.2.23 fmsubxin()**

```
static INLINE vect_t fmsubxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.289.2.24 hadd\_to\_scal()**

```
static INLINE CONST scalar_t hadd_to_scal (
    const vect_t a) [inline], [static]
```

**12.289.2.25 valid()**

```
template<class T >
static constexpr bool valid (
    T * p) [inline], [static], [constexpr], [inherited]
```

**12.289.2.26 compliant()**

```
template<class T >
static constexpr bool compliant (
    T n) [inline], [static], [constexpr], [inherited]
```

**12.289.2.27 set1() [2/2]**

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static], [inherited]
```

**12.289.2.28 set() [2/2]**

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3) [inline], [static], [inherited]
```

**12.289.2.29 gather() [2/2]**

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static], [inherited]
```

**12.289.2.30 get()**

```
template<int idx>
static INLINE CONST scalar_t get (
    vect_t v) [inline], [static], [inherited]
```

**12.289.2.31 load() [2/2]**

```
static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static], [inherited]
```

**12.289.2.32 loadu() [2/2]**

```
static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static], [inherited]
```

**12.289.2.33 store() [2/2]**

```
static INLINE void store (
    scalar_t * p,
    vect_t v) [inline], [static], [inherited]
```

**12.289.2.34 storeu() [2/2]**

```
static INLINE void storeu (
    scalar_t * p,
    vect_t v) [inline], [static], [inherited]
```

**12.289.2.35 stream() [2/2]**

```
static INLINE void stream (
    scalar_t * p,
    const vect_t v) [inline], [static], [inherited]
```

**12.289.2.36 sll()**

```
template<int s>
static INLINE CONST vect_t sll (
    const vect_t a) [inline], [static], [inherited]
```

**12.289.2.37 srl()**

```
template<int s>
static INLINE CONST vect_t srl (
    const vect_t a) [inline], [static], [inherited]
```

**12.289.2.38 shuffle()**

```
template<uint8_t s>
static INLINE CONST vect_t shuffle (
    const vect_t a) [inline], [static], [inherited]
```

**12.289.2.39 unpacklo\_intrinsic()**

```
static INLINE CONST vect_t unpacklo_intrinsic (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.40 unpackhi\_intrinsic()**

```
static INLINE CONST vect_t unpackhi_intrinsic (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.41 unpacklo()**

```
static INLINE CONST vect_t unpacklo (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.42 unpackhi()**

```
static INLINE CONST vect_t unpackhi (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.43 unpacklohi()**

```
static INLINE void unpacklohi (
    vect_t & lo,
    vect_t & hi,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```



**12.289.2.44 pack\_even()**

```
static INLINE CONST vect_t pack_even (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.45 pack\_odd()**

```
static INLINE CONST vect_t pack_odd (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.46 pack()**

```
static INLINE void pack (  
    vect_t & even,  
    vect_t & odd,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.47 transpose()**

```
static INLINE void transpose (  
    vect_t & r0,  
    vect_t & r1,  
    vect_t & r2,  
    vect_t & r3) [inline], [static], [inherited]
```

**12.289.2.48 blend()**

```
template<uint8_t s>  
static INLINE CONST vect_t blend (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.49 add()**

```
static INLINE CONST vect_t add (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.50 addin()**

```
static INLINE vect_t addin (  
    vect_t & a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.51 sub()**

```
static INLINE CONST vect_t sub (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.52 subin()**

```
static INLINE vect_t subin (  
    vect_t & a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.53 mul()**

```
static INLINE CONST vect_t mul (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.54 fmadd()**

```
static INLINE CONST vect_t fmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.55 fmaddin()**

```
static INLINE vect_t fmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.56 fnmadd()**

```
static INLINE CONST vect_t fnmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.57 fnmaddin()**

```
static INLINE vect_t fnmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.58 fmsub()**

```
static INLINE CONST vect_t fmsub (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.59 fmsubin()**

```
static INLINE vect_t fmsubin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.60 eq()**

```
static INLINE CONST vect_t eq (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.289.2.61 round()**

```
static INLINE CONST vect_t round (  
    const vect_t a) [inline], [static], [inherited]
```

**12.289.2.62 mask\_high()**

```
static INLINE CONST vect_t mask_high () [inline], [static], [inherited]
```

**12.289.2.63 mulhi\_fast()**

```
INLINE CONST vect_t mulhi_fast (
    vect_t x,
    vect_t y) [static], [inherited]
```

**12.289.2.64 mod()**

```
INLINE vect_t mod (
    vect_t & C,
    const __m256d & P,
    const __m256d & INVP,
    const __m256d & NEGP,
    const vect_t & POW5OREM,
    const __m256d & MIN,
    const __m256d & MAX,
    __m256d & Q,
    __m256d & T) [static], [inherited]
```

**12.289.2.65 signbits()**

```
static INLINE CONST vect_t signbits (
    const vect_t x) [inline], [static], [protected], [inherited]
```

**12.289.2.66 zero()**

```
static INLINE CONST vect_t zero () [inline], [static], [inherited]
```

**12.289.3 Field Documentation****12.289.3.1 vect\_size**

```
const constexpr size_t vect_size = 4 [static], [constexpr], [inherited]
```

**12.289.3.2 alignment**


```
const constexpr size_t alignment = 32 [static], [constexpr], [inherited]
```

The documentation for this struct was generated from the following file:

- [simd256\\_int64.inl](#)

**12.290 Simd256\_impl< true, true, true, 2 > Struct Reference**

Inheritance diagram for Simd256\_impl< true, true, true, 2 >:

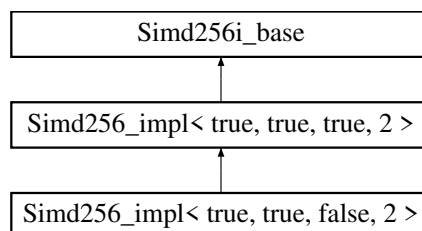

## Data Structures

- union [Converter](#)

## Public Types

- using [vect\\_t](#) = \_\_m256i
- using [half\\_t](#) = \_\_m128i
- using [scalar\\_t](#) = int16\_t
- using [simdHalf](#) = [Simd128](#)<[scalar\\_t](#)>
- using [aligned\\_allocator](#) = [AlignedAllocator](#)<[scalar\\_t](#), [Alignment](#)([alignment](#))>
- using [aligned\\_vector](#) = std::vector<[scalar\\_t](#), [aligned\\_allocator](#)>
- template<class [Field](#) >  
using [is\\_same\\_element](#) = std::is\_same<typename [Field::Element](#), [scalar\\_t](#)>

## Static Public Member Functions

- static const std::string [type\\_string](#) ()
- template<class T >  
static constexpr bool [valid](#) (T \*p)
- template<class T >  
static constexpr bool [compliant](#) (T n)
- static [INLINE CONST vect\\_t set1](#) (const [scalar\\_t](#) x)
- static [INLINE CONST vect\\_t set](#) (const [scalar\\_t](#) x0, const [scalar\\_t](#) x1, const [scalar\\_t](#) x2, const [scalar\\_t](#) x3, const [scalar\\_t](#) x4, const [scalar\\_t](#) x5, const [scalar\\_t](#) x6, const [scalar\\_t](#) x7, const [scalar\\_t](#) x8, const [scalar\\_t](#) x9, const [scalar\\_t](#) x10, const [scalar\\_t](#) x11, const [scalar\\_t](#) x12, const [scalar\\_t](#) x13, const [scalar\\_t](#) x14, const [scalar\\_t](#) x15)
- template<class T >  
static [INLINE PURE vect\\_t gather](#) (const [scalar\\_t](#) \*const p, const T \*const idx)
- static [INLINE PURE vect\\_t load](#) (const [scalar\\_t](#) \*const p)
- static [INLINE PURE vect\\_t loadu](#) (const [scalar\\_t](#) \*const p)
- static [INLINE void store](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE void storeu](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE void stream](#) ([scalar\\_t](#) \*p, const [vect\\_t](#) v)
- template<int s>  
static [INLINE CONST vect\\_t sll](#) (const [vect\\_t](#) a)
- template<int s>  
static [INLINE CONST vect\\_t srl](#) (const [vect\\_t](#) a)
- template<int s>  
static [INLINE CONST vect\\_t sra](#) (const [vect\\_t](#) a)
- template<uint64\_t s>  
static [INLINE CONST vect\\_t shuffle](#) (const [vect\\_t](#) a)
- static [INLINE CONST vect\\_t unpacklo\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpackhi\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpacklo](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpackhi](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE void unpacklohi](#) ([vect\\_t](#) &lo, [vect\\_t](#) &hi, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t pack\\_even](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t pack\\_odd](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE void pack](#) ([vect\\_t](#) &even, [vect\\_t](#) &odd, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE void transpose](#) ([vect\\_t](#) &r0, [vect\\_t](#) &r1, [vect\\_t](#) &r2, [vect\\_t](#) &r3, [vect\\_t](#) &r4, [vect\\_t](#) &r5, [vect\\_t](#) &r6, [vect\\_t](#) &r7, [vect\\_t](#) &r8, [vect\\_t](#) &r9, [vect\\_t](#) &r10, [vect\\_t](#) &r11, [vect\\_t](#) &r12, [vect\\_t](#) &r13, [vect\\_t](#) &r14, [vect\\_t](#) &r15)
- template<uint16\_t s, typename std::enable\_if<(s & 0x00ff) == (s > > 8)>::type \* = nullptr>  
static [INLINE vect\\_t blend](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- template<uint16\_t s, typename std::enable\_if<(s & 0x00ff) != (s > > 8)>::type \* = nullptr>  
static [INLINE vect\\_t blend](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t add](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)

- static `INLINE vect_t addin (vect_t &a, const vect_t b)`
- static `INLINE CONST vect_t sub (const vect_t a, const vect_t b)`
- static `INLINE vect_t subin (vect_t &a, const vect_t b)`
- static `INLINE CONST vect_t mullo (const vect_t a, const vect_t b)`
- static `INLINE CONST vect_t mul (const vect_t a, const vect_t b)`
- static `INLINE CONST vect_t mulhi (const vect_t a, const vect_t b)`
- static `INLINE CONST vect_t mulx (vect_t a, vect_t b)`
- static `INLINE CONST vect_t fmadd (const vect_t c, const vect_t a, const vect_t b)`
- static `INLINE vect_t fmaddin (vect_t &c, const vect_t a, const vect_t b)`
- static `INLINE CONST vect_t fmaddx (const vect_t c, const vect_t a, const vect_t b)`
- static `INLINE vect_t fmaddxin (vect_t &c, const vect_t a, const vect_t b)`
- static `INLINE CONST vect_t fnmadd (const vect_t c, const vect_t a, const vect_t b)`
- static `INLINE vect_t fnmaddin (vect_t &c, const vect_t a, const vect_t b)`
- static `INLINE CONST vect_t fnmaddx (const vect_t c, const vect_t a, const vect_t b)`
- static `INLINE vect_t fnmaddxin (vect_t &c, const vect_t a, const vect_t b)`
- static `INLINE CONST vect_t fmsub (const vect_t c, const vect_t a, const vect_t b)`
- static `INLINE vect_t fmsubin (vect_t &c, const vect_t a, const vect_t b)`
- static `INLINE CONST vect_t fmsubx (const vect_t c, const vect_t a, const vect_t b)`
- static `INLINE vect_t fmsubxin (vect_t &c, const vect_t a, const vect_t b)`
- static `INLINE CONST vect_t eq (const vect_t a, const vect_t b)`
- static `INLINE CONST vect_t greater (const vect_t a, const vect_t b)`
- static `INLINE CONST vect_t lesser (const vect_t a, const vect_t b)`
- static `INLINE CONST vect_t greater_eq (const vect_t a, const vect_t b)`
- static `INLINE CONST vect_t lesser_eq (const vect_t a, const vect_t b)`
- static `INLINE CONST scalar_t hadd_to_scal (const vect_t a)`
- static `INLINE CONST vect_t round (const vect_t a)`
- static `INLINE vect_t mod (vect_t &C, const vect_t &P, const vect_t &INVP, const vect_t &NEGP, const vect_t &MIN, const vect_t &MAX, vect_t &Q, vect_t &T)`
- static `INLINE CONST vect_t zero ()`

### Static Public Attributes

- static const constexpr size\_t `vect_size` = 16
- static const constexpr size\_t `alignment` = 32

## 12.290.1 Member Typedef Documentation

### 12.290.1.1 vect\_t

```
using vect_t = __m256i
```

### 12.290.1.2 half\_t

```
using half_t = __m128i
```

### 12.290.1.3 scalar\_t

```
using scalar_t = int16_t
```

### 12.290.1.4 simdHalf

```
using simdHalf = Simd128<scalar_t>
```

### 12.290.1.5 aligned\_allocator

```
using aligned_allocator = AlignedAllocator<scalar_t, Alignment(alignment)>
```

### 12.290.1.6 aligned\_vector

```
using aligned_vector = std::vector<scalar_t, aligned_allocator>
```

### 12.290.1.7 is\_same\_element

```
template<class Field >
using is_same_element = std::is_same<typename Field::Element, scalar_t>
```

## 12.290.2 Member Function Documentation

### 12.290.2.1 type\_string()

```
static const std::string type_string () [inline], [static]
```

### 12.290.2.2 valid()

```
template<class T >
static constexpr bool valid (
    T * p) [inline], [static], [constexpr]
```

### 12.290.2.3 compliant()

```
template<class T >
static constexpr bool compliant (
    T n) [inline], [static], [constexpr]
```

### 12.290.2.4 set1()

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static]
```

### 12.290.2.5 set()

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3,
    const scalar_t x4,
    const scalar_t x5,
    const scalar_t x6,
    const scalar_t x7,
    const scalar_t x8,
    const scalar_t x9,
    const scalar_t x10,
    const scalar_t x11,
    const scalar_t x12,
    const scalar_t x13,
    const scalar_t x14,
    const scalar_t x15) [inline], [static]
```

### 12.290.2.6 gather()

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static]
```

**12.290.2.7 load()**

```
static INLINE PURE vect_t load (  
    const scalar_t *const p) [inline], [static]
```

**12.290.2.8 loadu()**

```
static INLINE PURE vect_t loadu (  
    const scalar_t *const p) [inline], [static]
```

**12.290.2.9 store()**

```
static INLINE void store (  
    scalar_t * p,  
    vect_t v) [inline], [static]
```

**12.290.2.10 storeu()**

```
static INLINE void storeu (  
    scalar_t * p,  
    vect_t v) [inline], [static]
```

**12.290.2.11 stream()**

```
static INLINE void stream (  
    scalar_t * p,  
    const vect_t v) [inline], [static]
```

**12.290.2.12 sll()**

```
template<int s>  
static INLINE CONST vect_t sll (  
    const vect_t a) [inline], [static]
```

**12.290.2.13 srl()**

```
template<int s>  
static INLINE CONST vect_t srl (  
    const vect_t a) [inline], [static]
```

**12.290.2.14 sra()**

```
template<int s>  
static INLINE CONST vect_t sra (  
    const vect_t a) [inline], [static]
```

**12.290.2.15 shuffle()**

```
template<uint64_t s>  
static INLINE CONST vect_t shuffle (  
    const vect_t a) [inline], [static]
```

**12.290.2.16 unpacklo\_intrinsic()**

```
static INLINE CONST vect_t unpacklo_intrinsic (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.17 unpackhi\_intrinsic()**

```
static INLINE CONST vect_t unpackhi_intrinsic (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.18 unpacklo()**

```
static INLINE CONST vect_t unpacklo (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.19 unpackhi()**

```
static INLINE CONST vect_t unpackhi (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.20 unpacklohi()**

```
static INLINE void unpacklohi (  
    vect_t & lo,  
    vect_t & hi,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.21 pack\_even()**

```
static INLINE CONST vect_t pack_even (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.22 pack\_odd()**

```
static INLINE CONST vect_t pack_odd (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.23 pack()**

```
static INLINE void pack (  
    vect_t & even,  
    vect_t & odd,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.24 transpose()**

```
static INLINE void transpose (  
    vect_t & r0,  
    vect_t & r1,  
    vect_t & r2,  
    vect_t & r3,  
    vect_t & r4,  
    vect_t & r5,  
    vect_t & r6,  
    vect_t & r7,  
    vect_t & r8,  
    vect_t & r9,  
    vect_t & r10,
```



```
vect_t & r11,  
vect_t & r12,  
vect_t & r13,  
vect_t & r14,  
vect_t & r15) [inline], [static]
```

#### 12.290.2.25 blend() [1/2]

```
template<uint16_t s, typename std::enable_if<(s &0x00ff)==(s > > 8)>::type * = nullptr>  
static INLINE vect_t blend (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.290.2.26 blend() [2/2]

```
template<uint16_t s, typename std::enable_if<(s &0x00ff) !=(s > > 8)>::type * = nullptr>  
static INLINE vect_t blend (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.290.2.27 add()

```
static INLINE CONST vect_t add (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.290.2.28 addin()

```
static INLINE vect_t addin (  
    vect_t & a,  
    const vect_t b) [inline], [static]
```

#### 12.290.2.29 sub()

```
static INLINE CONST vect_t sub (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.290.2.30 subin()

```
static INLINE vect_t subin (  
    vect_t & a,  
    const vect_t b) [inline], [static]
```

#### 12.290.2.31 mullo()

```
static INLINE CONST vect_t mullo (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.290.2.32 mul()

```
static INLINE CONST vect_t mul (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.33 mulhi()**

```
static INLINE CONST vect_t mulhi (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.34 mulx()**

```
static INLINE CONST vect_t mulx (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.290.2.35 fmadd()**

```
static INLINE CONST vect_t fmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.36 fmaddin()**

```
static INLINE vect_t fmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.37 fmaddx()**

```
static INLINE CONST vect_t fmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.38 fmaddxin()**

```
static INLINE vect_t fmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.39 fnmadd()**

```
static INLINE CONST vect_t fnmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.40 fnmaddin()**

```
static INLINE vect_t fnmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.41 fnmaddx()**

```
static INLINE CONST vect_t fnmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.42 fnmaddxin()**

```
static INLINE vect_t fnmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.43 fmsub()**

```
static INLINE CONST vect_t fmsub (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.44 fmsubin()**

```
static INLINE vect_t fmsubin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.45 fmsubx()**

```
static INLINE CONST vect_t fmsubx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.46 fmsubxin()**

```
static INLINE vect_t fmsubxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.47 eq()**

```
static INLINE CONST vect_t eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.48 greater()**

```
static INLINE CONST vect_t greater (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.49 lesser()**

```
static INLINE CONST vect_t lesser (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.50 greater\_eq()**

```
static INLINE CONST vect_t greater_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.290.2.51 lesser\_eq()**

```
static INLINE CONST vect_t lesser_eq (
    const vect_t a,
    const vect_t b)  [inline], [static]
```

**12.290.2.52 hadd\_to\_scal()**

```
static INLINE CONST scalar_t hadd_to_scal (
    const vect_t a)  [inline], [static]
```

**12.290.2.53 round()**

```
static INLINE CONST vect_t round (
    const vect_t a)  [inline], [static]
```

**12.290.2.54 mod()**

```
static INLINE vect_t mod (
    vect_t & C,
    const vect_t & P,
    const vect_t & INVP,
    const vect_t & NEGP,
    const vect_t & MIN,
    const vect_t & MAX,
    vect_t & Q,
    vect_t & T)  [inline], [static]
```

**12.290.2.55 zero()**

```
static INLINE CONST vect_t zero ()  [inline], [static], [inherited]
```

**12.290.3 Field Documentation****12.290.3.1 vect\_size**

```
const constexpr size_t vect_size = 16  [static], [constexpr]
```

**12.290.3.2 alignment**

```
const constexpr size_t alignment = 32  [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [simd256\\_int16.inl](#)

**12.291 Simd256\_impl< true, true, true, 4 > Struct Reference**

Inheritance diagram for Simd256\_impl< true, true, true, 4 >:



## Data Structures

- union [Converter](#)

## Public Types

- using [vect\\_t](#) = \_\_m256i
- using [half\\_t](#) = \_\_m128i
- using [scalar\\_t](#) = int32\_t
- using [simdHalf](#) = [Simd128](#)<[scalar\\_t](#)>
- using [aligned\\_allocator](#) = [AlignedAllocator](#)<[scalar\\_t](#), [Alignment](#)([alignment](#))>
- using [aligned\\_vector](#) = std::vector<[scalar\\_t](#), [aligned\\_allocator](#)>
- template<class [Field](#) >  
using [is\\_same\\_element](#) = std::is\_same<typename [Field](#)::[Element](#), [scalar\\_t](#)>
- using [vect\\_t](#) = \_\_m512i
- using [half\\_t](#) = \_\_m256i
- using [simdHalf](#) = [Simd256](#)<[scalar\\_t](#)>

## Public Member Functions

- template<class [Field](#) >  
using [is\\_same\\_element](#)

## Static Public Member Functions

- static const std::string [type\\_string](#) ()
- template<class T >  
static constexpr bool [valid](#) (T \*p)
- template<class T >  
static constexpr bool [compliant](#) (T n)
- static [INLINE CONST](#) [vect\\_t set1](#) (const [scalar\\_t](#) x)
- static [INLINE CONST](#) [vect\\_t set](#) (const [scalar\\_t](#) x0, const [scalar\\_t](#) x1, const [scalar\\_t](#) x2, const [scalar\\_t](#) x3, const [scalar\\_t](#) x4, const [scalar\\_t](#) x5, const [scalar\\_t](#) x6, const [scalar\\_t](#) x7)
- template<class T >  
static [INLINE PURE](#) [vect\\_t gather](#) (const [scalar\\_t](#) \*const p, const T \*const idx)
- static [INLINE PURE](#) [vect\\_t load](#) (const [scalar\\_t](#) \*const p)
- static [INLINE PURE](#) [vect\\_t loadu](#) (const [scalar\\_t](#) \*const p)
- static [INLINE](#) void [store](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE](#) void [storeu](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE](#) void [stream](#) ([scalar\\_t](#) \*p, const [vect\\_t](#) v)
- template<int s>  
static [INLINE CONST](#) [vect\\_t sll](#) (const [vect\\_t](#) a)
- template<int s>  
static [INLINE CONST](#) [vect\\_t srl](#) (const [vect\\_t](#) a)
- template<int s>  
static [INLINE CONST](#) [vect\\_t sra](#) (const [vect\\_t](#) a)
- template<uint8\_t s>  
static [INLINE CONST](#) [vect\\_t shuffle\\_twice](#) (const [vect\\_t](#) a)
- template<uint32\_t s>  
static [INLINE CONST](#) [vect\\_t shuffle](#) (const [vect\\_t](#) a)
- static [INLINE CONST](#) [vect\\_t unpacklo\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST](#) [vect\\_t unpackhi\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST](#) [vect\\_t unpacklo](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST](#) [vect\\_t unpackhi](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE](#) void [unpacklohi](#) ([vect\\_t](#) &lo, [vect\\_t](#) &hi, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST](#) [vect\\_t pack\\_even](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST](#) [vect\\_t pack\\_odd](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)

- static `INLINE` void `pack` (`vect_t` &even, `vect_t` &odd, const `vect_t` a, const `vect_t` b)
- static `INLINE` void `transpose` (`vect_t` &r0, `vect_t` &r1, `vect_t` &r2, `vect_t` &r3, `vect_t` &r4, `vect_t` &r5, `vect_t` &r6, `vect_t` &r7)
- template<uint8\_t s>
  - static `INLINE` `CONST` `vect_t` `blend` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `add` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `addin` (`vect_t` &a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `sub` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `subin` (`vect_t` &a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `mullo` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `mul` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `mulhi` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `mulx` (`vect_t` a, `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fmadd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fmaddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fmaddx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fmaddxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fnmadd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fnmaddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fnmaddx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fnmaddxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fmsub` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fmsubin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fmsubx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fmsubxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `greater` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `lesser` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `greater_eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `lesser_eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `scalar_t` `hadd_to_scal` (const `vect_t` a)
- static `INLINE` `CONST` `vect_t` `round` (const `vect_t` a)
- static `INLINE` `vect_t` `mod` (`vect_t` &C, const `vect_t` &P, const `vect_t` &INVP, const `vect_t` &NEGP, const `vect_t` &MIN, const `vect_t` &MAX, `vect_t` &Q, `vect_t` &T)
- static const std::string `type_string` ()
- template<class T >
  - static constexpr bool `valid` (T \*p)
- template<class T >
  - static constexpr bool `compliant` (T n)
- static `INLINE` `CONST` `vect_t` `set1` (const `scalar_t` x)
- static `INLINE` `CONST` `vect_t` `set` (const `scalar_t` x0, const `scalar_t` x1, const `scalar_t` x2, const `scalar_t` x3, const `scalar_t` x4, const `scalar_t` x5, const `scalar_t` x6, const `scalar_t` x7, const `scalar_t` x8, const `scalar_t` x9, const `scalar_t` x10, const `scalar_t` x11, const `scalar_t` x12, const `scalar_t` x13, const `scalar_t` x14, const `scalar_t` x15)
- template<class T >
  - static `INLINE` `PURE` `vect_t` `gather` (const `scalar_t` \*const p, const T \*const idx)
- static `INLINE` `PURE` `vect_t` `load` (const `scalar_t` \*const p)
- static `INLINE` `PURE` `vect_t` `loadu` (const `scalar_t` \*const p)
- static `INLINE` void `store` (`scalar_t` \*p, `vect_t` v)
- static `INLINE` void `storeu` (`scalar_t` \*p, `vect_t` v)
- static `INLINE` void `stream` (`scalar_t` \*p, const `vect_t` v)
- template<int s>
  - static `INLINE` `CONST` `vect_t` `sll` (const `vect_t` a)
- template<int s>
  - static `INLINE` `CONST` `vect_t` `srl` (const `vect_t` a)

- `template<int s>`  
`static INLINE CONST vect_t sra (const vect_t a)`
- `template<uint8_t s>`  
`static INLINE CONST vect_t shuffle_twice (const vect_t a)`
- `template<uint64_t s>`  
`static INLINE CONST vect_t shuffle (const vect_t a)`
- `static INLINE CONST vect_t unpacklo_intrinsic (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t unpackhi_intrinsic (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t unpacklo (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t unpackhi (const vect_t a, const vect_t b)`
- `static INLINE void unpacklohi (vect_t &lo, vect_t &hi, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t pack_even (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t pack_odd (const vect_t a, const vect_t b)`
- `static INLINE void pack (vect_t &even, vect_t &odd, const vect_t a, const vect_t b)`
- `static INLINE void transpose (vect_t &r0, vect_t &r1, vect_t &r2, vect_t &r3, vect_t &r4, vect_t &r5, vect_t &r6, vect_t &r7, vect_t &r8, vect_t &r9, vect_t &r10, vect_t &r11, vect_t &r12, vect_t &r13, vect_t &r14, vect_t &r15)`
- `template<uint16_t s>`  
`static INLINE CONST vect_t blend (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t add (const vect_t a, const vect_t b)`
- `static INLINE vect_t addin (vect_t &a, const vect_t b)`
- `static INLINE CONST vect_t sub (const vect_t a, const vect_t b)`
- `static INLINE vect_t subin (vect_t &a, const vect_t b)`
- `static INLINE CONST vect_t mullo (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t mul (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t mulhi (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t mulx (vect_t a, vect_t b)`
- `static INLINE CONST vect_t fmadd (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fmadddin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fmadddx (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fmadddxin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fnmadd (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fnmaddin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fnmaddx (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fnmaddxin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fmsub (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fmsubin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fmsubx (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fmsubxin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t eq (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t greater (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t lesser (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t greater_eq (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t lesser_eq (const vect_t a, const vect_t b)`
- `static INLINE CONST scalar_t hadd_to_scal (const vect_t a)`
- `static INLINE CONST vect_t round (const vect_t a)`
- `static INLINE vect_t mod (vect_t &C, const vect_t &P, const vect_t &INVP, const vect_t &NEGP, const vect_t &MIN, const vect_t &MAX, vect_t &Q, vect_t &T)`
- `static INLINE CONST vect_t zero ()`
- `static INLINE CONST vect_t zero ()`
- `static INLINE CONST vect_t vor (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t vxor (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t vand (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t vandnot (const vect_t a, const vect_t b)`

### Static Public Attributes

- static const constexpr size\_t `vect_size` = 8
- static const constexpr size\_t `alignment` = 32

## 12.291.1 Member Typedef Documentation

### 12.291.1.1 `vect_t` [1/2]

```
using vect_t = __m256i
```

### 12.291.1.2 `half_t` [1/2]

```
using half_t = __m128i
```

### 12.291.1.3 `scalar_t`

```
typedef int32_t scalar_t = int32_t
```

### 12.291.1.4 `simdHalf` [1/2]

```
using simdHalf = Simd128<scalar_t>
```

### 12.291.1.5 `aligned_allocator`

```
typedef AlignedAllocator< scalar_t, Alignment(alignment)> aligned_allocator = AlignedAllocator<scalar_t,
Alignment(alignment)>
```

### 12.291.1.6 `aligned_vector`

```
typedef std::vector< scalar_t, aligned_allocator > aligned_vector = std::vector<scalar_t,
aligned_allocator>
```

### 12.291.1.7 `is_same_element`

```
template<class Field >
using is_same_element = std::is_same<typename Field::Element, scalar_t>
```

### 12.291.1.8 `vect_t` [2/2]

```
using vect_t = __m512i
```

### 12.291.1.9 `half_t` [2/2]

```
using half_t = __m256i
```

### 12.291.1.10 `simdHalf` [2/2]

```
using simdHalf = Simd256<scalar_t>
```

## 12.291.2 Member Function Documentation

### 12.291.2.1 `type_string()` [1/2]

```
static const std::string type_string () [inline], [static]
```

### 12.291.2.2 `valid()` [1/2]

```
template<class T >
static constexpr bool valid (
    T * p) [inline], [static], [constexpr]
```



**12.291.2.3 compliant()** [1/2]

```
template<class T >
static constexpr bool compliant (
    T n) [inline], [static], [constexpr]
```

**12.291.2.4 set1()** [1/2]

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static]
```

**12.291.2.5 set()** [1/2]

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3,
    const scalar_t x4,
    const scalar_t x5,
    const scalar_t x6,
    const scalar_t x7) [inline], [static]
```

**12.291.2.6 gather()** [1/2]

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static]
```

**12.291.2.7 load()** [1/2]

```
static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static]
```

**12.291.2.8 loadu()** [1/2]

```
static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static]
```

**12.291.2.9 store()** [1/2]

```
static INLINE void store (
    scalar_t * p,
    vect_t v) [inline], [static]
```

**12.291.2.10 storeu()** [1/2]

```
static INLINE void storeu (
    scalar_t * p,
    vect_t v) [inline], [static]
```

**12.291.2.11 stream()** [1/2]

```
static INLINE void stream (
    scalar_t * p,
    const vect_t v) [inline], [static]
```

**12.291.2.12 sll()** [1/2]

```
template<int s>
static INLINE CONST vect_t sll (
    const vect_t a) [inline], [static]
```

**12.291.2.13 srl()** [1/2]

```
template<int s>
static INLINE CONST vect_t srl (
    const vect_t a) [inline], [static]
```

**12.291.2.14 sra()** [1/2]

```
template<int s>
static INLINE CONST vect_t sra (
    const vect_t a) [inline], [static]
```

**12.291.2.15 shuffle\_twice()** [1/2]

```
template<uint8_t s>
static INLINE CONST vect_t shuffle_twice (
    const vect_t a) [inline], [static]
```

**12.291.2.16 shuffle()** [1/2]

```
template<uint32_t s>
static INLINE CONST vect_t shuffle (
    const vect_t a) [inline], [static]
```

**12.291.2.17 unpacklo\_intrinsic()** [1/2]

```
static INLINE CONST vect_t unpacklo_intrinsic (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.291.2.18 unpackhi\_intrinsic()** [1/2]

```
static INLINE CONST vect_t unpackhi_intrinsic (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.291.2.19 unpacklo()** [1/2]

```
static INLINE CONST vect_t unpacklo (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.291.2.20 unpackhi()** [1/2]

```
static INLINE CONST vect_t unpackhi (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.291.2.21 unpacklohi()** [1/2]

```
static INLINE void unpacklohi (
    vect_t & lo,
    vect_t & hi,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.291.2.22 pack\_even()** [1/2]

```
static INLINE CONST vect_t pack_even (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.23 pack\_odd()** [1/2]

```
static INLINE CONST vect_t pack_odd (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.24 pack()** [1/2]

```
static INLINE void pack (  
    vect_t & even,  
    vect_t & odd,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.25 transpose()** [1/2]

```
static INLINE void transpose (  
    vect_t & r0,  
    vect_t & r1,  
    vect_t & r2,  
    vect_t & r3,  
    vect_t & r4,  
    vect_t & r5,  
    vect_t & r6,  
    vect_t & r7) [inline], [static]
```

**12.291.2.26 blend()** [1/2]

```
template<uint8_t s>  
static INLINE CONST vect_t blend (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.27 add()** [1/2]

```
static INLINE CONST vect_t add (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.28 addin()** [1/2]

```
static INLINE vect_t addin (  
    vect_t & a,  
    const vect_t b) [inline], [static]
```

**12.291.2.29 sub()** [1/2]

```
static INLINE CONST vect_t sub (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.30 subin()** [1/2]

```
static INLINE vect_t subin (  
    vect_t & a,  
    const vect_t b) [inline], [static]
```

**12.291.2.31 mullo()** [1/2]

```
static INLINE CONST vect_t mullo (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.32 mul()** [1/2]

```
static INLINE CONST vect_t mul (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.33 mulhi()** [1/2]

```
static INLINE CONST vect_t mulhi (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.34 mulx()** [1/2]

```
static INLINE CONST vect_t mulx (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.291.2.35 fmadd()** [1/2]

```
static INLINE CONST vect_t fmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.36 fmaddin()** [1/2]

```
static INLINE vect_t fmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.37 fmaddx()** [1/2]

```
static INLINE CONST vect_t fmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.38 fmaddxin()** [1/2]

```
static INLINE vect_t fmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.39 fnmadd()** [1/2]

```
static INLINE CONST vect_t fnmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.40 fnmaddin()** [1/2]

```
static INLINE vect_t fnmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.41 fnmaddx()** [1/2]

```
static INLINE CONST vect_t fnmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.42 fnmaddxin()** [1/2]

```
static INLINE vect_t fnmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.43 fmsub()** [1/2]

```
static INLINE CONST vect_t fmsub (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.44 fmsubin()** [1/2]

```
static INLINE vect_t fmsubin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.45 fmsubx()** [1/2]

```
static INLINE CONST vect_t fmsubx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.46 fmsubxin()** [1/2]

```
static INLINE vect_t fmsubxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.47 eq()** [1/2]

```
static INLINE CONST vect_t eq (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.291.2.48 greater()** [1/2]

```
static INLINE CONST vect_t greater (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.291.2.49 lesser()** [1/2]

```
static INLINE CONST vect_t lesser (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.291.2.50 greater\_eq()** [1/2]

```
static INLINE CONST vect_t greater_eq (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.291.2.51 lesser\_eq()** [1/2]

```
static INLINE CONST vect_t lesser_eq (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.291.2.52 hadd\_to\_scal()** [1/2]

```
static INLINE CONST scalar_t hadd_to_scal (
    const vect_t a) [inline], [static]
```

**12.291.2.53 round()** [1/2]

```
static INLINE CONST vect_t round (
    const vect_t a) [inline], [static]
```

**12.291.2.54 mod()** [1/2]

```
static INLINE vect_t mod (
    vect_t & C,
    const vect_t & P,
    const vect_t & INVP,
    const vect_t & NEGP,
    const vect_t & MIN,
    const vect_t & MAX,
    vect_t & Q,
    vect_t & T) [inline], [static]
```

**12.291.2.55 type\_string()** [2/2]

```
static const std::string type_string () [inline], [static]
```

**12.291.2.56 valid()** [2/2]

```
template<class T >
static constexpr bool valid (
    T * p) [inline], [static], [constexpr]
```

**12.291.2.57 compliant()** [2/2]

```
template<class T >
static constexpr bool compliant (
    T n) [inline], [static], [constexpr]
```

**12.291.2.58 set1()** [2/2]

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static]
```

**12.291.2.59 set()** [2/2]

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3,
    const scalar_t x4,
    const scalar_t x5,
    const scalar_t x6,
    const scalar_t x7,
    const scalar_t x8,
    const scalar_t x9,
    const scalar_t x10,
    const scalar_t x11,
    const scalar_t x12,
    const scalar_t x13,
    const scalar_t x14,
    const scalar_t x15) [inline], [static]
```

**12.291.2.60 gather()** [2/2]

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static]
```

**12.291.2.61 load()** [2/2]

```
static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static]
```

**12.291.2.62 loadu()** [2/2]

```
static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static]
```

**12.291.2.63 store()** [2/2]

```
static INLINE void store (
    scalar_t * p,
    vect_t v) [inline], [static]
```

**12.291.2.64 storeu()** [2/2]

```
static INLINE void storeu (
    scalar_t * p,
    vect_t v) [inline], [static]
```

**12.291.2.65 stream() [2/2]**

```
static INLINE void stream (  
    scalar_t * p,  
    const vect_t v) [inline], [static]
```

**12.291.2.66 sll() [2/2]**

```
template<int s>  
static INLINE CONST vect_t sll (  
    const vect_t a) [inline], [static]
```

**12.291.2.67 srl() [2/2]**

```
template<int s>  
static INLINE CONST vect_t srl (  
    const vect_t a) [inline], [static]
```

**12.291.2.68 sra() [2/2]**

```
template<int s>  
static INLINE CONST vect_t sra (  
    const vect_t a) [inline], [static]
```

**12.291.2.69 shuffle\_twice() [2/2]**

```
template<uint8_t s>  
static INLINE CONST vect_t shuffle_twice (  
    const vect_t a) [inline], [static]
```

**12.291.2.70 shuffle() [2/2]**

```
template<uint64_t s>  
static INLINE CONST vect_t shuffle (  
    const vect_t a) [inline], [static]
```

**12.291.2.71 unpacklo\_intrinsic() [2/2]**

```
static INLINE CONST vect_t unpacklo_intrinsic (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.72 unpackhi\_intrinsic() [2/2]**

```
static INLINE CONST vect_t unpackhi_intrinsic (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.73 unpacklo() [2/2]**

```
static INLINE CONST vect_t unpacklo (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.74 unpackhi() [2/2]**

```
static INLINE CONST vect_t unpackhi (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```



**12.291.2.75 unpacklohi() [2/2]**

```
static INLINE void unpacklohi (  
    vect_t & lo,  
    vect_t & hi,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.76 pack\_even() [2/2]**

```
static INLINE CONST vect_t pack_even (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.77 pack\_odd() [2/2]**

```
static INLINE CONST vect_t pack_odd (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.78 pack() [2/2]**

```
static INLINE void pack (  
    vect_t & even,  
    vect_t & odd,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.79 transpose() [2/2]**

```
static INLINE void transpose (  
    vect_t & r0,  
    vect_t & r1,  
    vect_t & r2,  
    vect_t & r3,  
    vect_t & r4,  
    vect_t & r5,  
    vect_t & r6,  
    vect_t & r7,  
    vect_t & r8,  
    vect_t & r9,  
    vect_t & r10,  
    vect_t & r11,  
    vect_t & r12,  
    vect_t & r13,  
    vect_t & r14,  
    vect_t & r15) [inline], [static]
```

**12.291.2.80 blend() [2/2]**

```
template<uint16_t s>  
static INLINE CONST vect_t blend (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.81 add() [2/2]**

```
static INLINE CONST vect_t add (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.82 addin()** [2/2]

```
static INLINE vect_t addin (  
    vect_t & a,  
    const vect_t b) [inline], [static]
```

**12.291.2.83 sub()** [2/2]

```
static INLINE CONST vect_t sub (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.84 subin()** [2/2]

```
static INLINE vect_t subin (  
    vect_t & a,  
    const vect_t b) [inline], [static]
```

**12.291.2.85 mullo()** [2/2]

```
static INLINE CONST vect_t mullo (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.86 mul()** [2/2]

```
static INLINE CONST vect_t mul (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.87 mulhi()** [2/2]

```
static INLINE CONST vect_t mulhi (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.88 mulx()** [2/2]

```
static INLINE CONST vect_t mulx (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.291.2.89 fmadd()** [2/2]

```
static INLINE CONST vect_t fmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.90 fmaddin()** [2/2]

```
static INLINE vect_t fmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.91 fmaddx()** [2/2]

```
static INLINE CONST vect_t fmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.92 fmaddxin()** [2/2]

```
static INLINE vect_t fmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.93 fnmadd()** [2/2]

```
static INLINE CONST vect_t fnmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.94 fnmaddin()** [2/2]

```
static INLINE vect_t fnmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.95 fnmaddx()** [2/2]

```
static INLINE CONST vect_t fnmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.96 fnmaddxin()** [2/2]

```
static INLINE vect_t fnmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.97 fmsub()** [2/2]

```
static INLINE CONST vect_t fmsub (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.98 fmsubin()** [2/2]

```
static INLINE vect_t fmsubin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.291.2.99 fmsubx()** [2/2]

```
static INLINE CONST vect_t fmsubx (  
    const vect_t c,
```

```
const vect_t a,
const vect_t b) [inline], [static]
```

#### 12.291.2.100 fmsubxin() [2/2]

```
static INLINE vect_t fmsubxin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

#### 12.291.2.101 eq() [2/2]

```
static INLINE CONST vect_t eq (
    const vect_t a,
    const vect_t b) [inline], [static]
```

#### 12.291.2.102 greater() [2/2]

```
static INLINE CONST vect_t greater (
    const vect_t a,
    const vect_t b) [inline], [static]
```

#### 12.291.2.103 lesser() [2/2]

```
static INLINE CONST vect_t lesser (
    const vect_t a,
    const vect_t b) [inline], [static]
```

#### 12.291.2.104 greater\_eq() [2/2]

```
static INLINE CONST vect_t greater_eq (
    const vect_t a,
    const vect_t b) [inline], [static]
```

#### 12.291.2.105 lesser\_eq() [2/2]

```
static INLINE CONST vect_t lesser_eq (
    const vect_t a,
    const vect_t b) [inline], [static]
```

#### 12.291.2.106 hadd\_to\_scal() [2/2]

```
static INLINE CONST scalar_t hadd_to_scal (
    const vect_t a) [inline], [static]
```

#### 12.291.2.107 round() [2/2]

```
static INLINE CONST vect_t round (
    const vect_t a) [inline], [static]
```

#### 12.291.2.108 mod() [2/2]

```
static INLINE vect_t mod (
    vect_t & C,
    const vect_t & P,
    const vect_t & INVP,
    const vect_t & NEGP,
    const vect_t & MIN,
    const vect_t & MAX,
```

```

    vect_t & Q,
    vect_t & T) [inline], [static]

```

#### 12.291.2.109 is\_same\_element()

```

template<class Field >
typedef std::is_same<typename Field::Element, scalar_t> is_same_element

```

#### 12.291.2.110 zero() [1/2]

```

static INLINE CONST vect_t zero () [inline], [static], [inherited]

```

#### 12.291.2.111 zero() [2/2]

```

static INLINE CONST vect_t zero () [inline], [static], [inherited]

```

#### 12.291.2.112 vor()

```

static INLINE CONST vect_t vor (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]

```

#### 12.291.2.113 vxor()

```

static INLINE CONST vect_t vxor (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]

```

#### 12.291.2.114 vand()

```

static INLINE CONST vect_t vand (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]

```

#### 12.291.2.115 vandnot()

```

static INLINE CONST vect_t vandnot (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]

```

### 12.291.3 Field Documentation

#### 12.291.3.1 vect\_size

```

static const constexpr size_t vect_size = 8 [static], [constexpr]

```

#### 12.291.3.2 alignment

```

static const constexpr size_t alignment = 32 [static], [constexpr]

```

The documentation for this struct was generated from the following files:

- [simd256\\_int32.inl](#)
- [simd512\\_int32.inl](#)

## 12.292 Simd256\_impl< true, true, true, 8 > Struct Reference

Inheritance diagram for Simd256\_impl< true, true, true, 8 >:



## Data Structures

- union [Converter](#)

## Public Types

- using [vect\\_t](#) = \_\_m256i
- using [half\\_t](#) = \_\_m128i
- using [scalar\\_t](#) = int64\_t
- using [simdHalf](#) = [Simd128](#)<[scalar\\_t](#)>
- using [aligned\\_allocator](#) = [AlignedAllocator](#)<[scalar\\_t](#), [Alignment](#)([alignment](#))>
- using [aligned\\_vector](#) = std::vector<[scalar\\_t](#), [aligned\\_allocator](#)>
- template<class [Field](#) >  
using [is\\_same\\_element](#) = std::is\_same<typename [Field::Element](#), [scalar\\_t](#)>

## Static Public Member Functions

- static const std::string [type\\_string](#) ()
- template<class T >  
static constexpr bool [valid](#) (T \*p)
- template<class T >  
static constexpr bool [compliant](#) (T n)
- static [INLINE CONST vect\\_t set1](#) (const [scalar\\_t](#) x)
- static [INLINE CONST vect\\_t set](#) (const [scalar\\_t](#) x0, const [scalar\\_t](#) x1, const [scalar\\_t](#) x2, const [scalar\\_t](#) x3)
- template<class T >  
static [INLINE PURE vect\\_t gather](#) (const [scalar\\_t](#) \*const p, const T \*const idx)
- template<int idx>  
static [INLINE CONST scalar\\_t get](#) ([vect\\_t](#) v)
- static [INLINE PURE vect\\_t load](#) (const [scalar\\_t](#) \*const p)
- static [INLINE PURE vect\\_t loadu](#) (const [scalar\\_t](#) \*const p)
- static [INLINE void store](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE void storeu](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE void stream](#) ([scalar\\_t](#) \*p, const [vect\\_t](#) v)
- template<int s>  
static [INLINE CONST vect\\_t sll](#) (const [vect\\_t](#) a)
- template<int s>  
static [INLINE CONST vect\\_t srl](#) (const [vect\\_t](#) a)
- template<int s>  
static [INLINE CONST vect\\_t sra](#) (const [vect\\_t](#) a)
- template<uint8\_t s>  
static [INLINE CONST vect\\_t shuffle](#) (const [vect\\_t](#) a)
- static [INLINE CONST vect\\_t unpacklo\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpackhi\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpacklo](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpackhi](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE void unpacklohi](#) ([vect\\_t](#) &lo, [vect\\_t](#) &hi, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t pack\\_even](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t pack\\_odd](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)

- static `INLINE` void `pack` (`vect_t` &even, `vect_t` &odd, const `vect_t` a, const `vect_t` b)
- static `INLINE` void `transpose` (`vect_t` &r0, `vect_t` &r1, `vect_t` &r2, `vect_t` &r3)
- template<uint8\_t s>
  - static `INLINE` `CONST` `vect_t` `blend` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `add` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `addin` (`vect_t` &a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `sub` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `subin` (`vect_t` &a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `mullo` (`vect_t` a, `vect_t` b)
- static `INLINE` `CONST` `vect_t` `mul` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `mulhi` (`vect_t` a, `vect_t` b)
- static `INLINE` `CONST` `vect_t` `mulx` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fmadd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fmaddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fmaddx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fmaddxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fnmadd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fnmaddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fnmaddx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fnmaddxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fmsub` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fmsubin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `fmsubx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `vect_t` `fmsubxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `greater` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `lesser` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `greater_eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` `lesser_eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `scalar_t` `hadd_to_scal` (const `vect_t` a)
- static `INLINE` `CONST` `vect_t` `round` (const `vect_t` a)
- static `INLINE` `CONST` `vect_t` `mask_high` ()
- static `INLINE` `CONST` `vect_t` `mulhi_fast` (`vect_t` x, `vect_t` y)
- static `INLINE` `vect_t` `mod` (`vect_t` &C, const \_\_m256d &P, const \_\_m256d &INVP, const \_\_m256d &NEGP, const `vect_t` &POW50REM, const \_\_m256d &MIN, const \_\_m256d &MAX, \_\_m256d &Q, \_\_m256d &T)
- static `INLINE` `CONST` `vect_t` `zero` ()

### Static Public Attributes

- static const constexpr size\_t `vect_size` = 4
- static const constexpr size\_t `alignment` = 32

### Static Protected Member Functions

- static `INLINE` `CONST` `vect_t` `signbits` (const `vect_t` x)

## 12.292.1 Member Typedef Documentation

### 12.292.1.1 `vect_t`

using `vect_t` = \_\_m256i

### 12.292.1.2 `half_t`

using `half_t` = \_\_m128i

**12.292.1.3 scalar\_t**

```
using scalar_t = int64_t
```

**12.292.1.4 simdHalf**

```
using simdHalf = Simd128<scalar_t>
```

**12.292.1.5 aligned\_allocator**

```
using aligned_allocator = AlignedAllocator<scalar_t, Alignment(alignment)>
```

**12.292.1.6 aligned\_vector**

```
using aligned_vector = std::vector<scalar_t, aligned_allocator>
```

**12.292.1.7 is\_same\_element**

```
template<class Field >
using is_same_element = std::is_same<typename Field::Element, scalar_t>
```

**12.292.2 Member Function Documentation****12.292.2.1 type\_string()**

```
static const std::string type_string () [inline], [static]
```

**12.292.2.2 valid()**

```
template<class T >
static constexpr bool valid (
    T * p) [inline], [static], [constexpr]
```

**12.292.2.3 compliant()**

```
template<class T >
static constexpr bool compliant (
    T n) [inline], [static], [constexpr]
```

**12.292.2.4 set1()**

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static]
```

**12.292.2.5 set()**

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3) [inline], [static]
```

**12.292.2.6 gather()**

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static]
```



**12.292.2.7 get()**

```
template<int idx>
static INLINE CONST scalar_t get (
    vect_t v) [inline], [static]
```

**12.292.2.8 load()**

```
static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static]
```

**12.292.2.9 loadu()**

```
static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static]
```

**12.292.2.10 store()**

```
static INLINE void store (
    scalar_t * p,
    vect_t v) [inline], [static]
```

**12.292.2.11 storeu()**

```
static INLINE void storeu (
    scalar_t * p,
    vect_t v) [inline], [static]
```

**12.292.2.12 stream()**

```
static INLINE void stream (
    scalar_t * p,
    const vect_t v) [inline], [static]
```

**12.292.2.13 sll()**

```
template<int s>
static INLINE CONST vect_t sll (
    const vect_t a) [inline], [static]
```

**12.292.2.14 srl()**

```
template<int s>
static INLINE CONST vect_t srl (
    const vect_t a) [inline], [static]
```

**12.292.2.15 sra()**

```
template<int s>
static INLINE CONST vect_t sra (
    const vect_t a) [inline], [static]
```

**12.292.2.16 shuffle()**

```
template<uint8_t s>
static INLINE CONST vect_t shuffle (
    const vect_t a) [inline], [static]
```

**12.292.2.17 unpacklo\_intrinsic()**

```
static INLINE CONST vect_t unpacklo_intrinsic (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.292.2.18 unpackhi\_intrinsic()**

```
static INLINE CONST vect_t unpackhi_intrinsic (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.292.2.19 unpacklo()**

```
static INLINE CONST vect_t unpacklo (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.292.2.20 unpackhi()**

```
static INLINE CONST vect_t unpackhi (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.292.2.21 unpacklohi()**

```
static INLINE void unpacklohi (  
    vect_t & lo,  
    vect_t & hi,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.292.2.22 pack\_even()**

```
static INLINE CONST vect_t pack_even (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.292.2.23 pack\_odd()**

```
static INLINE CONST vect_t pack_odd (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.292.2.24 pack()**

```
static INLINE void pack (  
    vect_t & even,  
    vect_t & odd,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.292.2.25 transpose()**

```
static INLINE void transpose (  
    vect_t & r0,  
    vect_t & r1,  
    vect_t & r2,  
    vect_t & r3) [inline], [static]
```

**12.292.2.26 blend()**

```
template<uint8_t s>
static INLINE CONST vect_t blend (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.292.2.27 add()**

```
static INLINE CONST vect_t add (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.292.2.28 addin()**

```
static INLINE vect_t addin (
    vect_t & a,
    const vect_t b) [inline], [static]
```

**12.292.2.29 sub()**

```
static INLINE CONST vect_t sub (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.292.2.30 subin()**

```
static INLINE vect_t subin (
    vect_t & a,
    const vect_t b) [inline], [static]
```

**12.292.2.31 mullo()**

```
static INLINE CONST vect_t mullo (
    vect_t a,
    vect_t b) [inline], [static]
```

**12.292.2.32 mul()**

```
static INLINE CONST vect_t mul (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.292.2.33 mulhi()**

```
static INLINE CONST vect_t mulhi (
    vect_t a,
    vect_t b) [inline], [static]
```

**12.292.2.34 mulx()**

```
static INLINE CONST vect_t mulx (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.292.2.35 fmadd()**

```
static INLINE CONST vect_t fmadd (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.292.2.36 fmaddin()**

```
static INLINE vect_t fmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.292.2.37 fmaddx()**

```
static INLINE CONST vect_t fmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.292.2.38 fmaddxin()**

```
static INLINE vect_t fmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.292.2.39 fnmadd()**

```
static INLINE CONST vect_t fnmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.292.2.40 fnmaddin()**

```
static INLINE vect_t fnmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.292.2.41 fnmaddx()**

```
static INLINE CONST vect_t fnmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.292.2.42 fnmaddxin()**

```
static INLINE vect_t fnmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.292.2.43 fmsub()**

```
static INLINE CONST vect_t fmsub (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.292.2.44 fmsubin()**

```
static INLINE vect_t fmsubin (  
    vect_t & c,
```

```
const vect_t a,  
const vect_t b) [inline], [static]
```

#### 12.292.2.45 fmsubx()

```
static INLINE CONST vect_t fmsubx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.292.2.46 fmsubxin()

```
static INLINE vect_t fmsubxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.292.2.47 eq()

```
static INLINE CONST vect_t eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.292.2.48 greater()

```
static INLINE CONST vect_t greater (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.292.2.49 lesser()

```
static INLINE CONST vect_t lesser (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.292.2.50 greater\_eq()

```
static INLINE CONST vect_t greater_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.292.2.51 lesser\_eq()

```
static INLINE CONST vect_t lesser_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.292.2.52 hadd\_to\_scal()

```
static INLINE CONST scalar_t hadd_to_scal (  
    const vect_t a) [inline], [static]
```

#### 12.292.2.53 round()

```
static INLINE CONST vect_t round (  
    const vect_t a) [inline], [static]
```

#### 12.292.2.54 mask\_high()

```
static INLINE CONST vect_t mask_high () [inline], [static]
```

**12.292.2.55 mulhi\_fast()**

```

INLINE CONST vect_t mulhi_fast (
    vect_t x,
    vect_t y) [static]

```

**12.292.2.56 mod()**

```

INLINE vect_t mod (
    vect_t & C,
    const __m256d & P,
    const __m256d & INVP,
    const __m256d & NEGP,
    const vect_t & POW50REM,
    const __m256d & MIN,
    const __m256d & MAX,
    __m256d & Q,
    __m256d & T) [static]

```

**12.292.2.57 signbits()**

```

static INLINE CONST vect_t signbits (
    const vect_t x) [inline], [static], [protected]

```

**12.292.2.58 zero()**

```

static INLINE CONST vect_t zero () [inline], [static], [inherited]

```

**12.292.3 Field Documentation****12.292.3.1 vect\_size**

```

const constexpr size_t vect_size = 4 [static], [constexpr]

```

**12.292.3.2 alignment**

```

const constexpr size_t alignment = 32 [static], [constexpr]

```

The documentation for this struct was generated from the following file:

- [simd256\\_int64.inl](#)

**12.293 Simd256fp\_base Struct Reference**

Inheritance diagram for Simd256fp\_base:



The documentation for this struct was generated from the following file:

- [simd256.inl](#)

## 12.294 Simd256i\_base Struct Reference

Inheritance diagram for Simd256i\_base:



### Public Types

- using [vect\\_t](#) = \_\_m256i

### Static Public Member Functions

- static [INLINE CONST vect\\_t zero](#) ()

### 12.294.1 Member Typedef Documentation

#### 12.294.1.1 vect\_t

using [vect\\_t](#) = \_\_m256i

### 12.294.2 Member Function Documentation

#### 12.294.2.1 zero()

static [INLINE CONST vect\\_t zero](#) () [inline], [static]

The documentation for this struct was generated from the following file:

- [simd256.inl](#)

## 12.295 Simd512\_impl< ArithType, Int, Signed, Size > Struct Template Reference

The documentation for this struct was generated from the following file:

- [simd512.inl](#)

## 12.296 Simd512\_impl< true, false, true, 4 > Struct Reference

The documentation for this struct was generated from the following file:

- [simd512\\_float.inl](#)

## 12.297 Simd512\_impl< true, false, true, 8 > Struct Reference

### Public Types

- using [vect\\_t](#) = \_\_m512d
- using [scalar\\_t](#) = double
- using [aligned\\_allocator](#) = AlignedAllocator<[scalar\\_t](#), Alignment([alignment](#))>
- using [aligned\\_vector](#) = std::vector<[scalar\\_t](#), [aligned\\_allocator](#)>
- template<class [Field](#) >
  - using [is\\_same\\_element](#) = std::is\_same<typename [Field::Element](#), [scalar\\_t](#)>

## Static Public Member Functions

- static const std::string [type\\_string](#) ()
- template<class T >  
static constexpr bool [valid](#) (T \*p)
- template<class T >  
static constexpr bool [compliant](#) (T n)
- static [INLINE CONST vect\\_t zero](#) ()
- static [INLINE CONST vect\\_t set1](#) (const [scalar\\_t](#) x)
- static [INLINE CONST vect\\_t set](#) (const [scalar\\_t](#) x1, const [scalar\\_t](#) x2, const [scalar\\_t](#) x3, const [scalar\\_t](#) x4, const [scalar\\_t](#) x5, const [scalar\\_t](#) x6, const [scalar\\_t](#) x7, const [scalar\\_t](#) x8)
- template<class T >  
static [INLINE PURE vect\\_t gather](#) (const [scalar\\_t](#) \*const p, const T \*const idx)
- static [INLINE PURE vect\\_t load](#) (const [scalar\\_t](#) \*const p)
- static [INLINE PURE vect\\_t loadu](#) (const [scalar\\_t](#) \*const p)
- static [INLINE void store](#) (const [scalar\\_t](#) \*p, const [vect\\_t](#) v)
- static [INLINE void storeu](#) (const [scalar\\_t](#) \*p, const [vect\\_t](#) v)
- static [INLINE void stream](#) (const [scalar\\_t](#) \*p, const [vect\\_t](#) v)
- template<uint8\_t s>  
static [INLINE CONST vect\\_t shuffle](#) (const [vect\\_t](#) a)
- static [INLINE CONST vect\\_t unpacklo\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpackhi\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpacklo](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpackhi](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE void unpacklohi](#) ([vect\\_t](#) &lo, [vect\\_t](#) &hi, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t pack\\_even](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t pack\\_odd](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE void pack](#) ([vect\\_t](#) &even, [vect\\_t](#) &odd, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE void transpose](#) ([vect\\_t](#) &r0, [vect\\_t](#) &r1, [vect\\_t](#) &r2, [vect\\_t](#) &r3, [vect\\_t](#) &r4, [vect\\_t](#) &r5, [vect\\_t](#) &r6, [vect\\_t](#) &r7)
- template<uint8\_t s>  
static [INLINE CONST vect\\_t blend](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t blendv](#) (const [vect\\_t](#) a, const [vect\\_t](#) b, const [vect\\_t](#) mask)
- static [INLINE CONST vect\\_t add](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE vect\\_t addin](#) ([vect\\_t](#) &a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t sub](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t subin](#) ([vect\\_t](#) &a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t mul](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t mulin](#) ([vect\\_t](#) &a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t div](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t fmad](#) (const [vect\\_t](#) c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t fmadin](#) ([vect\\_t](#) &c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t fnmad](#) (const [vect\\_t](#) c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t fnmadin](#) ([vect\\_t](#) &c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t fmsub](#) (const [vect\\_t](#) c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t fmsubin](#) ([vect\\_t](#) &c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t eq](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t lesser](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t lesser\\_eq](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t greater](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t greater\\_eq](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t floor](#) (const [vect\\_t](#) a)
- static [INLINE CONST vect\\_t ceil](#) (const [vect\\_t](#) a)
- static [INLINE CONST vect\\_t round](#) (const [vect\\_t](#) a)
- static [INLINE CONST vect\\_t hadd](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST scalar\\_t hadd\\_to\\_scal](#) (const [vect\\_t](#) a)



**Static Public Attributes**

- static const constexpr size\_t `vect_size` = 8
- static const constexpr size\_t `alignment` = 64

**12.297.1 Member Typedef Documentation****12.297.1.1 vect\_t**

```
using vect_t = __m512d
```

**12.297.1.2 scalar\_t**

```
using scalar_t = double
```

**12.297.1.3 aligned\_allocator**

```
using aligned_allocator = AlignedAllocator<scalar_t, Alignment(alignment)>
```

**12.297.1.4 aligned\_vector**

```
using aligned_vector = std::vector<scalar_t, aligned_allocator>
```

**12.297.1.5 is\_same\_element**

```
template<class Field >
using is_same_element = std::is_same<typename Field::Element, scalar_t>
```

**12.297.2 Member Function Documentation****12.297.2.1 type\_string()**

```
static const std::string type_string () [inline], [static]
```

**12.297.2.2 valid()**

```
template<class T >
static constexpr bool valid (
    T * p) [inline], [static], [constexpr]
```

**12.297.2.3 compliant()**

```
template<class T >
static constexpr bool compliant (
    T n) [inline], [static], [constexpr]
```

**12.297.2.4 zero()**

```
static INLINE CONST vect_t zero () [inline], [static]
```

**12.297.2.5 set1()**

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static]
```

**12.297.2.6 set()**

```
static INLINE CONST vect_t set (
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3,
    const scalar_t x4,
    const scalar_t x5,
    const scalar_t x6,
    const scalar_t x7,
    const scalar_t x8) [inline], [static]
```

**12.297.2.7 gather()**

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static]
```

**12.297.2.8 load()**

```
static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static]
```

**12.297.2.9 loadu()**

```
static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static]
```

**12.297.2.10 store()**

```
static INLINE void store (
    const scalar_t * p,
    const vect_t v) [inline], [static]
```

**12.297.2.11 storeu()**

```
static INLINE void storeu (
    const scalar_t * p,
    const vect_t v) [inline], [static]
```

**12.297.2.12 stream()**

```
static INLINE void stream (
    const scalar_t * p,
    const vect_t v) [inline], [static]
```

**12.297.2.13 shuffle()**

```
template<uint8_t s>
static INLINE CONST vect_t shuffle (
    const vect_t a) [inline], [static]
```

**12.297.2.14 unpacklo\_intrinsic()**

```
static INLINE CONST vect_t unpacklo_intrinsic (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.297.2.15 unpackhi\_intrinsic()**

```
static INLINE CONST vect_t unpackhi_intrinsic (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.297.2.16 unpacklo()**

```
static INLINE CONST vect_t unpacklo (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.297.2.17 unpackhi()**

```
static INLINE CONST vect_t unpackhi (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.297.2.18 unpacklohi()**

```
static INLINE void unpacklohi (  
    vect_t & lo,  
    vect_t & hi,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.297.2.19 pack\_even()**

```
static INLINE CONST vect_t pack_even (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.297.2.20 pack\_odd()**

```
static INLINE CONST vect_t pack_odd (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.297.2.21 pack()**

```
static INLINE void pack (  
    vect_t & even,  
    vect_t & odd,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.297.2.22 transpose()**

```
static INLINE void transpose (  
    vect_t & r0,  
    vect_t & r1,  
    vect_t & r2,  
    vect_t & r3,  
    vect_t & r4,  
    vect_t & r5,  
    vect_t & r6,  
    vect_t & r7) [inline], [static]
```

**12.297.2.23 blend()**

```
template<uint8_t s>
static INLINE CONST vect_t blend (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.297.2.24 blendv()**

```
static INLINE CONST vect_t blendv (
    const vect_t a,
    const vect_t b,
    const vect_t mask) [inline], [static]
```

**12.297.2.25 add()**

```
static INLINE CONST vect_t add (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.297.2.26 addin()**

```
static INLINE vect_t addin (
    vect_t & a,
    const vect_t b) [inline], [static]
```

**12.297.2.27 sub()**

```
static INLINE CONST vect_t sub (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.297.2.28 subin()**

```
static INLINE CONST vect_t subin (
    vect_t & a,
    const vect_t b) [inline], [static]
```

**12.297.2.29 mul()**

```
static INLINE CONST vect_t mul (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.297.2.30 mulin()**

```
static INLINE CONST vect_t mulin (
    vect_t & a,
    const vect_t b) [inline], [static]
```

**12.297.2.31 div()**

```
static INLINE CONST vect_t div (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.297.2.32 fmadd()**

```
static INLINE CONST vect_t fmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.297.2.33 fmaddin()**

```
static INLINE CONST vect_t fmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.297.2.34 fnmadd()**

```
static INLINE CONST vect_t fnmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.297.2.35 fnmaddin()**

```
static INLINE CONST vect_t fnmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.297.2.36 fmsub()**

```
static INLINE CONST vect_t fmsub (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.297.2.37 fmsubin()**

```
static INLINE CONST vect_t fmsubin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.297.2.38 eq()**

```
static INLINE CONST vect_t eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.297.2.39 lesser()**

```
static INLINE CONST vect_t lesser (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.297.2.40 lesser\_eq()**

```
static INLINE CONST vect_t lesser_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.297.2.41 greater()**

```
static INLINE CONST vect_t greater (
    const vect_t a,
    const vect_t b)  [inline], [static]
```

**12.297.2.42 greater\_eq()**

```
static INLINE CONST vect_t greater_eq (
    const vect_t a,
    const vect_t b)  [inline], [static]
```

**12.297.2.43 floor()**

```
static INLINE CONST vect_t floor (
    const vect_t a)  [inline], [static]
```

**12.297.2.44 ceil()**

```
static INLINE CONST vect_t ceil (
    const vect_t a)  [inline], [static]
```

**12.297.2.45 round()**

```
static INLINE CONST vect_t round (
    const vect_t a)  [inline], [static]
```

**12.297.2.46 hadd()**

```
static INLINE CONST vect_t hadd (
    const vect_t a,
    const vect_t b)  [inline], [static]
```

**12.297.2.47 hadd\_to\_scal()**

```
static INLINE CONST scalar_t hadd_to_scal (
    const vect_t a)  [inline], [static]
```

**12.297.3 Field Documentation****12.297.3.1 vect\_size**

```
const constexpr size_t vect_size = 8  [static], [constexpr]
```

**12.297.3.2 alignment**

```
const constexpr size_t alignment = 64  [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [simd512\\_double.inl](#)

**12.298 Simd512\_impl< true, true, false, 8 > Struct Reference**

Inheritance diagram for Simd512\_impl< true, true, false, 8 >:



## Data Structures

- union [Converter](#)

## Public Types

- using [scalar\\_t](#) = uint64\_t
- using [aligned\\_allocator](#) = AlignedAllocator<[scalar\\_t](#), Alignment([alignment](#))>
- using [aligned\\_vector](#) = std::vector<[scalar\\_t](#), [aligned\\_allocator](#)>
- template<class [Field](#) >  
using [is\\_same\\_element](#) = std::is\_same<typename [Field](#)::Element, [scalar\\_t](#)>
- using [simdHalf](#) = Simd256<[scalar\\_t](#)>
- using [vect\\_t](#) = \_\_m512i
- using [half\\_t](#) = \_\_m256i

## Static Public Member Functions

- static const std::string [type\\_string](#) ()
- static [INLINE CONST vect\\_t set1](#) (const [scalar\\_t](#) x)
- static [INLINE CONST vect\\_t set](#) (const [scalar\\_t](#) x0, const [scalar\\_t](#) x1, const [scalar\\_t](#) x2, const [scalar\\_t](#) x3, const [scalar\\_t](#) x4, const [scalar\\_t](#) x5, const [scalar\\_t](#) x6, const [scalar\\_t](#) x7)
- template<class T >  
static [INLINE PURE vect\\_t gather](#) (const [scalar\\_t](#) \*const p, const T \*const idx)
- static [INLINE PURE vect\\_t load](#) (const [scalar\\_t](#) \*const p)
- static [INLINE PURE vect\\_t loadu](#) (const [scalar\\_t](#) \*const p)
- static [INLINE](#) void [store](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- template<uint8\_t k>  
static [INLINE](#) void [maskstore](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE](#) void [storeu](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE](#) void [stream](#) ([scalar\\_t](#) \*p, const [vect\\_t](#) v)
- template<int s>  
static [INLINE CONST vect\\_t sra](#) (const [vect\\_t](#) a)
- static [INLINE CONST vect\\_t greater](#) ([vect\\_t](#) a, [vect\\_t](#) b)
- static [INLINE CONST vect\\_t lesser](#) ([vect\\_t](#) a, [vect\\_t](#) b)
- static [INLINE CONST vect\\_t greater\\_eq](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t lesser\\_eq](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t mullo](#) ([vect\\_t](#) a, [vect\\_t](#) b)
- static [INLINE CONST vect\\_t mulhi](#) ([vect\\_t](#) a, [vect\\_t](#) b)
- static [INLINE CONST vect\\_t mulx](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t fmaddx](#) (const [vect\\_t](#) c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE vect\\_t fmaddxin](#) ([vect\\_t](#) &c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t fnmaddx](#) (const [vect\\_t](#) c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE vect\\_t fnmaddxin](#) ([vect\\_t](#) &c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t fmsubx](#) (const [vect\\_t](#) c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE vect\\_t fmsubxin](#) ([vect\\_t](#) &c, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST scalar\\_t hadd\\_to\\_scal](#) (const [vect\\_t](#) a)
- template<class T >  
static constexpr bool [valid](#) (T \*p)

- `template<class T >`  
`static constexpr bool compliant (T n)`
- `static INLINE CONST vect_t set1 (const scalar_t x)`
- `static INLINE CONST vect_t set (const scalar_t x0, const scalar_t x1, const scalar_t x2, const scalar_t x3, const scalar_t x4, const scalar_t x5, const scalar_t x6, const scalar_t x7)`
- `static INLINE CONST vect_t set (const scalar_t x0, const scalar_t x1, const scalar_t x2, const scalar_t x3)`
- `template<class T >`  
`static INLINE PURE vect_t gather (const scalar_t *const p, const T *const idx)`
- `static INLINE PURE vect_t load (const scalar_t *const p)`
- `static INLINE PURE vect_t loadu (const scalar_t *const p)`
- `static INLINE void store (scalar_t *p, vect_t v)`
- `template<uint8_t k>`  
`static INLINE void maskstore (scalar_t *p, vect_t v)`
- `static INLINE void storeu (scalar_t *p, vect_t v)`
- `static INLINE void stream (scalar_t *p, const vect_t v)`
- `template<int s>`  
`static INLINE CONST vect_t sll (const vect_t a)`
- `template<int s>`  
`static INLINE CONST vect_t srl (const vect_t a)`
- `template<uint8_t s>`  
`static INLINE CONST vect_t shuffle (const vect_t a)`
- `static INLINE CONST vect_t unpacklo_intrinsic (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t unpackhi_intrinsic (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t unpacklo (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t unpackhi (const vect_t a, const vect_t b)`
- `static INLINE void unpacklohi (vect_t &lo, vect_t &hi, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t pack_even (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t pack_odd (const vect_t a, const vect_t b)`
- `static INLINE void pack (vect_t &even, vect_t &odd, const vect_t a, const vect_t b)`
- `static INLINE void transpose (vect_t &r0, vect_t &r1, vect_t &r2, vect_t &r3, vect_t &r4, vect_t &r5, vect_t &r6, vect_t &r7)`
- `template<uint8_t s>`  
`static INLINE CONST vect_t blend (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t add (const vect_t a, const vect_t b)`
- `static INLINE vect_t addin (vect_t &a, const vect_t b)`
- `static INLINE CONST vect_t sub (const vect_t a, const vect_t b)`
- `static INLINE vect_t subin (vect_t &a, const vect_t b)`
- `static INLINE CONST vect_t mul (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fmadd (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fmaddin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fnmadd (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fnmaddin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t fmsub (const vect_t c, const vect_t a, const vect_t b)`
- `static INLINE vect_t fmsubin (vect_t &c, const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t eq (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t round (const vect_t a)`
- `static INLINE CONST vect_t mask_high ()`
- `static INLINE CONST vect_t mulhi_fast (vect_t x, vect_t y)`
- `static INLINE vect_t mod (vect_t &C, const __m512d &P, const __m512d &INVP, const __m512d &NEGP, const vect_t &POW50REM, const __m512d &MIN, const __m512d &MAX, __m512d &Q, __m512d &T)`
- `static INLINE CONST vect_t zero ()`
- `static INLINE CONST vect_t vor (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t vxor (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t vand (const vect_t a, const vect_t b)`
- `static INLINE CONST vect_t vandnot (const vect_t a, const vect_t b)`



### Static Public Attributes

- static const constexpr size\_t `vect_size` = 8
- static const constexpr size\_t `alignment` = 64

### Static Protected Member Functions

- static `INLINE CONST vect_t signbits` (const `vect_t` x)

## 12.298.1 Member Typedef Documentation

### 12.298.1.1 scalar\_t

```
using scalar_t = uint64_t
```

### 12.298.1.2 aligned\_allocator

```
using aligned_allocator = AlignedAllocator<scalar_t, Alignment(alignment)>
```

### 12.298.1.3 aligned\_vector

```
using aligned_vector = std::vector<scalar_t, aligned_allocator>
```

### 12.298.1.4 is\_same\_element

```
template<class Field >
using is_same_element = std::is_same<typename Field::Element, scalar_t>
```

### 12.298.1.5 simdHalf

```
using simdHalf = Simd256<scalar_t>
```

### 12.298.1.6 vect\_t

```
using vect_t = __m512i [inherited]
```

### 12.298.1.7 half\_t

```
using half_t = __m256i [inherited]
```

## 12.298.2 Member Function Documentation

### 12.298.2.1 type\_string()

```
static const std::string type_string () [inline], [static]
```

### 12.298.2.2 set1() [1/2]

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static]
```

### 12.298.2.3 set() [1/3]

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3,
    const scalar_t x4,
    const scalar_t x5,
    const scalar_t x6,
    const scalar_t x7) [inline], [static]
```

**12.298.2.4 gather()** [1/2]

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static]
```

**12.298.2.5 load()** [1/2]

```
static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static]
```

**12.298.2.6 loadu()** [1/2]

```
static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static]
```

**12.298.2.7 store()** [1/2]

```
static INLINE void store (
    scalar_t * p,
    vect_t v) [inline], [static]
```

**12.298.2.8 maskstore()** [1/2]

```
template<uint8_t k>
static INLINE void maskstore (
    scalar_t * p,
    vect_t v) [inline], [static]
```

**12.298.2.9 storeu()** [1/2]

```
static INLINE void storeu (
    scalar_t * p,
    vect_t v) [inline], [static]
```

**12.298.2.10 stream()** [1/2]

```
static INLINE void stream (
    scalar_t * p,
    const vect_t v) [inline], [static]
```

**12.298.2.11 sra()**

```
template<int s>
static INLINE CONST vect_t sra (
    const vect_t a) [inline], [static]
```

**12.298.2.12 greater()**

```
static INLINE CONST vect_t greater (
    vect_t a,
    vect_t b) [inline], [static]
```

**12.298.2.13 lesser()**

```
static INLINE CONST vect_t lesser (
    vect_t a,
    vect_t b) [inline], [static]
```

**12.298.2.14 greater\_eq()**

```
static INLINE CONST vect_t greater_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.298.2.15 lesser\_eq()**

```
static INLINE CONST vect_t lesser_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.298.2.16 mullo()**

```
static INLINE CONST vect_t mullo (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.298.2.17 mulhi()**

```
static INLINE CONST vect_t mulhi (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.298.2.18 mulx()**

```
static INLINE CONST vect_t mulx (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.298.2.19 fmaddx()**

```
static INLINE CONST vect_t fmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.298.2.20 fmaddxin()**

```
static INLINE vect_t fmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.298.2.21 fnmaddx()**

```
static INLINE CONST vect_t fnmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.298.2.22 fnmaddxin()**

```
static INLINE vect_t fnmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.298.2.23 fmsubx()**

```
static INLINE CONST vect_t fmsubx (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.298.2.24 fmsubxin()**

```
static INLINE vect_t fmsubxin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.298.2.25 hadd\_to\_scal()**

```
static INLINE CONST scalar_t hadd_to_scal (
    const vect_t a) [inline], [static]
```

**12.298.2.26 valid()**

```
template<class T >
static constexpr bool valid (
    T * p) [inline], [static], [constexpr], [inherited]
```

**12.298.2.27 compliant()**

```
template<class T >
static constexpr bool compliant (
    T n) [inline], [static], [constexpr], [inherited]
```

**12.298.2.28 set1() [2/2]**

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static], [inherited]
```

**12.298.2.29 set() [2/3]**

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3,
    const scalar_t x4,
    const scalar_t x5,
    const scalar_t x6,
    const scalar_t x7) [inline], [static], [inherited]
```

**12.298.2.30 set() [3/3]**

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3) [inline], [static], [inherited]
```

**12.298.2.31 gather() [2/2]**

```
template<class T >
static INLINE PURE vect_t gather (
```

```
const scalar_t *const p,
const T *const idx) [inline], [static], [inherited]
```

**12.298.2.32 load() [2/2]**

```
static INLINE PURE vect_t load (
const scalar_t *const p) [inline], [static], [inherited]
```

**12.298.2.33 loadu() [2/2]**

```
static INLINE PURE vect_t loadu (
const scalar_t *const p) [inline], [static], [inherited]
```

**12.298.2.34 store() [2/2]**

```
static INLINE void store (
scalar_t * p,
vect_t v) [inline], [static], [inherited]
```

**12.298.2.35 maskstore() [2/2]**

```
template<uint8_t k>
static INLINE void maskstore (
scalar_t * p,
vect_t v) [inline], [static], [inherited]
```

**12.298.2.36 storeu() [2/2]**

```
static INLINE void storeu (
scalar_t * p,
vect_t v) [inline], [static], [inherited]
```

**12.298.2.37 stream() [2/2]**

```
static INLINE void stream (
scalar_t * p,
const vect_t v) [inline], [static], [inherited]
```

**12.298.2.38 sll()**

```
template<int s>
static INLINE CONST vect_t sll (
const vect_t a) [inline], [static], [inherited]
```

**12.298.2.39 srl()**

```
template<int s>
static INLINE CONST vect_t srl (
const vect_t a) [inline], [static], [inherited]
```

**12.298.2.40 shuffle()**

```
template<uint8_t s>
static INLINE CONST vect_t shuffle (
const vect_t a) [inline], [static], [inherited]
```

**12.298.2.41 unpacklo\_intrinsic()**

```
static INLINE CONST vect_t unpacklo_intrinsic (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.298.2.42 unpackhi\_intrinsic()**

```
static INLINE CONST vect_t unpackhi_intrinsic (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.298.2.43 unpacklo()**

```
static INLINE CONST vect_t unpacklo (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.298.2.44 unpackhi()**

```
static INLINE CONST vect_t unpackhi (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.298.2.45 unpacklohi()**

```
static INLINE void unpacklohi (  
    vect_t & lo,  
    vect_t & hi,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.298.2.46 pack\_even()**

```
static INLINE CONST vect_t pack_even (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.298.2.47 pack\_odd()**

```
static INLINE CONST vect_t pack_odd (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.298.2.48 pack()**

```
static INLINE void pack (  
    vect_t & even,  
    vect_t & odd,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

**12.298.2.49 transpose()**

```
static INLINE void transpose (  
    vect_t & r0,  
    vect_t & r1,  
    vect_t & r2,  
    vect_t & r3,  
    vect_t & r4,
```

```
vect_t & r5,  
vect_t & r6,  
vect_t & r7) [inline], [static], [inherited]
```

#### 12.298.2.50 blend()

```
template<uint8_t s>  
static INLINE CONST vect_t blend (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

#### 12.298.2.51 add()

```
static INLINE CONST vect_t add (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

#### 12.298.2.52 addin()

```
static INLINE vect_t addin (  
    vect_t & a,  
    const vect_t b) [inline], [static], [inherited]
```

#### 12.298.2.53 sub()

```
static INLINE CONST vect_t sub (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

#### 12.298.2.54 subin()

```
static INLINE vect_t subin (  
    vect_t & a,  
    const vect_t b) [inline], [static], [inherited]
```

#### 12.298.2.55 mul()

```
static INLINE CONST vect_t mul (  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

#### 12.298.2.56 fmadd()

```
static INLINE CONST vect_t fmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

#### 12.298.2.57 fmaddin()

```
static INLINE vect_t fmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static], [inherited]
```

#### 12.298.2.58 fnmadd()

```
static INLINE CONST vect_t fnmadd (  
    const vect_t c,
```

```
const vect_t a,
const vect_t b) [inline], [static], [inherited]
```

#### 12.298.2.59 fnmaddin()

```
static INLINE vect_t fnmaddin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

#### 12.298.2.60 fmsub()

```
static INLINE CONST vect_t fmsub (
    const vect_t c,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

#### 12.298.2.61 fmsubin()

```
static INLINE vect_t fmsubin (
    vect_t & c,
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

#### 12.298.2.62 eq()

```
static INLINE CONST vect_t eq (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

#### 12.298.2.63 round()

```
static INLINE CONST vect_t round (
    const vect_t a) [inline], [static], [inherited]
```

#### 12.298.2.64 mask\_high()

```
static INLINE CONST vect_t mask_high () [inline], [static], [inherited]
```

#### 12.298.2.65 mulhi\_fast()

```
INLINE CONST vect_t mulhi_fast (
    vect_t x,
    vect_t y) [static], [inherited]
```

#### 12.298.2.66 mod()

```
INLINE vect_t mod (
    vect_t & C,
    const __m512d & P,
    const __m512d & INV_P,
    const __m512d & NEGP,
    const vect_t & POW50REM,
    const __m512d & MIN,
    const __m512d & MAX,
    __m512d & Q,
    __m512d & T) [static], [inherited]
```



**12.298.2.67 signbits()**

```
static INLINE CONST vect_t signbits (
    const vect_t x) [inline], [static], [protected], [inherited]
```

**12.298.2.68 zero()**

```
static INLINE CONST vect_t zero () [inline], [static], [inherited]
```

**12.298.2.69 vor()**

```
static INLINE CONST vect_t vor (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.298.2.70 vxor()**

```
static INLINE CONST vect_t vxor (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.298.2.71 vand()**

```
static INLINE CONST vect_t vand (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.298.2.72 vandnot()**

```
static INLINE CONST vect_t vandnot (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.298.3 Field Documentation****12.298.3.1 vect\_size**

```
const constexpr size_t vect_size = 8 [static], [constexpr], [inherited]
```

**12.298.3.2 alignment**

```
const constexpr size_t alignment = 64 [static], [constexpr], [inherited]
```

The documentation for this struct was generated from the following file:

- [simd512\\_int64.inl](#)

**12.299 Simd512\_impl< true, true, true, 8 > Struct Reference**

Inheritance diagram for Simd512\_impl< true, true, true, 8 >:



## Data Structures

- union [Converter](#)

## Public Types

- using [vect\\_t](#) = \_\_m512i
- using [half\\_t](#) = \_\_m256i
- using [scalar\\_t](#) = int64\_t
- using [simdHalf](#) = Simd256<[scalar\\_t](#)>
- using [aligned\\_allocator](#) = AlignedAllocator<[scalar\\_t](#), Alignment([alignment](#))>
- using [aligned\\_vector](#) = std::vector<[scalar\\_t](#), [aligned\\_allocator](#)>
- template<class [Field](#) >  
using [is\\_same\\_element](#) = std::is\_same<typename [Field::Element](#), [scalar\\_t](#)>

## Static Public Member Functions

- static const std::string [type\\_string](#) ()
- template<class T >  
static constexpr bool [valid](#) (T \*p)
- template<class T >  
static constexpr bool [compliant](#) (T n)
- static [INLINE CONST vect\\_t set1](#) (const [scalar\\_t](#) x)
- static [INLINE CONST vect\\_t set](#) (const [scalar\\_t](#) x0, const [scalar\\_t](#) x1, const [scalar\\_t](#) x2, const [scalar\\_t](#) x3, const [scalar\\_t](#) x4, const [scalar\\_t](#) x5, const [scalar\\_t](#) x6, const [scalar\\_t](#) x7)
- static [INLINE CONST vect\\_t set](#) (const [scalar\\_t](#) x0, const [scalar\\_t](#) x1, const [scalar\\_t](#) x2, const [scalar\\_t](#) x3)
- template<class T >  
static [INLINE PURE vect\\_t gather](#) (const [scalar\\_t](#) \*const p, const T \*const idx)
- static [INLINE PURE vect\\_t load](#) (const [scalar\\_t](#) \*const p)
- static [INLINE PURE vect\\_t loadu](#) (const [scalar\\_t](#) \*const p)
- static [INLINE void store](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- template<uint8\_t k>  
static [INLINE void maskstore](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE void storeu](#) ([scalar\\_t](#) \*p, [vect\\_t](#) v)
- static [INLINE void stream](#) ([scalar\\_t](#) \*p, const [vect\\_t](#) v)
- template<int s>  
static [INLINE CONST vect\\_t sll](#) (const [vect\\_t](#) a)
- template<int s>  
static [INLINE CONST vect\\_t srl](#) (const [vect\\_t](#) a)
- template<int s>  
static [INLINE CONST vect\\_t sra](#) (const [vect\\_t](#) a)
- template<uint8\_t s>  
static [INLINE CONST vect\\_t shuffle](#) (const [vect\\_t](#) a)
- static [INLINE CONST vect\\_t unpacklo\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpackhi\\_intrinsic](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpacklo](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t unpackhi](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE void unpacklohi](#) ([vect\\_t](#) &lo, [vect\\_t](#) &hi, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t pack\\_even](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t pack\\_odd](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE void pack](#) ([vect\\_t](#) &even, [vect\\_t](#) &odd, const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE void transpose](#) ([vect\\_t](#) &r0, [vect\\_t](#) &r1, [vect\\_t](#) &r2, [vect\\_t](#) &r3, [vect\\_t](#) &r4, [vect\\_t](#) &r5, [vect\\_t](#) &r6, [vect\\_t](#) &r7)
- template<uint8\_t s>  
static [INLINE CONST vect\\_t blend](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE CONST vect\\_t add](#) (const [vect\\_t](#) a, const [vect\\_t](#) b)
- static [INLINE vect\\_t addin](#) ([vect\\_t](#) &a, const [vect\\_t](#) b)

- static `INLINE CONST vect_t sub` (const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t subin` (`vect_t` &a, const `vect_t` b)
- static `INLINE CONST vect_t mullo` (`vect_t` a, `vect_t` b)
- static `INLINE CONST vect_t mul` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t mulhi` (`vect_t` a, `vect_t` b)
- static `INLINE CONST vect_t mulx` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fmadd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fmaddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fmaddx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fmaddxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fnmadd` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fnmaddin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fnmaddx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fnmaddxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fmsub` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fmsubin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t fmsubx` (const `vect_t` c, const `vect_t` a, const `vect_t` b)
- static `INLINE vect_t fmsubxin` (`vect_t` &c, const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t greater` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t lesser` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t greater_eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t lesser_eq` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST scalar_t hadd_to_scal` (const `vect_t` a)
- static `INLINE CONST vect_t round` (const `vect_t` a)
- static `INLINE CONST vect_t mask_high` ()
- static `INLINE CONST vect_t mulhi_fast` (`vect_t` x, `vect_t` y)
- static `INLINE vect_t mod` (`vect_t` &C, const `__m512d` &P, const `__m512d` &INVP, const `__m512d` &NEGP, const `vect_t` &POW50REM, const `__m512d` &MIN, const `__m512d` &MAX, `__m512d` &Q, `__m512d` &T)
- static `INLINE CONST vect_t zero` ()
- static `INLINE CONST vect_t vor` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t vxor` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t vand` (const `vect_t` a, const `vect_t` b)
- static `INLINE CONST vect_t vandnot` (const `vect_t` a, const `vect_t` b)

### Static Public Attributes

- static const constexpr size\_t `vect_size` = 8
- static const constexpr size\_t `alignment` = 64

### Static Protected Member Functions

- static `INLINE CONST vect_t signbits` (const `vect_t` x)

## 12.299.1 Member Typedef Documentation

### 12.299.1.1 vect\_t

```
using vect_t = __m512i
```

### 12.299.1.2 half\_t

```
using half_t = __m256i
```

### 12.299.1.3 scalar\_t

```
using scalar_t = int64_t
```

**12.299.1.4 simdHalf**

```
using simdHalf = Simd256<scalar_t>
```

**12.299.1.5 aligned\_allocator**

```
using aligned_allocator = AlignedAllocator<scalar_t, Alignment(alignment)>
```

**12.299.1.6 aligned\_vector**

```
using aligned_vector = std::vector<scalar_t, aligned_allocator>
```

**12.299.1.7 is\_same\_element**

```
template<class Field >
using is_same_element = std::is_same<typename Field::Element, scalar_t>
```

**12.299.2 Member Function Documentation****12.299.2.1 type\_string()**

```
static const std::string type_string () [inline], [static]
```

**12.299.2.2 valid()**

```
template<class T >
static constexpr bool valid (
    T * p) [inline], [static], [constexpr]
```

**12.299.2.3 compliant()**

```
template<class T >
static constexpr bool compliant (
    T n) [inline], [static], [constexpr]
```

**12.299.2.4 set1()**

```
static INLINE CONST vect_t set1 (
    const scalar_t x) [inline], [static]
```

**12.299.2.5 set() [1/2]**

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3,
    const scalar_t x4,
    const scalar_t x5,
    const scalar_t x6,
    const scalar_t x7) [inline], [static]
```

**12.299.2.6 set() [2/2]**

```
static INLINE CONST vect_t set (
    const scalar_t x0,
    const scalar_t x1,
    const scalar_t x2,
    const scalar_t x3) [inline], [static]
```

### 12.299.2.7 gather()

```
template<class T >
static INLINE PURE vect_t gather (
    const scalar_t *const p,
    const T *const idx) [inline], [static]
```

### 12.299.2.8 load()

```
static INLINE PURE vect_t load (
    const scalar_t *const p) [inline], [static]
```

### 12.299.2.9 loadu()

```
static INLINE PURE vect_t loadu (
    const scalar_t *const p) [inline], [static]
```

### 12.299.2.10 store()

```
static INLINE void store (
    scalar_t * p,
    vect_t v) [inline], [static]
```

### 12.299.2.11 maskstore()

```
template<uint8_t k>
static INLINE void maskstore (
    scalar_t * p,
    vect_t v) [inline], [static]
```

### 12.299.2.12 storeu()

```
static INLINE void storeu (
    scalar_t * p,
    vect_t v) [inline], [static]
```

### 12.299.2.13 stream()

```
static INLINE void stream (
    scalar_t * p,
    const vect_t v) [inline], [static]
```

### 12.299.2.14 sll()

```
template<int s>
static INLINE CONST vect_t sll (
    const vect_t a) [inline], [static]
```

### 12.299.2.15 srl()

```
template<int s>
static INLINE CONST vect_t srl (
    const vect_t a) [inline], [static]
```

### 12.299.2.16 sra()

```
template<int s>
static INLINE CONST vect_t sra (
    const vect_t a) [inline], [static]
```

**12.299.2.17 shuffle()**

```
template<uint8_t s>
static INLINE CONST vect_t shuffle (
    const vect_t a) [inline], [static]
```

**12.299.2.18 unpacklo\_intrinsic()**

```
static INLINE CONST vect_t unpacklo_intrinsic (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.299.2.19 unpackhi\_intrinsic()**

```
static INLINE CONST vect_t unpackhi_intrinsic (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.299.2.20 unpacklo()**

```
static INLINE CONST vect_t unpacklo (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.299.2.21 unpackhi()**

```
static INLINE CONST vect_t unpackhi (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.299.2.22 unpacklohi()**

```
static INLINE void unpacklohi (
    vect_t & lo,
    vect_t & hi,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.299.2.23 pack\_even()**

```
static INLINE CONST vect_t pack_even (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.299.2.24 pack\_odd()**

```
static INLINE CONST vect_t pack_odd (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.299.2.25 pack()**

```
static INLINE void pack (
    vect_t & even,
    vect_t & odd,
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.299.2.26 transpose()**

```
static INLINE void transpose (  
    vect_t & r0,  
    vect_t & r1,  
    vect_t & r2,  
    vect_t & r3,  
    vect_t & r4,  
    vect_t & r5,  
    vect_t & r6,  
    vect_t & r7) [inline], [static]
```

**12.299.2.27 blend()**

```
template<uint8_t s>  
static INLINE CONST vect_t blend (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.299.2.28 add()**

```
static INLINE CONST vect_t add (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.299.2.29 addin()**

```
static INLINE vect_t addin (  
    vect_t & a,  
    const vect_t b) [inline], [static]
```

**12.299.2.30 sub()**

```
static INLINE CONST vect_t sub (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.299.2.31 subin()**

```
static INLINE vect_t subin (  
    vect_t & a,  
    const vect_t b) [inline], [static]
```

**12.299.2.32 mullo()**

```
static INLINE CONST vect_t mullo (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.299.2.33 mul()**

```
static INLINE CONST vect_t mul (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.299.2.34 mulhi()**

```
static INLINE CONST vect_t mulhi (  
    vect_t a,  
    vect_t b) [inline], [static]
```

**12.299.2.35 mulx()**

```
static INLINE CONST vect_t mulx (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.299.2.36 fmadd()**

```
static INLINE CONST vect_t fmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.299.2.37 fmaddin()**

```
static INLINE vect_t fmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.299.2.38 fmaddx()**

```
static INLINE CONST vect_t fmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.299.2.39 fmaddxin()**

```
static INLINE vect_t fmaddxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.299.2.40 fnmadd()**

```
static INLINE CONST vect_t fnmadd (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.299.2.41 fnmaddin()**

```
static INLINE vect_t fnmaddin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.299.2.42 fnmaddx()**

```
static INLINE CONST vect_t fnmaddx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.299.2.43 fnmaddxin()**

```
static INLINE vect_t fnmaddxin (  
    vect_t & c,
```



```
const vect_t a,  
const vect_t b) [inline], [static]
```

#### 12.299.2.44 fmsub()

```
static INLINE CONST vect_t fmsub (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.299.2.45 fmsubin()

```
static INLINE vect_t fmsubin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.299.2.46 fmsubx()

```
static INLINE CONST vect_t fmsubx (  
    const vect_t c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.299.2.47 fmsubxin()

```
static INLINE vect_t fmsubxin (  
    vect_t & c,  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.299.2.48 eq()

```
static INLINE CONST vect_t eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.299.2.49 greater()

```
static INLINE CONST vect_t greater (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.299.2.50 lesser()

```
static INLINE CONST vect_t lesser (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.299.2.51 greater\_eq()

```
static INLINE CONST vect_t greater_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

#### 12.299.2.52 lesser\_eq()

```
static INLINE CONST vect_t lesser_eq (  
    const vect_t a,  
    const vect_t b) [inline], [static]
```

**12.299.2.53 hadd\_to\_scal()**

```
static INLINE CONST scalar_t hadd_to_scal (
    const vect_t a)  [inline], [static]
```

**12.299.2.54 round()**

```
static INLINE CONST vect_t round (
    const vect_t a)  [inline], [static]
```

**12.299.2.55 mask\_high()**

```
static INLINE CONST vect_t mask_high ()  [inline], [static]
```

**12.299.2.56 mulhi\_fast()**

```
INLINE CONST vect_t mulhi_fast (
    vect_t x,
    vect_t y)  [static]
```

**12.299.2.57 mod()**

```
INLINE vect_t mod (
    vect_t & C,
    const __m512d & P,
    const __m512d & INVP,
    const __m512d & NEGP,
    const vect_t & POW50REM,
    const __m512d & MIN,
    const __m512d & MAX,
    __m512d & Q,
    __m512d & T)  [static]
```

**12.299.2.58 signbits()**

```
static INLINE CONST vect_t signbits (
    const vect_t x)  [inline], [static], [protected]
```

**12.299.2.59 zero()**

```
static INLINE CONST vect_t zero ()  [inline], [static], [inherited]
```

**12.299.2.60 vor()**

```
static INLINE CONST vect_t vor (
    const vect_t a,
    const vect_t b)  [inline], [static], [inherited]
```

**12.299.2.61 vxor()**

```
static INLINE CONST vect_t vxor (
    const vect_t a,
    const vect_t b)  [inline], [static], [inherited]
```

**12.299.2.62 vand()**

```
static INLINE CONST vect_t vand (
    const vect_t a,
    const vect_t b)  [inline], [static], [inherited]
```

**12.299.2.63 vandnot()**

```
static INLINE CONST vect_t vandnot (
    const vect_t a,
    const vect_t b) [inline], [static], [inherited]
```

**12.299.3 Field Documentation****12.299.3.1 vect\_size**

```
const constexpr size_t vect_size = 8 [static], [constexpr]
```

**12.299.3.2 alignment**

```
const constexpr size_t alignment = 64 [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [simd512\\_int64.inl](#)

**12.300 Simd512i\_base Struct Reference**

Inheritance diagram for Simd512i\_base:

**Public Types**

- using `vect_t` = `__m512i`

**Static Public Member Functions**

- static `INLINE` `CONST` `vect_t` zero ()
- static `INLINE` `CONST` `vect_t` vor (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` vxor (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` vand (const `vect_t` a, const `vect_t` b)
- static `INLINE` `CONST` `vect_t` vandnot (const `vect_t` a, const `vect_t` b)

**12.300.1 Member Typedef Documentation****12.300.1.1 vect\_t**

```
using vect_t = __m512i
```

**12.300.2 Member Function Documentation****12.300.2.1 zero()**

```
static INLINE CONST vect_t zero () [inline], [static]
```

**12.300.2.2 vor()**

```
static INLINE CONST vect_t vor (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.300.2.3 vxor()**

```
static INLINE CONST vect_t vxor (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.300.2.4 vand()**

```
static INLINE CONST vect_t vand (
    const vect_t a,
    const vect_t b) [inline], [static]
```

**12.300.2.5 vandnot()**

```
static INLINE CONST vect_t vandnot (
    const vect_t a,
    const vect_t b) [inline], [static]
```

The documentation for this struct was generated from the following file:

- [simd512.inl](#)

**12.301 SimdChooser< T, bool, bool > Struct Template Reference**

```
#include <fflas_simd.h>
```

The documentation for this struct was generated from the following file:

- [fflas\\_simd.h](#)

**12.302 SimdChooser< T, false, b > Struct Template Reference**

```
#include <fflas_simd.h>
```

**Public Types**

- using [value](#) = [NoSimd](#)<T>

**12.302.1 Member Typedef Documentation****12.302.1.1 value**

```
template<class T , bool b>
using value = NoSimd<T>
```

The documentation for this struct was generated from the following file:

- [fflas\\_simd.h](#)

**12.303 SimdChooser< T, true, false > Struct Template Reference**

```
#include <fflas_simd.h>
```

**Public Types**

- using [value](#) = [NoSimd](#)<T>

### 12.303.1 Member Typedef Documentation

#### 12.303.1.1 value

```
template<class T >
using value = NoSimd<T>
```

The documentation for this struct was generated from the following file:

- [fflas\\_simd.h](#)

## 12.304 SimdChooser< T, true, true > Struct Template Reference

```
#include <fflas_simd.h>
```

### Public Types

- using [value](#) = [NoSimd](#)<T>

### 12.304.1 Member Typedef Documentation

#### 12.304.1.1 value

```
template<class T >
using value = NoSimd<T>
```

The documentation for this struct was generated from the following file:

- [fflas\\_simd.h](#)

## 12.305 simdToType< T > Struct Template Reference

The documentation for this struct was generated from the following file:

- [fflas\\_simd.h](#)

## 12.306 Single Struct Reference

The documentation for this struct was generated from the following file:

- [blockcuts.inl](#)

## 12.307 Sparse< Field, SparseMatrix\_t, IdxT, PtrT > Struct Template Reference


The documentation for this struct was generated from the following file:

- [fflas\\_sparse.h](#)

## 12.308 Sparse< \_Field, SparseMatrix\_t::COO > Struct Template Reference

```
#include <coo.h>
```

Inheritance diagram for Sparse< \_Field, SparseMatrix\_t::COO >:



## Public Types

- using `Field` = `_Field`

## Data Fields

- `index_t` \* `col` = `nullptr`
- `index_t` \* `row` = `nullptr`
- `_Field::Element_ptr` `dat`
- bool `delayed` = `false`
- `uint64_t` `kmax` = `0`
- `index_t` `m` = `0`
- `index_t` `n` = `0`
- `uint64_t` `nnz` = `0`
- `uint64_t` `nElements` = `0`
- `uint64_t` `maxrow` = `0`

## 12.308.1 Member Typedef Documentation

### 12.308.1.1 Field

```
template<class _Field >
using Field = _Field
```

## 12.308.2 Field Documentation

### 12.308.2.1 col

```
template<class _Field >
index_t* col = nullptr
```

### 12.308.2.2 row

```
template<class _Field >
index_t* row = nullptr
```

### 12.308.2.3 dat

```
template<class _Field >
_Field::Element_ptr dat
```

### 12.308.2.4 delayed

```
template<class _Field >
bool delayed = false
```

### 12.308.2.5 kmax

```
template<class _Field >
uint64_t kmax = 0
```

### 12.308.2.6 m

```
template<class _Field >
index_t m = 0
```

### 12.308.2.7 n

```
template<class _Field >
index_t n = 0
```

**12.308.2.8 nnz**

```
template<class _Field >
uint64_t nnz = 0
```

**12.308.2.9 nElements**

```
template<class _Field >
uint64_t nElements = 0
```

**12.308.2.10 maxrow**

```
template<class _Field >
uint64_t maxrow = 0
```


The documentation for this struct was generated from the following file:

- [coo.h](#)

## 12.309 Sparse< \_Field, SparseMatrix\_t::COO\_ZO > Struct Template Reference

```
#include <coo.h>
```

Inheritance diagram for Sparse< \_Field, SparseMatrix\_t::COO\_ZO >:

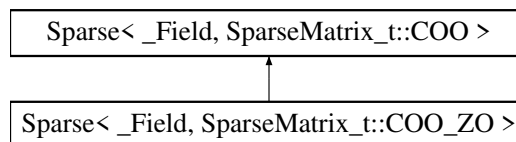**Public Types**

- using [Field](#) = \_Field

**Data Fields**

- \_Field::Element [cst](#) = 1
- [index\\_t](#) \* [col](#) = nullptr
- [index\\_t](#) \* [row](#) = nullptr
- \_Field::Element\_ptr [dat](#)
- bool [delayed](#) = false
- uint64\_t [kmax](#) = 0
- [index\\_t](#) [m](#) = 0
- [index\\_t](#) [n](#) = 0
- uint64\_t [nnz](#) = 0
- uint64\_t [nElements](#) = 0
- uint64\_t [maxrow](#) = 0

**12.309.1 Member Typedef Documentation****12.309.1.1 Field**

```
template<class _Field >
using Field = _Field
```

## 12.309.2 Field Documentation

### 12.309.2.1 cst

```
template<class _Field >
_Field::Element cst = 1
```

### 12.309.2.2 col

```
template<class _Field >
index_t* col = nullptr [inherited]
```

### 12.309.2.3 row

```
template<class _Field >
index_t* row = nullptr [inherited]
```

### 12.309.2.4 dat

```
template<class _Field >
_Field::Element_ptr dat [inherited]
```

### 12.309.2.5 delayed

```
template<class _Field >
bool delayed = false [inherited]
```

### 12.309.2.6 kmax

```
template<class _Field >
uint64_t kmax = 0 [inherited]
```

### 12.309.2.7 m

```
template<class _Field >
index_t m = 0 [inherited]
```

### 12.309.2.8 n

```
template<class _Field >
index_t n = 0 [inherited]
```

### 12.309.2.9 nnz

```
template<class _Field >
uint64_t nnz = 0 [inherited]
```

### 12.309.2.10 nElements

```
template<class _Field >
uint64_t nElements = 0 [inherited]
```

### 12.309.2.11 maxrow

```
template<class _Field >
uint64_t maxrow = 0 [inherited]
```

The documentation for this struct was generated from the following file:


- [coo.h](#)



## 12.310 Sparse< \_Field, SparseMatrix\_t::CSR > Struct Template Reference

```
#include <csr.h>
```

Inheritance diagram for Sparse< \_Field, SparseMatrix\_t::CSR >:

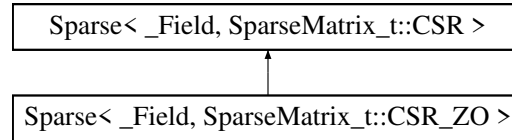

### Public Types

- using [Field](#) = \_Field

### Data Fields

- bool [delayed](#) = false
- uint64\_t [kmax](#) = 0
- [index\\_t](#) [m](#) = 0
- [index\\_t](#) [n](#) = 0
- uint64\_t [nnz](#) = 0
- uint64\_t [nElements](#) = 0
- uint64\_t [maxrow](#) = 0
- [index\\_t](#) \* [col](#) = nullptr
- [index\\_t](#) \* [st](#) = nullptr
- [index\\_t](#) \* [stend](#) = nullptr
- \_Field::Element\_ptr [dat](#)

### 12.310.1 Member Typedef Documentation

#### 12.310.1.1 Field

```
template<class _Field >
using Field = _Field
```

### 12.310.2 Field Documentation

#### 12.310.2.1 delayed

```
template<class _Field >
bool delayed = false
```

#### 12.310.2.2 kmax

```
template<class _Field >
uint64_t kmax = 0
```

#### 12.310.2.3 m

```
template<class _Field >
index\_t m = 0
```

#### 12.310.2.4 n

```
template<class _Field >
index\_t n = 0
```

**12.310.2.5 nnz**

```
template<class _Field >
uint64_t nnz = 0
```

**12.310.2.6 nElements**

```
template<class _Field >
uint64_t nElements = 0
```

**12.310.2.7 maxrow**

```
template<class _Field >
uint64_t maxrow = 0
```

**12.310.2.8 col**

```
template<class _Field >
index_t* col = nullptr
```

**12.310.2.9 st**

```
template<class _Field >
index_t* st = nullptr
```

**12.310.2.10 stend**

```
template<class _Field >
index_t* stend = nullptr
```

**12.310.2.11 dat**

```
template<class _Field >
_Field::Element_ptr dat
```

The documentation for this struct was generated from the following file:

- [csr.h](#)

## 12.311 Sparse<\_Field, SparseMatrix\_t::CSR\_HYB > Struct Template Reference

```
#include <csr_hyb.h>
```

**Public Types**

- using [Field](#) = \_Field

**Data Fields**

- bool [delayed](#) = false
- [index\\_t](#) \* [col](#) = nullptr
- [index\\_t](#) \* [st](#) = nullptr
- \_Field::Element\_ptr [dat](#)
- uint64\_t [kmax](#) = 0
- [index\\_t](#) [m](#) = 0
- [index\\_t](#) [n](#) = 0
- uint64\_t [nnz](#) = 0
- uint64\_t [nElements](#) = 0

- uint64\_t `maxrow` = 0
- uint64\_t `nOnes` = 0
- uint64\_t `nMOnes` = 0
- uint64\_t `nOthers` = 0

## 12.311.1 Member Typedef Documentation

### 12.311.1.1 Field

```
template<class _Field >  
using Field = _Field
```

## 12.311.2 Field Documentation

### 12.311.2.1 delayed

```
template<class _Field >  
bool delayed = false
```

### 12.311.2.2 col

```
template<class _Field >  
index_t* col = nullptr
```

### 12.311.2.3 st

```
template<class _Field >  
index_t* st = nullptr
```

### 12.311.2.4 dat

```
template<class _Field >  
_Field::Element_ptr dat
```

### 12.311.2.5 kmax

```
template<class _Field >  
uint64_t kmax = 0
```

### 12.311.2.6 m

```
template<class _Field >  
index_t m = 0
```

### 12.311.2.7 n

```
template<class _Field >  
index_t n = 0
```

### 12.311.2.8 nnz

```
template<class _Field >  
uint64_t nnz = 0
```

### 12.311.2.9 nElements

```
template<class _Field >  
uint64_t nElements = 0
```

**12.311.2.10 maxrow**

```
template<class _Field >
uint64_t maxrow = 0
```

**12.311.2.11 nOnes**

```
template<class _Field >
uint64_t nOnes = 0
```

**12.311.2.12 nMOnes**

```
template<class _Field >
uint64_t nMOnes = 0
```

**12.311.2.13 nOthers**

```
template<class _Field >
uint64_t nOthers = 0
```


The documentation for this struct was generated from the following file:

- [csr\\_hyb.h](#)

## 12.312 Sparse<\_Field, SparseMatrix\_t::CSR\_ZO > Struct Template Reference

```
#include <csr.h>
```

Inheritance diagram for Sparse<\_Field, SparseMatrix\_t::CSR\_ZO >:

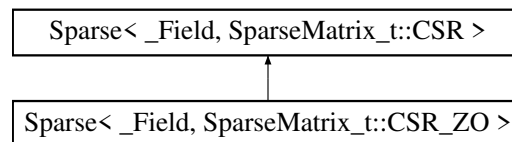**Public Types**

- using [Field](#) = \_Field

**Data Fields**

- int64\_t [cst](#) = 1
- bool [delayed](#) = false
- uint64\_t [kmax](#) = 0
- [index\\_t](#) [m](#) = 0
- [index\\_t](#) [n](#) = 0
- uint64\_t [nnz](#) = 0
- uint64\_t [nElements](#) = 0
- uint64\_t [maxrow](#) = 0
- [index\\_t](#) \* [col](#) = nullptr
- [index\\_t](#) \* [st](#) = nullptr
- [index\\_t](#) \* [stend](#) = nullptr
- \_Field::Element\_ptr [dat](#)

## 12.312.1 Member Typedef Documentation

### 12.312.1.1 Field

```
template<class _Field >
using Field = _Field
```

## 12.312.2 Field Documentation

### 12.312.2.1 cst

```
template<class _Field >
int64_t cst = 1
```

### 12.312.2.2 delayed

```
template<class _Field >
bool delayed = false
```

### 12.312.2.3 kmax

```
template<class _Field >
uint64_t kmax = 0 [inherited]
```

### 12.312.2.4 m

```
template<class _Field >
index_t m = 0 [inherited]
```

### 12.312.2.5 n

```
template<class _Field >
index_t n = 0 [inherited]
```

### 12.312.2.6 nnz

```
template<class _Field >
uint64_t nnz = 0 [inherited]
```

### 12.312.2.7 nElements

```
template<class _Field >
uint64_t nElements = 0 [inherited]
```

### 12.312.2.8 maxrow

```
template<class _Field >
uint64_t maxrow = 0 [inherited]
```

### 12.312.2.9 col

```
template<class _Field >
index_t* col = nullptr [inherited]
```

### 12.312.2.10 st

```
template<class _Field >
index_t* st = nullptr [inherited]
```

**12.312.2.11 stend**

```
template<class _Field >
index_t* stend = nullptr [inherited]
```

**12.312.2.12 dat**

```
template<class _Field >
_Field::Element_ptr dat [inherited]
```


The documentation for this struct was generated from the following file:

- [csr.h](#)

## 12.313 Sparse< \_Field, SparseMatrix\_t::ELL > Struct Template Reference

```
#include <ell.h>
```

Inheritance diagram for Sparse< \_Field, SparseMatrix\_t::ELL >:

**Public Types**

- using [Field](#) = \_Field

**Data Fields**

- bool [delayed](#) = false
- uint64\_t [kmax](#) = 0
- [index\\_t](#) [m](#) = 0
- [index\\_t](#) [n](#) = 0
- [index\\_t](#) [ld](#) = 0
- uint64\_t [nnz](#) = 0
- uint64\_t [nElements](#) = 0
- uint64\_t [maxrow](#) = 0
- [index\\_t](#) \* [col](#) = nullptr
- \_Field::Element\_ptr [dat](#)

**12.313.1 Member Typedef Documentation****12.313.1.1 Field**

```
template<class _Field >
using Field = _Field
```

**12.313.2 Field Documentation****12.313.2.1 delayed**

```
template<class _Field >
bool delayed = false
```

**12.313.2.2 kmax**

```
template<class _Field >
uint64_t kmax = 0
```

**12.313.2.3 m**

```
template<class _Field >
index_t m = 0
```

**12.313.2.4 n**

```
template<class _Field >
index_t n = 0
```

**12.313.2.5 ld**

```
template<class _Field >
index_t ld = 0
```

**12.313.2.6 nnz**

```
template<class _Field >
uint64_t nnz = 0
```

**12.313.2.7 nElements**

```
template<class _Field >
uint64_t nElements = 0
```

**12.313.2.8 maxrow**

```
template<class _Field >
uint64_t maxrow = 0
```

**12.313.2.9 col**

```
template<class _Field >
index_t* col = nullptr
```

**12.313.2.10 dat**

```
template<class _Field >
_Field::Element_ptr dat
```


The documentation for this struct was generated from the following file:

- [ell.h](#)

## 12.314 Sparse< \_Field, SparseMatrix\_t::ELL\_simd > Struct Template Reference

```
#include <ell_simd.h>
```

Inheritance diagram for Sparse< \_Field, SparseMatrix\_t::ELL\_simd >:

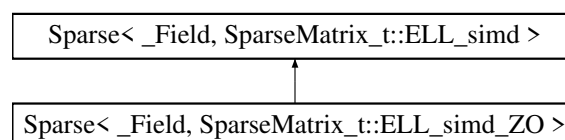

## Data Fields

- bool `delayed` = false
- int `chunk` = 0
- `index_t` `m` = 0
- `index_t` `n` = 0
- `index_t` `ld` = 0
- `uint64_t` `kmax` = 0
- `uint64_t` `nnz` = 0
- `uint64_t` `nElements` = 0
- `uint64_t` `maxrow` = 0
- `uint64_t` `nChunks` = 0
- `index_t` \* `col` = nullptr
- `_Field::Element_ptr` `dat`

## 12.314.1 Field Documentation

### 12.314.1.1 `delayed`

```
template<class _Field >
bool delayed = false
```

### 12.314.1.2 `chunk`

```
template<class _Field >
int chunk = 0
```

### 12.314.1.3 `m`

```
template<class _Field >
index_t m = 0
```

### 12.314.1.4 `n`

```
template<class _Field >
index_t n = 0
```

### 12.314.1.5 `ld`

```
template<class _Field >
index_t ld = 0
```

### 12.314.1.6 `kmax`

```
template<class _Field >
uint64_t kmax = 0
```

### 12.314.1.7 `nnz`

```
template<class _Field >
uint64_t nnz = 0
```

### 12.314.1.8 `nElements`

```
template<class _Field >
uint64_t nElements = 0
```



**12.314.1.9 maxrow**

```
template<class _Field >
uint64_t maxrow = 0
```

**12.314.1.10 nChunks**

```
template<class _Field >
uint64_t nChunks = 0
```

**12.314.1.11 col**

```
template<class _Field >
index_t* col = nullptr
```

**12.314.1.12 dat**

```
template<class _Field >
_Field::Element_ptr dat
```

The documentation for this struct was generated from the following file:

- [ell\\_simd.h](#)

## 12.315 Sparse< \_Field, SparseMatrix\_t::ELL\_simd\_ZO > Struct Template Reference

```
#include <ell_simd.h>
```

Inheritance diagram for Sparse< \_Field, SparseMatrix\_t::ELL\_simd\_ZO >:

**Data Fields**

- \_Field::Element [cst](#) = 1
- bool [delayed](#) = false
- int [chunk](#) = 0
- [index\\_t](#) [m](#) = 0
- [index\\_t](#) [n](#) = 0
- [index\\_t](#) [ld](#) = 0
- uint64\_t [kmax](#) = 0
- uint64\_t [nnz](#) = 0
- uint64\_t [nElements](#) = 0
- uint64\_t [maxrow](#) = 0
- uint64\_t [nChunks](#) = 0
- [index\\_t](#) \* [col](#) = nullptr
- \_Field::Element\_ptr [dat](#)

**12.315.1 Field Documentation****12.315.1.1 cst**

```
template<class _Field >
_Field::Element cst = 1
```

**12.315.1.2 delayed**

```
template<class _Field >
bool delayed = false [inherited]
```

**12.315.1.3 chunk**

```
template<class _Field >
int chunk = 0 [inherited]
```

**12.315.1.4 m**

```
template<class _Field >
index_t m = 0 [inherited]
```

**12.315.1.5 n**

```
template<class _Field >
index_t n = 0 [inherited]
```

**12.315.1.6 ld**

```
template<class _Field >
index_t ld = 0 [inherited]
```

**12.315.1.7 kmax**

```
template<class _Field >
uint64_t kmax = 0 [inherited]
```

**12.315.1.8 nnz**

```
template<class _Field >
uint64_t nnz = 0 [inherited]
```

**12.315.1.9 nElements**

```
template<class _Field >
uint64_t nElements = 0 [inherited]
```

**12.315.1.10 maxrow**

```
template<class _Field >
uint64_t maxrow = 0 [inherited]
```

**12.315.1.11 nChunks**

```
template<class _Field >
uint64_t nChunks = 0 [inherited]
```

**12.315.1.12 col**

```
template<class _Field >
index_t* col = nullptr [inherited]
```

**12.315.1.13 dat**

```
template<class _Field >
_Field::Element_ptr dat [inherited]
```


The documentation for this struct was generated from the following file:

- [ell\\_simd.h](#)

## 12.316 Sparse< \_Field, SparseMatrix\_t::ELL\_ZO > Struct Template Reference

```
#include <ell.h>
```

Inheritance diagram for Sparse< \_Field, SparseMatrix\_t::ELL\_ZO >:

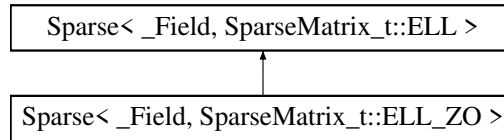

### Public Types

- using [Field](#) = \_Field

### Data Fields

- \_Field::Element [cst](#) = 1
- bool [delayed](#) = false
- uint64\_t [kmax](#) = 0
- [index\\_t](#) [m](#) = 0
- [index\\_t](#) [n](#) = 0
- [index\\_t](#) [ld](#) = 0
- uint64\_t [nnz](#) = 0
- uint64\_t [nElements](#) = 0
- uint64\_t [maxrow](#) = 0
- [index\\_t](#) \* [col](#) = nullptr
- \_Field::Element\_ptr [dat](#)

### 12.316.1 Member Typedef Documentation

#### 12.316.1.1 Field

```
template<class _Field >
using Field = _Field
```

### 12.316.2 Field Documentation

#### 12.316.2.1 cst

```
template<class _Field >
_Field::Element cst = 1
```

#### 12.316.2.2 delayed

```
template<class _Field >
bool delayed = false [inherited]
```

#### 12.316.2.3 kmax

```
template<class _Field >
uint64_t kmax = 0 [inherited]
```

#### 12.316.2.4 m

```
template<class _Field >
index\_t m = 0 [inherited]
```

**12.316.2.5 n**

```
template<class _Field >
index_t n = 0 [inherited]
```

**12.316.2.6 ld**

```
template<class _Field >
index_t ld = 0 [inherited]
```

**12.316.2.7 nnz**

```
template<class _Field >
uint64_t nnz = 0 [inherited]
```

**12.316.2.8 nElements**

```
template<class _Field >
uint64_t nElements = 0 [inherited]
```

**12.316.2.9 maxrow**

```
template<class _Field >
uint64_t maxrow = 0 [inherited]
```

**12.316.2.10 col**

```
template<class _Field >
index_t* col = nullptr [inherited]
```

**12.316.2.11 dat**

```
template<class _Field >
_Field::Element_ptr dat [inherited]
```

The documentation for this struct was generated from the following file:

- [ell.h](#)

## 12.317 Sparse<\_Field, SparseMatrix\_t::HYB\_ZO > Struct Template Reference

```
#include <hyb_zo.h>
```

**Public Types**

- using [Field](#) = [\\_Field](#)
- typedef [Sparse](#)< [\\_Field](#), [SparseMatrix\\_t::HYB\\_ZO](#) > [Self\\_t](#)

**Data Fields**

- bool [delayed](#) = false
- uint64\_t [kmax](#) = 0
- [index\\_t](#) [m](#) = 0
- [index\\_t](#) [n](#) = 0
- uint64\_t [nnz](#) = 0
- uint64\_t [maxrow](#) = 0
- uint64\_t [nElements](#) = 0
- [Sparse](#)< [\\_Field](#), [SparseMatrix\\_t::CSR](#) > \* [dat](#) = nullptr
- [Sparse](#)< [\\_Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > \* [one](#) = nullptr
- [Sparse](#)< [\\_Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > \* [mone](#) = nullptr

## 12.317.1 Member Typedef Documentation

### 12.317.1.1 Field

```
template<class _Field >
using Field = _Field
```

### 12.317.1.2 Self\_t

```
template<class _Field >
Sparse<_Field, SparseMatrix_t::HYB_ZO> Self_t
```

## 12.317.2 Field Documentation

### 12.317.2.1 delayed

```
template<class _Field >
bool delayed = false
```

### 12.317.2.2 kmax

```
template<class _Field >
uint64_t kmax = 0
```

### 12.317.2.3 m

```
template<class _Field >
index_t m = 0
```

### 12.317.2.4 n

```
template<class _Field >
index_t n = 0
```

### 12.317.2.5 nnz

```
template<class _Field >
uint64_t nnz = 0
```

### 12.317.2.6 maxrow

```
template<class _Field >
uint64_t maxrow = 0
```

### 12.317.2.7 nElements

```
template<class _Field >
uint64_t nElements = 0
```

### 12.317.2.8 dat

```
template<class _Field >
Sparse<_Field, SparseMatrix_t::CSR>* dat = nullptr
```

### 12.317.2.9 one

```
template<class _Field >
Sparse<_Field, SparseMatrix_t::CSR_ZO>* one = nullptr
```

### 12.317.2.10 mone

```
template<class _Field >
Sparse<_Field, SparseMatrix_t::CSR_ZO>* mone = nullptr
```

The documentation for this struct was generated from the following file:

- [hyb\\_zo.h](#)

## 12.318 Sparse< \_Field, SparseMatrix\_t::SELL > Struct Template Reference

```
#include <sell.h>
Inheritance diagram for Sparse< _Field, SparseMatrix_t::SELL >:
```



### Public Types

- using [Field](#) = [\\_Field](#)

### Data Fields

- bool [delayed](#) = false
- int [chunk](#) = 0
- [index\\_t](#) [kmax](#) = 0
- [index\\_t](#) [m](#) = 0
- [index\\_t](#) [n](#) = 0
- [index\\_t](#) [maxrow](#) = 0
- [index\\_t](#) [sigma](#) = 0
- [index\\_t](#) [nChunks](#) = 0
- [uint64\\_t](#) [nnz](#) = 0
- [uint64\\_t](#) [nElements](#) = 0
- [index\\_t](#) \* [perm](#) = nullptr
- [uint64\\_t](#) \* [st](#) = nullptr
- [index\\_t](#) \* [chunkSize](#) = nullptr
- [index\\_t](#) \* [col](#) = nullptr
- [\\_Field::Element\\_ptr](#) [dat](#)

## 12.318.1 Member Typedef Documentation

### 12.318.1.1 Field

```
template<class _Field >
using Field = \_Field
```

## 12.318.2 Field Documentation

### 12.318.2.1 delayed

```
template<class _Field >
bool delayed = false
```

#### 12.318.2.2 chunk

```
template<class _Field >  
int chunk = 0
```

#### 12.318.2.3 kmax

```
template<class _Field >  
index_t kmax = 0
```

#### 12.318.2.4 m

```
template<class _Field >  
index_t m = 0
```

#### 12.318.2.5 n

```
template<class _Field >  
index_t n = 0
```

#### 12.318.2.6 maxrow

```
template<class _Field >  
index_t maxrow = 0
```

#### 12.318.2.7 sigma

```
template<class _Field >  
index_t sigma = 0
```

#### 12.318.2.8 nChunks

```
template<class _Field >  
index_t nChunks = 0
```

#### 12.318.2.9 nnz

```
template<class _Field >  
uint64_t nnz = 0
```

#### 12.318.2.10 nElements

```
template<class _Field >  
uint64_t nElements = 0
```

#### 12.318.2.11 perm

```
template<class _Field >  
index_t* perm = nullptr
```

#### 12.318.2.12 st

```
template<class _Field >  
uint64_t* st = nullptr
```

#### 12.318.2.13 chunkSize

```
template<class _Field >  
index_t* chunkSize = nullptr
```

**12.318.2.14 col**

```
template<class _Field >
index_t* col = nullptr
```

**12.318.2.15 dat**

```
template<class _Field >
_Field::Element_ptr dat
```


The documentation for this struct was generated from the following file:

- [sell.h](#)

## 12.319 Sparse< \_Field, SparseMatrix\_t::SELL\_ZO > Struct Template Reference

```
#include <sell.h>
```

Inheritance diagram for Sparse< \_Field, SparseMatrix\_t::SELL\_ZO >:

**Public Types**

- using [Field](#) = \_Field

**Data Fields**

- \_Field::Element [cst](#) = 1
- bool [delayed](#) = false
- int [chunk](#) = 0
- index\_t [kmax](#) = 0
- index\_t [m](#) = 0
- index\_t [n](#) = 0
- index\_t [maxrow](#) = 0
- index\_t [sigma](#) = 0
- index\_t [nChunks](#) = 0
- uint64\_t [nnz](#) = 0
- uint64\_t [nElements](#) = 0
- index\_t \* [perm](#) = nullptr
- uint64\_t \* [st](#) = nullptr
- index\_t \* [chunkSize](#) = nullptr
- index\_t \* [col](#) = nullptr
- \_Field::Element\_ptr [dat](#)

**12.319.1 Member Typedef Documentation****12.319.1.1 Field**

```
template<class _Field >
using Field = _Field
```



## 12.319.2 Field Documentation

### 12.319.2.1 cst

```
template<class _Field >
_Field::Element cst = 1
```

### 12.319.2.2 delayed

```
template<class _Field >
bool delayed = false [inherited]
```

### 12.319.2.3 chunk

```
template<class _Field >
int chunk = 0 [inherited]
```

### 12.319.2.4 kmax

```
template<class _Field >
index_t kmax = 0 [inherited]
```

### 12.319.2.5 m

```
template<class _Field >
index_t m = 0 [inherited]
```

### 12.319.2.6 n

```
template<class _Field >
index_t n = 0 [inherited]
```

### 12.319.2.7 maxrow

```
template<class _Field >
index_t maxrow = 0 [inherited]
```

### 12.319.2.8 sigma

```
template<class _Field >
index_t sigma = 0 [inherited]
```

### 12.319.2.9 nChunks

```
template<class _Field >
index_t nChunks = 0 [inherited]
```

### 12.319.2.10 nnz

```
template<class _Field >
uint64_t nnz = 0 [inherited]
```

### 12.319.2.11 nElements

```
template<class _Field >
uint64_t nElements = 0 [inherited]
```

### 12.319.2.12 perm

```
template<class _Field >
index_t* perm = nullptr [inherited]
```

**12.319.2.13 st**

```
template<class _Field >
uint64_t* st = nullptr [inherited]
```

**12.319.2.14 chunkSize**

```
template<class _Field >
index_t* chunkSize = nullptr [inherited]
```

**12.319.2.15 col**

```
template<class _Field >
index_t* col = nullptr [inherited]
```

**12.319.2.16 dat**

```
template<class _Field >
_Field::Element_ptr dat [inherited]
```

The documentation for this struct was generated from the following file:

- [sell.h](#)

**12.320 SpMat< Field, flag > Struct Template Reference**

```
#include <fflas_sparse.h>
```

**Data Fields**

- [FFLAS::CooMat< Field > \\* \\_coo](#) = nullptr
- [FFLAS::CsrMat< Field > \\* \\_csr](#) = nullptr
- [FFLAS::EllMat< Field > \\* \\_ell](#) = nullptr

**12.320.1 Field Documentation****12.320.1.1 \_coo**

```
template<class Field , int flag = HelperFlag::none>
FFLAS::CooMat<Field>* _coo = nullptr
```

**12.320.1.2 \_csr**

```
template<class Field , int flag = HelperFlag::none>
FFLAS::CsrMat<Field>* _csr = nullptr
```

**12.320.1.3 \_ell**

```
template<class Field , int flag = HelperFlag::none>
FFLAS::EllMat<Field>* _ell = nullptr
```

The documentation for this struct was generated from the following file:

- [fflas\\_sparse.h](#)

**12.321 StatsMatrix Struct Reference**

```
#include <utils.h>
```

**Data Fields**

- uint64\_t rowdim = 0
- uint64\_t coldim = 0
- uint64\_t nOnes = 0
- uint64\_t nMOnes = 0
- uint64\_t nOthers = 0
- uint64\_t nnz = 0
- uint64\_t maxRow = 0
- uint64\_t minRow = 0
- uint64\_t averageRow = 0
- uint64\_t deviationRow = 0
- uint64\_t maxCol = 0
- uint64\_t minCol = 0
- uint64\_t averageCol = 0
- uint64\_t deviationCol = 0
- uint64\_t minColDifference = 0
- uint64\_t maxColDifference = 0
- uint64\_t averageColDifference = 0
- uint64\_t deviationColDifference = 0
- uint64\_t minRowDifference = 0
- uint64\_t maxRowDifference = 0
- uint64\_t averageRowDifference = 0
- uint64\_t deviationRowDifference = 0
- uint64\_t nDenseRows = 0
- uint64\_t nDenseCols = 0
- uint64\_t nEmptyRows = 0
- uint64\_t nEmptyCols = 0
- uint64\_t nEmptyColsEnd = 0
- std::vector< uint64\_t > denseRows
- std::vector< uint64\_t > denseCols

**12.321.1 Field Documentation****12.321.1.1 rowdim**

```
uint64_t rowdim = 0
```

**12.321.1.2 coldim**

```
uint64_t coldim = 0
```

**12.321.1.3 nOnes**

```
uint64_t nOnes = 0
```

**12.321.1.4 nMOnes**

```
uint64_t nMOnes = 0
```

**12.321.1.5 nOthers**

```
uint64_t nOthers = 0
```

**12.321.1.6 nnz**

```
uint64_t nnz = 0
```

**12.321.1.7 maxRow**

```
uint64_t maxRow = 0
```

**12.321.1.8 minRow**

```
uint64_t minRow = 0
```

**12.321.1.9 averageRow**

```
uint64_t averageRow = 0
```

**12.321.1.10 deviationRow**

```
uint64_t deviationRow = 0
```

**12.321.1.11 maxCol**

```
uint64_t maxCol = 0
```

**12.321.1.12 minCol**

```
uint64_t minCol = 0
```

**12.321.1.13 averageCol**

```
uint64_t averageCol = 0
```

**12.321.1.14 deviationCol**

```
uint64_t deviationCol = 0
```

**12.321.1.15 minColDifference**

```
uint64_t minColDifference = 0
```

**12.321.1.16 maxColDifference**

```
uint64_t maxColDifference = 0
```

**12.321.1.17 averageColDifference**

```
uint64_t averageColDifference = 0
```

**12.321.1.18 deviationColDifference**

```
uint64_t deviationColDifference = 0
```

**12.321.1.19 minRowDifference**

```
uint64_t minRowDifference = 0
```

**12.321.1.20 maxRowDifference**

```
uint64_t maxRowDifference = 0
```

**12.321.1.21 averageRowDifference**

```
uint64_t averageRowDifference = 0
```

**12.321.1.22 deviationRowDifference**

```
uint64_t deviationRowDifference = 0
```

**12.321.1.23 nDenseRows**

```
uint64_t nDenseRows = 0
```

**12.321.1.24 nDenseCols**

```
uint64_t nDenseCols = 0
```

**12.321.1.25 nEmptyRows**

```
uint64_t nEmptyRows = 0
```

**12.321.1.26 nEmptyCols**

```
uint64_t nEmptyCols = 0
```

**12.321.1.27 nEmptyColsEnd**

```
uint64_t nEmptyColsEnd = 0
```

**12.321.1.28 denseRows**

```
std::vector<uint64_t> denseRows
```

**12.321.1.29 denseCols**

```
std::vector<uint64_t> denseCols
```

The documentation for this struct was generated from the following file:

- [utils.h](#)

**12.322 support\_fast\_mod< T > Struct Template Reference**

```
#include <fflas_freduce.h>
```

Inheritance diagram for support\_fast\_mod< T >:




The documentation for this struct was generated from the following file:

- [fflas\\_freduce.h](#)

**12.323 support\_fast\_mod< double > Struct Reference**

```
#include <fflas_freduce.h>
```

Inheritance diagram for support\_fast\_mod< double >:



The documentation for this struct was generated from the following file:

- [fflas\\_freduce.h](#)

### 12.324 support\_fast\_mod< float > Struct Reference

```
#include <fflas_freduce.h>
```

Inheritance diagram for support\_fast\_mod< float >:



The documentation for this struct was generated from the following file:

- [fflas\\_freduce.h](#)

### 12.325 support\_fast\_mod< int64\_t > Struct Reference

```
#include <fflas_freduce.h>
```

Inheritance diagram for support\_fast\_mod< int64\_t >:




The documentation for this struct was generated from the following file:

- [fflas\\_freduce.h](#)

### 12.326 support\_simd< T > Struct Template Reference

```
#include <fflas_simd.h>
```

Inheritance diagram for support\_simd< T >:




The documentation for this struct was generated from the following file:

- [fflas\\_simd.h](#)

## 12.327 support\_simd\_add< T > Struct Template Reference

```
#include <fflas_fadd.h>
```

Inheritance diagram for support\_simd\_add< T >:




The documentation for this struct was generated from the following file:

- [fflas\\_fadd.h](#)

## 12.328 support\_simd\_mod< T > Struct Template Reference

```
#include <fflas_freduce.h>
```

Inheritance diagram for support\_simd\_mod< T >:



The documentation for this struct was generated from the following file:

- [fflas\\_freduce.h](#)

## 12.329 Test< Elt > Class Template Reference

### Public Types

- using [Field](#) = Modular<Elt>
- using [Elt\\_ptr](#) = typename [Field::Element\\_ptr](#)
- using [Residu](#) = typename [Field::Residu\\_t](#)
- template<bool B, class T = void>  
using [enable\\_if\\_t](#) = typename std::enable\_if<B, T>::type
- template<typename [Simd](#) >  
using [is\\_same\\_element](#) = typename [Simd::template is\\_same\\_element<\[Field\]\(#\)>](#)
- template<typename E >  
using [enable\\_if\\_no\\_simd\\_t](#) = [enable\\_if\\_t](#)<[Simd](#)<E>::vect\_size == 1>
- template<typename E >  
using [enable\\_if\\_simd128\\_t](#) = [enable\\_if\\_t](#)<sizeof(E)\*[Simd](#)<E>::vect\_size == 16>
- template<typename E >  
using [enable\\_if\\_simd256\\_t](#) = [enable\\_if\\_t](#)<sizeof(E)\*[Simd](#)<E>::vect\_size == 32>
- template<typename E >  
using [enable\\_if\\_simd512\\_t](#) = [enable\\_if\\_t](#)<sizeof(E)\*[Simd](#)<E>::vect\_size == 64>

### Public Member Functions

- [Test](#) (size\_t mm, size\_t nn)
- template<typename [Simd](#) = NoSimd<Elt>, [enable\\_if\\_t](#)<[is\\_same\\_element](#)< [Simd](#) >::value > \* = nullptr>  
bool [test\\_franspose](#) (size\_t m, size\_t n, [Elt\\_ptr](#) A, size\_t lda, [Elt\\_ptr](#) B, size\_t ldb)

- `template<typename Simd = NoSimd<Elt>, enable_if_t< is_same_element< Simd >::value > * = nullptr>  
bool doTests ()`
- `template<typename _E = Elt, enable_if_t< is_same< _E, Elt >::value > * = nullptr, enable_if_no_simd_t< _E > * = nullptr>  
bool run ()`

### Static Public Member Functions

- `template<typename _E = Elt, enable_if_t< !is_same< _E, Givaro::Integer >::value > * = nullptr>  
static Residu cardinality ()`
- `template<typename _E = Elt, enable_if_t< is_same< _E, Givaro::Integer >::value > * = nullptr>  
static Residu cardinality ()`

### Protected Attributes

- `Field F`
- `size_t _mm`
- `size_t _nn`

## 12.329.1 Member Typedef Documentation

### 12.329.1.1 Field

```
template<typename Elt >
using Field = Modular<Elt>
```

### 12.329.1.2 Elt\_ptr

```
template<typename Elt >
using Elt_ptr = typename Field::Element_ptr
```

### 12.329.1.3 Residu

```
template<typename Elt >
using Residu = typename Field::Residu_t
```

### 12.329.1.4 enable\_if\_t

```
template<typename Elt >
template<bool B, class T = void>
using enable_if_t = typename std::enable_if<B, T>::type
```

### 12.329.1.5 is\_same\_element

```
template<typename Elt >
template<typename Simd >
using is_same_element = typename Simd::template is_same_element<Field>
```

### 12.329.1.6 enable\_if\_no\_simd\_t

```
template<typename Elt >
template<typename E >
using enable_if_no_simd_t = enable_if_t<Simd<E>::vect_size == 1>
```

### 12.329.1.7 enable\_if\_simd128\_t

```
template<typename Elt >
template<typename E >
using enable_if_simd128_t = enable_if_t<sizeof(E)*Simd<E>::vect_size == 16>
```



**12.329.1.8 enable\_if\_simd256\_t**

```
template<typename Elt >
template<typename E >
using enable_if_simd256_t = enable_if_t<sizeof(E)*Simd<E>::vect_size == 32>
```

**12.329.1.9 enable\_if\_simd512\_t**

```
template<typename Elt >
template<typename E >
using enable_if_simd512_t = enable_if_t<sizeof(E)*Simd<E>::vect_size == 64>
```

**12.329.2 Constructor & Destructor Documentation****12.329.2.1 Test()**

```
template<typename Elt >
Test (
    size_t mm,
    size_t nn) [inline]
```

**12.329.3 Member Function Documentation****12.329.3.1 cardinality() [1/2]**

```
template<typename Elt >
template<typename _E = Elt, enable_if_t<!is_same< _E, Givaro::Integer >::value > * = nullptr>
static Residu cardinality () [inline], [static]
```

**12.329.3.2 cardinality() [2/2]**

```
template<typename Elt >
template<typename _E = Elt, enable_if_t< is_same< _E, Givaro::Integer >::value > * = nullptr>
static Residu cardinality () [inline], [static]
```

**12.329.3.3 test\_ftranspose()**

```
template<typename Elt >
template<typename Simd = NoSimd<Elt>, enable_if_t< is_same_element< Simd >::value > * =
nullptr>
bool test_ftranspose (
    size_t m,
    size_t n,
    Elt_ptr A,
    size_t lda,
    Elt_ptr B,
    size_t ldb) [inline]
```

**12.329.3.4 doTests()**

```
template<typename Elt >
template<typename Simd = NoSimd<Elt>, enable_if_t< is_same_element< Simd >::value > * =
nullptr>
bool doTests () [inline]
```

**12.329.3.5 run()**

```
template<typename Elt >
template<typename _E = Elt, enable_if_t< is_same< _E, Elt >::value > * = nullptr, enable_if_no_simd_t<
_E > * = nullptr>
bool run () [inline]
```

## 12.329.4 Field Documentation

### 12.329.4.1 F

```
template<typename Elt >
Field F [protected]
```

### 12.329.4.2 \_mm

```
template<typename Elt >
size_t _mm [protected]
```

### 12.329.4.3 \_nn

```
template<typename Elt >
size_t _nn [protected]
```

The documentation for this class was generated from the following file:

- [test-storage-transpose.C](#)

## 12.330 TestOneMethod< Simd > Class Template Reference

### Public Types

- using [Element](#) = typename Simd::scalar\_t
- using [vect\\_t](#) = typename Simd::vect\_t
- using [vectElt](#) = vector<[Element](#)>
- template<bool B, typename T = void>  
using [enable\\_if\\_t](#) = typename enable\_if<B, T>::type

### Public Member Functions

- template<typename... AScal, typename RScal, typename... ASimd, typename RSimd, [enable\\_if\\_t](#)< sizeof...(AScal)==sizeof...(ASimd)>  
\* = nullptr, [enable\\_if\\_t](#)< [count\\_nonconst\\_lvalue\\_reference](#)< AScal... >::n==[count\\_nonconst\\_lvalue\\_reference](#)< ASimd... >::n > \*  
= nullptr, [enable\\_if\\_t](#)< [is\\_all\\_same](#)< AScal... >::value > \* = nullptr, [enable\\_if\\_t](#)< [is\\_all\\_same](#)< [vect\\_t](#), ASimd... >::value > \* =  
nullptr>  
[TestOneMethod](#) (function< RSimd(ASimd...)> fsimd, function< RScal(AScal...)> fscal, function<  
void(vector< [vectElt](#) > &)> genInputs, string fname)
- template<typename Ret, typename... AScal>  
[enable\\_if\\_t](#)< [is\\_all\\_same](#)< [Element](#), AScal... >::value &&std::is\_convertible< Ret, [Element](#) >::value, void  
> [evaluate\\_scalar\\_method](#) (function< Ret(AScal...)> fscal)
- template<typename... AScal>  
[enable\\_if\\_t](#)< [is\\_all\\_same](#)< [vectElt](#), AScal... >::value, void > [evaluate\\_scalar\\_method](#) (function<  
[vectElt](#)(AScal...)> fscal)
- template<typename... AScal>  
[enable\\_if\\_t](#)< [is\\_all\\_same](#)< [vectElt](#), AScal... >::value, void > [evaluate\\_scalar\\_method](#) (function<  
void(AScal...)> fscal)
- template<typename Ret, typename... ASimd>  
[enable\\_if\\_t](#)< [is\\_all\\_same](#)< [vect\\_t](#), ASimd... >::value &&std::is\_convertible< Ret, [vect\\_t](#) >::value, void >  
[evaluate\\_simd\\_method](#) (function< Ret(ASimd...)> fsimd, array< [vect\\_t](#), sizeof...(ASimd)> &simd\_in)
- template<typename... ASimd>  
[enable\\_if\\_t](#)< [is\\_all\\_same](#)< [vect\\_t](#), ASimd... >::value, void > [evaluate\\_simd\\_method](#) (function<  
void(ASimd...)> fsimd, array< [vect\\_t](#), sizeof...(ASimd)> &simd\_in)
- bool [getStatus](#) () const
- string [getTestName](#) () const
- bool [writeResultLine](#) () const
- void [writeDebugData](#) () const

### Static Public Attributes

- static constexpr size\_t [vect\\_size](#) = Simd::vect\_size

### Protected Attributes

- size\_t [nb\\_lref](#)
- string [name](#)
- vector< [vectElt](#) > [inputs](#)
- vector< [vectElt](#) > [outputs\\_simd](#)
- vector< [vectElt](#) > [outputs\\_scalar](#)

## 12.330.1 Member Typedef Documentation

### 12.330.1.1 Element

```
template<typename Simd >
using Element = typename Simd::scalar_t
```

### 12.330.1.2 vect\_t

```
template<typename Simd >
using vect_t = typename Simd::vect_t
```

### 12.330.1.3 vectElt

```
template<typename Simd >
using vectElt = vector<Element>
```

### 12.330.1.4 enable\_if\_t

```
template<typename Simd >
template<bool B, typename T = void>
using enable_if_t = typename enable_if<B, T>::type
```

## 12.330.2 Constructor & Destructor Documentation

### 12.330.2.1 TestOneMethod()

```
template<typename Simd >
template<typename... AScal, typename RScal , typename... ASimd, typename RSimd , enable_if_t<
sizeof...(AScal)==sizeof...(ASimd)> * = nullptr, enable_if_t< count_nonconst_lvalue_reference<
AScal... >::n==count_nonconst_lvalue_reference< ASimd... >::n > * = nullptr, enable_if_t<
is_all_same< AScal... >::value > * = nullptr, enable_if_t< is_all_same< vect_t, ASimd...
>::value > * = nullptr>
TestOneMethod (
    function< RSimd(ASimd...)> fsimd,
    function< RScal(AScal...)> fscal,
    function< void(vector< vectElt > &)> genInputs,
    string fname) [inline]
```

## 12.330.3 Member Function Documentation

### 12.330.3.1 evaluate\_scalar\_method() [1/3]

```
template<typename Simd >
template<typename Ret , typename... AScal>
enable_if_t< is_all_same< Element, AScal... >::value &&std::is_convertible< Ret, Element >↔
::value, void > evaluate_scalar_method (
    function< Ret(AScal...)> fscal) [inline]
```

**12.330.3.2 evaluate\_scalar\_method() [2/3]**

```
template<typename Simd >
template<typename... AScal>
enable_if_t< is_all_same< vectElt, AScal... >::value, void > evaluate_scalar_method (
    function< vectElt (AScal...)> fscal) [inline]
```

**12.330.3.3 evaluate\_scalar\_method() [3/3]**

```
template<typename Simd >
template<typename... AScal>
enable_if_t< is_all_same< vectElt, AScal... >::value, void > evaluate_scalar_method (
    function< void (AScal...)> fscal) [inline]
```

**12.330.3.4 evaluate\_simd\_method() [1/2]**

```
template<typename Simd >
template<typename Ret , typename... ASimd>
enable_if_t< is_all_same< vect_t, ASimd... >::value &&std::is_convertible< Ret, vect_t >↔
::value, void > evaluate_simd_method (
    function< Ret (ASimd...)> fsimd,
    array< vect_t, sizeof...(ASimd)> & simd_in) [inline]
```

**12.330.3.5 evaluate\_simd\_method() [2/2]**

```
template<typename Simd >
template<typename... ASimd>
enable_if_t< is_all_same< vect_t, ASimd... >::value, void > evaluate_simd_method (
    function< void (ASimd...)> fsimd,
    array< vect_t, sizeof...(ASimd)> & simd_in) [inline]
```

**12.330.3.6 getStatus()**

```
template<typename Simd >
bool getStatus () const [inline]
```

**12.330.3.7 getTestName()**

```
template<typename Simd >
string getTestName () const [inline]
```

**12.330.3.8 writeResultLine()**

```
template<typename Simd >
bool writeResultLine () const [inline]
```

**12.330.3.9 writeDebugData()**

```
template<typename Simd >
void writeDebugData () const [inline]
```

**12.330.4 Field Documentation****12.330.4.1 vect\_size**

```
template<typename Simd >
size_t vect_size = Simd::vect_size [static], [constexpr]
```

**12.330.4.2 nb\_lref**

```
template<typename Simd >
size_t nb_lref [protected]
```

**12.330.4.3 name**

```
template<typename Simd >
string name [protected]
```

**12.330.4.4 inputs**

```
template<typename Simd >
vector<vectElt> inputs [protected]
```

**12.330.4.5 outputs\_simd**

```
template<typename Simd >
vector<vectElt> outputs_simd [protected]
```

**12.330.4.6 outputs\_scalar**

```
template<typename Simd >
vector<vectElt> outputs_scalar [protected]
```

The documentation for this class was generated from the following file:

- [test-simd.C](#)

**12.331 tfn\_minus Struct Reference**

```
#include <sparse_matrix_traits.h>
```

**Public Member Functions**

- `template<typename... Args>`  
`auto operator() (Args &&... args) const -> decltype(operator+(std::forward< Args >(args)...))`

**12.331.1 Member Function Documentation****12.331.1.1 operator>()()**

```
template<typename... Args>
auto operator() (
    Args &&... args) const -> decltype(operator+(std::forward<Args>(args)...))

[inline]
```

The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

**12.332 tfn\_minus\_eq Struct Reference**

```
#include <sparse_matrix_traits.h>
```

**Public Member Functions**

- `template<typename... Args>`  
`auto operator() (Args &&... args) const -> decltype(operator+(std::forward< Args >(args)...))`

## 12.332.1 Member Function Documentation

### 12.332.1.1 operator>()

```
template<typename... Args>
auto operator() (
    Args &&... args) const -> decltype(operator+(std::forward<Args>(args)...))
[inline]
```

The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.333 tfn\_mul Struct Reference

```
#include <sparse_matrix_traits.h>
```

### Public Member Functions

- template<typename... Args>  
auto [operator\(\)](#) (Args &&... args) const -> decltype(operator+(std::forward< Args >(args)...))

## 12.333.1 Member Function Documentation

### 12.333.1.1 operator>()

```
template<typename... Args>
auto operator() (
    Args &&... args) const -> decltype(operator+(std::forward<Args>(args)...))
[inline]
```

The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.334 tfn\_mul\_eq Struct Reference

```
#include <sparse_matrix_traits.h>
```

### Public Member Functions

- template<typename... Args>  
auto [operator\(\)](#) (Args &&... args) const -> decltype(operator+(std::forward< Args >(args)...))

## 12.334.1 Member Function Documentation

### 12.334.1.1 operator>()

```
template<typename... Args>
auto operator() (
    Args &&... args) const -> decltype(operator+(std::forward<Args>(args)...))
[inline]
```

The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

## 12.335 tfn\_plus Struct Reference

```
#include <sparse_matrix_traits.h>
```

**Public Member Functions**

- `template<typename... Args>`  
`auto operator\(\) (Args &&... args) const -> decltype(operator+(std::forward< Args >(args)...))`

**12.335.1 Member Function Documentation****12.335.1.1 [operator\(\)](#)()**

```
template<typename... Args>
auto operator() (
    Args &&... args) const -> decltype(operator+(std::forward<Args>(args)...))
[inline]
```

The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

**12.336 tfn\_plus\_eq Struct Reference**

```
#include <sparse_matrix_traits.h>
```

**Public Member Functions**

- `template<typename... Args>`  
`auto operator\(\) (Args &&... args) const -> decltype(operator+(std::forward< Args >(args)...))`

**12.336.1 Member Function Documentation****12.336.1.1 [operator\(\)](#)()**

```
template<typename... Args>
auto operator() (
    Args &&... args) const -> decltype(operator+(std::forward<Args>(args)...))
[inline]
```

The documentation for this struct was generated from the following file:

- [sparse\\_matrix\\_traits.h](#)

**12.337 Threads Struct Reference**

The documentation for this struct was generated from the following file:

- [blockcuts.inl](#)

**12.338 ThreeD Struct Reference**

The documentation for this struct was generated from the following file:

- [blockcuts.inl](#)

**12.339 ThreeDAdaptive Struct Reference**

The documentation for this struct was generated from the following file:

- [blockcuts.inl](#)

## 12.340 ThreeDInPlace Struct Reference

The documentation for this struct was generated from the following file:

- [blockcuts.inl](#)

## 12.341 TRSMHelper< RecIterTrait, ParSeqTrait > Struct Template Reference

TRSM Helper.

### Public Member Functions

- `template<class Cut , class Param >`  
[TRSMHelper](#) ([ParSeqHelper::Parallel](#)< Cut, Param > \_PS)
- `TRSMHelper` ([ParSeqHelper::Sequential](#) \_PS)
- `template<typename RIT , typename PST >`  
[TRSMHelper](#) ([TRSMHelper](#)< RIT, PST > &\_TH)
- `template<class Dom , class Algo = FFLAS::MMHelperAlgo::Winograd, class ModeT = typename FFLAS::ModeTraits<Dom>::value>`  
[FFLAS::MMHelper](#)< Dom, Algo, ModeT, ParSeqTrait > [pMMH](#) (Dom &D, size\_t m, size\_t k, size\_t n, ParSeqTrait p) const
- `template<class Dom , class Algo = FFLAS::MMHelperAlgo::Winograd, class ModeT = typename FFLAS::ModeTraits<Dom>::value>`  
[FFLAS::MMHelper](#)< Dom, Algo, ModeT, ParSeqTrait > [pMMH](#) (Dom &D, size\_t m, size\_t k, size\_t n) const

### Data Fields

- ParSeqTrait [parseq](#)

### 12.341.1 Detailed Description

```
template<typename RecIterTrait = StructureHelper::Recursive, typename ParSeqTrait = ParSeqHelper::Sequential>
struct FFLAS::TRSMHelper< RecIterTrait, ParSeqTrait >
```

TRSM Helper.

### 12.341.2 Constructor & Destructor Documentation

#### 12.341.2.1 TRSMHelper() [1/3]

```
template<typename RecIterTrait = StructureHelper::Recursive, typename ParSeqTrait = ParSeqHelper::Sequential>
template<class Cut , class Param >
TRSMHelper (
    ParSeqHelper::Parallel< Cut, Param > _PS) [inline]
```

#### 12.341.2.2 TRSMHelper() [2/3]

```
template<typename RecIterTrait = StructureHelper::Recursive, typename ParSeqTrait = ParSeqHelper::Sequential>
TRSMHelper (
    ParSeqHelper::Sequential _PS) [inline]
```

#### 12.341.2.3 TRSMHelper() [3/3]

```
template<typename RecIterTrait = StructureHelper::Recursive, typename ParSeqTrait = ParSeqHelper::Sequential>
template<typename RIT , typename PST >
TRSMHelper (
    TRSMHelper< RIT, PST > &_TH) [inline]
```



### 12.341.3 Member Function Documentation

#### 12.341.3.1 pMMH() [1/2]

```
template<typename RecIterTrait = StructureHelper::Recursive, typename ParSeqTrait = ParSeq↵
Helper::Sequential>
template<class Dom , class Algo = FFLAS::MMHelperAlgo::Winograd, class ModeT = typename FFLAS↵
::ModeTraits<Dom>::value>
FFLAS::MMHelper< Dom, Algo, ModeT, ParSeqTrait > pMMH (
    Dom & D,
    size_t m,
    size_t k,
    size_t n,
    ParSeqTrait p) const [inline]
```

#### 12.341.3.2 pMMH() [2/2]

```
template<typename RecIterTrait = StructureHelper::Recursive, typename ParSeqTrait = ParSeq↵
Helper::Sequential>
template<class Dom , class Algo = FFLAS::MMHelperAlgo::Winograd, class ModeT = typename FFLAS↵
::ModeTraits<Dom>::value>
FFLAS::MMHelper< Dom, Algo, ModeT, ParSeqTrait > pMMH (
    Dom & D,
    size_t m,
    size_t k,
    size_t n) const [inline]
```

### 12.341.4 Field Documentation

#### 12.341.4.1 parseq

```
template<typename RecIterTrait = StructureHelper::Recursive, typename ParSeqTrait = ParSeq↵
Helper::Sequential>
ParSeqTrait parseq
```

The documentation for this struct was generated from the following file:

- [fflas\\_helpers.inl](#)

## 12.342 TwoD Struct Reference

The documentation for this struct was generated from the following file:

- [blockcuts.inl](#)

## 12.343 TwoDAdaptive Struct Reference

The documentation for this struct was generated from the following file:

- [blockcuts.inl](#)

## 12.344 UnparametricTag Struct Reference

If the field uses a representation with infix operators.

```
#include <field-traits.h>
```

### 12.344.1 Detailed Description

If the field uses a representation with infix operators.

The documentation for this struct was generated from the following file:

- [field-traits.h](#)

## 12.345 `width< T >` Struct Template Reference

### Static Public Attributes

- static constexpr `size_t value` = 2+2\*sizeof(T)

### 12.345.1 Field Documentation

#### 12.345.1.1 `value`

```
template<typename T >
size_t value = 2+2*sizeof(T) [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [test-simd.C](#)

## 12.346 `width< double >` Struct Reference

### Static Public Attributes

- static constexpr `size_t value` = 24

### 12.346.1 Field Documentation

#### 12.346.1.1 `value`

```
size_t value = 24 [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [test-simd.C](#)

## 12.347 `width< float >` Struct Reference

### Static Public Attributes

- static constexpr `size_t value` = 16

### 12.347.1 Field Documentation

#### 12.347.1.1 `value`

```
size_t value = 16 [static], [constexpr]
```

The documentation for this struct was generated from the following file:

- [test-simd.C](#)

## 12.348 Winograd Struct Reference

The documentation for this struct was generated from the following file:

- [fflas\\_helpers.inl](#)

## 12.349 WinogradPar Struct Reference

The documentation for this struct was generated from the following file:

- [fflas\\_helpers.inl](#)

# Chapter 13

## File Documentation

### 13.1 arithprog.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "fflas-ffpack/utils/fflas_randommatrix.h"
```

#### Typedefs

- typedef Givaro::OMPTimer [TTimer](#)

#### Functions

- int [main](#) (int argc, char \*\*argv)

#### 13.1.1 Typedef Documentation

##### 13.1.1.1 TTimer

```
typedef FFLAS::Timer TTimer
```

#### 13.1.2 Function Documentation

##### 13.1.2.1 main()

```
int main (
    int argc,
    char ** argv)
```

### 13.2 autotune/charpoly.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "fflas-ffpack/utils/fflas_randommatrix.h"
#include <iostream>
#include <givaro/modular-balanced.h>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/ffpack/ffpack.h"
#include <ctime>
```

#### Macros

- #define [CUBE](#)(x)
- #define [GFOPS](#)(m, n, r, t)

**Typedefs**

- typedef Givaro::Timer [TTimer](#)

**Functions**

- int [main](#) ()

**13.2.1 Macro Definition Documentation****13.2.1.1 CUBE**

```
#define CUBE(
                x)
```

**Value:**

```
((x)*(x)*(x))
```

**13.2.1.2 GFOPS**

```
#define GFOPS(
                m,
                n,
                r,
                t)
```

**Value:**

```
(2.7*CUBE(double(n)/1000.0))/t
```

**13.2.2 Typedef Documentation****13.2.2.1 TTimer**

```
typedef Givaro::Timer TTimer
```

**13.2.3 Function Documentation****13.2.3.1 main()**

```
int main (
        void )
```

**13.3 examples/charpoly.C File Reference**

```
#include <iostream>
#include "fflas-ffpack/fflas-ffpack.h"
```

**Functions**

- int [main](#) (int argc, char \*\*argv)

*This example computes the characteristic polynomial of a matrix over a defined finite field.*

**13.3.1 Function Documentation****13.3.1.1 main()**

```
int main (
        int argc,
        char ** argv)
```

This example computes the characteristic polynomial of a matrix over a defined finite field.  
Outputs the characteristic polynomial.

## 13.4 fsyrk.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <givaro/modular-balanced.h>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/ffpack/ffpack.h"
#include "fflas-ffpack/utils/fflas_randommatrix.h"
#include <ctime>
```

### Macros

- #define [CUBE](#)(x)
- #define [GFOPS](#)(n, t)

### Functions

- int [main](#) ()

### 13.4.1 Macro Definition Documentation

#### 13.4.1.1 CUBE

```
#define CUBE(
    x)
```

##### Value:

```
((x) * (x) * (x))
```

#### 13.4.1.2 GFOPS

```
#define GFOPS(
    n,
    t)
```

##### Value:

```
(CUBE(double(n) / 1000.0) / (3.0 * t))
```

### 13.4.2 Function Documentation

#### 13.4.2.1 main()

```
int main (
    void )
```

## 13.5 fsytrf.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <givaro/modular-balanced.h>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/ffpack/ffpack.h"
#include "fflas-ffpack/utils/fflas_randommatrix.h"
#include <ctime>
```

### Macros

- #define [CUBE](#)(x)
- #define [GFOPS](#)(n, t)

## Functions

- int [main](#) ()

## 13.5.1 Macro Definition Documentation

### 13.5.1.1 CUBE

```
#define CUBE(  
                x)
```

#### Value:

```
((x) * (x) * (x))
```

### 13.5.1.2 GFOPS

```
#define GFOPS(  
                n,  
                t)
```

#### Value:

```
(CUBE(double(n) / 1000.0) / (3.0 * t))
```

## 13.5.2 Function Documentation

### 13.5.2.1 main()

```
int main (  
            void )
```

## 13.6 ftrtri.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"  
#include "fflas-ffpack/utils/fflas_randommatrix.h"  
#include <iostream>  
#include <givaro/modular-balanced.h>  
#include "fflas-ffpack/utils/timer.h"  
#include "fflas-ffpack/ffpack/ffpack.h"  
#include <ctime>
```

## Macros

- #define [CUBE](#)(x)
- #define [GFOPS](#)(n, t)

## Functions

- int [main](#) ()

## 13.6.1 Macro Definition Documentation

### 13.6.1.1 CUBE

```
#define CUBE(  
                x)
```

#### Value:

```
((x) * (x) * (x))
```

### 13.6.1.2 GFOPS

```
#define GFOPS(
    n,
    t)
```

**Value:**

```
(CUBE(double(n)/1000.0)/(3.0*t))
```

## 13.6.2 Function Documentation

### 13.6.2.1 main()

```
int main (
    void )
```

## 13.7 autotune/pluq.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "fflas-ffpack/utils/fflas_randommatrix.h"
#include <iostream>
#include <givaro/modular-balanced.h>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/ffpack/ffpack.h"
#include <ctime>
```

### Macros

- #define CUBE(x)
- #define GFOPS(m, n, r, t)

### Functions

- int main ()

## 13.7.1 Macro Definition Documentation

### 13.7.1.1 CUBE

```
#define CUBE(
    x)
```

**Value:**

```
((x)*(x)*(x))
```

### 13.7.1.2 GFOPS

```
#define GFOPS(
    m,
    n,
    r,
    t)
```

**Value:**

```
(2.0/3.0*CUBE(double(n)/1000.0) + 2*m/1000.0*n/1000.0*double(r)/1000.0 -
double(r)/1000.0*double(r)/1000.0*(m+n)/1000)/t
```

## 13.7.2 Function Documentation

### 13.7.2.1 main()

```
int main (
    void )
```

## 13.8 examples/pluq.C File Reference

```
#include <iostream>
#include <givaro/modular.h>
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/fflas_io.h"
```

### Functions

- int [main](#) (int argc, char \*\*argv)

### 13.8.1 Function Documentation

#### 13.8.1.1 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.9 winograd.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "fflas-ffpack/utils/fflas_randommatrix.h"
#include <iostream>
#include <fstream>
#include <givaro/modular.h>
#include <givaro/modular-balanced.h>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/fflas/fflas.h"
#include <ctime>
```

### Macros

- #define [DOUBLE\\_TO\\_FLOAT\\_CROSSOVER](#) 0
- #define [GFOPS](#)(n, t)

### Functions

- template<class [Field](#) >  
bool [balanced](#) (const [Field](#) &)
- template<class T >  
bool [balanced](#) (const [Givaro::ModularBalanced](#)< T > &)
- int [main](#) ()

### 13.9.1 Macro Definition Documentation

#### 13.9.1.1 DOUBLE\_TO\_FLOAT\_CROSSOVER

```
#define DOUBLE_TO_FLOAT_CROSSOVER 0
```

#### 13.9.1.2 GFOPS

```
#define GFOPS(
    n,
    t)
```

#### Value:

```
(2.0/t*(double)n/1000.0*(double)n/1000.0*(double)n/1000.0)
```



## 13.9.2 Function Documentation

### 13.9.2.1 `balanced()` [1/2]

```
template<class Field >
bool balanced (
    const Field & )
```

### 13.9.2.2 `balanced()` [2/2]

```
template<class T >
bool balanced (
    const Givaro::ModularBalanced< T > & )
```

### 13.9.2.3 `main()`

```
int main (
    void )
```

## 13.10 benchmark-charpoly-mp.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <givaro/modular.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "fflas-ffpack/utils/Matio.h"
#include "fflas-ffpack/utils/args-parser.h"
```

### Macros

- `#define __FFLASFFPACK_FORCE_SEQ`

### Functions

- `int main` (int argc, char \*\*argv)

## 13.10.1 Macro Definition Documentation

### 13.10.1.1 `__FFLASFFPACK_FORCE_SEQ`

```
#define __FFLASFFPACK_FORCE_SEQ
```

## 13.10.2 Function Documentation

### 13.10.2.1 `main()`

```
int main (
    int argc,
    char ** argv)
```

## 13.11 benchmark-charpoly.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <givaro/modular.h>
#include <givaro/givpoly1.h>
```

```
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "fflas-ffpack/utils/fflas_randommatrix.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/args-parser.h"
```

## Macros

- `#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1`

## Functions

- `template<class Field >`  
`void run_with_field (int q, uint64_t bits, size_t n, size_t d, size_t iter, std::string file, int variant, uint64_t seed)`
- `int main (int argc, char **argv)`

## 13.11.1 Macro Definition Documentation

### 13.11.1.1 \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET

```
#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1
```

## 13.11.2 Function Documentation

### 13.11.2.1 run\_with\_field()

```
template<class Field >
void run_with_field (
    int q,
    uint64_t bits,
    size_t n,
    size_t d,
    size_t iter,
    std::string file,
    int variant,
    uint64_t seed)
```

### 13.11.2.2 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.12 benchmark-checkers.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <stdlib.h>
#include <time.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/fflas_randommatrix.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/checkers/checkers_fflas.h"
#include "fflas-ffpack/checkers/checkers_ffpack.h"
```

```
#include <fstream>
```

## Macros

- #define [ENABLE\\_ALL\\_CHECKINGS](#) 1
- #define [\\_NR\\_TESTS](#) 5
- #define [\\_MAX\\_SIZE\\_MATRICES](#) 1000
- #define [CUBE](#)(x)

## Functions

- int [main](#) (int argc, char \*\*argv)

## 13.12.1 Macro Definition Documentation

### 13.12.1.1 [ENABLE\\_ALL\\_CHECKINGS](#)

```
#define ENABLE_ALL_CHECKINGS 1
```

### 13.12.1.2 [\\_NR\\_TESTS](#)

```
#define _NR_TESTS 5
```

### 13.12.1.3 [\\_MAX\\_SIZE\\_MATRICES](#)

```
#define _MAX_SIZE_MATRICES 1000
```

### 13.12.1.4 [CUBE](#)

```
#define CUBE(  
            x)
```

#### Value:

```
((x) * (x) * (x))
```

## 13.12.2 Function Documentation

### 13.12.2.1 [main\(\)](#)

```
int main (  
        int argc,  
        char ** argv)
```

## 13.13 benchmark-dgemm.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"  
#include <iostream>  
#include <givaro/modular.h>  
#include "fflas-ffpack/config-blas.h"  
#include "fflas-ffpack/fflas/fflas.h"  
#include "fflas-ffpack/utils/timer.h"  
#include "fflas-ffpack/utils/fflas_io.h"  
#include "fflas-ffpack/utils/args-parser.h"
```

## Macros

- #define [CBLAS\\_GEMM](#) cblas\_dgemm

**Typedefs**

- typedef [FFLAS::Timer](#) [TTimer](#)
- typedef double [Floats](#)

**Functions**

- int [main](#) (int argc, char \*\*argv)

**13.13.1 Macro Definition Documentation****13.13.1.1 CBLAS\_GEMM**

```
#define CBLAS_GEMM cblas_dgemm
```

**13.13.2 Typedef Documentation****13.13.2.1 TTimer**

```
typedef FFLAS::Timer TTimer
```

**13.13.2.2 Floats**

```
typedef double Floats
```

**13.13.3 Function Documentation****13.13.3.1 main()**

```
int main (
    int argc,
    char ** argv)
```

**13.14 benchmark-dgetrf.C File Reference**

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <vector>
#include <givaro/modular.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/args-parser.h"
```

**Macros**

- #define [\\_\\_FFLASFFPACK\\_HAVE\\_DGETRF](#) 1

**Functions**

- int [main](#) (int argc, char \*\*argv)

**13.14.1 Macro Definition Documentation****13.14.1.1 \_\_FFLASFFPACK\_HAVE\_DGETRF**

```
#define \_\_FFLASFFPACK\_HAVE\_DGETRF 1
```

## 13.14.2 Function Documentation

### 13.14.2.1 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.15 benchmark-dgetri.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <vector>
#include <givaro/modular.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/args-parser.h"
```

### Functions

- int [main](#) (int argc, char \*\*argv)

## 13.15.1 Function Documentation

### 13.15.1.1 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.16 benchmark-dsytrf.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <vector>
#include <givaro/modular.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/args-parser.h"
```

### Macros

- #define [EFFGFF](#)(n, t, i)

### Functions

- int [main](#) (int argc, char \*\*argv)

## 13.16.1 Macro Definition Documentation

### 13.16.1.1 EFFGFF

```
#define EFFGFF(
    n,
```

```
t,
i)
```

**Value:**

```
( (double(n)/1000.*double(n)/1000.*double(n)/1000.0) / double(t) * double(i) / 3.)
```

**13.16.2 Function Documentation****13.16.2.1 main()**

```
int main (
    int argc,
    char ** argv)
```

**13.17 benchmark-dtrsm.C File Reference**

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <givaro/modular.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/args-parser.h"
```

**Functions**

- int [main](#) (int argc, char \*\*argv)

**13.17.1 Function Documentation****13.17.1.1 main()**

```
int main (
    int argc,
    char ** argv)
```

**13.18 benchmark-dtrtri.C File Reference**

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <givaro/modular.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/args-parser.h"
```

**Macros**

- #define [\\_\\_FFLASFFPACK\\_HAVE\\_DTRTRI](#) 1

**Functions**

- int [main](#) (int argc, char \*\*argv)

## 13.18.1 Macro Definition Documentation

### 13.18.1.1 \_\_FFLASFFPACK\_HAVE\_DTRTRI

```
#define __FFLASFFPACK_HAVE_DTRTRI 1
```

## 13.18.2 Function Documentation

### 13.18.2.1 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.19 benchmark-fadd-lvl2.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <givaro/modular.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/args-parser.h"
```

### Macros

- `#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1`

### Functions

- `int main (int argc, char **argv)`

## 13.19.1 Macro Definition Documentation

### 13.19.1.1 \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET

```
#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1
```

## 13.19.2 Function Documentation

### 13.19.2.1 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.20 benchmark-fdot.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <givaro/modular.h>
#include <givaro/givrational.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/paladin/parallel.h"
#include "fflas-ffpack/paladin/fflas_plevel1.h"
```

```
#include "fflas-ffpack/utils/args-parser.h"
```

## Macros

- `#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1`

## Functions

- `template<class Field >`  
`Field::Element run_with_field` (int q, size\_t iter, size\_t N, const uint64\_t BS, const size\_t p, const size\_t threads, uint64\_t seed)
- `int main` (int argc, char \*\*argv)

## 13.20.1 Macro Definition Documentation

### 13.20.1.1 \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET

```
#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1
```

## 13.20.2 Function Documentation

### 13.20.2.1 run\_with\_field()

```
template<class Field >
Field::Element run_with_field (
    int q,
    size_t iter,
    size_t N,
    const uint64_t BS,
    const size_t p,
    const size_t threads,
    uint64_t seed)
```

### 13.20.2.2 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.21 benchmark-fgemm-mp.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <typeinfo>
#include <vector>
#include <string>
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "givaro/modular-integer.h"
#include "givaro/givcaster.h"
#include "fflas-ffpack/paladin/parallel.h"
```



**Macros**

- `#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1`
- `#define MG_DEFAULT MG_ACTIVE`
- `#define STD_RECINT_SIZE 8`

**Functions**

- `template<typename Ints >`  
`int tmain ()`
- `int main (int argc, char **argv)`

**13.21.1 Macro Definition Documentation****13.21.1.1 \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET**

```
#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1
```

**13.21.1.2 MG\_DEFAULT**

```
#define MG_DEFAULT MG_ACTIVE
```

**13.21.1.3 STD\_RECINT\_SIZE**

```
#define STD_RECINT_SIZE 8
```

**13.21.2 Function Documentation****13.21.2.1 tmain()**

```
template<typename Ints >
int tmain ()
```

**13.21.2.2 main()**

```
int main (
    int argc,
    char ** argv)
```

**13.22 benchmark-fgemm-rns.C File Reference**

```
#include "fflas-ffpack/fflas/fflas.h"
#include <iostream>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/args-parser.h"
```

**Macros**

- `#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1`

**Typedefs**

- `typedef FFPACK::rns_double RNS`
- `typedef FFPACK::RNSInteger< RNS > Field`
- `typedef Field::Element_ptr Element_ptr`
- `typedef Field::ConstElement_ptr ConstElement_ptr`
- `typedef StrategyParameter::Threads THREADS`
- `typedef StrategyParameter::Grain GRAIN`

- typedef [StrategyParameter::TwoD](#) TWOD
- typedef [StrategyParameter::TwoDAdaptive](#) TWODA
- typedef [StrategyParameter::ThreeD](#) THREED
- typedef [StrategyParameter::ThreeDAdaptive](#) THREEDA
- typedef [StrategyParameter::ThreeDInPlace](#) THREEDIP
- typedef [ParSeqHelper::Sequential](#) PSeq

## Functions

- int [main](#) (int argc, char \*argv[])

## 13.22.1 Macro Definition Documentation

### 13.22.1.1 \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET

```
#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1
```

## 13.22.2 Typedef Documentation

### 13.22.2.1 RNS

```
typedef FFPACK::rns\_double RNS
```

### 13.22.2.2 Field

```
typedef FFPACK::RNSInteger<RNS> Field
```

### 13.22.2.3 Element\_ptr

```
typedef Field::Element\_ptr Element_ptr
```

### 13.22.2.4 ConstElement\_ptr

```
typedef Field::ConstElement\_ptr ConstElement_ptr
```

### 13.22.2.5 THREADS

```
typedef StrategyParameter::Threads THREADS
```

### 13.22.2.6 GRAIN

```
typedef StrategyParameter::Grain GRAIN
```

### 13.22.2.7 TWOD

```
typedef StrategyParameter::TwoD TWOD
```

### 13.22.2.8 TWODA

```
typedef StrategyParameter::TwoDAdaptive TWODA
```

### 13.22.2.9 THREED

```
typedef StrategyParameter::ThreeD THREED
```

### 13.22.2.10 THREEDA

```
typedef StrategyParameter::ThreeDAdaptive THREEDA
```

**13.22.2.11 THREEDIP**

```
typedef StrategyParameter::ThreeDInPlace THREEDIP
```

**13.22.2.12 PSeq**

```
typedef ParSeqHelper::Sequential PSeq
```

**13.22.3 Function Documentation****13.22.3.1 main()**

```
int main (
    int argc,
    char * argv[])
```

**13.23 benchmark-fgemm.C File Reference**

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <givaro/modular-balanced.h>
#include "fflas-ffpack/config-blas.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/args-parser.h"
```

**Macros**

- #define CLASSIC\_HYBRID

**Functions**

- int main (int argc, char \*\*argv)

**13.23.1 Macro Definition Documentation****13.23.1.1 CLASSIC\_HYBRID**

```
#define CLASSIC_HYBRID
```

**13.23.2 Function Documentation****13.23.2.1 main()**

```
int main (
    int argc,
    char ** argv)
```

**13.24 benchmark-fgemv-mp.C File Reference**

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <typeinfo>
#include <vector>
#include <string>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/args-parser.h"
```

```
#include "givaro/modular-integer.h"
#include "givaro/givcaster.h"
#include "fflas-ffpack/paladin/parallel.h"
```

## Macros

- `#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1`
- `#define MG_DEFAULT MG_ACTIVE`
- `#define STD_RECINT_SIZE 8`

## Functions

- `template<typename T >`  
`std::ostream & write_matrix (std::ostream &out, Givaro::Integer p, size_t m, size_t n, T *C, size_t ldc)`
- `template<typename Ints >`  
`int tmain ()`
- `int main (int argc, char **argv)`

## 13.24.1 Macro Definition Documentation

### 13.24.1.1 \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET

```
#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1
```

### 13.24.1.2 MG\_DEFAULT

```
#define MG_DEFAULT MG_ACTIVE
```

### 13.24.1.3 STD\_RECINT\_SIZE

```
#define STD_RECINT_SIZE 8
```

## 13.24.2 Function Documentation

### 13.24.2.1 write\_matrix()

```
template<typename T >
std::ostream & write_matrix (
    std::ostream & out,
    Givaro::Integer p,
    size_t m,
    size_t n,
    T * C,
    size_t ldc)
```

### 13.24.2.2 tmain()

```
template<typename Ints >
int tmain ()
```

### 13.24.2.3 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.25 benchmark-fgemv.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <givaro/modular-balanced.h>
#include "fflas-ffpack/config-blas.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "givaro/modular-integer.h"
#include "givaro/givcaster.h"
```

### Data Structures

- struct [need\\_field\\_characteristic](#)< Field >
- struct [need\\_field\\_characteristic](#)< Givaro::Modular< Field > >
- struct [need\\_field\\_characteristic](#)< Givaro::ModularBalanced< Field > >
- struct [compatible\\_data\\_type](#)< Field >
- struct [compatible\\_data\\_type](#)< Givaro::ZRing< float > >
- struct [compatible\\_data\\_type](#)< Givaro::ZRing< double > >

### Macros

- #define [\\_\\_FFLASFFPACK\\_OPENBLAS\\_NT\\_ALREADY\\_SET](#) 1

### Functions

- template<class [Field](#) , class RandIter , class Matrix , class Vector >  
void [fill\\_value](#) ([Field](#) &F, RandIter &Rand, Matrix &A, Vector &X, Vector &Y, size\_t m, size\_t k, size\_t incX, size\_t incY, size\_t lda, int NBK)
- template<class [Field](#) , class Matrix , class Vector >  
void [genData](#) ([Field](#) &F, Matrix &A, Vector &X, Vector &Y, size\_t m, size\_t k, size\_t incX, size\_t incY, size\_t lda, int NBK, uint64\_t bitsize, uint64\_t seed)
- template<class [Field](#) , class Matrix , class Vector >  
bool [check\\_result](#) ([Field](#) &F, size\_t m, size\_t lda, Matrix &A, Vector &X, size\_t incX, Vector &Y, size\_t incY)
- template<class [Field](#) , class Matrix , class Vector >  
bool [benchmark\\_with\\_timer](#) ([Field](#) &F, int p, Matrix &A, Vector &X, Vector &Y, size\_t m, size\_t k, size\_t incX, size\_t incY, size\_t lda, size\_t iters, int t, double &time, size\_t GrainSize)
- template<class [Field](#) , class arg >  
void [benchmark\\_disp](#) ([Field](#) &F, bool pass, double &time, size\_t iters, int p, size\_t m, size\_t k, arg &as)
- template<class [Field](#) , class arg >  
void [benchmark\\_in\\_Field](#) ([Field](#) &F, int p, size\_t m, size\_t k, int NBK, uint64\_t bitsize, uint64\_t seed, size\_t iters, int t, arg &as, size\_t GrainSize)
- template<class [Field](#) , class arg >  
void [benchmark\\_with\\_field](#) (int p, size\_t m, size\_t k, int NBK, uint64\_t bitsize, uint64\_t seed, size\_t iters, int t, arg &as, size\_t GrainSize)
- template<class [Field](#) , class arg >  
void [benchmark\\_with\\_field](#) (const Givaro::Integer &q, int p, size\_t m, size\_t k, int NBK, uint64\_t bitsize, uint64\_t seed, size\_t iters, int t, arg &as, size\_t GrainSize)
- int [main](#) (int argc, char \*\*argv)

### 13.25.1 Macro Definition Documentation

#### 13.25.1.1 \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET

```
#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1
```

## 13.25.2 Function Documentation

### 13.25.2.1 fill\_value()

```
template<class Field , class RandIter , class Matrix , class Vector >
void fill_value (
    Field & F,
    RandIter & Rand,
    Matrix & A,
    Vector & X,
    Vector & Y,
    size_t m,
    size_t k,
    size_t incX,
    size_t incY,
    size_t lda,
    int NBK)
```

### 13.25.2.2 genData()

```
template<class Field , class Matrix , class Vector >
void genData (
    Field & F,
    Matrix & A,
    Vector & X,
    Vector & Y,
    size_t m,
    size_t k,
    size_t incX,
    size_t incY,
    size_t lda,
    int NBK,
    uint64_t bitsize,
    uint64_t seed)
```

### 13.25.2.3 check\_result()

```
template<class Field , class Matrix , class Vector >
bool check_result (
    Field & F,
    size_t m,
    size_t lda,
    Matrix & A,
    Vector & X,
    size_t incX,
    Vector & Y,
    size_t incY)
```

### 13.25.2.4 benchmark\_with\_timer()

```
template<class Field , class Matrix , class Vector >
bool benchmark_with_timer (
    Field & F,
    int p,
    Matrix & A,
    Vector & X,
    Vector & Y,
    size_t m,
    size_t k,
    size_t incX,
```

```

    size_t incY,
    size_t lda,
    size_t iters,
    int t,
    double & time,
    size_t GrainSize)

```

#### 13.25.2.5 benchmark\_disp()

```

template<class Field , class arg >
void benchmark_disp (
    Field & F,
    bool pass,
    double & time,
    size_t iters,
    int p,
    size_t m,
    size_t k,
    arg & as)

```

#### 13.25.2.6 benchmark\_in\_Field()

```

template<class Field , class arg >
void benchmark_in_Field (
    Field & F,
    int p,
    size_t m,
    size_t k,
    int NBK,
    uint64_t bitsize,
    uint64_t seed,
    size_t iters,
    int t,
    arg & as,
    size_t GrainSize)

```

#### 13.25.2.7 benchmark\_with\_field() [1/2]

```

template<class Field , class arg >
void benchmark_with_field (
    int p,
    size_t m,
    size_t k,
    int NBK,
    uint64_t bitsize,
    uint64_t seed,
    size_t iters,
    int t,
    arg & as,
    size_t GrainSize)

```

#### 13.25.2.8 benchmark\_with\_field() [2/2]

```

template<class Field , class arg >
void benchmark_with_field (
    const Givaro::Integer & q,
    int p,
    size_t m,
    size_t k,

```

```

    int NBK,
    uint64_t bitsize,
    uint64_t seed,
    size_t iters,
    int t,
    arg & as,
    size_t GrainSize)

```

### 13.25.2.9 main()

```

int main (
    int argc,
    char ** argv)

```

## 13.26 benchmark-fgesv.C File Reference

```

#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <givaro/modular.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/args-parser.h"

```

### Macros

- `#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1`

### Functions

- `int main (int argc, char **argv)`

## 13.26.1 Macro Definition Documentation

### 13.26.1.1 \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET

```

#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1

```

## 13.26.2 Function Documentation

### 13.26.2.1 main()

```

int main (
    int argc,
    char ** argv)

```

## 13.27 benchmark-fsyr2k.C File Reference

```

#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <givaro/modular-balanced.h>
#include "fflas-ffpack/config-blas.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/args-parser.h"

```



**Functions**

- int [main](#) (int argc, char \*\*argv)

**13.27.1 Function Documentation****13.27.1.1 main()**

```
int main (
    int argc,
    char ** argv)
```

**13.28 benchmark-fsyrrk.C File Reference**

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <givaro/modular.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/args-parser.h"
```

**Macros**

- #define [\\_\\_FFLASFFPACK\\_OPENBLAS\\_NT\\_ALREADY\\_SET](#) 1

**Functions**

- int [main](#) (int argc, char \*\*argv)

**13.28.1 Macro Definition Documentation****13.28.1.1 \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET**

```
#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1
```

**13.28.2 Function Documentation****13.28.2.1 main()**

```
int main (
    int argc,
    char ** argv)
```

**13.29 benchmark-fsytrf.C File Reference**

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <givaro/modular.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/args-parser.h"
```

**Macros**

- #define [\\_\\_FFPACK\\_FSYTRF\\_BC\\_CROUT](#)
- #define [\\_\\_FFLASFFPACK\\_OPENBLAS\\_NT\\_ALREADY\\_SET](#) 1

- #define `CUBE(x)`

## Functions

- int `main` (int argc, char \*\*argv)

## 13.29.1 Macro Definition Documentation

### 13.29.1.1 `__FFPACK_FSYTRF_BC_CROUT`

```
#define __FFPACK_FSYTRF_BC_CROUT
```

### 13.29.1.2 `__FFLASFFPACK_OPENBLAS_NT_ALREADY_SET`

```
#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1
```

### 13.29.1.3 `CUBE`

```
#define CUBE(  
            x)
```

#### Value:

```
((x)*(x)*(x))
```

## 13.29.2 Function Documentation

### 13.29.2.1 `main()`

```
int main (  
          int argc,  
          char ** argv)
```

## 13.30 benchmark-ftsrm-mp.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"  
#include <iostream>  
#include <vector>  
#include <string>  
#include "fflas-ffpack/utils/timer.h"  
#include "fflas-ffpack/fflas/fflas.h"  
#include "fflas-ffpack/utils/args-parser.h"  
#include "givaro/modular-integer.h"
```

## Macros

- #define `__FFLASFFPACK_OPENBLAS_NT_ALREADY_SET` 1

## Functions

- int `main` (int argc, char \*\*argv)

## 13.30.1 Macro Definition Documentation

### 13.30.1.1 `__FFLASFFPACK_OPENBLAS_NT_ALREADY_SET`

```
#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1
```

## 13.30.2 Function Documentation

### 13.30.2.1 main()

```
int main (  
    int argc,  
    char ** argv)
```

## 13.31 benchmark-fftrsm.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"  
#include <iostream>  
#include <givaro/modular.h>  
#include "fflas-ffpack/fflas-ffpack.h"  
#include "fflas-ffpack/utils/timer.h"  
#include "fflas-ffpack/utils/fflas_io.h"  
#include "fflas-ffpack/utils/args-parser.h"
```

### Macros

- `#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1`

### Functions

- `int main (int argc, char **argv)`

## 13.31.1 Macro Definition Documentation

### 13.31.1.1 \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET

```
#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1
```

## 13.31.2 Function Documentation

### 13.31.2.1 main()

```
int main (  
    int argc,  
    char ** argv)
```

## 13.32 benchmark-fftrsv.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"  
#include <iostream>  
#include <givaro/modular.h>  
#include "fflas-ffpack/fflas-ffpack.h"  
#include "fflas-ffpack/utils/timer.h"  
#include "fflas-ffpack/utils/args-parser.h"
```

### Macros

- `#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1`

### Functions

- `int main (int argc, char **argv)`

### 13.32.1 Macro Definition Documentation

#### 13.32.1.1 \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET

```
#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1
```

### 13.32.2 Function Documentation

#### 13.32.2.1 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.33 benchmark-ftsrttri.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <givaro/modular.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/args-parser.h"
```

#### Macros

- `#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1`
- `#define CUBE(x)`

#### Functions

- `int main (int argc, char **argv)`

### 13.33.1 Macro Definition Documentation

#### 13.33.1.1 \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET

```
#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1
```

#### 13.33.1.2 CUBE

```
#define CUBE(
    x)
```

#### Value:

```
((x) * (x) * (x))
```

### 13.33.2 Function Documentation

#### 13.33.2.1 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.34 benchmark-inverse.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
```

```
#include <givaro/modular.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/args-parser.h"
```

## Macros

- `#define CUBE(x)`

## Functions

- `int main (int argc, char **argv)`

### 13.34.1 Macro Definition Documentation

#### 13.34.1.1 CUBE

```
#define CUBE(  
    x)
```

#### Value:

```
((x) * (x) * (x))
```

### 13.34.2 Function Documentation

#### 13.34.2.1 main()

```
int main (  
    int argc,  
    char ** argv)
```

## 13.35 benchmark-lqmp.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"  
#include <iostream>  
#include <vector>  
#include <string>  
#include "fflas-ffpack/utils/timer.h"  
#include "fflas-ffpack/ffpack/ffpack.h"  
#include "fflas-ffpack/utils/args-parser.h"  
#include "givaro/modular-integer.h"
```

## Functions

- `int main (int argc, char **argv)`

### 13.35.1 Function Documentation

#### 13.35.1.1 main()

```
int main (  
    int argc,  
    char ** argv)
```

## 13.36 benchmark-lqup.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <givaro/modular.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/args-parser.h"
```

### Macros

- #define [CUBE](#)(x)

### Functions

- int [main](#) (int argc, char \*\*argv)

## 13.36.1 Macro Definition Documentation

### 13.36.1.1 CUBE

```
#define CUBE(  
            x)
```

#### Value:

```
((x) * (x) * (x))
```

## 13.36.2 Function Documentation

### 13.36.2.1 main()

```
int main (  
          int argc,  
          char ** argv)
```

## 13.37 benchmark-pluq.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <givaro/modular.h>
#include <givaro/givranditer.h>
#include <iostream>
#include "fflas-ffpack/config-blas.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/fflas_randommatrix.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/ffpack/ffpack.h"
```

### Macros

- #define [\\_\\_FFLASFFPACK\\_OPENBLAS\\_NT\\_ALREADY\\_SET](#) 1
- #define [CUBE](#)(x)

### Typedefs

- typedef [Givaro::ModularBalanced](#)< double > [Field](#)

## Functions

- void `verification_PLUQ` (const `Field` &`F`, typename `Field::Element` \*`B`, typename `Field::Element` \*`A`, `size_t` \*`P`, `size_t` \*`Q`, `size_t` `m`, `size_t` `n`, `size_t` `R`)
- void `Rec_Initialize` (`Field` &`F`, `Field::Element` \*`C`, `size_t` `m`, `size_t` `n`, `size_t` `ldc`)
- int `main` (int `argc`, char \*\*`argv`)

## 13.37.1 Macro Definition Documentation

### 13.37.1.1 \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET

```
#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1
```

### 13.37.1.2 CUBE

```
#define CUBE(  
            x)
```

#### Value:

```
((x)*(x)*(x))
```

## 13.37.2 Typedef Documentation

### 13.37.2.1 Field

```
typedef Givaro::ModularBalanced<double> Field
```

## 13.37.3 Function Documentation

### 13.37.3.1 verification\_PLUQ()

```
void verification_PLUQ (  
    const Field & F,  
    typename Field::Element * B,  
    typename Field::Element * A,  
    size_t * P,  
    size_t * Q,  
    size_t m,  
    size_t n,  
    size_t R)
```

### 13.37.3.2 Rec\_Initialize()

```
void Rec_Initialize (  
    Field & F,  
    Field::Element * C,  
    size_t m,  
    size_t n,  
    size_t ldc)
```

### 13.37.3.3 main()

```
int main (  
    int argc,  
    char ** argv)
```

## 13.38 benchmark-quasisep.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"  
#include <iostream>  
#include <givaro/modular.h>
```

```
#include <givaro/givpoly1.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "fflas-ffpack/utils/fflas_randommatrix.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/args-parser.h"
```

## Macros

- `#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1`

## Functions

- `template<class Field >`  
`void run_with_field (int q, size_t n, size_t m, size_t t, size_t r, size_t iter, uint64_t seed)`
- `int main (int argc, char **argv)`

## 13.38.1 Macro Definition Documentation

### 13.38.1.1 \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET

```
#define __FFLASFFPACK_OPENBLAS_NT_ALREADY_SET 1
```

## 13.38.2 Function Documentation

### 13.38.2.1 run\_with\_field()

```
template<class Field >
void run_with_field (
    int q,
    size_t n,
    size_t m,
    size_t t,
    size_t r,
    size_t iter,
    uint64_t seed)
```

### 13.38.2.2 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.39 benchmark-storage-transpose.C File Reference

```
#include <iomanip>
#include <iostream>
#include <random>
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/fflas_memory.h"
#include <givaro/modular.h>
#include <recint/rint.h>
#include "fflas-ffpack/fflas/fflas_transpose.h"
```



## Data Structures

- class [Bench<Elt>](#)

## Functions

- int [main](#) (int argc, char \*\*argv)

### 13.39.1 Function Documentation

#### 13.39.1.1 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.40 benchmark-wino.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <fstream>
#include <givaro/modular.h>
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/utils/args-parser.h"
```

## Macros

- #define [CUBE](#)(x)

## Functions

- template<class [Field](#) >  
void [launch\\_wino](#) (const [Field](#) &F, const size\_t &n, const size\_t &NB, const size\_t &wino, const bool &asmax, const size\_t &seed, const bool compare)
- int [main](#) (int argc, char \*\*argv)

### 13.40.1 Macro Definition Documentation

#### 13.40.1.1 CUBE

```
#define CUBE(
    x)
```

#### Value:

```
((x) * (x) * (x))
```

### 13.40.2 Function Documentation

#### 13.40.2.1 launch\_wino()

```
template<class Field >
void launch_wino (
    const Field & F,
    const size_t & n,
    const size_t & NB,
    const size_t & wino,
    const bool & asmax,
    const size_t & seed,
    const bool compare)
```

### 13.40.2.2 main()

```
int main (  
    int argc,  
    char ** argv)
```

## 13.41 mainpage.doxy File Reference

## 13.42 det.C File Reference

```
#include <givaro/modular.h>  
#include <iostream>  
#include "fflas-ffpack/fflas-ffpack-config.h"  
#include "fflas-ffpack/fflas-ffpack.h"  
#include "fflas-ffpack/utils/fflas_io.h"
```

### Functions

- int [main](#) (int argc, char \*\*argv)

*This example computes the determinant of a matrix over a defined finite field.*

### 13.42.1 Function Documentation

#### 13.42.1.1 main()

```
int main (  
    int argc,  
    char ** argv)
```

This example computes the determinant of a matrix over a defined finite field.  
Outputs the determinant.

## 13.43 matmul.C File Reference

```
#include <iostream>  
#include "fflas-ffpack/fflas-ffpack.h"
```

### Functions

- int [main](#) (int argc, char \*\*argv)

*This example computes the matrix multiplication over a defined finite field.*

### 13.43.1 Function Documentation

#### 13.43.1.1 main()

```
int main (  
    int argc,  
    char ** argv)
```

This example computes the matrix multiplication over a defined finite field.  
Outputs the product of the matrix given as input.

## 13.44 rank.C File Reference

```
#include <iostream>
#include "fflas-ffpack/fflas-ffpack.h"
```

### Functions

- int [main](#) (int argc, char \*\*argv)

*This example computes the rank of a matrix over a defined finite field.*

### 13.44.1 Function Documentation

#### 13.44.1.1 main()

```
int main (
    int argc,
    char ** argv)
```

This example computes the rank of a matrix over a defined finite field.  
Outputs the rank.

## 13.45 solve.C File Reference

```
#include <iostream>
#include "fflas-ffpack/fflas-ffpack.h"
```

### Functions

- int [main](#) (int argc, char \*\*argv)

*This example solve the quare system defined by the input over a defined finite field.*

### 13.45.1 Function Documentation

#### 13.45.1.1 main()

```
int main (
    int argc,
    char ** argv)
```

This example solve the quare system defined by the input over a defined finite field.

## 13.46 checker\_charpoly.inl File Reference

```
#include "fflas-ffpack/ffpack/ffpack.h"
```

### Data Structures

- class [CheckerImplem\\_charpoly](#)< [Field](#), [Polynomial](#) >
- class [CheckerImplem\\_charpoly](#)< [Givaro::ZRing](#)< [Givaro::Integer](#) >, [Polynomial](#) >

### Namespaces

- namespace [FFPACK](#)

*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

## Macros

- `#define` [\\_\\_FFLASFFPACK\\_checker\\_charpoly\\_INL](#)

### 13.46.1 Macro Definition Documentation

#### 13.46.1.1 [\\_\\_FFLASFFPACK\\_checker\\_charpoly\\_INL](#)

```
#define __FFLASFFPACK_checker_charpoly_INL
```

## 13.47 checker\_det.inl File Reference

```
#include "fflas-ffpack/ffpack/ffpack.h"
```

## Data Structures

- class [CheckerImplem\\_Det< Field >](#)

## Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

## Macros

- `#define` [\\_\\_FFLASFFPACK\\_checker\\_det\\_INL](#)

### 13.47.1 Macro Definition Documentation

#### 13.47.1.1 [\\_\\_FFLASFFPACK\\_checker\\_det\\_INL](#)

```
#define __FFLASFFPACK_checker_det_INL
```

## 13.48 checker\_empty.h File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
```

## Data Structures

- struct [Checker\\_Empty< Field >](#)

## Namespaces

- namespace [FFLAS](#)

## 13.49 checker\_fgemm.inl File Reference

## Data Structures

- class [CheckerImplem\\_fgemm< Field >](#)

## Namespaces

- namespace [FFLAS](#)

**Macros**

- #define [\\_\\_FFLASFFPACK\\_checker\\_fgemm\\_INL](#)

**13.49.1 Macro Definition Documentation****13.49.1.1 \_\_FFLASFFPACK\_checker\_fgemm\_INL**

```
#define __FFLASFFPACK_checker_fgemm_INL
```

**13.50 checker\_ftsm.inl File Reference****Data Structures**

- class [CheckerImplem\\_ftsm](#)< Field >

**Namespaces**

- namespace [FFLAS](#)

**Macros**

- #define [\\_\\_FFLASFFPACK\\_checker\\_ftsm\\_INL](#)

**13.50.1 Macro Definition Documentation****13.50.1.1 \_\_FFLASFFPACK\_checker\_ftsm\_INL**

```
#define __FFLASFFPACK_checker_ftsm_INL
```

**13.51 checker\_invert.inl File Reference****Data Structures**

- class [CheckerImplem\\_invert](#)< Field >

**Namespaces**

- namespace [FFPACK](#)

*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

**Macros**

- #define [\\_\\_FFLASFFPACK\\_checker\\_invert\\_INL](#)

**13.51.1 Macro Definition Documentation****13.51.1.1 \_\_FFLASFFPACK\_checker\_invert\_INL**

```
#define __FFLASFFPACK_checker_invert_INL
```

**13.52 checker\_pluq.inl File Reference**

```
#include "fflas-ffpack/ffpack/ffpack.h"
#include "fflas-ffpack/utils/fflas_io.h"
```

## Data Structures

- class [CheckerImplem\\_PLUQ<Field>](#)

## Namespaces

- namespace [FFPACK](#)  
*Finite **Field** **PACK** Set of elimination based routines for dense linear algebra.*

## Macros

- `#define` [\\_\\_FFLASFFPACK\\_checker\\_pluq\\_INL](#)

## 13.52.1 Macro Definition Documentation

### 13.52.1.1 [\\_\\_FFLASFFPACK\\_checker\\_pluq\\_INL](#)

```
#define __FFLASFFPACK_checker_pluq_INL
```

## 13.53 checkers.doxy File Reference

## 13.54 checkers\_fflas.h File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "checker_empty.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/fflas/fflas_enum.h"
#include "fflas-ffpack/fflas/fflas_memory.h"
```

## Data Structures

- class [FailureFgemmCheck](#)
- class [FailureTrsmCheck](#)

## Namespaces

- namespace [FFLAS](#)

## Typedefs

- `template<class Field>`  
`using Checker\_fgemm = FFLAS::Checker\_Empty<Field>`
- `template<class Field>`  
`using Checker\_ftrsm = FFLAS::Checker\_Empty<Field>`

## 13.55 checkers\_fflas.inl File Reference

```
#include "checker_fgemm.inl"
#include "checker_ftrsm.inl"
```

## Namespaces

- namespace [FFLAS](#)

## Macros

- `#define FFLASFFPACK_checkers_fflas_inl_H`

## Typedefs

- `template<class Field >`  
`using ForceCheck_fgemm = CheckerImplem_fgemm<Field>`
- `template<class Field >`  
`using ForceCheck_ftrsm = CheckerImplem_ftrsm<Field>`

## 13.55.1 Macro Definition Documentation

### 13.55.1.1 FFLASFFPACK\_checkers\_fflas\_inl\_H

```
#define FFLASFFPACK_checkers_fflas_inl_H
```

## 13.56 checkers\_ffpack.h File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "checker_empty.h"
#include "fflas-ffpack/ffpack/ffpack.h"
```

## Data Structures

- class [FailurePLUQCheck](#)
- class [FailureDetCheck](#)
- class [FailureInvertCheck](#)
- class [FailureCharpolyCheck](#)

## Namespaces

- namespace [FFPACK](#)

*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

## Typedefs

- `template<class Field >`  
`using Checker_PLUQ = FFLAS::Checker_Empty<Field>`
- `template<class Field >`  
`using Checker_Det = FFLAS::Checker_Empty<Field>`
- `template<class Field >`  
`using Checker_invert = FFLAS::Checker_Empty<Field>`
- `template<class Field , class Polynomial >`  
`using Checker_charpoly = FFLAS::Checker_Empty<Field>`

## 13.57 checkers\_ffpack.inl File Reference

```
#include "checker_pluq.inl"
#include "checker_det.inl"
#include "checker_invert.inl"
#include "checker_charpoly.inl"
```

## Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

## Macros

- `#define` [FFLASFFPACK\\_checkers\\_ffpack\\_inl\\_H](#)

## Typedefs

- `template<class Field >`  
  `using ForceCheck\_PLUQ = CheckerImplem\_PLUQ<Field>`
- `template<class Field >`  
  `using ForceCheck\_Det = CheckerImplem\_Det<Field>`
- `template<class Field >`  
  `using ForceCheck\_invert = CheckerImplem\_invert<Field>`
- `template<class Field , class Polynomial >`  
  `using ForceCheck\_charpoly = CheckerImplem\_charpoly<Field,Polynomial>`

## 13.57.1 Macro Definition Documentation

### 13.57.1.1 FFLASFFPACK\_checkers\_ffpack\_inl\_H

```
#define FFLASFFPACK_checkers_ffpack_inl_H
```

## 13.58 config-blas.h File Reference

### Macros

- `#define` [CBLAS\\_INT](#) int
- `#define` [CBLAS\\_ENUM\\_DEFINED\\_H](#)
- `#define` [CBLAS\\_EXTERNALS](#)
- `#define` [blas\\_enum](#) enum

### Enumerations

- enum [CBLAS\\_ORDER](#) { [CblasRowMajor](#) =101 , [CblasColMajor](#) =102 }
- enum [CBLAS\\_TRANSPOSE](#) { [CblasNoTrans](#) =111 , [CblasTrans](#) =112 , [CblasConjTrans](#) =113 , [AtlasConj](#) =114 }
- enum [CBLAS\\_UPLO](#) { [CblasUpper](#) =121 , [CblasLower](#) =122 }
- enum [CBLAS\\_DIAG](#) { [CblasNonUnit](#) =131 , [CblasUnit](#) =132 }
- enum [CBLAS\\_SIDE](#) { [CblasLeft](#) =141 , [CblasRight](#) =142 }

### Functions

- void [daxpy\\_](#) (const int \*, const double \*, const double \*, const int \*, double \*, const int \*)
- void [saxpy\\_](#) (const int \*, const float \*, const float \*, const int \*, float \*, const int \*)
- double [ddot\\_](#) (const int \*, const double \*, const int \*, const double \*, const int \*)
- float [sdot\\_](#) (const int \*, const float \*, const int \*, const float \*, const int \*)
- double [dasum\\_](#) (const int \*, const double \*, const int \*)
- int [idamax\\_](#) (const int \*, const double \*, const int \*)
- double [dnrm2\\_](#) (const int \*, const double \*, const int \*)
- void [dgemv\\_](#) (const char \*, const int \*, const int \*, const double \*, const double \*, const int \*, const double \*, const int \*, const double \*, double \*, const int \*)
- void [sgemv\\_](#) (const char \*, const int \*, const int \*, const float \*, const float \*, const int \*, const float \*, const int \*, const float \*, float \*, const int \*)



- void [dger\\_](#) (const int \*, const int \*, const double \*, const double \*, const int \*, const double \*, const int \*, double \*, const int \*)
- void [sger\\_](#) (const int \*, const int \*, const float \*, const float \*, const int \*, const float \*, const int \*, float \*, const int \*)
- void [dcopy\\_](#) (const int \*, const double \*, const int \*, double \*, const int \*)
- void [scopy\\_](#) (const int \*, const float \*, const int \*, float \*, const int \*)
- void [dscal\\_](#) (const int \*, const double \*, double \*, const int \*)
- void [sscal\\_](#) (const int \*, const float \*, float \*, const int \*)
- void [dtrsm\\_](#) (const char \*, const char \*, const char \*, const char \*, const int \*, const int \*, const double \*, const double \*, const int \*, double \*, const int \*)
- void [strsm\\_](#) (const char \*, const char \*, const char \*, const char \*, const int \*, const int \*, const float \*, const float \*, const int \*, float \*, const int \*)
- void [dtrmm\\_](#) (const char \*, const char \*, const char \*, const char \*, const int \*, const int \*, const double \*, const double \*, const int \*, double \*, const int \*)
- void [strmm\\_](#) (const char \*, const char \*, const char \*, const char \*, const int \*, const int \*, const float \*, const float \*, const int \*, float \*, const int \*)
- void [sgemm\\_](#) (const char \*, const char \*, const int \*, const int \*, const int \*, const float \*, const float \*, const int \*, const float \*, const int \*, const float \*, float \*, const int \*)
- void [dgemm\\_](#) (const char \*, const char \*, const int \*, const int \*, const int \*, const double \*, const double \*, const int \*, const double \*, const int \*, const double \*, double \*, const int \*)
- void [cblas\\_dsyrk](#) (const enum [CBLAS\\_ORDER](#) Order, const enum [CBLAS\\_UPLO](#) Uplo, const enum [CBLAS\\_TRANSPOSE](#) Trans, const int N, const int K, const double alpha, const double \*A, const int lda, const double beta, double \*C, const int ldc)

## 13.58.1 Macro Definition Documentation

### 13.58.1.1 CBLAS\_INT

```
#define CBLAS_INT int
```

### 13.58.1.2 CBLAS\_ENUM\_DEFINED\_H

```
#define CBLAS_ENUM_DEFINED_H
```

### 13.58.1.3 CBLAS\_EXTERNALS

```
#define CBLAS_EXTERNALS
```

### 13.58.1.4 blas\_enum

```
#define blas_enum enum
```

## 13.58.2 Enumeration Type Documentation

### 13.58.2.1 CBLAS\_ORDER

```
enum CBLAS\_ORDER
```

Enumerator

|               |  |
|---------------|--|
| CblasRowMajor |  |
| CblasColMajor |  |

### 13.58.2.2 CBLAS\_TRANSPOSE

```
enum CBLAS\_TRANSPOSE
```

**Enumerator**

|                |  |
|----------------|--|
| CblasNoTrans   |  |
| CblasTrans     |  |
| CblasConjTrans |  |
| AtlasConj      |  |

**13.58.2.3 CBLAS\_UPLO**

enum [CBLAS\\_UPLO](#)

**Enumerator**

|            |  |
|------------|--|
| CblasUpper |  |
| CblasLower |  |

**13.58.2.4 CBLAS\_DIAG**

enum [CBLAS\\_DIAG](#)

**Enumerator**

|              |  |
|--------------|--|
| CblasNonUnit |  |
| CblasUnit    |  |

**13.58.2.5 CBLAS\_SIDE**

enum [CBLAS\\_SIDE](#)

**Enumerator**

|            |  |
|------------|--|
| CblasLeft  |  |
| CblasRight |  |

**13.58.3 Function Documentation****13.58.3.1 daxpy\_()**

```
void daxpy_ (
    const int * ,
    const double * ,
    const double * ,
    const int * ,
    double * ,
    const int * )
```

**13.58.3.2 saxpy\_()**

```
void saxpy_ (
    const int * ,
    const float * ,
    const float * ,
    const int * ,
    float * ,
    const int * )
```

### 13.58.3.3 ddot\_()

```
double ddot_ (
    const int * ,
    const double * ,
    const int * ,
    const double * ,
    const int * )
```

### 13.58.3.4 sdot\_()

```
float sdot_ (
    const int * ,
    const float * ,
    const int * ,
    const float * ,
    const int * )
```

### 13.58.3.5 dasum\_()

```
double dasum_ (
    const int * ,
    const double * ,
    const int * )
```

### 13.58.3.6 idamax\_()

```
int idamax_ (
    const int * ,
    const double * ,
    const int * )
```

### 13.58.3.7 dnrm2\_()

```
double dnrm2_ (
    const int * ,
    const double * ,
    const int * )
```

### 13.58.3.8 dgemv\_()

```
void dgemv_ (
    const char * ,
    const int * ,
    const int * ,
    const double * ,
    const double * ,
    const int * ,
    const double * ,
    const int * ,
    const double * ,
    double * ,
    const int * )
```

### 13.58.3.9 sgemv\_()

```
void sgemv_ (
    const char * ,
    const int * ,
    const int * ,
```

```
    const float * ,  
    const float * ,  
    const int * ,  
    const float * ,  
    const int * ,  
    const float * ,  
    float * ,  
    const int * )
```

#### 13.58.3.10 dger\_()

```
void dger_ (  
    const int * ,  
    const int * ,  
    const double * ,  
    const double * ,  
    const int * ,  
    const double * ,  
    const int * ,  
    double * ,  
    const int * )
```

#### 13.58.3.11 sger\_()

```
void sger_ (  
    const int * ,  
    const int * ,  
    const float * ,  
    const float * ,  
    const int * ,  
    const float * ,  
    const int * ,  
    float * ,  
    const int * )
```

#### 13.58.3.12 dcopy\_()

```
void dcopy_ (  
    const int * ,  
    const double * ,  
    const int * ,  
    double * ,  
    const int * )
```

#### 13.58.3.13 scopy\_()

```
void scopy_ (  
    const int * ,  
    const float * ,  
    const int * ,  
    float * ,  
    const int * )
```

#### 13.58.3.14 dscal\_()

```
void dscal_ (  
    const int * ,  
    const double * ,
```

```
double * ,  
const int * )
```

#### 13.58.3.15 sscal\_()

```
void sscal_ (  
    const int * ,  
    const float * ,  
    float * ,  
    const int * )
```

#### 13.58.3.16 dtrsm\_()

```
void dtrsm_ (  
    const char * ,  
    const char * ,  
    const char * ,  
    const char * ,  
    const int * ,  
    const int * ,  
    const double * ,  
    const double * ,  
    const int * ,  
    double * ,  
    const int * )
```

#### 13.58.3.17 strsm\_()

```
void strsm_ (  
    const char * ,  
    const char * ,  
    const char * ,  
    const char * ,  
    const int * ,  
    const int * ,  
    const float * ,  
    const float * ,  
    const int * ,  
    float * ,  
    const int * )
```

#### 13.58.3.18 dtrmm\_()

```
void dtrmm_ (  
    const char * ,  
    const char * ,  
    const char * ,  
    const char * ,  
    const int * ,  
    const int * ,  
    const double * ,  
    const double * ,  
    const int * ,  
    double * ,  
    const int * )
```

#### 13.58.3.19 strmm\_()

```
void strmm_ (  

```

```
    const char * ,  
    const char * ,  
    const char * ,  
    const char * ,  
    const int * ,  
    const int * ,  
    const float * ,  
    const float * ,  
    const int * ,  
    float * ,  
    const int * )
```

#### 13.58.3.20 sgemm\_()

```
void sgemm_ (  
    const char * ,  
    const char * ,  
    const int * ,  
    const int * ,  
    const int * ,  
    const float * ,  
    const float * ,  
    const int * ,  
    const float * ,  
    const int * ,  
    const float * ,  
    float * ,  
    const int * )
```

#### 13.58.3.21 dgemm\_()

```
void dgemm_ (  
    const char * ,  
    const char * ,  
    const int * ,  
    const int * ,  
    const int * ,  
    const double * ,  
    const double * ,  
    const int * ,  
    const double * ,  
    const int * ,  
    const double * ,  
    double * ,  
    const int * )
```

#### 13.58.3.22 cblas\_dsyrk()

```
void cblas_dsyrk (  
    const enum CBLAS_ORDER Order,  
    const enum CBLAS_UPLO Uplo,  
    const enum CBLAS_TRANSPOSE Trans,  
    const int N,  
    const int K,  
    const double alpha,  
    const double * A,  
    const int lda,  
    const double beta,
```

```
double * C,
const int ldc)
```

## 13.59 config.h File Reference

### Macros

- #define [HAVE\\_BLAS](#) 1
- #define [HAVE\\_CBLAS](#) 1
- #define [HAVE\\_CXX11](#) 1
- #define [HAVE\\_DLFCN\\_H](#) 1
- #define [HAVE\\_FLOAT\\_H](#) 1
- #define [HAVE\\_INTTYPES\\_H](#) 1
- #define [HAVE\\_LAPACK](#) 1
- #define [HAVE\\_LIMITS\\_H](#) 1
- #define [HAVE\\_LITTLE\\_ENDIAN](#) 1
- #define [HAVE\\_PTHREAD\\_H](#) 1
- #define [HAVE\\_STDDEF\\_H](#) 1
- #define [HAVE\\_STDINT\\_H](#) 1
- #define [HAVE\\_STDIO\\_H](#) 1
- #define [HAVE\\_STDLIB\\_H](#) 1
- #define [HAVE\\_STRINGS\\_H](#) 1
- #define [HAVE\\_STRING\\_H](#) 1
- #define [HAVE\\_SYS\\_STAT\\_H](#) 1
- #define [HAVE\\_SYS\\_TIME\\_H](#) 1
- #define [HAVE\\_SYS\\_TYPES\\_H](#) 1
- #define [HAVE\\_UNISTD\\_H](#) 1
- #define [LT\\_OBJDIR](#) ".libs/"
- #define [OPENBLAS\\_NUM\\_THREADS](#) 1
- #define [PACKAGE](#) "fflas-ffpack"
- #define [PACKAGE\\_BUGREPORT](#) "ffpack-devel@googlegroups.com"
- #define [PACKAGE\\_NAME](#) "FFLAS-FFPACK"
- #define [PACKAGE\\_STRING](#) "FFLAS-FFPACK 2.5.0"
- #define [PACKAGE\\_TARNAME](#) "fflas-ffpack"
- #define [PACKAGE\\_URL](#) "https://github.com/linbox-team/fflas-ffpack"
- #define [PACKAGE\\_VERSION](#) "2.5.0"
- #define [SIZEOF\\_CHAR](#) 1
- #define [SIZEOF\\_INT](#) 4
- #define [SIZEOF\\_LONG](#) 4
- #define [SIZEOF\\_LONG\\_LONG](#) 8
- #define [SIZEOF\\_SHORT](#) 2
- #define [SIZEOF\\_\\_\\_INT64\\_T](#) 8
- #define [STDC\\_HEADERS](#) 1
- #define [USE\\_OPENMP](#) 1
- #define [VERSION](#) "2.5.0"

### 13.59.1 Macro Definition Documentation

#### 13.59.1.1 HAVE\_BLAS

```
#define HAVE_BLAS 1
```

#### 13.59.1.2 HAVE\_CBLAS

```
#define HAVE_CBLAS 1
```

**13.59.1.3 HAVE\_CXX11**

```
#define HAVE_CXX11 1
```

**13.59.1.4 HAVE\_DLFCN\_H**

```
#define HAVE_DLFCN_H 1
```

**13.59.1.5 HAVE\_FLOAT\_H**

```
#define HAVE_FLOAT_H 1
```

**13.59.1.6 HAVE\_INTTYPES\_H**

```
#define HAVE_INTTYPES_H 1
```

**13.59.1.7 HAVE\_LAPACK**

```
#define HAVE_LAPACK 1
```

**13.59.1.8 HAVE\_LIMITS\_H**

```
#define HAVE_LIMITS_H 1
```

**13.59.1.9 HAVE\_LITTLE\_ENDIAN**

```
#define HAVE_LITTLE_ENDIAN 1
```

**13.59.1.10 HAVE\_PTHREAD\_H**

```
#define HAVE_PTHREAD_H 1
```

**13.59.1.11 HAVE\_STDDEF\_H**

```
#define HAVE_STDDEF_H 1
```

**13.59.1.12 HAVE\_STDINT\_H**

```
#define HAVE_STDINT_H 1
```

**13.59.1.13 HAVE\_STDIO\_H**

```
#define HAVE_STDIO_H 1
```

**13.59.1.14 HAVE\_STDLIB\_H**

```
#define HAVE_STDLIB_H 1
```

**13.59.1.15 HAVE\_STRINGS\_H**

```
#define HAVE_STRINGS_H 1
```

**13.59.1.16 HAVE\_STRING\_H**

```
#define HAVE_STRING_H 1
```

**13.59.1.17 HAVE\_SYS\_STAT\_H**

```
#define HAVE_SYS_STAT_H 1
```



**13.59.1.18 HAVE\_SYS\_TIME\_H**

```
#define HAVE_SYS_TIME_H 1
```

**13.59.1.19 HAVE\_SYS\_TYPES\_H**

```
#define HAVE_SYS_TYPES_H 1
```

**13.59.1.20 HAVE\_UNISTD\_H**

```
#define HAVE_UNISTD_H 1
```

**13.59.1.21 LT\_OBJDIR**

```
#define LT_OBJDIR ".libs/"
```

**13.59.1.22 OPENBLAS\_NUM\_THREADS**

```
#define OPENBLAS_NUM_THREADS 1
```

**13.59.1.23 PACKAGE**

```
#define PACKAGE "fflas-ffpack"
```

**13.59.1.24 PACKAGE\_BUGREPORT**

```
#define PACKAGE_BUGREPORT "ffpack-devel@googlegroups.com"
```

**13.59.1.25 PACKAGE\_NAME**

```
#define PACKAGE_NAME "FFLAS-FFPACK"
```

**13.59.1.26 PACKAGE\_STRING**

```
#define PACKAGE_STRING "FFLAS-FFPACK 2.5.0"
```

**13.59.1.27 PACKAGE\_TARNAME**

```
#define PACKAGE_TARNAME "fflas-ffpack"
```

**13.59.1.28 PACKAGE\_URL**

```
#define PACKAGE_URL "https://github.com/linbox-team/fflas-ffpack"
```

**13.59.1.29 PACKAGE\_VERSION**

```
#define PACKAGE_VERSION "2.5.0"
```

**13.59.1.30 SIZEOF\_CHAR**

```
#define SIZEOF_CHAR 1
```

**13.59.1.31 SIZEOF\_INT**

```
#define SIZEOF_INT 4
```

**13.59.1.32 SIZEOF\_LONG**

```
#define SIZEOF_LONG 4
```

**13.59.1.33    `SIZEOF_LONG_LONG`**

```
#define SIZEOF_LONG_LONG 8
```

**13.59.1.34    `SIZEOF_SHORT`**

```
#define SIZEOF_SHORT 2
```

**13.59.1.35    `SIZEOF___INT64_T`**

```
#define SIZEOF___INT64_T 8
```

**13.59.1.36    `STDC_HEADERS`**

```
#define STDC_HEADERS 1
```

**13.59.1.37    `USE_OPENMP`**

```
#define USE_OPENMP 1
```

**13.59.1.38    `VERSION`**

```
#define VERSION "2.5.0"
```

**13.60    `fflas-ffpack/config.h` File Reference****Macros**

- `#define __FFLASFFPACK_HAVE_BLAS 1`
- `#define __FFLASFFPACK_HAVE_CBLAS 1`
- `#define __FFLASFFPACK_HAVE_CXX11 1`
- `#define __FFLASFFPACK_HAVE_DLFCN_H 1`
- `#define __FFLASFFPACK_HAVE_FLOAT_H 1`
- `#define __FFLASFFPACK_HAVE_INTTYPES_H 1`
- `#define __FFLASFFPACK_HAVE_LAPACK 1`
- `#define __FFLASFFPACK_HAVE_LIMITS_H 1`
- `#define __FFLASFFPACK_HAVE_LITTLE_ENDIAN 1`
- `#define __FFLASFFPACK_HAVE_PTHREAD_H 1`
- `#define __FFLASFFPACK_HAVE_STDDEF_H 1`
- `#define __FFLASFFPACK_HAVE_STDINT_H 1`
- `#define __FFLASFFPACK_HAVE_STDIO_H 1`
- `#define __FFLASFFPACK_HAVE_STDLIB_H 1`
- `#define __FFLASFFPACK_HAVE_STRINGS_H 1`
- `#define __FFLASFFPACK_HAVE_STRING_H 1`
- `#define __FFLASFFPACK_HAVE_SYS_STAT_H 1`
- `#define __FFLASFFPACK_HAVE_SYS_TIME_H 1`
- `#define __FFLASFFPACK_HAVE_SYS_TYPES_H 1`
- `#define __FFLASFFPACK_HAVE_UNISTD_H 1`
- `#define __FFLASFFPACK_LT_OBJDIR ".libs/"`
- `#define __FFLASFFPACK_OPENBLAS_NUM_THREADS 1`
- `#define __FFLASFFPACK_PACKAGE "fflas-ffpack"`
- `#define __FFLASFFPACK_PACKAGE_BUGREPORT "ffpack-devel@googlegroups.com"`
- `#define __FFLASFFPACK_PACKAGE_NAME "FFLAS-FFPACK"`
- `#define __FFLASFFPACK_PACKAGE_STRING "FFLAS-FFPACK 2.5.0"`
- `#define __FFLASFFPACK_PACKAGE_TARNAME "fflas-ffpack"`
- `#define __FFLASFFPACK_PACKAGE_URL "https://github.com/linbox-team/fflas-ffpack"`
- `#define __FFLASFFPACK_PACKAGE_VERSION "2.5.0"`

- `#define __FFLASFFPACK_SIZEOF_CHAR 1`
- `#define __FFLASFFPACK_SIZEOF_INT 4`
- `#define __FFLASFFPACK_SIZEOF_LONG 4`
- `#define __FFLASFFPACK_SIZEOF_LONG_LONG 8`
- `#define __FFLASFFPACK_SIZEOF_SHORT 2`
- `#define __FFLASFFPACK_SIZEOF__INT64_T 8`
- `#define __FFLASFFPACK_STDC_HEADERS 1`
- `#define __FFLASFFPACK_USE_OPENMP 1`
- `#define __FFLASFFPACK_VERSION "2.5.0"`

## 13.60.1 Macro Definition Documentation

### 13.60.1.1 `__FFLASFFPACK_HAVE_BLAS`

```
#define __FFLASFFPACK_HAVE_BLAS 1
```

### 13.60.1.2 `__FFLASFFPACK_HAVE_CBLAS`

```
#define __FFLASFFPACK_HAVE_CBLAS 1
```

### 13.60.1.3 `__FFLASFFPACK_HAVE_CXX11`

```
#define __FFLASFFPACK_HAVE_CXX11 1
```

### 13.60.1.4 `__FFLASFFPACK_HAVE_DLFCN_H`

```
#define __FFLASFFPACK_HAVE_DLFCN_H 1
```

### 13.60.1.5 `__FFLASFFPACK_HAVE_FLOAT_H`

```
#define __FFLASFFPACK_HAVE_FLOAT_H 1
```

### 13.60.1.6 `__FFLASFFPACK_HAVE_INTTYPES_H`

```
#define __FFLASFFPACK_HAVE_INTTYPES_H 1
```

### 13.60.1.7 `__FFLASFFPACK_HAVE_LAPACK`

```
#define __FFLASFFPACK_HAVE_LAPACK 1
```

### 13.60.1.8 `__FFLASFFPACK_HAVE_LIMITS_H`

```
#define __FFLASFFPACK_HAVE_LIMITS_H 1
```

### 13.60.1.9 `__FFLASFFPACK_HAVE_LITTLE_ENDIAN`

```
#define __FFLASFFPACK_HAVE_LITTLE_ENDIAN 1
```

### 13.60.1.10 `__FFLASFFPACK_HAVE_PTHREAD_H`

```
#define __FFLASFFPACK_HAVE_PTHREAD_H 1
```

### 13.60.1.11 `__FFLASFFPACK_HAVE_STDDEF_H`

```
#define __FFLASFFPACK_HAVE_STDDEF_H 1
```

### 13.60.1.12 `__FFLASFFPACK_HAVE_STDINT_H`

```
#define __FFLASFFPACK_HAVE_STDINT_H 1
```

**13.60.1.13 \_\_FFLASFFPACK\_HAVE\_STDIO\_H**

```
#define __FFLASFFPACK_HAVE_STDIO_H 1
```

**13.60.1.14 \_\_FFLASFFPACK\_HAVE\_STDLIB\_H**

```
#define __FFLASFFPACK_HAVE_STDLIB_H 1
```

**13.60.1.15 \_\_FFLASFFPACK\_HAVE\_STRINGS\_H**

```
#define __FFLASFFPACK_HAVE_STRINGS_H 1
```

**13.60.1.16 \_\_FFLASFFPACK\_HAVE\_STRING\_H**

```
#define __FFLASFFPACK_HAVE_STRING_H 1
```

**13.60.1.17 \_\_FFLASFFPACK\_HAVE\_SYS\_STAT\_H**

```
#define __FFLASFFPACK_HAVE_SYS_STAT_H 1
```

**13.60.1.18 \_\_FFLASFFPACK\_HAVE\_SYS\_TIME\_H**

```
#define __FFLASFFPACK_HAVE_SYS_TIME_H 1
```

**13.60.1.19 \_\_FFLASFFPACK\_HAVE\_SYS\_TYPES\_H**

```
#define __FFLASFFPACK_HAVE_SYS_TYPES_H 1
```

**13.60.1.20 \_\_FFLASFFPACK\_HAVE\_UNISTD\_H**

```
#define __FFLASFFPACK_HAVE_UNISTD_H 1
```

**13.60.1.21 \_\_FFLASFFPACK\_LT\_OBJDIR**

```
#define __FFLASFFPACK_LT_OBJDIR ".libs/"
```

**13.60.1.22 \_\_FFLASFFPACK\_OPENBLAS\_NUM\_THREADS**

```
#define __FFLASFFPACK_OPENBLAS_NUM_THREADS 1
```

**13.60.1.23 \_\_FFLASFFPACK\_PACKAGE**

```
#define __FFLASFFPACK_PACKAGE "fflas-ffpack"
```

**13.60.1.24 \_\_FFLASFFPACK\_PACKAGE\_BUGREPORT**

```
#define __FFLASFFPACK_PACKAGE_BUGREPORT "ffpack-devel@googlegroups.com"
```

**13.60.1.25 \_\_FFLASFFPACK\_PACKAGE\_NAME**

```
#define __FFLASFFPACK_PACKAGE_NAME "FFLAS-FFPACK"
```

**13.60.1.26 \_\_FFLASFFPACK\_PACKAGE\_STRING**

```
#define __FFLASFFPACK_PACKAGE_STRING "FFLAS-FFPACK 2.5.0"
```

**13.60.1.27 \_\_FFLASFFPACK\_PACKAGE\_TARNAME**

```
#define __FFLASFFPACK_PACKAGE_TARNAME "fflas-ffpack"
```

**13.60.1.28 \_\_FFLASFFPACK\_PACKAGE\_URL**

```
#define __FFLASFFPACK_PACKAGE_URL "https://github.com/linbox-team/fflas-ffpack"
```

**13.60.1.29 \_\_FFLASFFPACK\_PACKAGE\_VERSION**

```
#define __FFLASFFPACK_PACKAGE_VERSION "2.5.0"
```

**13.60.1.30 \_\_FFLASFFPACK\_SIZEOF\_CHAR**

```
#define __FFLASFFPACK_SIZEOF_CHAR 1
```

**13.60.1.31 \_\_FFLASFFPACK\_SIZEOF\_INT**

```
#define __FFLASFFPACK_SIZEOF_INT 4
```

**13.60.1.32 \_\_FFLASFFPACK\_SIZEOF\_LONG**

```
#define __FFLASFFPACK_SIZEOF_LONG 4
```

**13.60.1.33 \_\_FFLASFFPACK\_SIZEOF\_LONG\_LONG**

```
#define __FFLASFFPACK_SIZEOF_LONG_LONG 8
```

**13.60.1.34 \_\_FFLASFFPACK\_SIZEOF\_SHORT**

```
#define __FFLASFFPACK_SIZEOF_SHORT 2
```

**13.60.1.35 \_\_FFLASFFPACK\_SIZEOF\_\_INT64\_T**

```
#define __FFLASFFPACK_SIZEOF__INT64_T 8
```

**13.60.1.36 \_\_FFLASFFPACK\_STDC\_HEADERS**

```
#define __FFLASFFPACK_STDC_HEADERS 1
```

**13.60.1.37 \_\_FFLASFFPACK\_USE\_OPENMP**

```
#define __FFLASFFPACK_USE_OPENMP 1
```

**13.60.1.38 \_\_FFLASFFPACK\_VERSION**

```
#define __FFLASFFPACK_VERSION "2.5.0"
```

**13.61 fflas-ffpack-config.h File Reference**

Defaults for optimised values.

```
#include "fflas-ffpack/config.h"
#include "fflas-ffpack/fflas-ffpack-thresholds.h"
#include "fflas-ffpack/fflas-ffpack-default-thresholds.h"
#include "givaro/givconfig.h"
```

**Macros**

- #define [GCC\\_VERSION](#) (\_\_GNUC\_\_ \* 10000 + \_\_GNUC\_MINOR\_\_ \* 100 + \_\_GNUC\_PATCHLEVEL\_\_)

### 13.61.1 Detailed Description

Defaults for optimised values.

While `fflas-ffpack-optimise.h` is created by `configure` script, (either left blank or filled by optimiser), this file produces the defaults for the optimised values. If `fflas-ffpack-optimise.h` is not empty, then its values preceeds the defaults here.

### 13.61.2 Macro Definition Documentation

#### 13.61.2.1 GCC\_VERSION

```
#define GCC_VERSION (__GNUC__ * 10000 + __GNUC_MINOR__ * 100 + __GNUC_PATCHLEVEL__)
```

## 13.62 fflas-ffpack-default-thresholds.h File Reference

### Macros

- `#define __FFLASFFPACK_WINOTHRESHOLD 1000`
- `#define __FFLASFFPACK_WINOTHRESHOLD_FLT 2000`
- `#define __FFLASFFPACK_WINOTHRESHOLD_BAL 1000`
- `#define __FFLASFFPACK_WINOTHRESHOLD_BAL_FLT 2000`
- `#define __FFLASFFPACK_PLUQ_THRESHOLD 256`
- `#define __FFLASFFPACK_CHARPOLY_LUKrylov_ArithProg_THRESHOLD 1000`
- `#define __FFLASFFPACK_CHARPOLY_Danilevskii_LUKrylov_THRESHOLD 16`
- `#define __FFLASFFPACK_ARITHPROG_THRESHOLD 30`
- `#define __FFLASFFPACK_FTRTRI_THRESHOLD 32`
- `#define __FFLASFFPACK_FSYTRF_THRESHOLD 64`
- `#define __FFLASFFPACK_FSYRK_THRESHOLD 3000`

### 13.62.1 Macro Definition Documentation

#### 13.62.1.1 \_\_FFLASFFPACK\_WINOTHRESHOLD

```
#define __FFLASFFPACK_WINOTHRESHOLD 1000
```

#### 13.62.1.2 \_\_FFLASFFPACK\_WINOTHRESHOLD\_FLT

```
#define __FFLASFFPACK_WINOTHRESHOLD_FLT 2000
```

#### 13.62.1.3 \_\_FFLASFFPACK\_WINOTHRESHOLD\_BAL

```
#define __FFLASFFPACK_WINOTHRESHOLD_BAL 1000
```

#### 13.62.1.4 \_\_FFLASFFPACK\_WINOTHRESHOLD\_BAL\_FLT

```
#define __FFLASFFPACK_WINOTHRESHOLD_BAL_FLT 2000
```

#### 13.62.1.5 \_\_FFLASFFPACK\_PLUQ\_THRESHOLD

```
#define __FFLASFFPACK_PLUQ_THRESHOLD 256
```

#### 13.62.1.6 \_\_FFLASFFPACK\_CHARPOLY\_LUKrylov\_ArithProg\_THRESHOLD

```
#define __FFLASFFPACK_CHARPOLY_LUKrylov_ArithProg_THRESHOLD 1000
```

#### 13.62.1.7 \_\_FFLASFFPACK\_CHARPOLY\_Danilevskii\_LUKrylov\_THRESHOLD

```
#define __FFLASFFPACK_CHARPOLY_Danilevskii_LUKrylov_THRESHOLD 16
```

**13.62.1.8 \_\_FFLASFFPACK\_ARITHPROG\_THRESHOLD**

```
#define __FFLASFFPACK_ARITHPROG_THRESHOLD 30
```

**13.62.1.9 \_\_FFLASFFPACK\_FTRTRI\_THRESHOLD**

```
#define __FFLASFFPACK_FTRTRI_THRESHOLD 32
```

**13.62.1.10 \_\_FFLASFFPACK\_FSYTRF\_THRESHOLD**

```
#define __FFLASFFPACK_FSYTRF_THRESHOLD 64
```

**13.62.1.11 \_\_FFLASFFPACK\_FSYRK\_THRESHOLD**

```
#define __FFLASFFPACK_FSYRK_THRESHOLD 3000
```

**13.63 fflas-ffpack-thresholds.h File Reference****13.64 fflas-ffpack.doxy File Reference****13.65 fflas-ffpack.h File Reference**

Includes [FFLAS](#) and [FFPACK](#).

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "fflas/fflas.h"
#include "ffpack/ffpack.h"
```

**13.65.1 Detailed Description**

Includes [FFLAS](#) and [FFPACK](#).

**13.66 fflas.doxy File Reference****13.67 fflas.h File Reference**

**Finite Field Linear Algebra Subroutines**

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "fflas-ffpack/config.h"
#include "fflas-ffpack/config-blas.h"
#include <cmath>
#include <cstring>
#include <float.h>
#include <algorithm>
#include "fflas_enum.h"
#include "fflas-ffpack/utils/fflas_memory.h"
#include "fflas-ffpack/paladin/parallel.h"
#include "fflas_level1.inl"
#include "fflas_level2.inl"
#include "fflas_level3.inl"
#include "fflas-ffpack/checkers/checkers_fflas.h"
#include "fflas_freduce.h"
#include "fflas_fadd.h"
#include "fflas_fscal.h"
#include "fflas_fassign.h"
#include "fflas_fgemm.inl"
```

```
#include "fflas_pfgemm.inl"
#include "fflas_fgmv.inl"
#include "fflas-ffpack/paladin/pfgmv.inl"
#include "fflas_freivalds.inl"
#include "fflas_fger.inl"
#include "fflas_fsyrk.inl"
#include "fflas_fsyrk_strassen.inl"
#include "fflas_fsyr2k.inl"
#include "fflas_ftrsm.inl"
#include "fflas_pftsm.inl"
#include "fflas_ftrmm.inl"
#include "fflas_ftrsv.inl"
#include "fflas_faxpy.inl"
#include "fflas_fdot.inl"
#include "fflas-ffpack/field/rns.h"
#include "fflas_fscal_mp.inl"
#include "fflas_freduce_mp.inl"
#include "fflas-ffpack/fflas/fflas_fger_mp.inl"
#include "fflas_fgmm/fgmm_classical_mp.inl"
#include "fflas_ftrsm_mp.inl"
#include "fflas_fgmv_mp.inl"
#include "fflas-ffpack/field/rns.inl"
#include "fflas-ffpack/paladin/fflas_plevel1.h"
#include "fflas_sparse.h"
#include "fflas-ffpack/checkers/checkers_fflas.inl"
```

## Macros

- `#define WINOTHRESHOLD __FFLASFFPACK_WINOTHRESHOLD`
- `#define DOUBLE_TO_FLOAT_CROSSOVER 800`

*Thresholds determining which floating point representation to use, depending on the cardinality of the finite field.*

## 13.67.1 Detailed Description

### Finite Field Linear Algebra Subroutines

#### Author

Clément Pernet.

## 13.67.2 Macro Definition Documentation

### 13.67.2.1 WINOTHRESHOLD

```
#define WINOTHRESHOLD __FFLASFFPACK_WINOTHRESHOLD
```

### 13.67.2.2 DOUBLE\_TO\_FLOAT\_CROSSOVER

```
#define DOUBLE_TO_FLOAT_CROSSOVER 800
```

Thresholds determining which floating point representation to use, depending on the cardinality of the finite field. This is only used when the element representation is not a floating point type.

**Bug** to be benchmarked.

## 13.68 fflas\_bounds.inl File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "fflas-ffpack/utils/flimits.h"
```



```
#include <givaro/udl.h>
#include <givaro/modular.h>
#include <givaro/modular-balanced.h>
```

## Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::Protected](#)

## Macros

- `#define` [\\_\\_FFLASFFPACK\\_fflas\\_bounds\\_INL](#)
- `#define` [FFLAS\\_INT\\_TYPE](#) `uint64_t`

## Functions

- `template<class Field >`  
`double computeFactorClassic (const Field &F)`
- `template<> double computeFactorClassic (const Givaro::ModularBalanced< double > &F)`
- `template<> double computeFactorClassic (const Givaro::ModularBalanced< float > &F)`
- `template<class Field >`  
`size_t DotProdBoundClassic (const Field &F, const typename Field::Element &beta)`
- `Givaro::Integer InfNorm (const size_t M, const size_t N, const Givaro::Integer *A, const size_t lda)`
- `template<class Field >`  
`size_t TRSMBound (const Field &)`  
*TRSMBound.*
- `template<class Element >`  
`size_t TRSMBound (const Givaro::Modular< Element > &F)`  
*Specialization for positive modular representation over double Computes nmax s.t.*
- `template<class Element >`  
`size_t TRSMBound (const Givaro::ModularBalanced< Element > &F)`  
*Specialization for balanced modular representation over double.*

## 13.68.1 Macro Definition Documentation

### 13.68.1.1 [\\_\\_FFLASFFPACK\\_fflas\\_bounds\\_INL](#)

```
#define __FFLASFFPACK_fflas_bounds_INL
```

### 13.68.1.2 [FFLAS\\_INT\\_TYPE](#)

```
#define FFLAS_INT_TYPE uint64_t
```

## 13.69 fflas\_enum.h File Reference

```
#include <algorithm>
```

## Data Structures

- class [AreEqual](#)< X, Y >
- class [AreEqual](#)< X, X >

## Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::Protected](#)

## Enumerations

- enum `FFLAS_ORDER` { `FflasRowMajor` =101 , `FflasColMajor` =102 }  
*Storage by row or col ?*
- enum `FFLAS_TRANSPOSE` { `FflasNoTrans` = 111 , `FflasTrans` = 112 }  
*Is matrix transposed ?*
- enum `FFLAS_UPLO` { `FflasUpper` = 121 , `FflasLower` = 122 , `FflasLeftTri` = 123 , `FflasRightTri` = 124 }  
*Is triangular matrix's shape upper ?*
- enum `FFLAS_DIAG` { `FflasNonUnit` = 131 , `FflasUnit` = 132 }  
*Is the triangular matrix implicitly unit diagonal ?*
- enum `FFLAS_SIDE` { `FflasLeft` = 141 , `FflasRight` = 142 }  
*On what side ?*
- enum `FFLAS_BASE` { `FflasDouble` = 151 , `FflasFloat` = 152 , `FflasGeneric` = 153 }  
*FFLAS\_BASE determines the type of the element representation for Matrix Mult kernel.*

## Functions

- template<class T >  
const T & `min3` (const T &m, const T &n, const T &k)
- template<class T >  
const T & `max3` (const T &m, const T &n, const T &k)
- template<class T >  
const T & `min4` (const T &m, const T &n, const T &k, const T &l)
- template<class T >  
const T & `max4` (const T &m, const T &n, const T &k, const T &l)

## 13.70 fflas\_fadd.h File Reference

```
#include "fflas-ffpack/fflas/fflas_simd.h"
#include "fflas_fadd.inl"
```

## Data Structures

- struct `support_simd_add< T >`

## Namespaces

- namespace `FFLAS`

## Functions

- template<class `Field` >  
void `fadd` (const `Field` &F, const size\_t N, typename `Field::ConstElement_ptr` A, const size\_t inca, typename `Field::ConstElement_ptr` B, const size\_t incb, typename `Field::Element_ptr` C, const size\_t incc)
- template<class `Field` >  
void `faddin` (const `Field` &F, const size\_t N, typename `Field::ConstElement_ptr` B, const size\_t incb, typename `Field::Element_ptr` C, const size\_t incc)
- template<class `Field` >  
void `fsub` (const `Field` &F, const size\_t N, typename `Field::ConstElement_ptr` A, const size\_t inca, typename `Field::ConstElement_ptr` B, const size\_t incb, typename `Field::Element_ptr` C, const size\_t incc)
- template<class `Field` >  
void `fsubin` (const `Field` &F, const size\_t N, typename `Field::ConstElement_ptr` B, const size\_t incb, typename `Field::Element_ptr` C, const size\_t incc)

- `template<class Field >`  
`void fadd (const Field &F, const size_t N, typename Field::ConstElement_ptr A, const size_t inca, const`  
`typename Field::Element alpha, typename Field::ConstElement_ptr B, const size_t incb, typename`  
`Field::Element_ptr C, const size_t incc)`
- `template<class Field >`  
`void pfadd (const Field &F, const size_t M, const size_t N, typename Field::ConstElement_ptr A, const size_t`  
`lda, typename Field::ConstElement_ptr B, const size_t ldb, typename Field::Element_ptr C, const size_t ldc,`  
`const size_t numths)`
- `template<class Field >`  
`void pfsub (const Field &F, const size_t M, const size_t N, typename Field::ConstElement_ptr A, const size_t`  
`lda, typename Field::ConstElement_ptr B, const size_t ldb, typename Field::Element_ptr C, const size_t ldc,`  
`const size_t numths)`
- `template<class Field >`  
`void pfaddin (const Field &F, const size_t M, const size_t N, typename Field::ConstElement_ptr B, const`  
`size_t ldb, typename Field::Element_ptr C, const size_t ldc, size_t numths)`
- `template<class Field >`  
`void pfsubin (const Field &F, const size_t M, const size_t N, typename Field::ConstElement_ptr B, const`  
`size_t ldb, typename Field::Element_ptr C, const size_t ldc, size_t numths)`
- `template<class Field >`  
`void fadd (const Field &F, const size_t M, const size_t N, typename Field::ConstElement_ptr A, const size_t`  
`lda, typename Field::ConstElement_ptr B, const size_t ldb, typename Field::Element_ptr C, const size_t ldc)`  
*fadd : matrix addition.*
- `template<class Field >`  
`void fsub (const Field &F, const size_t M, const size_t N, typename Field::ConstElement_ptr A, const size_t`  
`lda, typename Field::ConstElement_ptr B, const size_t ldb, typename Field::Element_ptr C, const size_t ldc)`  
*fsub : matrix subtraction.*
- `template<class Field >`  
`void faddin (const Field &F, const size_t M, const size_t N, typename Field::ConstElement_ptr B, const size_t`  
`lda, typename Field::Element_ptr C, const size_t ldc)`  
*faddin*
- `template<class Field >`  
`void faddin (const Field &F, const FFLAS_UPLO uplo, const size_t N, typename Field::ConstElement_ptr B,`  
`const size_t ldb, typename Field::Element_ptr C, const size_t ldc)`  
*fadding for symmetric matrices*
- `template<class Field >`  
`void fsubin (const Field &F, const size_t M, const size_t N, typename Field::ConstElement_ptr B, const size_t`  
`lda, typename Field::Element_ptr C, const size_t ldc)`  
*fsubin  $C = C - B$*
- `template<class Field >`  
`void fadd (const Field &F, const size_t M, const size_t N, typename Field::ConstElement_ptr A, const size_t`  
`lda, const typename Field::Element alpha, typename Field::ConstElement_ptr B, const size_t ldb, typename`  
`Field::Element_ptr C, const size_t ldc)`  
*fadd : matrix addition with scaling.*

## 13.71 fflas\_fadd.inl File Reference

```
#include "fflas-ffpack/fflas/fflas_simd.h"
```

### Namespaces

- namespace `FFLAS`
- namespace `FFLAS::vectorised`
- namespace `FFLAS::details`

## Macros

- `#define __FFLASFFPACK_fadd_INL`

## Functions

- `template<class SimdT, class Element, bool positive>`  
`std::enable_if< is_simd< SimdT >::value, void >::type VEC_ADD (SimdT &C, SimdT &A, SimdT &B, SimdT`  
`&Q, SimdT &T, SimdT &P, SimdT &NEGP, SimdT &MIN, SimdT &MAX)`
- `template<bool positive, class Element, class T1, class T2 >`  
`std::enable_if< FFLAS::support_simd_add< Element >::value, void >::type addp (Element *T, const Ele-`  
`ment *TA, const Element *TB, size_t n, Element p, T1 min_, T2 max_)`
- `template<class SimdT, class Element, bool positive>`  
`std::enable_if< is_simd< SimdT >::value, void >::type VEC_SUB (SimdT &C, SimdT &A, SimdT &B, SimdT`  
`&Q, SimdT &T, SimdT &P, SimdT &NEGP, SimdT &MIN, SimdT &MAX)`
- `template<bool positive, class Element, class T1, class T2 >`  
`std::enable_if< FFLAS::support_simd_add< Element >::value, void >::type subp (Element *T, const Ele-`  
`ment *TA, const Element *TB, const size_t n, const Element p, const T1 min_, const T2 max_)`
- `template<class Element >`  
`std::enable_if< FFLAS::support_simd_add< Element >::value, void >::type add (Element *T, const Element`  
`*TA, const Element *TB, size_t n)`
- `template<class Element >`  
`std::enable_if< FFLAS::support_simd_add< Element >::value, void >::type sub (Element *T, const Element`  
`*TA, const Element *TB, size_t n)`
- `template<class Field, bool ADD>`  
`std::enable_if< FFLAS::support_simd_add< typenameField::Element >::value, void >::type fadd`  
`(const Field &F, const size_t N, typename Field::ConstElement_ptr A, const size_t inca, typename`  
`Field::ConstElement_ptr B, const size_t incb, typename Field::Element_ptr C, const size_t incc,`  
`FieldCategories::ModularTag)`
- `template<class Field, bool ADD>`  
`std::enable_if<!FFLAS::support_simd_add< typenameField::Element >::value, void >::type fadd`  
`(const Field &F, const size_t N, typename Field::ConstElement_ptr A, const size_t inca, typename`  
`Field::ConstElement_ptr B, const size_t incb, typename Field::Element_ptr C, const size_t incc,`  
`FieldCategories::ModularTag)`
- `template<class Field, bool ADD>`  
`void fadd (const Field &F, const size_t N, typename Field::ConstElement_ptr A, const size_t inca, type-`  
`name Field::ConstElement_ptr B, const size_t incb, typename Field::Element_ptr C, const size_t incc,`  
`FieldCategories::GenericTag)`
- `template<class Field, bool ADD>`  
`std::enable_if<!FFLAS::support_simd_add< typenameField::Element >::value, void >::type fadd`  
`(const Field &F, const size_t N, typename Field::ConstElement_ptr A, const size_t inca, typename`  
`Field::ConstElement_ptr B, const size_t incb, typename Field::Element_ptr C, const size_t incc,`  
`FieldCategories::UnparametricTag)`
- `template<class Field, bool ADD>`  
`std::enable_if< FFLAS::support_simd_add< typenameField::Element >::value, void >::type fadd`  
`(const Field &F, const size_t N, typename Field::ConstElement_ptr A, const size_t inca, typename`  
`Field::ConstElement_ptr B, const size_t incb, typename Field::Element_ptr C, const size_t incc,`  
`FieldCategories::UnparametricTag)`

## 13.71.1 Macro Definition Documentation

### 13.71.1.1 \_\_FFLASFFPACK\_fadd\_INL

```
#define __FFLASFFPACK_fadd_INL
```

## 13.72 fflas\_fassign.h File Reference

```
#include "fflas_fassign.inl"
```

## 13.73 fflas\_fassign.inl File Reference

```
#include <string.h>
#include <givaro/modular.h>
#include <givaro/modular-balanced.h>
#include <givaro/zring.h>
#include "fflas-ffpack/utils/debug.h"
```

### Namespaces

- namespace [FFLAS](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fassign\\_INL](#)

### Functions

- template<class [Field](#) >  
void [fassign](#) (const [Field](#) &F, const size\_t N, typename [Field::ConstElement\\_ptr](#) Y, const size\_t incY, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
 $fassign : x \leftarrow y.$
- template<> void [fassign](#) (const Givaro::Modular< float > &F, const size\_t N, const float \*Y, const size\_t incY, float \*X, const size\_t incX)
- template<> void [fassign](#) (const Givaro::ModularBalanced< float > &F, const size\_t N, const float \*Y, const size\_t incY, float \*X, const size\_t incX)
- template<> void [fassign](#) (const Givaro::ZRing< float > &F, const size\_t N, const float \*Y, const size\_t incY, float \*X, const size\_t incX)
- template<> void [fassign](#) (const Givaro::Modular< double > &F, const size\_t N, const double \*Y, const size\_t incY, double \*X, const size\_t incX)
- template<> void [fassign](#) (const Givaro::ModularBalanced< double > &F, const size\_t N, const double \*Y, const size\_t incY, double \*X, const size\_t incX)
- template<> void [fassign](#) (const Givaro::ZRing< double > &F, const size\_t N, const double \*Y, const size\_t incY, double \*X, const size\_t incX)
- template<class [Field](#) >  
void [fassign](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
 $fassign : A \leftarrow B.$

### 13.73.1 Macro Definition Documentation

#### 13.73.1.1 \_\_FFLASFFPACK\_fassign\_INL

```
#define __FFLASFFPACK_fassign_INL
```

## 13.74 fflas\_faxpy.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::vectorised](#)
- namespace [FFLAS::vectorised::unswitch](#)
- namespace [FFLAS::details](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_faxpy\\_INL](#)

## Functions

- `template<class Field >`  
`std::enable_if<!FFLAS::support_simd_mod< typenameField::Element >::value &&FFLAS::support_fast_mod<`  
`typenameField::Element >::value, void >::type axpyp (const Field &F, const typename Field::Element a,`  
`typename Field::ConstElement_ptr X, typename Field::Element_ptr Y, const size_t n, HelperMod< Field >`  
`&H)`
- `template<class Field >`  
`std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type axpyp`  
`(const Field &F, const typename Field::Element a, typename Field::ConstElement_ptr X, typename`  
`Field::Element_ptr Y, const size_t n, const size_t incX, const size_t incY, HelperMod< Field > &H)`
- `template<class Field >`  
`std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type axpyp`  
`(const Field &F, const typename Field::Element a, typename Field::ConstElement_ptr X, typename`  
`Field::Element_ptr Y, const size_t n)`
- `template<class Field >`  
`std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type axpyp`  
`(const Field &F, const typename Field::Element a, typename Field::ConstElement_ptr X, typename`  
`Field::Element_ptr Y, const size_t n, const size_t incX, const size_t incY)`
- `template<class Field >`  
`std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type faxpy (const`  
`Field &F, const size_t N, const typename Field::Element a, typename Field::ConstElement_ptr X, const size_t`  
`incX, typename Field::Element_ptr Y, const size_t incY, FieldCategories::ModularTag)`
- `template<class Field, class FC >`  
`void faxpy (const Field &F, const size_t N, const typename Field::Element a, typename Field::ConstElement_ptr`  
`X, const size_t incX, typename Field::Element_ptr Y, const size_t incY, FC)`
- `template<class Field >`  
`void faxpy (const Field &F, const size_t N, const typename Field::Element alpha, typename Field::ConstElement_ptr`  
`X, const size_t incX, typename Field::Element_ptr Y, const size_t incY)`  

$$faxpy : y \leftarrow \alpha \cdot x + y.$$
- `template<> void faxpy (const Givaro::DoubleDomain &, const size_t N, const Givaro::DoubleDomain::Element a,`  
`Givaro::DoubleDomain::ConstElement_ptr x, const size_t incx, Givaro::DoubleDomain::Element_ptr y,`  
`const size_t incy)`
- `template<> void faxpy (const Givaro::FloatDomain &, const size_t N, const Givaro::FloatDomain::Element`  
`a, Givaro::FloatDomain::ConstElement_ptr x, const size_t incx, Givaro::FloatDomain::Element_ptr y, const`  
`size_t incy)`
- `template<class Field >`  
`void faxpy (const Field &F, const size_t m, const size_t n, const typename Field::Element alpha, typename`  
`Field::ConstElement_ptr X, const size_t idx, typename Field::Element_ptr Y, const size_t ldy)`  

$$faxpy : y \leftarrow \alpha \cdot x + y.$$

## 13.74.1 Macro Definition Documentation

### 13.74.1.1 \_\_FFLASFFPACK\_faxpy\_INL

```
#define __FFLASFFPACK_faxpy_INL
```

## 13.75 fflas\_fdot.inl File Reference

```
#include "fflas-ffpack/fflas/fflas_helpers.inl"
```

## Namespaces

- namespace [FFLAS](#)

## Macros

- `#define __FFLASFFPACK_fdot_INL`

## Functions

- `template<class Field >`  
`Field::Element fdot` (const `Field` &F, const `size_t` N, typename `Field::ConstElement_ptr` x, const `size_t` incx, typename `Field::ConstElement_ptr` y, const `size_t` incy, `ModeCategories::DefaultTag` &MT)
- `template<class Field >`  
`Field::Element fdot` (const `Field` &F, const `size_t` N, typename `Field::ConstElement_ptr` x, const `size_t` incx, typename `Field::ConstElement_ptr` y, const `size_t` incy, `ModeCategories::DelayedTag` &MT)
- `template<>` `Givaro::DoubleDomain::Element fdot` (const `Givaro::DoubleDomain` &, const `size_t` N, `Givaro::DoubleDomain::ConstElement_ptr` x, const `size_t` incx, `Givaro::DoubleDomain::ConstElement_ptr` y, const `size_t` incy, `ModeCategories::DefaultTag` &MT)
- `template<>` `Givaro::FloatDomain::Element fdot` (const `Givaro::FloatDomain` &, const `size_t` N, `Givaro::FloatDomain::ConstElement_ptr` x, const `size_t` incx, `Givaro::FloatDomain::ConstElement_ptr` y, const `size_t` incy, `ModeCategories::DefaultTag` &MT)
- `template<class Field, class T >`  
`Field::Element fdot` (const `Field` &F, const `size_t` N, typename `Field::ConstElement_ptr` x, const `size_t` incx, typename `Field::ConstElement_ptr` y, const `size_t` incy, `ModeCategories::ConvertTo`< T > &MT)
- `template<class Field >`  
`Field::Element fdot` (const `Field` &F, const `size_t` N, typename `Field::ConstElement_ptr` x, const `size_t` incx, typename `Field::ConstElement_ptr` y, const `size_t` incy, `ModeCategories::DefaultBoundedTag` &dbt)
- `template<class Field >`  
`Field::Element fdot` (const `Field` &F, const `size_t` N, typename `Field::ConstElement_ptr` x, const `size_t` incx, typename `Field::ConstElement_ptr` y, const `size_t` incy, const `ParSeqHelper::Sequential` seq)
- `template<class Field >`  
`Field::Element fdot` (const `Field` &F, const `size_t` N, typename `Field::ConstElement_ptr` X, const `size_t` incX, typename `Field::ConstElement_ptr` Y, const `size_t` incY)  

$$\text{fdot: dot product } x^T y.$$

## 13.75.1 Macro Definition Documentation

### 13.75.1.1 \_\_FFLASFFPACK\_fdot\_INL

```
#define __FFLASFFPACK_fdot_INL
```

## 13.76 fflas\_fgemm.inl File Reference

```
#include <givaro/modular.h>
#include <givaro/modular-balanced.h>
#include "fflas-ffpack/utils/debug.h"
#include "fflas_fgemm/fgemm_classical.inl"
#include "fflas_fgemm/fgemm_winograd.inl"
```

## Namespaces

- namespace `FFLAS`
- namespace `FFLAS::Protected`

## Macros

- `#define __FFLASFFPACK_fgemm_INL`

## Functions

- `template<class NewField , class Field , class FieldMode >`  
`Field::Element_ptr fgemm_convert` (const `Field` &F, const `FFLAS_TRANSPOSE` ta, const `FFLAS_TRANSPOSE` tb, const `size_t` m, const `size_t` n, const `size_t` k, const `typename Field::Element` alpha, `typename Field::ConstElement_ptr` A, const `size_t` lda, `typename Field::ConstElement_ptr` B, const `size_t` ldb, const `typename Field::Element` beta, `typename Field::Element_ptr` C, const `size_t` ldc, `MMHelper`< `Field`, `MMHelperAlgo::Winograd`, `FieldMode` > &H)
- `template<class Field , class Element , class AlgoT , class ParSeqTrait >`  
`bool NeedPreAddReduction` (`Element` &Outmin, `Element` &Outmax, `Element` &Op1min, `Element` &Op1max, `Element` &Op2min, `Element` &Op2max, `MMHelper`< `Field`, `AlgoT`, `ModeCategories::LazyTag`, `ParSeqTrait` > &WH)
- `template<class Field , class Element , class AlgoT , class ModeT , class ParSeqTrait >`  
`bool NeedPreAddReduction` (`Element` &Outmin, `Element` &Outmax, `Element` &Op1min, `Element` &Op1max, `Element` &Op2min, `Element` &Op2max, `MMHelper`< `Field`, `AlgoT`, `ModeT`, `ParSeqTrait` > &WH)
- `template<class Field , class Element , class AlgoT , class ParSeqTrait >`  
`bool NeedPreSubReduction` (`Element` &Outmin, `Element` &Outmax, `Element` &Op1min, `Element` &Op1max, `Element` &Op2min, `Element` &Op2max, `MMHelper`< `Field`, `AlgoT`, `ModeCategories::LazyTag`, `ParSeqTrait` > &WH)
- `template<class Field , class Element , class AlgoT , class ModeT , class ParSeqTrait >`  
`bool NeedPreSubReduction` (`Element` &Outmin, `Element` &Outmax, `Element` &Op1min, `Element` &Op1max, `Element` &Op2min, `Element` &Op2max, `MMHelper`< `Field`, `AlgoT`, `ModeT`, `ParSeqTrait` > &WH)
- `template<class Field , class Element , class AlgoT , class ParSeqTrait >`  
`bool NeedDoublePreAddReduction` (`Element` &Outmin, `Element` &Outmax, `Element` &Op1min, `Element` &Op1max, `Element` &Op2min, `Element` &Op2max, `Element` beta, `MMHelper`< `Field`, `AlgoT`, `ModeCategories::LazyTag`, `ParSeqTrait` > &WH)
- `template<class Field , class Element , class AlgoT , class ModeT , class ParSeqTrait >`  
`bool NeedDoublePreAddReduction` (`Element` &Outmin, `Element` &Outmax, `Element` &Op1min, `Element` &Op1max, `Element` &Op2min, `Element` &Op2max, `Element` beta, `MMHelper`< `Field`, `AlgoT`, `ModeT`, `ParSeqTrait` > &WH)
- `template<class Field , class AlgoT , class ParSeqTrait >`  
`void ScalAndReduce` (const `Field` &F, const `size_t` N, const `typename Field::Element` alpha, `typename Field::Element_ptr` X, const `size_t` incX, const `MMHelper`< `Field`, `AlgoT`, `ModeCategories::LazyTag`, `ParSeqTrait` > &H)
- `template<class Field , class AlgoT , class ParSeqTrait >`  
`void ScalAndReduce` (const `Field` &F, const `size_t` M, const `size_t` N, const `typename Field::Element` alpha, `typename Field::Element_ptr` A, const `size_t` lda, const `MMHelper`< `Field`, `AlgoT`, `ModeCategories::LazyTag`, `ParSeqTrait` > &H)
- `template<class Field >`  
`Field::Element_ptr fgemm` (const `Field` &F, const `FFLAS_TRANSPOSE` ta, const `FFLAS_TRANSPOSE` tb, const `size_t` m, const `size_t` n, const `size_t` k, const `typename Field::Element` alpha, `typename Field::ConstElement_ptr` A, const `size_t` lda, `typename Field::ConstElement_ptr` B, const `size_t` ldb, const `typename Field::Element` beta, `typename Field::Element_ptr` C, const `size_t` ldc, `MMHelper`< `Field`, `MMHelperAlgo::Winograd`, `ModeCategories::ConvertTo`< `ElementCategories::MachineFloatTag` >, `ParSeqHelper::Sequential` > &H)
- `template<typename Field >`  
`Field::Element_ptr fgemm` (const `Field` &F, const `FFLAS_TRANSPOSE` ta, const `FFLAS_TRANSPOSE` tb, const `size_t` m, const `size_t` n, const `size_t` k, const `typename Field::Element` alpha, `typename Field::ConstElement_ptr` A, const `size_t` lda, `typename Field::ConstElement_ptr` B, const `size_t` ldb, const `typename Field::Element` beta, `typename Field::Element_ptr` C, const `size_t` ldc, const `ParSeqHelper::Sequential` seq)
- `template<typename Field , class Cut , class Param >`  
`Field::Element_ptr fgemm` (const `Field` &F, const `FFLAS_TRANSPOSE` ta, const `FFLAS_TRANSPOSE` tb, const `size_t` m, const `size_t` n, const `size_t` k, const `typename Field::Element` alpha, `typename Field::ConstElement_ptr` A, const `size_t` lda, `typename Field::ConstElement_ptr` B, const `size_t` ldb, const `typename Field::Element` beta, `typename Field::Element_ptr` C, const `size_t` ldc, const `ParSeqHelper::Parallel`< `Cut`, `Param` > par)



- `template<typename Field >`  
`Field::Element_ptr fgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc)`  
*fgemm: Field GENeral Matrix Multiply.*
- `template<typename Field , class ModeT , class ParSeq >`  
`Field::Element_ptr fgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field, MMHelperAlgo::Auto, ModeT, ParSeq > &H)`
- `template<class Field >`  
`Field::Element_ptr fgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field, MMHelperAlgo::Winograd, ModeCategories::DelayedTag, ParSeqHelper::Sequential > &H)`
- `template<class Field >`  
`Field::Element_ptr fsquare (const Field &F, const FFLAS_TRANSPOSE ta, const size_t n, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc)`  
*fsquare: Squares a matrix.*
- `template<class Field >`  
`Field::Element_ptr fsquareCommon (const Field &F, const FFLAS_TRANSPOSE ta, const size_t n, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc)`
- `template<> double * fsquare (const Givaro::ModularBalanced< double > &F, const FFLAS_TRANSPOSE ta, const size_t n, const double alpha, const double *A, const size_t lda, const double beta, double *C, const size_t ldc)`
- `template<> float * fsquare (const Givaro::ModularBalanced< float > &F, const FFLAS_TRANSPOSE ta, const size_t n, const float alpha, const float *A, const size_t lda, const float beta, float *C, const size_t ldc)`
- `template<> double * fsquare (const Givaro::Modular< double > &F, const FFLAS_TRANSPOSE ta, const size_t n, const double alpha, const double *A, const size_t lda, const double beta, double *C, const size_t ldc)`
- `template<> float * fsquare (const Givaro::Modular< float > &F, const FFLAS_TRANSPOSE ta, const size_t n, const float alpha, const float *A, const size_t lda, const float beta, float *C, const size_t ldc)`

## 13.76.1 Macro Definition Documentation

### 13.76.1.1 \_\_FFLASFFPACK\_fgemm\_INL

```
#define __FFLASFFPACK_fgemm_INL
```

## 13.77 fgemm\_classical.inl File Reference

## 13.78 fgemm\_classical\_mp.inl File Reference

matrix multiplication with multiprecision input (either over Z or over Z/pZ)

```
#include <givaro/modular-integer.h>
#include <givaro/zring.h>
#include "fflas-ffpack/field/rns-double.h"
#include "fflas-ffpack/field/rns-integer.h"
#include "fflas-ffpack/field/rns-integer-mod.h"
#include "fflas-ffpack/field/field-traits.h"
#include "fflas-ffpack/fflas/fflas_helpers.inl"
```

```
#include "fflas-ffpack/fflas/fflas_bounds.inl"
```

## Data Structures

- struct [MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeqTrait >](#)
- struct [MMHelper< FFPACK::RNSInteger< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >](#)
- struct [MMHelper< FFPACK::RNSIntegerMod< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >](#)

## Namespaces

- namespace [FFLAS](#)

## Macros

- #define [\\_\\_FFPACK\\_fgemm\\_classical\\_INL](#)

## Functions

- template<typename [RNS](#) , typename [ParSeqTrait](#) >  
[FFPACK::RNSInteger< RNS >::Element\\_ptr fgemm](#) (const [FFPACK::RNSInteger< RNS >](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [FFPACK::RNSInteger< RNS >::Element](#) alpha, typename [FFPACK::RNSInteger< RNS >::ConstElement\\_ptr](#) Ad, const size\_t lda, typename [FFPACK::RNSInteger< RNS >::ConstElement\\_ptr](#) Bd, const size\_t ldb, const typename [FFPACK::RNSInteger< RNS >::Element](#) beta, typename [FFPACK::RNSInteger< RNS >::Element\\_ptr](#) Cd, const size\_t ldc, [MMHelper< FFPACK::RNSInteger< RNS >, MMHelperAlgo::Classic, ModeCategories::DefaultTag, ParSeqHelper::Compose< ParSeqHelper::Sequential, ParSeqTrait > >](#) &H)
- template<typename [RNS](#) >  
[FFPACK::RNSInteger< RNS >::Element\\_ptr fgemm](#) (const [FFPACK::RNSInteger< RNS >](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [FFPACK::RNSInteger< RNS >::Element](#) alpha, typename [FFPACK::RNSInteger< RNS >::ConstElement\\_ptr](#) Ad, const size\_t lda, typename [FFPACK::RNSInteger< RNS >::ConstElement\\_ptr](#) Bd, const size\_t ldb, const typename [FFPACK::RNSInteger< RNS >::Element](#) beta, typename [FFPACK::RNSInteger< RNS >::Element\\_ptr](#) Cd, const size\_t ldc, [MMHelper< FFPACK::RNSInteger< RNS >, MMHelperAlgo::Classic, ModeCategories::DefaultTag, ParSeqHelper::Sequential >](#) &H)
- template<typename [RNS](#) , typename [ParSeqTrait](#) >  
[FFPACK::RNSInteger< RNS >::Element\\_ptr fgemm](#) (const [FFPACK::RNSInteger< RNS >](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [FFPACK::RNSInteger< RNS >::Element](#) alpha, typename [FFPACK::RNSInteger< RNS >::ConstElement\\_ptr](#) Ad, const size\_t lda, typename [FFPACK::RNSInteger< RNS >::ConstElement\\_ptr](#) Bd, const size\_t ldb, const typename [FFPACK::RNSInteger< RNS >::Element](#) beta, typename [FFPACK::RNSInteger< RNS >::Element\\_ptr](#) Cd, const size\_t ldc, [MMHelper< FFPACK::RNSInteger< RNS >, MMHelperAlgo::Classic, ModeCategories::DefaultTag, ParSeqHelper::Compose< ParSeqHelper::Parallel< CuttingStrategy::RNSModulus, StrategyParameter::Threads >, ParSeqTrait > >](#) &H)
- template<typename [RNS](#) , typename [Cut](#) , typename [Param](#) >  
[FFPACK::RNSInteger< RNS >::Element\\_ptr fgemm](#) (const [FFPACK::RNSInteger< RNS >](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [FFPACK::RNSInteger< RNS >::Element](#) alpha, typename [FFPACK::RNSInteger< RNS >::ConstElement\\_ptr](#) Ad, const size\_t lda, typename [FFPACK::RNSInteger< RNS >::ConstElement\\_ptr](#) Bd, const size\_t ldb, const typename [FFPACK::RNSInteger< RNS >::Element](#) beta, typename [FFPACK::RNSInteger< RNS >::Element\\_ptr](#) Cd, const size\_t ldc, [MMHelper< FFPACK::RNSInteger< RNS >, MMHelperAlgo::Classic, ModeCategories::DefaultTag, ParSeqHelper::Parallel< Cut, Param > >](#) &H)
- template<class [ParSeq](#) >  
[Givaro::Integer \\* fgemm](#) (const [Givaro::ZRing< Givaro::Integer >](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const [Givaro::Integer](#) alpha, const [Givaro::Integer](#) \*A, const size\_t lda, const [Givaro::Integer](#) \*B, const size\_t ldb, [Givaro::Integer](#) beta,

- Givaro::Integer \*C, const size\_t ldc, MMHelper< Givaro::ZRing< Givaro::Integer >, MMHelperAlgo::Classic, ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeq > &H)
- template<typename RNS, class ModeT >  
RNS::Element\_ptr fgemm (const FFPACK::RNSInteger< RNS > &F, const FFLAS\_TRANSPOSE ta, const FFLAS\_TRANSPOSE tb, const size\_t m, const size\_t n, const size\_t k, const typename RNS::Element alpha, typename RNS::ConstElement\_ptr Ad, const size\_t lda, typename RNS::ConstElement\_ptr Bd, const size\_t ldb, const typename RNS::Element beta, typename RNS::Element\_ptr Cd, const size\_t ldc, MMHelper< FFPACK::RNSInteger< RNS >, MMHelperAlgo::Winograd, ModeT, ParSeqHelper::Sequential > &H)
  - template<typename RNS >  
RNS::Element\_ptr fgemm (const FFPACK::RNSIntegerMod< RNS > &F, const FFLAS\_TRANSPOSE ta, const FFLAS\_TRANSPOSE tb, const size\_t m, const size\_t n, const size\_t k, const typename RNS::Element alpha, typename RNS::ConstElement\_ptr Ad, const size\_t lda, typename RNS::ConstElement\_ptr Bd, const size\_t ldb, const typename RNS::Element beta, typename RNS::Element\_ptr Cd, const size\_t ldc, MMHelper< FFPACK::RNSIntegerMod< RNS >, MMHelperAlgo::Winograd > &H)
  - Givaro::Integer \* fgemm (const Givaro::Modular< Givaro::Integer > &F, const FFLAS\_TRANSPOSE ta, const FFLAS\_TRANSPOSE tb, const size\_t m, const size\_t n, const size\_t k, const Givaro::Integer alpha, const Givaro::Integer \*A, const size\_t lda, const Givaro::Integer \*B, const size\_t ldb, const Givaro::Integer beta, Givaro::Integer \*C, const size\_t ldc, MMHelper< Givaro::Modular< Givaro::Integer >, MMHelperAlgo::Classic, ModeCategories::ConvertTo< ElementCategories::RNSElementTag > > &H)
  - template<class ParSeq >  
Givaro::Integer \* fgemm (const Givaro::Modular< Givaro::Integer > &F, const FFLAS\_TRANSPOSE ta, const FFLAS\_TRANSPOSE tb, const size\_t m, const size\_t n, const size\_t k, const Givaro::Integer alpha, const Givaro::Integer \*A, const size\_t lda, const Givaro::Integer \*B, const size\_t ldb, const Givaro::Integer beta, Givaro::Integer \*C, const size\_t ldc, MMHelper< Givaro::Modular< Givaro::Integer >, MMHelperAlgo::Auto, ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeq > &H)
  - template<size\_t K1, size\_t K2, class ParSeq >  
RecInt::ruint< K1 > \* fgemm (const Givaro::Modular< RecInt::ruint< K1 >, RecInt::ruint< K2 > > &F, const FFLAS\_TRANSPOSE ta, const FFLAS\_TRANSPOSE tb, const size\_t m, const size\_t n, const size\_t k, const RecInt::ruint< K1 > alpha, const RecInt::ruint< K1 > \*A, const size\_t lda, const RecInt::ruint< K1 > \*B, const size\_t ldb, RecInt::ruint< K1 > beta, RecInt::ruint< K1 > \*C, const size\_t ldc, MMHelper< Givaro::Modular< RecInt::ruint< K1 >, RecInt::ruint< K2 > >, MMHelperAlgo::Classic, ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeq > &H)

### 13.78.1 Detailed Description

matrix multiplication with multiprecision input (either over Z or over Z/pZ)

### 13.78.2 Macro Definition Documentation

#### 13.78.2.1 \_\_FFPACK\_fgemm\_classical\_INL

```
#define __FFPACK_fgemm_classical_INL
```

## 13.79 fgemm\_winograd.inl File Reference

```
#include <stdint.h>
#include <givaro/modular.h>
#include <givaro/zring.h>
#include "fgemm_classical.inl"
#include "schedule_winograd.inl"
#include "schedule_winograd_acc.inl"
#include "schedule_winograd_acc_ip.inl"
#include "schedule_winograd_ip.inl"
#include "fflas-ffpack/fflas-ffpack-config.h"
```

## Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::Protected](#)

## Macros

- `#define` [\\_\\_FFLASFFPACK\\_fflas\\_fflas\\_fgemm\\_winograd\\_INL](#)
- `#define` [NEWWINO](#)

## Functions

- `template<class Field >`  
`int WinogradThreshold (const Field &F)`  
*Computes the number of recursive levels to perform.*
- `template<> int WinogradThreshold (const Givaro::Modular< float > &F)`
- `template<> int WinogradThreshold (const Givaro::ModularBalanced< double > &F)`
- `template<> int WinogradThreshold (const Givaro::ModularBalanced< float > &F)`
- `template<class Field >`  
`int WinogradSteps (const Field &F, const size_t &m)`  
*Computes the number of recursive levels to perform.*
- `template<class Field , class FieldMode >`  
`void DynamicPeeling (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const size_t mr, const size_t nr, const size_t kr, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field, MMHelperAlgo::Winograd, FieldMode > &H, const typename MMHelper< Field, MMHelperAlgo::Winograd, FieldMode >::DelayedField::Element Cmin, const typename MMHelper< Field, MMHelperAlgo::Winograd, FieldMode >::DelayedField::Element Cmax)`
- `template<class Field , class FieldMode >`  
`void DynamicPeeling2 (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const size_t mr, const size_t nr, const size_t kr, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field, MMHelperAlgo::Winograd, FieldMode > &H, const typename MMHelper< Field, MMHelperAlgo::Winograd, FieldMode >::DelayedField::Element Cmin, const typename MMHelper< Field, MMHelperAlgo::Winograd, FieldMode >::DelayedField::Element Cmax)`
- `template<class Field , class FieldMode >`  
`void WinogradCalc (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t nr, const size_t kr, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field, MMHelperAlgo::Winograd, FieldMode > &H)`
- `template<class Field , class ModeT >`  
`Field::Element_ptr fgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field, MMHelperAlgo::Winograd, ModeT > &H)`
- `template<class Field , class ModeT , class Cut , class Param >`  
`Field::Element_ptr fgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field, MMHelperAlgo::WinogradPar, ModeT, ParSeqHelper::Parallel< Cut, Param > > &H)`

## 13.79.1 Macro Definition Documentation

### 13.79.1.1 \_\_FFLASFFPACK\_fflas\_fflas\_fgemm\_winograd\_INL

```
#define __FFLASFFPACK_fflas_fflas_fgemm_winograd_INL
```

### 13.79.1.2 NEWWINO

```
#define NEWWINO
```

## 13.80 matmul.doxy File Reference

## 13.81 schedule\_bini.inl File Reference

Bini implementation.

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::BLAS3](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fgemm\\_bini\\_INL](#)

### Functions

- template<class [Field](#) >  
void [Bini](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t mr, const size\_t nr, const size\_t kr, const typename [Field::Element](#) alpha, const typename [Field::Element\\_ptr](#) A, const size\_t lda, const typename [Field::Element\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, const typename [Field::Element\\_ptr](#) C, const size\_t ldc, const size\_t kmax, const size\_t w, const [FFLAS\\_BASE](#) base, const size\_t rec\_level)

### 13.81.1 Detailed Description

Bini implementation.

### 13.81.2 Macro Definition Documentation

#### 13.81.2.1 \_\_FFLASFFPACK\_fgemm\_bini\_INL

```
#define __FFLASFFPACK_fgemm_bini_INL
```

## 13.82 schedule\_winograd.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::BLAS3](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fgemm\\_winograd\\_INL](#)

## Functions

- `template<class Field , class FieldTrait , class Strat , class Param >`  
`Field::Element_ptr WinoPar (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE`  
`tb, const size_t mr, const size_t nr, const size_t kr, const typename Field::Element alpha, typename`  
`Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb,`  
`const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field,`  
`MMHelperAlgo::WinogradPar, FieldTrait, ParSeqHelper::Parallel< Strat, Param > > &WH)`
- `template<class Field , class FieldTrait >`  
`void Winograd (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t`  
`mr, const size_t nr, const size_t kr, const typename Field::Element alpha, typename Field::ConstElement_ptr`  
`A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element`  
`beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field, MMHelperAlgo::Winograd, Field↵`  
`Trait > &WH)`

## 13.82.1 Macro Definition Documentation

### 13.82.1.1 \_\_FFLASFFPACK\_fgemm\_winograd\_INL

```
#define __FFLASFFPACK_fgemm_winograd_INL
```

## 13.83 schedule\_winograd\_acc.inl File Reference

### Namespaces

- namespace `FFLAS`
- namespace `FFLAS::BLAS3`

### Macros

- `#define __FFLASFFPACK_fgemm_winograd_acc_INL`

### Functions

- `template<class Field , class FieldTrait >`  
`void WinogradAcc_3_23 (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE`  
`tb, const size_t mr, const size_t nr, const size_t kr, const typename Field::Element alpha, typename`  
`Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb,`  
`const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field,`  
`MMHelperAlgo::Winograd, FieldTrait > &WH)`
- `template<class Field , class FieldTrait >`  
`void WinogradAcc_3_21 (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE`  
`tb, const size_t mr, const size_t nr, const size_t kr, const typename Field::Element alpha, typename`  
`Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb,`  
`const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field,`  
`MMHelperAlgo::Winograd, FieldTrait > &WH)`
- `template<class Field , class FieldTrait >`  
`void WinogradAcc_2_24 (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE`  
`tb, const size_t mr, const size_t nr, const size_t kr, const typename Field::Element alpha, const type-`  
`name Field::Element_ptr A, const size_t lda, const typename Field::Element_ptr B, const size_t ldb,`  
`const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field,`  
`MMHelperAlgo::Winograd, FieldTrait > &WH)`
- `template<class Field , class FieldTrait >`  
`void WinogradAcc_2_27 (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE`  
`tb, const size_t mr, const size_t nr, const size_t kr, const typename Field::Element alpha, const type-`  
`name Field::Element_ptr A, const size_t lda, const typename Field::Element_ptr B, const size_t ldb,`  
`const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field,`  
`MMHelperAlgo::Winograd, FieldTrait > &WH)`

### 13.83.1 Macro Definition Documentation

#### 13.83.1.1 \_\_FFLASFFPACK\_fgemm\_winograd\_acc\_INL

```
#define __FFLASFFPACK_fgemm_winograd_acc_INL
```

## 13.84 schedule\_winograd\_acc\_ip.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::BLAS3](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fgemm\\_winograd\\_acc\\_ip\\_INL](#)

### Functions

- template<class [Field](#) , class FieldTrait >  
void [WinogradAcc\\_LR](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t mr, const size\_t nr, const size\_t kr, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, const [MMHelper](#)< [Field](#), [MMHelperAlgo::Winograd](#), Field↵Trait > &WH)
- template<class [Field](#) , class FieldTrait >  
void [WinogradAcc\\_R\\_S](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t mr, const size\_t nr, const size\_t kr, const typename [Field::Element](#) alpha, const type-  
name [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) B, const size\_t ldb, const type-  
name [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, const [MMHelper](#)< [Field](#),  
[MMHelperAlgo::Winograd](#), FieldTrait > &WH)
- template<class [Field](#) , class FieldTrait >  
void [WinogradAcc\\_L\\_S](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t mr, const size\_t nr, const size\_t kr, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) A, const size\_t lda, const typename [Field::Element\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, const [MMHelper](#)< [Field](#), [MMHelperAlgo::Winograd](#), FieldTrait > &WH)

### 13.84.1 Macro Definition Documentation

#### 13.84.1.1 \_\_FFLASFFPACK\_fgemm\_winograd\_acc\_ip\_INL

```
#define __FFLASFFPACK_fgemm_winograd_acc_ip_INL
```

## 13.85 schedule\_winograd\_ip.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::BLAS3](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fgemm\\_winograd\\_ip\\_INL](#)



## Functions

- `template<class Field , class FieldTrait >`  
`void Winograd_LR_S (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t mr, const size_t nr, const size_t kr, const typename Field::Element alpha, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, const MMHelper< Field, MMHelperAlgo::Winograd, Field↔Trait > &WH)`
- `template<class Field , class FieldTrait >`  
`void Winograd_L_S (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t mr, const size_t nr, const size_t kr, const typename Field::Element alpha, typename Field::Element_ptr A, const size_t lda, const typename Field::Element_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, const MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > &WH)`
- `template<class Field , class FieldTrait >`  
`void Winograd_R_S (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb, const size_t mr, const size_t nr, const size_t kr, const typename Field::Element alpha, const typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, const MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > &WH)`

### 13.85.1 Macro Definition Documentation

#### 13.85.1.1 \_\_FFLASFFPACK\_fgemm\_winograd\_ip\_INL

```
#define __FFLASFFPACK_fgemm_winograd_ip_INL
```

## 13.86 fflas\_fgemv.inl File Reference

```
#include <givaro/zring.h>
```

## Namespaces

- namespace `FFLAS`
- namespace `FFLAS::Protected`

## Macros

- `#define __FFLASFFPACK_fgemv_INL`

## Functions

- `template<typename FloatElement , class Field >`  
`Field::Element_ptr fgemv_convert (const Field &F, const FFLAS_TRANSPOSE ta, const size_t M, const size_t N, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr X, const size_t incX, const typename Field::Element beta, typename Field::Element_ptr Y, const size_t incY)`
- `template<class Field >`  
`Field::Element_ptr fgemv (const Field &F, const FFLAS_TRANSPOSE ta, const size_t M, const size_t N, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr X, const size_t incX, const typename Field::Element beta, typename Field::Element_ptr Y, const size_t incY, MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::ConvertTo< ElementCategories::MachineFloatTag > > &H)`
- `template<class Field >`  
`Field::Element_ptr fgemv (const Field &F, const FFLAS_TRANSPOSE ta, const size_t M, const size_t N, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr X, const size_t incX, const typename Field::Element`



- beta, typename [Field::Element\\_ptr](#) Y, const size\_t incY, [MMHelper](#)< [Field](#), [MMHelperAlgo::Classic](#), [ModeCategories::DelayedTag](#) > &H)
- `template<class Field >`  
[Field::Element\\_ptr](#) fgmv (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) Y, const size\_t incY, [MMHelper](#)< [Field](#), [MMHelperAlgo::Classic](#), [ModeCategories::DefaultTag](#) > &H)
  - `template<class Field >`  
[Field::Element\\_ptr](#) fgmv (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) Y, const size\_t incY, [MMHelper](#)< [Field](#), [MMHelperAlgo::Classic](#), [ModeCategories::LazyTag](#) > &H)
  - `template<class Field >`  
[Field::Element\\_ptr](#) fgmv (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) TransA, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) Y, const size\_t incY)
- finite prime Field GEneral Matrix Vector multiplication.*
- [Givaro::ZRing](#)< int64\_t >::[Element\\_ptr](#) fgmv (const [Givaro::ZRing](#)< int64\_t > &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t M, const size\_t N, const int64\_t alpha, const int64\_t \*A, const size\_t lda, const int64\_t \*X, const size\_t incX, const int64\_t beta, const int64\_t \*Y, const size\_t incY, [MMHelper](#)< [Givaro::ZRing](#)< int64\_t >, [MMHelperAlgo::Classic](#), [ModeCategories::DefaultTag](#) > &H)
  - [Givaro::DoubleDomain::Element\\_ptr](#) fgmv (const [Givaro::DoubleDomain](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t M, const size\_t N, const [Givaro::DoubleDomain::Element](#) alpha, const [Givaro::DoubleDomain::ConstElement\\_ptr](#) A, const size\_t lda, const [Givaro::DoubleDomain::ConstElement\\_ptr](#) X, const size\_t incX, const [Givaro::DoubleDomain::Element](#) beta, [Givaro::DoubleDomain::Element\\_ptr](#) Y, const size\_t incY, [MMHelper](#)< [Givaro::DoubleDomain](#), [MMHelperAlgo::Classic](#), [ModeCategories::DefaultTag](#) > &H)
  - `template<class Field >`  
[Field::Element\\_ptr](#) fgmv (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, const typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, const typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) Y, const size\_t incY, [MMHelper](#)< [Field](#), [MMHelperAlgo::Classic](#), [ModeCategories::DefaultBoundedTag](#) > &H)
  - [Givaro::FloatDomain::Element\\_ptr](#) fgmv (const [Givaro::FloatDomain](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t M, const size\_t N, const [Givaro::FloatDomain::Element](#) alpha, const [Givaro::FloatDomain::ConstElement\\_ptr](#) A, const size\_t lda, const [Givaro::FloatDomain::ConstElement\\_ptr](#) X, const size\_t incX, const [Givaro::FloatDomain::Element](#) beta, [Givaro::FloatDomain::Element\\_ptr](#) Y, const size\_t incY, [MMHelper](#)< [Givaro::FloatDomain](#), [MMHelperAlgo::Classic](#), [ModeCategories::DefaultTag](#) > &H)
  - `template<class Field , class Cut , class Param >`  
[Field::Element\\_ptr](#) fgmv (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t m, const size\_t n, const typename [Field::Element](#) alpha, const typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, const typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) Y, const size\_t incY, [ParSeqHelper::Parallel](#)< Cut, Param > &parH)
  - `template<class Field >`  
[Field::Element\\_ptr](#) fgmv (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t m, const size\_t n, const typename [Field::Element](#) alpha, const typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, const typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) Y, const size\_t incY, [ParSeqHelper::Sequential](#) &seqH)

## 13.86.1 Macro Definition Documentation

### 13.86.1.1 \_\_FFLASFFPACK\_fgmv\_INL

```
#define __FFLASFFPACK_fgmv_INL
```

## 13.87 fflas\_fgmv\_mp.inl File Reference

```
#include "fflas-ffpack/field/rns-integer-mod.h"
```

### Namespaces

- namespace [FFLAS](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fgmv\\_mp\\_INL](#)

### Functions

- [FFPACK::rns\\_double::Element\\_ptr fgmv](#) (const [FFPACK::RNSInteger](#)< [FFPACK::rns\\_double](#) > &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t M, const size\_t N, const [FFPACK::rns\\_double::Element](#) alpha, [FFPACK::rns\\_double::ConstElement\\_ptr](#) A, const size\_t lda, [FFPACK::rns\\_double::ConstElement\\_ptr](#) X, const size\_t incX, const [FFPACK::rns\\_double::Element](#) beta, [FFPACK::rns\\_double::Element\\_ptr](#) Y, const size\_t incY, [MMHelper](#)< [FFPACK::RNSInteger](#)< [FFPACK::rns\\_double](#) >, [MMHelperAlgo::Classic](#), [ModeCategories::DefaultTag](#) > &H)
- [FFPACK::rns\\_double::Element\\_ptr fgmv](#) (const [FFPACK::RNSIntegerMod](#)< [FFPACK::rns\\_double](#) > &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t M, const size\_t N, const [FFPACK::rns\\_double::Element](#) alpha, [FFPACK::rns\\_double::ConstElement\\_ptr](#) A, const size\_t lda, [FFPACK::rns\\_double::ConstElement\\_ptr](#) X, const size\_t incX, const [FFPACK::rns\\_double::Element](#) beta, [FFPACK::rns\\_double::Element\\_ptr](#) Y, const size\_t incY, [MMHelper](#)< [FFPACK::RNSIntegerMod](#)< [FFPACK::rns\\_double](#) >, [MMHelperAlgo::Classic](#), [ModeCategories::DefaultTag](#) > &H)
- [Givaro::Integer \\* fgmv](#) (const [Givaro::ZRing](#)< [Givaro::Integer](#) > &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t m, const size\_t n, const [Givaro::Integer](#) alpha, [Givaro::Integer \\*A](#), const size\_t lda, [Givaro::Integer \\*X](#), const size\_t ldx, [Givaro::Integer](#) beta, [Givaro::Integer \\*Y](#), const size\_t ldy, [MMHelper](#)< [Givaro::ZRing](#)< [Givaro::Integer](#) >, [MMHelperAlgo::Classic](#), [ModeCategories::ConvertTo](#)< [ElementCategories::RNSElementTag](#) > > &H)
- [Givaro::Integer \\* fgmv](#) (const [Givaro::Modular](#)< [Givaro::Integer](#) > &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t m, const size\_t n, const [Givaro::Integer](#) alpha, [Givaro::Integer \\*A](#), const size\_t lda, [Givaro::Integer \\*X](#), const size\_t ldx, [Givaro::Integer](#) beta, [Givaro::Integer \\*Y](#), const size\_t ldy, [MMHelper](#)< [Givaro::Modular](#)< [Givaro::Integer](#) >, [MMHelperAlgo::Classic](#), [ModeCategories::ConvertTo](#)< [ElementCategories::RNSElementTag](#) > > &H)
- [template<size\\_t K1, size\\_t K2, class ParSeq>](#) [Reclnt::ruint](#)< K1 > \* [fgmv](#) (const [Givaro::Modular](#)< [Reclnt::ruint](#)< K1 >, [Reclnt::ruint](#)< K2 > > &F, const [FFLAS\\_TRANSPOSE](#) ta, const size\_t m, const size\_t n, const [Reclnt::ruint](#)< K1 > alpha, const [Reclnt::ruint](#)< K1 > \*A, const size\_t lda, const [Reclnt::ruint](#)< K1 > \*X, const size\_t incx, [Reclnt::ruint](#)< K1 > beta, [Reclnt::ruint](#)< K1 > \*Y, const size\_t incy, [MMHelper](#)< [Givaro::Modular](#)< [Reclnt::ruint](#)< K1 >, [Reclnt::ruint](#)< K2 > >, [MMHelperAlgo::Classic](#), [ModeCategories::ConvertTo](#)< [ElementCategories::RNSElementTag](#) >, [ParSeq](#) > &H)

### 13.87.1 Macro Definition Documentation

#### 13.87.1.1 \_\_FFLASFFPACK\_fgmv\_mp\_INL

```
#define __FFLASFFPACK_fgmv_mp_INL
```

## 13.88 fflas\_fger.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::Protected](#)

## Macros

- `#define __FFLASFFPACK_fger_INL`

## Functions

- `template<class Field >`  
`void fger (const Field &F, const size_t M, const size_t N, const typename Field::Element alpha, typename Field::ConstElement_ptr x, const size_t incx, typename Field::ConstElement_ptr y, const size_t incy, typename Field::Element_ptr A, const size_t lda)`  
*fger: rank one update of a general matrix*
- `template<class FloatElement, class Field >`  
`void fger_convert (const Field &F, const size_t M, const size_t N, const typename Field::Element alpha, typename Field::ConstElement_ptr x, const size_t incx, typename Field::ConstElement_ptr y, const size_t incy, typename Field::Element_ptr A, const size_t lda)`
- `template<class Field >`  
`void fger (const Field &F, const size_t M, const size_t N, const typename Field::Element alpha, typename Field::ConstElement_ptr x, const size_t incx, typename Field::ConstElement_ptr y, const size_t incy, typename Field::Element_ptr A, const size_t lda, MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::ConvertTo< ElementCategories::MachineFloatTag > > &H)`
- `template<class Field, class AnyTag >`  
`void fger (const Field &F, const size_t M, const size_t N, const typename Field::Element alpha, typename Field::ConstElement_ptr x, const size_t incx, typename Field::ConstElement_ptr y, const size_t incy, typename Field::Element_ptr A, const size_t lda, MMHelper< Field, MMHelperAlgo::Classic, AnyTag > &H)`
- `void fger (const Givaro::DoubleDomain &F, const size_t M, const size_t N, const Givaro::DoubleDomain::Element alpha, const Givaro::DoubleDomain::ConstElement_ptr x, const size_t incx, const Givaro::DoubleDomain::ConstElement_ptr y, const size_t incy, Givaro::DoubleDomain::Element_ptr A, const size_t lda, MMHelper< Givaro::DoubleDomain, MMHelperAlgo::Classic, ModeCategories::DefaultTag > &H)`
- `template<class Field >`  
`void fger (const Field &F, const size_t M, const size_t N, const typename Field::Element alpha, const typename Field::ConstElement_ptr x, const size_t incx, const typename Field::ConstElement_ptr y, const size_t incy, typename Field::Element_ptr A, const size_t lda, MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::DefaultBoundedTag > &H)`
- `void fger (const Givaro::FloatDomain &F, const size_t M, const size_t N, const Givaro::FloatDomain::Element alpha, const Givaro::FloatDomain::ConstElement_ptr x, const size_t incx, const Givaro::FloatDomain::ConstElement_ptr y, const size_t incy, Givaro::FloatDomain::Element_ptr A, const size_t lda, MMHelper< Givaro::FloatDomain, MMHelperAlgo::Classic, ModeCategories::DefaultTag > &H)`
- `template<class Field >`  
`void fger (const Field &F, const size_t M, const size_t N, const typename Field::Element alpha, typename Field::ConstElement_ptr x, const size_t incx, typename Field::ConstElement_ptr y, const size_t incy, typename Field::Element_ptr A, const size_t lda, MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::LazyTag > &H)`
- `template<class Field >`  
`void fger (const Field &F, const size_t M, const size_t N, const typename Field::Element alpha, typename Field::ConstElement_ptr x, const size_t incx, typename Field::ConstElement_ptr y, const size_t incy, typename Field::Element_ptr A, const size_t lda, MMHelper< Field, MMHelperAlgo::Classic, ModeCategories::DelayedTag > &H)`

## 13.88.1 Macro Definition Documentation

### 13.88.1.1 \_\_FFLASFFPACK\_fger\_INL

```
#define __FFLASFFPACK_fger_INL
```

## 13.89 fflas\_fger\_mp.inl File Reference

```
#include <givaro/modular-integer.h>
#include <givaro/zring.h>
```

```
#include "fflas-ffpack/fflas/fflas_helpers.inl"
#include "fflas-ffpack/fflas/fflas_fgemm/fgemm_classical_mp.inl"
#include "fflas-ffpack/field/rns-integer.h"
#include "fflas-ffpack/field/rns-integer-mod.h"
```

## Namespaces

- namespace [FFLAS](#)

## Macros

- #define [\\_\\_FFPACK\\_fger\\_mp\\_INL](#)

## Functions

- void [fger](#) (const Givaro::Modular< Givaro::Integer > &F, const size\_t M, const size\_t N, const typename Givaro::Integer alpha, typename Givaro::Integer \*x, const size\_t incx, typename Givaro::Integer \*y, const size\_t incy, typename Givaro::Integer \*A, const size\_t lda, [MMHelper](#)< Givaro::Modular< Givaro::Integer >, [MMHelperAlgo::Classic](#), [ModeCategories::ConvertTo](#)< [ElementCategories::RNSElementTag](#) > > &H)
- template<typename [RNS](#) >  
void [fger](#) (const [FFPACK::RNSInteger](#)< [RNS](#) > &F, const size\_t M, const size\_t N, const typename [FFPACK::RNSInteger](#)< [RNS](#) >::Element alpha, typename [FFPACK::RNSInteger](#)< [RNS](#) >::Element\_ptr x, const size\_t incx, typename [FFPACK::RNSInteger](#)< [RNS](#) >::Element\_ptr y, const size\_t incy, typename [FFPACK::RNSInteger](#)< [RNS](#) >::Element\_ptr A, const size\_t lda, [MMHelper](#)< [FFPACK::RNSInteger](#)< [RNS](#) >, [MMHelperAlgo::Classic](#), [ModeCategories::DefaultTag](#) > &H)
- template<typename [RNS](#) >  
void [fger](#) (const [FFPACK::RNSIntegerMod](#)< [RNS](#) > &F, const size\_t M, const size\_t N, const type-name [FFPACK::RNSIntegerMod](#)< [RNS](#) >::Element alpha, typename [FFPACK::RNSIntegerMod](#)< [RNS](#) >::Element\_ptr x, const size\_t incx, typename [FFPACK::RNSIntegerMod](#)< [RNS](#) >::Element\_ptr y, const size\_t incy, typename [FFPACK::RNSIntegerMod](#)< [RNS](#) >::Element\_ptr A, const size\_t lda, [MMHelper](#)< [FFPACK::RNSIntegerMod](#)< [RNS](#) >, [MMHelperAlgo::Classic](#) > &H)

## 13.89.1 Macro Definition Documentation

### 13.89.1.1 [\\_\\_FFPACK\\_fger\\_mp\\_INL](#)

```
#define __FFPACK_fger_mp_INL
```

## 13.90 fflas\_freduce.h File Reference

```
#include "fflas-ffpack/fflas/fflas_simd.h"
#include "fflas-ffpack/field/field-traits.h"
#include "fflas-ffpack/utils/cast.h"
#include "fflas-ffpack/fflas/fflas_freduce.inl"
```

## Data Structures

- struct [support\\_simd\\_mod](#)< T >
- struct [support\\_fast\\_mod](#)< T >
- struct [support\\_fast\\_mod](#)< float >
- struct [support\\_fast\\_mod](#)< double >
- struct [support\\_fast\\_mod](#)< int64\_t >

## Namespaces

- namespace [FFLAS](#)

## Functions

- template<class [Field](#) >  
void [freduce](#) (const [Field](#) &F, const size\_t n, typename [Field::ConstElement\\_ptr](#) Y, const size\_t incY, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
$$\text{freduce } x \leftarrow y \bmod F.$$
- template<class [Field](#) >  
void [freduce](#) (const [Field](#) &F, const size\_t n, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
$$\text{freduce } x \leftarrow x \bmod F.$$
- template<class [Field](#) >  
void [freduce\\_constoverride](#) (const [Field](#) &F, const size\_t m, typename [Field::ConstElement\\_ptr](#) A, const size\_t incX)
- template<class [Field](#), class ConstOtherElement\_ptr >  
void [finit](#) (const [Field](#) &F, const size\_t n, ConstOtherElement\_ptr Y, const size\_t incY, typename [Field::Element\\_ptr](#) X, const size\_t incX)
- template<class [Field](#) >  
void [finit](#) (const [Field](#) &F, const size\_t n, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
$$\text{finit Initializes } X \text{ in } F.$$
- template<class [Field](#) >  
void [freduce](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
$$\text{freduce } A \leftarrow A \bmod F.$$
- template<class [Field](#) >  
void [freduce](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) uplo, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
$$\text{freduce for square symmetric matrices}$$
- template<class [Field](#) >  
void [pfreduce](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t numths)
- template<class [Field](#) >  
void [freduce](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
$$\text{freduce } A \leftarrow B \bmod F.$$
- template<class [Field](#) >  
void [freduce\\_constoverride](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda)
- template<class [Field](#), class OtherElement\_ptr >  
void [finit](#) (const [Field](#) &F, const size\_t m, const size\_t n, const OtherElement\_ptr B, const size\_t ldb, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
$$\text{finit } A \leftarrow B \bmod F.$$
- template<class [Field](#) >  
void [finit](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda)

## 13.91 fflas\_freduce.inl File Reference

```
#include <givaro/udl.h>
#include "fflas-ffpack/fflas/fflas_fassign.h"
```

## Data Structures

- struct [HelperMod](#)< [Field](#), [ElementCategories::MachineIntTag](#) >
- struct [HelperMod](#)< [Field](#), [FFLAS::ElementCategories::MachineFloatTag](#) >
- struct [HelperMod](#)< [Field](#), [FFLAS::ElementCategories::ArbitraryPrecIntTag](#) >
- struct [HelperMod](#)< [Field](#), [FFLAS::ElementCategories::FixedPrecIntTag](#) >

## Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::vectorised](#)
- namespace [FFLAS::vectorised::unswitch](#)
- namespace [FFLAS::details](#)

## Macros

- `#define __FFLASFFPACK_fflas_freduce_INL`
- `#define FFLASFFPACK_COPY_REDUCE 32 /* TODO TO BENCHMARK LATER */`

## Functions

- `template<class T >`  
`std::enable_if<!std::is_integral< T >::value, T >::type reduce (T A, T B)`
- `template<class T >`  
`std::enable_if< std::is_integral< T >::value, T >::type reduce (T A, T B)`
- `template<> Givaro::Integer reduce (Givaro::Integer A, Givaro::Integer B)`
- `float reduce (float A, float B, float invB, float min, float max)`
- `double reduce (double A, double B, double invB, double min, double max)`
- `int64_t reduce (int64_t A, int64_t p, double invp, double min, double max, int64_t pow50rem)`
- `template<class Field >`  
`Field::Element reduce (typename Field::Element A, HelperMod< Field, ElementCategories::MachineIntTag > &H)`
- `template<class Field >`  
`Field::Element reduce (typename Field::Element A, HelperMod< Field, ElementCategories::MachineFloatTag > &H)`
- `template<class Field >`  
`Field::Element reduce (typename Field::Element A, HelperMod< Field, ElementCategories::ArbitraryPrecIntTag > &H)`
- `template<class Field >`  
`std::enable_if<!FFLAS::support_simd_mod< typenameField::Element >::value &&FFLAS::support_fast_mod< typenameField::Element >::value, void >::type modp (const Field &F, typename Field::ConstElement\_ptr U, const size_t &n, typename Field::Element\_ptr T, HelperMod< Field > &H)`
- `template<class Field >`  
`std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type modp (const Field &F, typename Field::ConstElement\_ptr U, const size_t &n, const size_t &incX, typename Field::Element\_ptr T, HelperMod< Field > &H)`
- `template<class Field >`  
`std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type modp (const Field &F, typename Field::ConstElement\_ptr U, const size_t &n, typename Field::Element\_ptr T)`
- `template<class Field >`  
`std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type modp (const Field &F, typename Field::ConstElement\_ptr U, const size_t &n, const size_t &incX, typename Field::Element\_ptr T)`
- `template<class Field >`  
`std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type freduce (const Field &F, const size_t m, typename Field::Element\_ptr A, const size_t incX, FieldCategories::ModularTag)`
- `template<class Field >`  
`std::enable_if< FFLAS::support_fast_mod< typenameField::Element >::value, void >::type freduce (const Field &F, const size_t m, typename Field::ConstElement\_ptr B, const size_t incY, typename Field::Element\_ptr A, const size_t incX, FieldCategories::ModularTag)`
- `template<class Field , class FC >`  
`void freduce (const Field &F, const size_t m, typename Field::Element\_ptr A, const size_t incX, FC)`
- `template<class Field , class FC >`  
`void freduce (const Field &F, const size_t m, typename Field::ConstElement\_ptr B, const size_t incY, type-  
name Field::Element\_ptr A, const size_t incX, FC)`

### 13.91.1 Macro Definition Documentation

#### 13.91.1.1 \_\_FFLASFFPACK\_fflas\_freduce\_INL

```
#define __FFLASFFPACK_fflas_freduce_INL
```

#### 13.91.1.2 FFLASFFPACK\_COPY\_REDUCE

```
#define FFLASFFPACK_COPY_REDUCE 32 /* TODO TO BENCHMARK LATER */
```

## 13.92 fflas\_freduce\_mp.inl File Reference

```
#include "fflas-ffpack/field/rns-integer-mod.h"
```

### Namespaces

- namespace [FFLAS](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fflas\\_freduce\\_mp\\_INL](#)

### Functions

- template<> void [freduce](#) (const [FFPACK::RNSIntegerMod](#)< [FFPACK::rns\\_double](#) > &F, const size\_t n, [FFPACK::RNSIntegerMod](#)< [FFPACK::rns\\_double](#) >::Element\_ptr A, size\_t inc)
- template<> void [freduce](#) (const [FFPACK::RNSIntegerMod](#)< [FFPACK::rns\\_double](#) > &F, const size\_t m, const size\_t n, [FFPACK::rns\\_double::Element\\_ptr](#) A, size\_t lda)

### 13.92.1 Macro Definition Documentation

#### 13.92.1.1 \_\_FFLASFFPACK\_fflas\_freduce\_mp\_INL

```
#define __FFLASFFPACK_fflas_freduce_mp_INL
```

## 13.93 fflas\_freivalds.inl File Reference

### Namespaces

- namespace [FFLAS](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_freivalds\\_INL](#)

### Functions

- template<class [Field](#) >  
bool [freivalds](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, typename [Field::ConstElement\\_ptr](#) C, const size\_t ldc)

*freivalds: Freivalds **GE**neral **M**atrix **M**ultiply **R**andom **C**heck.*

### 13.93.1 Macro Definition Documentation

#### 13.93.1.1 \_\_FFLASFFPACK\_freivalds\_INL

```
#define __FFLASFFPACK_freivalds_INL
```



## 13.94 fflas\_fscal.h File Reference

```
#include "fflas_fscal.inl"
```

## 13.95 fflas\_fscal.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::vectorised](#)
- namespace [FFLAS::vectorised::unswitch](#)
- namespace [FFLAS::details](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fscal\\_INL](#)

### Functions

- [template<class Field >](#)  
std::enable\_if<![FFLAS::support\\_simd\\_mod](#)< typenameField::Element >::value &&[FFLAS::support\\_fast\\_mod](#)< typenameField::Element >::value, void >::type [scalp](#) (const [Field](#) &F, typename [Field::Element\\_ptr](#) T, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) U, const size\_t n, [HelperMod](#)< [Field](#) > &H)
- [template<class Field >](#)  
std::enable\_if< [FFLAS::support\\_fast\\_mod](#)< typenameField::Element >::value, void >::type [scalp](#) (const [Field](#) &F, typename [Field::Element\\_ptr](#) T, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) U, const size\_t n, const size\_t &incX, [HelperMod](#)< [Field](#) > &H)
- [template<class Field >](#)  
std::enable\_if< [FFLAS::support\\_fast\\_mod](#)< typenameField::Element >::value, void >::type [scalp](#) (const [Field](#) &F, typename [Field::Element\\_ptr](#) T, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) U, const size\_t n, const size\_t &incX, const size\_t &incY, [HelperMod](#)< [Field](#) > &H)
- [template<class Field >](#)  
std::enable\_if< [FFLAS::support\\_fast\\_mod](#)< typenameField::Element >::value, void >::type [scalp](#) (const [Field](#) &F, typename [Field::Element\\_ptr](#) T, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) U, const size\_t n)
- [template<class Field >](#)  
std::enable\_if< [FFLAS::support\\_fast\\_mod](#)< typenameField::Element >::value, void >::type [scalp](#) (const [Field](#) &F, typename [Field::Element\\_ptr](#) T, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) U, const size\_t n, const size\_t &incX)
- [template<class Field >](#)  
std::enable\_if< [FFLAS::support\\_fast\\_mod](#)< typenameField::Element >::value, void >::type [scalp](#) (const [Field](#) &F, typename [Field::Element\\_ptr](#) T, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) U, const size\_t n, const size\_t &incX, const size\_t &incY)
- [template<class Field >](#)  
std::enable\_if< [FFLAS::support\\_fast\\_mod](#)< typenameField::Element >::value, void >::type [fscalin](#) (const [Field](#) &F, const size\_t N, const typename [Field::Element](#) a, typename [Field::Element\\_ptr](#) X, const size\_t incX, [FieldCategories::ModularTag](#))
- [template<class Field >](#)  
std::enable\_if< [FFLAS::support\\_fast\\_mod](#)< typenameField::Element >::value, void >::type [fscal](#) (const [Field](#) &F, const size\_t N, const typename [Field::Element](#) a, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, typename [Field::Element\\_ptr](#) Y, const size\_t incY, [FieldCategories::ModularTag](#))
- [template<class Field , class FC >](#)  
void [fscalin](#) (const [Field](#) &F, const size\_t n, const typename [Field::Element](#) a, typename [Field::Element\\_ptr](#) X, const size\_t incX, FC)



- template<class [Field](#) , class FC >  
void [fscal](#) (const [Field](#) &F, const size\_t N, const typename [Field::Element](#) a, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, typename [Field::Element\\_ptr](#) Y, const size\_t incY, FC)
- template<class [Field](#) >  
void [fscal](#) (const [Field](#) &F, const size\_t n, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
$$fscal\ x \leftarrow \alpha \cdot x.$$
- template<class [Field](#) >  
void [fscal](#) (const [Field](#) &F, const size\_t n, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, typename [Field::Element\\_ptr](#) Y, const size\_t incY)  
$$fscal\ y \leftarrow \alpha \cdot x.$$
- template<> void [fscal](#) (const Givaro::DoubleDomain &, const size\_t N, const Givaro::DoubleDomain::↔Element a, Givaro::DoubleDomain::ConstElement\_ptr x, const size\_t incx, Givaro::DoubleDomain::Element↔\_ptr y, const size\_t incy)
- template<> void [fscal](#) (const Givaro::FloatDomain &, const size\_t N, const Givaro::FloatDomain::Element a, Givaro::FloatDomain::ConstElement\_ptr x, const size\_t incx, Givaro::FloatDomain::Element\_ptr y, const size\_t incy)
- template<> void [fscal](#) (const Givaro::DoubleDomain &, const size\_t N, const Givaro::DoubleDomain::↔Element a, Givaro::DoubleDomain::Element\_ptr y, const size\_t incy)
- template<> void [fscal](#) (const Givaro::FloatDomain &, const size\_t N, const Givaro::FloatDomain::Element a, Givaro::FloatDomain::Element\_ptr y, const size\_t incy)
- template<class [Field](#) >  
void [fscal](#) (const [Field](#) &F, const size\_t m, const size\_t n, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
$$fscal\ A \leftarrow a \cdot A.$$
- template<class [Field](#) >  
void [fscal](#) (const [Field](#) &F, const size\_t m, const size\_t n, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) B, const size\_t ldb)  
$$fscal\ B \leftarrow a \cdot A.$$

## 13.95.1 Macro Definition Documentation

### 13.95.1.1 \_\_FFLASFFPACK\_fscal\_INL

```
#define __FFLASFFPACK_fscal_INL
```

## 13.96 fflas\_fscal\_mp.inl File Reference

```
#include "fflas-ffpack/field/rns-integer.h"
#include "fflas_fscal.h"
#include "fflas_fgemm.inl"
#include "fflas-ffpack/fflas/fflas_freduce_mp.inl"
```

### Namespaces

- namespace [FFLAS](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fscal\\_mp\\_INL](#)

### Functions

- template<> void [fscal](#) (const [FFPACK::RNSInteger](#)< [FFPACK::rns\\_double](#) > &F, const size\_t n, const [FFPACK::rns\\_double::Element](#) alpha, [FFPACK::rns\\_double::Element\\_ptr](#) A, const size\_t inc)

- `template<> void fscal (const FFPACK::RNSInteger< FFPACK::rns_double > &F, const size_t n, const FFPACK::rns_double::Element alpha, FFPACK::rns_double::ConstElement_ptr A, const size_t Ainc, FFPACK::rns_double::Element_ptr B, const size_t Binc)`
- `template<> void fscaln (const FFPACK::RNSInteger< FFPACK::rns_double > &F, const size_t m, const size_t n, const FFPACK::rns_double::Element alpha, FFPACK::rns_double::Element_ptr A, const size_t lda)`
- `template<> void fscal (const FFPACK::RNSInteger< FFPACK::rns_double > &F, const size_t m, const size_t n, const FFPACK::rns_double::Element alpha, FFPACK::rns_double::ConstElement_ptr A, const size_t lda, FFPACK::rns_double::Element_ptr B, const size_t ldb)`
- `template<> void fscaln (const FFPACK::RNSIntegerMod< FFPACK::rns_double > &F, const size_t n, const typename FFPACK::RNSIntegerMod< FFPACK::rns_double >::Element alpha, typename FFPACK::RNSIntegerMod< FFPACK::rns_double >::Element_ptr A, const size_t inc)`
- `template<> void fscal (const FFPACK::RNSIntegerMod< FFPACK::rns_double > &F, const size_t n, const FFPACK::rns_double::Element alpha, FFPACK::rns_double::ConstElement_ptr A, const size_t Ainc, FFPACK::rns_double::Element_ptr B, const size_t Binc)`
- `template<> void fscaln (const FFPACK::RNSIntegerMod< FFPACK::rns_double > &F, const size_t m, const size_t n, const FFPACK::rns_double::Element alpha, FFPACK::rns_double::Element_ptr A, const size_t lda)`
- `template<> void fscal (const FFPACK::RNSIntegerMod< FFPACK::rns_double > &F, const size_t m, const size_t n, const FFPACK::rns_double::Element alpha, FFPACK::rns_double::ConstElement_ptr A, const size_t lda, FFPACK::rns_double::Element_ptr B, const size_t ldb)`

### 13.96.1 Macro Definition Documentation

#### 13.96.1.1 \_\_FFLASFFPACK\_fscal\_mp\_INL

```
#define __FFLASFFPACK_fscal_mp_INL
```

## 13.97 fflas\_fsyr2k.inl File Reference

```
#include <fflas-ffpack/utils/fflas_io.h>
```

### Namespaces

- namespace [FFLAS](#)

### Macros

- `#define __FFLASFFPACK_fflas_fsyr2k_INL`

### Functions

- `template<class Field > Field::Element_ptr fsyr2k (const Field &F, const FFLAS_UPLO UpLo, const FFLAS_TRANSPOSE trans, const size_t n, const size_t k, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc)`

*fsyr2k: Symmetric Rank 2K update*

### 13.97.1 Macro Definition Documentation

#### 13.97.1.1 \_\_FFLASFFPACK\_fflas\_fsyr2k\_INL

```
#define __FFLASFFPACK_fflas_fsyr2k_INL
```

## 13.98 fflas\_fsyrr.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::Protected](#)

### Macros

- `#define __FFLASFFPACK_fflas_fsyrr_INL`

### Functions

- `template<class NewField , class Field , class FieldMode >`  
[Field::Element\\_ptr](#) [fsyrr\\_convert](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) UpLo, const [FFLAS\\_TRANSPOSE](#) trans, const [size\\_t](#) N, const [size\\_t](#) K, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const [size\\_t](#) lda, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const [size\\_t](#) ldc, [MMHelper](#)< [Field](#), [MMHelperAlgo::Classic](#), FieldMode > &H)
- `template<class Field >`  
[Field::Element\\_ptr](#) [fsyrr](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) UpLo, const [FFLAS\\_TRANSPOSE](#) trans, const [size\\_t](#) n, const [size\\_t](#) k, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const [size\\_t](#) lda, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const [size\\_t](#) ldc)  
*fsyrr: Symmetric Rank K update*
- `template<class Field >`  
[Field::Element\\_ptr](#) [fsyrr](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) UpLo, const [FFLAS\\_TRANSPOSE](#) trans, const [size\\_t](#) N, const [size\\_t](#) K, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const [size\\_t](#) lda, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const [size\\_t](#) ldc, const [ParSeqHelper::Sequential](#) seq)
- `template<class Field >`  
[Field::Element\\_ptr](#) [fsyrr](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) UpLo, const [FFLAS\\_TRANSPOSE](#) trans, const [size\\_t](#) N, const [size\\_t](#) K, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const [size\\_t](#) lda, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const [size\\_t](#) ldc, [MMHelper](#)< [Field](#), [MMHelperAlgo::Classic](#), [ModeCategories::DefaultTag](#) > &H)
- `template<class Field >`  
[Field::Element\\_ptr](#) [fsyrr](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) UpLo, const [FFLAS\\_TRANSPOSE](#) trans, const [size\\_t](#) N, const [size\\_t](#) K, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const [size\\_t](#) lda, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const [size\\_t](#) ldc, [MMHelper](#)< [Field](#), [MMHelperAlgo::Classic](#), [ModeCategories::ConvertTo](#)< [ElementCategories::MachineFloatTag](#) >, [ParSeqHelper::Sequential](#) > &H)
- `template<class Field , class AlgoT , class ParSeqTrait >`  
void [ScalAndReduce](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) UpLo, const [size\\_t](#) N, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) A, const [size\\_t](#) lda, const [MMHelper](#)< [Field](#), AlgoT, [ModeCategories::LazyTag](#), ParSeqTrait > &H)
- `template<class Field >`  
[Field::Element\\_ptr](#) [fsyrr](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) UpLo, const [FFLAS\\_TRANSPOSE](#) trans, const [size\\_t](#) N, const [size\\_t](#) K, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const [size\\_t](#) lda, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const [size\\_t](#) ldc, [MMHelper](#)< [Field](#), [MMHelperAlgo::Classic](#), [ModeCategories::DelayedTag](#) > &H)
- `template<class Field >`  
[Field::Element\\_ptr](#) [fsyrr](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) UpLo, const [FFLAS\\_TRANSPOSE](#) trans, const [size\\_t](#) N, const [size\\_t](#) K, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const [size\\_t](#) lda, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const [size\\_t](#) ldc, [MMHelper](#)< [Field](#), [MMHelperAlgo::Classic](#), [ModeCategories::LazyTag](#) > &H)
- `template<class Field , typename Mode >`  
[Field::Element\\_ptr](#) [fsyrr](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) UpLo, const [FFLAS\\_TRANSPOSE](#) trans, const [size\\_t](#) N, const [size\\_t](#) K, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const [size\\_t](#) lda, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const [size\\_t](#) ldc, [MMHelper](#)< [Field](#), [MMHelperAlgo::DivideAndConquer](#), Mode > &H)

- `template<class Field >`  
`Field::Element_ptr fsyrk` (const `Field` &F, const `FFLAS_UPLO` UpLo, const `FFLAS_TRANSPOSE` trans, const `size_t` N, const `size_t` K, const typename `Field::Element` alpha, typename `Field::ConstElement_ptr` A, const `size_t` lda, const typename `Field::Element` beta, typename `Field::Element_ptr` C, const `size_t` ldc, `MMHelper`< `Field`, `MMHelperAlgo::Classic`, `ModeCategories::DefaultBoundedTag` > &H)
- `Givaro::FloatDomain::Element_ptr fsyrk` (const `Givaro::FloatDomain` &F, const `FFLAS_UPLO` UpLo, const `FFLAS_TRANSPOSE` trans, const `size_t` N, const `size_t` K, const `Givaro::FloatDomain::Element` alpha, `Givaro::FloatDomain::ConstElement_ptr` A, const `size_t` lda, const `Givaro::FloatDomain::Element` beta, `Givaro::FloatDomain::Element_ptr` C, const `size_t` ldc, `MMHelper`< `Givaro::FloatDomain`, `MMHelperAlgo::Classic`, `ModeCategories::DefaultTag` > &H)
- `Givaro::DoubleDomain::Element_ptr fsyrk` (const `Givaro::DoubleDomain` &F, const `FFLAS_UPLO` UpLo, const `FFLAS_TRANSPOSE` trans, const `size_t` N, const `size_t` K, const `Givaro::DoubleDomain::Element` alpha, `Givaro::DoubleDomain::ConstElement_ptr` A, const `size_t` lda, const `Givaro::DoubleDomain::Element` beta, `Givaro::DoubleDomain::Element_ptr` C, const `size_t` ldc, `MMHelper`< `Givaro::DoubleDomain`, `MMHelperAlgo::Classic`, `ModeCategories::DefaultTag` > &H)
- `template<class Field >`  
`Field::Element_ptr fsyrk` (const `Field` &F, const `FFLAS_UPLO` UpLo, const `FFLAS_TRANSPOSE` trans, const `size_t` n, const `size_t` k, const typename `Field::Element` alpha, typename `Field::Element_ptr` A, const `size_t` lda, typename `Field::ConstElement_ptr` D, const `size_t` incD, const typename `Field::Element` beta, typename `Field::Element_ptr` C, const `size_t` ldc, const `size_t` threshold=`__FFLASFFPACK_FSYRK_THRESHOLD`)  
*fsyrk: Symmetric Rank K update with diagonal scaling*
- `template<class Field >`  
`Field::Element_ptr fsyrk` (const `Field` &F, const `FFLAS_UPLO` UpLo, const `FFLAS_TRANSPOSE` trans, const `size_t` N, const `size_t` K, const typename `Field::Element` alpha, typename `Field::Element_ptr` A, const `size_t` lda, typename `Field::ConstElement_ptr` D, const `size_t` incD, const typename `Field::Element` beta, typename `Field::Element_ptr` C, const `size_t` ldc, const `ParSeqHelper::Sequential` seq, const `size_t` threshold)
- `template<class Field , class Cut , class Param >`  
`Field::Element_ptr fsyrk` (const `Field` &F, const `FFLAS_UPLO` UpLo, const `FFLAS_TRANSPOSE` trans, const `size_t` N, const `size_t` K, const typename `Field::Element` alpha, typename `Field::Element_ptr` A, const `size_t` lda, typename `Field::ConstElement_ptr` D, const `size_t` incD, const typename `Field::Element` beta, typename `Field::Element_ptr` C, const `size_t` ldc, const `ParSeqHelper::Parallel`< `Cut`, `Param` > par, const `size_t` threshold)
- `template<class Field >`  
`Field::Element_ptr fsyrk` (const `Field` &F, const `FFLAS_UPLO` UpLo, const `FFLAS_TRANSPOSE` trans, const `size_t` n, const `size_t` k, const typename `Field::Element` alpha, typename `Field::Element_ptr` A, const `size_t` lda, typename `Field::ConstElement_ptr` D, const `size_t` incD, const `std::vector< bool >` &twoBlock, const typename `Field::Element` beta, typename `Field::Element_ptr` C, const `size_t` ldc, const `size_t` threshold=`__FFLASFFPACK_FSYRK_THRESHOLD`)  
*fsyrk: Symmetric Rank K update with diagonal scaling*

## 13.98.1 Macro Definition Documentation

### 13.98.1.1 `__FFLASFFPACK_fflas_fsyk_INL`

```
#define __FFLASFFPACK_fflas_fsyk_INL
```

## 13.99 `fflas_fsyk_strassen.inl` File Reference

```
#include <givaro/givintsqrootmod.h>
```

### Namespaces

- namespace `FFLAS`
- namespace `FFLAS::Protected`

## Macros

- `#define __FFLASFFPACK_fflas_fsyk_strassen_INL`

## Functions

- `template<class Field , class Element , class AlgoT , class ParSeqTrait >`  
`bool NeedPreScalReduction (Element &Outmin, Element &Outmax, Element &Op1min, Element &Op1max,`  
`const Element &x, MMHelper< Field, AlgoT, ModeCategories::LazyTag, ParSeqTrait > &WH)`
- `template<class Field , class Element , class AlgoT , class ModeT , class ParSeqTrait >`  
`bool NeedPreScalReduction (Element &Outmin, Element &Outmax, Element &Op1min, Element &Op1max,`  
`const Element &x, MMHelper< Field, AlgoT, ModeT, ParSeqTrait > &WH)`
- `template<class Field , class Element , class AlgoT , class ParSeqTrait >`  
`bool NeedPreApxyReduction (Element &Outmin, Element &Outmax, Element &Op1min, Element`  
`&Op1max, Element &Op2min, Element &Op2max, const Element &x, MMHelper< Field, AlgoT,`  
`ModeCategories::LazyTag, ParSeqTrait > &WH)`
- `template<class Field , class Element , class AlgoT , class ModeT , class ParSeqTrait >`  
`bool NeedPreApxyReduction (Element &Outmin, Element &Outmax, Element &Op1min, Element &Op1max,`  
`Element &Op2min, Element &Op2max, const Element &x, MMHelper< Field, AlgoT, ModeT, ParSeqTrait >`  
`&WH)`
- `template<class Field , class FieldTrait >`  
`void computeS1S2 (const Field &F, const FFLAS_TRANSPOSE trans, const size_t N, const size_t K, const`  
`typename Field::Element x, const typename Field::Element y, typename Field::Element_ptr A, const size_t`  
`_t lda, typename Field::Element_ptr S, const size_t lds, typename Field::Element_ptr T, const size_t ldt,`  
`MMHelper< Field, MMHelperAlgo::Winograd, FieldTrait > &WH)`
- `template<class Field >`  
`Field::Element_ptr fsyrk (const Field &F, const FFLAS_UPLO UpLo, const FFLAS_TRANSPOSE trans, const`  
`size_t N, const size_t K, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const`  
`size_t lda, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper<`  
`Field, MMHelperAlgo::Winograd, ModeCategories::DelayedTag, ParSeqHelper::Sequential > &H)`
- `template<class Field , class Mode >`  
`Field::Element_ptr fsyrk (const Field &F, const FFLAS_UPLO UpLo, const FFLAS_TRANSPOSE trans, const`  
`size_t N, const size_t K, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const`  
`size_t lda, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper<`  
`Field, MMHelperAlgo::Winograd, Mode > &H)`
- `template<class Field , class FieldTrait >`  
`Field::Element_ptr fsyrk_strassen (const Field &F, const FFLAS_UPLO uplo, const FFLAS_TRANSPOSE`  
`trans, const size_t N, const size_t K, const typename Field::Element y1, const typename Field::Element`  
`y2, const typename Field::Element alpha, typename Field::Element_ptr A, const size_t lda, const`  
`typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field,`  
`MMHelperAlgo::Winograd, FieldTrait > &WH)`

## 13.99.1 Macro Definition Documentation

### 13.99.1.1 \_\_FFLASFFPACK\_fflas\_fsyk\_strassen\_INL

```
#define __FFLASFFPACK_fflas_fsyk_strassen_INL
```

## 13.100 fflas\_ftrmm.inl File Reference

### Namespaces

- namespace `FFLAS`

### Macros

- `#define __FFLASFFPACK_ftrmm_INL`

## Functions

- `template<class Field >`  
`void ftrmm (const Field &F, const FFLAS_SIDE Side, const FFLAS_UPLO Uplo, const FFLAS_TRANSPOSE TransA, const FFLAS_DIAG Diag, const size_t M, const size_t N, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb)`  
*ftrmm: **TR**angular **M**atrix **M**ultiply.*
- `template<class Field >`  
`void ftrmm (const Field &F, const FFLAS_SIDE Side, const FFLAS_UPLO Uplo, const FFLAS_TRANSPOSE TransA, const FFLAS_DIAG Diag, const size_t M, const size_t N, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc)`  
*ftrmm: **TR**angular **M**atrix **M**ultiply with 3 operands Computes  $C \leftarrow \alpha_{op}(A)B + betaC$  or  $C \leftarrow \alpha B_{op}(A) + betaC$ .*

### 13.100.1 Macro Definition Documentation

#### 13.100.1.1 \_\_FFLASFFPACK\_ftrmm\_INL

```
#define __FFLASFFPACK_ftrmm_INL
```

## 13.101 fflas\_ftrsm.inl File Reference

### Namespaces

- namespace [FFLAS](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_ftrsm\\_INL](#)

## Functions

- `template<class Field >`  
`void ftrsm (const Field &F, const FFLAS_SIDE Side, const FFLAS_UPLO Uplo, const FFLAS_TRANSPOSE TransA, const FFLAS_DIAG Diag, const size_t M, const size_t N, const typename Field::Element alpha, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb)`
- `template<class Field >`  
`void ftrsm (const Field &F, const FFLAS_SIDE Side, const FFLAS_UPLO Uplo, const FFLAS_TRANSPOSE TransA, const FFLAS_DIAG Diag, const size_t M, const size_t N, const typename Field::Element alpha, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb, const ParSeqHelper::Sequential &PSH)`
- `template<class Field , class Cut , class Param >`  
`void ftrsm (const Field &F, const FFLAS_SIDE Side, const FFLAS_UPLO Uplo, const FFLAS_TRANSPOSE TransA, const FFLAS_DIAG Diag, const size_t M, const size_t N, const typename Field::Element alpha, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb, const ParSeqHelper::Parallel< Cut, Param > &PSH)`
- `template<class Field , class ParSeqTrait = ParSeqHelper::Sequential>`  
`void ftrsm (const Field &F, const FFLAS_SIDE Side, const FFLAS_UPLO Uplo, const FFLAS_TRANSPOSE TransA, const FFLAS_DIAG Diag, const size_t M, const size_t N, const typename Field::Element alpha, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb, TRSMHelper< StructureHelper::Recursive, ParSeqTrait > &H)`

### 13.101.1 Macro Definition Documentation

#### 13.101.1.1 \_\_FFLASFFPACK\_ftrsm\_INL

```
#define __FFLASFFPACK_ftrsm_INL
```

## 13.102 fflas\_ftrsm\_mp.inl File Reference

triangular system with matrix right hand side over multiprecision domain (either over Z or over Z/pZ)

```
#include <cmath>
#include <givaro/modular-integer.h>
#include <givaro/givinteger.h>
#include "fflas-ffpack/fflas/fflas_bounds.inl"
#include "fflas-ffpack/fflas/fflas_level3.inl"
#include "fflas-ffpack/field/rns-integer-mod.h"
#include "fflas-ffpack/field/rns-integer.h"
```

### Namespaces

- namespace [FFLAS](#)

### Macros

- #define [\\_\\_FFPACK\\_ftrsm\\_mp\\_INL](#)

### Functions

- void [ftrsm](#) (const Givaro::Modular< Givaro::Integer > &F, const [FFLAS\\_SIDE](#) Side, const [FFLAS\\_UPLO](#) Uplo, const [FFLAS\\_TRANSPOSE](#) TransA, const [FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, const Givaro::Integer alpha, const Givaro::Integer \*A, const size\_t lda, Givaro::Integer \*B, const size\_t ldb)
- void [cblas\\_imptrsm](#) (const enum [FFLAS\\_ORDER](#) Order, const enum [FFLAS\\_SIDE](#) Side, const enum [FFLAS\\_UPLO](#) Uplo, const enum [FFLAS\\_TRANSPOSE](#) TransA, const enum [FFLAS\\_DIAG](#) Diag, const int M, const int N, const [FFPACK::rns\\_double\\_elt](#) alpha, [FFPACK::rns\\_double\\_elt\\_cstptr](#) A, const int lda, [FFPACK::rns\\_double\\_elt\\_ptr](#) B, const int ldb)

### 13.102.1 Detailed Description

triangular system with matrix right hand side over multiprecision domain (either over Z or over Z/pZ)

### 13.102.2 Macro Definition Documentation

#### 13.102.2.1 \_\_FFPACK\_ftrsm\_mp\_INL

```
#define __FFPACK_ftrsm_mp_INL
```

## 13.103 fflas\_ftrsv.inl File Reference

### Namespaces

- namespace [FFLAS](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_ftrsv\\_INL](#)

### Functions

- template<class [Field](#) >  
void [ftrsv](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) Uplo, const [FFLAS\\_TRANSPOSE](#) TransA, const [FFLAS\\_DIAG](#) Diag, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) X, int incX)

*ftrsv: TRIangular System solve with Vector Computes  $X \leftarrow \text{op}(A^{-1})X$*

### 13.103.1 Macro Definition Documentation

#### 13.103.1.1 \_\_FFLASFFPACK\_ftrsv\_INL

```
#define __FFLASFFPACK_ftrsv_INL
```

### 13.104 fflas\_helpers.inl File Reference

```
#include "fflas-ffpack/field/field-traits.h"
#include "fflas-ffpack/paladin/parallel.h"
#include "fflas-ffpack/utils/flimits.h"
#include <algorithm>
```

#### Data Structures

- struct [Auto](#)
- struct [Classic](#)
- struct [DivideAndConquer](#)
- struct [Winograd](#)
- struct [WinogradPar](#)
- struct [Bini](#)
- struct [AlgoChooser](#)< [ModeT](#), [ParSeq](#) >
- struct [AlgoChooser](#)< [ModeCategories::ConvertTo](#)< [ElementCategories::RNSElementTag](#) >, [ParSeq](#) >
- struct [MMHelper](#)< [Field](#), [AlgoTrait](#), [ModeCategories::DefaultTag](#), [ParSeqTrait](#) >

*FGEMM Helper for Default and ConvertTo modes of operation.*

- struct [MMHelper](#)< [Field](#), [AlgoTrait](#), [ModeCategories::ConvertTo](#)< [Dest](#) >, [ParSeqTrait](#) >
- struct [MMHelper](#)< [Field](#), [AlgoTrait](#), [ModeTrait](#), [ParSeqTrait](#) >
- struct [Recursive](#)
- struct [Iterative](#)
- struct [Hybrid](#)
- struct [TRSMHelper](#)< [ReclterTrait](#), [ParSeqTrait](#) >

*TRSM Helper.*

#### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::Protected](#)
- namespace [FFLAS::MMHelperAlgo](#)
- namespace [FFLAS::StructureHelper](#)

*StructureHelper for ftrsm.*

#### Macros

- #define [\\_\\_FFLASFFPACK\\_fflas\\_fflas\\_mmhelper\\_INL](#)

#### Functions

- template<class [Field](#) >  
int [WinogradSteps](#) (const [Field](#) &F, const size\_t &m)  
*Computes the number of recursive levels to perform.*
- template<class DFE >  
size\_t [min\\_types](#) (const DFE &k)
- template<> size\_t [min\\_types](#) (const [Reclnt::rint](#)< 6 > &k)
- template<> size\_t [min\\_types](#) (const [Reclnt::rint](#)< 7 > &k)
- template<> size\_t [min\\_types](#) (const [Reclnt::rint](#)< 8 > &k)



- `template<> size_t min_types (const RecInt::rint< 9 > &k)`
- `template<> size_t min_types (const RecInt::rint< 10 > &k)`
- `template<> size_t min_types (const Givaro::Integer &k)`
- `template<class T >`  
    `bool unfit (T x)`
- `template<> bool unfit (int64_t x)`
- `template<size_t K>`  
    `bool unfit (RecInt::rint< K > x)`
- `template<> bool unfit (RecInt::rint< 6 > x)`

### 13.104.1 Macro Definition Documentation

#### 13.104.1.1 \_\_FFLASFFPACK\_fflas\_fflas\_mmhelper\_INL

```
#define __FFLASFFPACK_fflas_fflas_mmhelper_INL
```

## 13.105 igemm.doxy File Reference

## 13.106 igemm.h File Reference

```
#include "igemm_kernels.h"
#include "igemm_tools.h"
#include "fflas-ffpack/utils/fflas_memory.h"
#include "igemm.inl"
```

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::Protected](#)

### Enumerations

- enum [number\\_kind](#) { [zero](#) =0 , [one](#) =1 , [mone](#) =-1 , [other](#) =2 }

### Functions

- `template<enum FFLAS\_TRANSPOSE tA, enum FFLAS\_TRANSPOSE tB>`  
    `void igemm\_colmajor (size_t rows, size_t cols, size_t depth, const int64_t alpha, const int64_t *A, size_t lda, const int64_t *B, size_t ldb, int64_t *C, size_t ldc)`
- `template<enum FFLAS\_TRANSPOSE tA, enum FFLAS\_TRANSPOSE tB, enum number\_kind alpha_kind>`  
    `void igemm\_colmajor (size_t rows, size_t cols, size_t depth, const int64_t alpha, const int64_t *A, size_t lda, const int64_t *B, size_t ldb, int64_t *C, size_t ldc)`
- `void igemm (const enum FFLAS\_TRANSPOSE TransA, const enum FFLAS\_TRANSPOSE TransB, size_t rows, size_t cols, size_t depth, const int64_t alpha, const int64_t *A, size_t lda, const int64_t *B, size_t ldb, const int64_t beta, int64_t *C, size_t ldc)`
- `void igemm\_ (const enum FFLAS\_ORDER Order, const enum FFLAS\_TRANSPOSE TransA, const enum FFLAS\_TRANSPOSE TransB, const size_t M, const size_t N, const size_t K, const int64_t alpha, const int64_t *A, const size_t lda, const int64_t *B, const size_t ldb, const int64_t beta, int64_t *C, const size_t ldc)`

## 13.107 igemm.inl File Reference

```
#include "fflas-ffpack/utils/fflas_memory.h"
```

## Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::Protected](#)

## Macros

- `#define` [\\_\\_FFLASFFPACK\\_fflas\\_igemm\\_igemm\\_INL](#)

## Functions

- `template<enum FFLAS\_TRANSPOSE tA, enum FFLAS\_TRANSPOSE tB>`  
void [igemm\\_colmajor](#) (size\_t rows, size\_t cols, size\_t depth, const int64\_t alpha, const int64\_t \*A, size\_t lda, const int64\_t \*B, size\_t ldb, int64\_t \*C, size\_t ldc)
- `template<enum FFLAS\_TRANSPOSE tA, enum FFLAS\_TRANSPOSE tB, enum number\_kind alpha_kind>`  
void [igemm\\_colmajor](#) (size\_t rows, size\_t cols, size\_t depth, const int64\_t alpha, const int64\_t \*A, size\_t lda, const int64\_t \*B, size\_t ldb, int64\_t \*C, size\_t ldc)
- void [igemm](#) (const enum [FFLAS\\_TRANSPOSE](#) TransA, const enum [FFLAS\\_TRANSPOSE](#) TransB, size\_t rows, size\_t cols, size\_t depth, const int64\_t alpha, const int64\_t \*A, size\_t lda, const int64\_t \*B, size\_t ldb, const int64\_t beta, int64\_t \*C, size\_t ldc)
- void [igemm\\_](#) (const enum [FFLAS\\_ORDER](#) Order, const enum [FFLAS\\_TRANSPOSE](#) TransA, const enum [FFLAS\\_TRANSPOSE](#) TransB, const size\_t M, const size\_t N, const size\_t K, const int64\_t alpha, const int64\_t \*A, const size\_t lda, const int64\_t \*B, const size\_t ldb, const int64\_t beta, int64\_t \*C, const size\_t ldc)

### 13.107.1 Macro Definition Documentation

#### 13.107.1.1 [\\_\\_FFLASFFPACK\\_fflas\\_igemm\\_igemm\\_INL](#)

```
#define __FFLASFFPACK_fflas_igemm_igemm_INL
```

## 13.108 [igemm\\_kernels.h](#) File Reference

```
#include "igemm_kernels.inl"
```

## Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::details](#)

## Functions

- `template<enum number\_kind K>`  
void [igebb44](#) (size\_t i, size\_t j, size\_t depth, size\_t pdeth, const int64\_t alpha, const int64\_t \*bIA, const int64\_t \*bIB, int64\_t \*C, size\_t ldc)
- `template<enum number\_kind K>`  
void [igebb24](#) (size\_t i, size\_t j, size\_t depth, size\_t pdeth, const int64\_t alpha, const int64\_t \*bIA, const int64\_t \*bIB, int64\_t \*C, size\_t ldc)
- `template<enum number\_kind K>`  
void [igebb14](#) (size\_t i, size\_t j, size\_t depth, size\_t pdeth, const int64\_t alpha, const int64\_t \*bIA, const int64\_t \*bIB, int64\_t \*C, size\_t ldc)
- `template<enum number\_kind K>`  
void [igebb41](#) (size\_t i, size\_t j, size\_t depth, size\_t pdeth, const int64\_t alpha, const int64\_t \*bIA, const int64\_t \*bIB, int64\_t \*C, size\_t ldc)
- `template<enum number\_kind K>`  
void [igebb21](#) (size\_t i, size\_t j, size\_t depth, size\_t pdeth, const int64\_t alpha, const int64\_t \*bIA, const int64\_t \*bIB, int64\_t \*C, size\_t ldc)

- template<enum [number\\_kind](#) K>  
void [igebb11](#) (size\_t i, size\_t j, size\_t depth, size\_t pdeth, const int64\_t alpha, const int64\_t \*bIA, const int64\_t \*bIB, int64\_t \*C, size\_t ldc)
- template<enum [number\\_kind](#) K>  
void [igebp](#) (size\_t rows, size\_t cols, size\_t depth, const int64\_t alpha, const int64\_t \*blockA, size\_t lda, const int64\_t \*blockB, size\_t ldb, int64\_t \*C, size\_t ldc)

## 13.109 igemm\_kernels.inl File Reference

```
#include "fflas-ffpack/utils/fflas_memory.h"
#include "igemm_tools.h"
```

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::details](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fflas\\_igemm\\_igemm\\_kernels\\_INL](#)

### Functions

- template<enum [number\\_kind](#) K>  
void [igebb44](#) (size\_t i, size\_t j, size\_t depth, size\_t pdeth, const int64\_t alpha, const int64\_t \*bIA, const int64\_t \*bIB, int64\_t \*C, size\_t ldc)
- template<enum [number\\_kind](#) K>  
void [igebb24](#) (size\_t i, size\_t j, size\_t depth, size\_t pdeth, const int64\_t alpha, const int64\_t \*bIA, const int64\_t \*bIB, int64\_t \*C, size\_t ldc)
- template<enum [number\\_kind](#) K>  
void [igebb14](#) (size\_t i, size\_t j, size\_t depth, size\_t pdeth, const int64\_t alpha, const int64\_t \*bIA, const int64\_t \*bIB, int64\_t \*C, size\_t ldc)
- template<enum [number\\_kind](#) K>  
void [igebb41](#) (size\_t i, size\_t j, size\_t depth, size\_t pdeth, const int64\_t alpha, const int64\_t \*bIA, const int64\_t \*bIB, int64\_t \*C, size\_t ldc)
- template<enum [number\\_kind](#) K>  
void [igebb21](#) (size\_t i, size\_t j, size\_t depth, size\_t pdeth, const int64\_t alpha, const int64\_t \*bIA, const int64\_t \*bIB, int64\_t \*C, size\_t ldc)
- template<enum [number\\_kind](#) K>  
void [igebb11](#) (size\_t i, size\_t j, size\_t depth, size\_t pdeth, const int64\_t alpha, const int64\_t \*bIA, const int64\_t \*bIB, int64\_t \*C, size\_t ldc)
- template<enum [number\\_kind](#) K>  
void [igebp](#) (size\_t rows, size\_t cols, size\_t depth, const int64\_t alpha, const int64\_t \*blockA, size\_t lda, const int64\_t \*blockB, size\_t ldb, int64\_t \*C, size\_t ldc)

### 13.109.1 Macro Definition Documentation

#### 13.109.1.1 [\\_\\_FFLASFFPACK\\_fflas\\_igemm\\_igemm\\_kernels\\_INL](#)

```
#define __FFLASFFPACK_fflas_igemm_igemm_kernels_INL
```

## 13.110 igemm\_tools.h File Reference

```
#include "igemm_tools.inl"
```

## Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::details](#)

## Functions

- `template<size_t k, bool transpose>`  
void [pack\\_lhs](#) (int64\_t \*XX, const int64\_t \*X, size\_t ldx, size\_t rows, size\_t cols)
- `template<size_t k, bool transpose>`  
void [pack\\_rhs](#) (int64\_t \*XX, const int64\_t \*X, size\_t ldx, size\_t rows, size\_t cols)
- void [gebp](#) (size\_t rows, size\_t cols, size\_t depth, int64\_t \*C, size\_t ldc, const int64\_t \*blockA, size\_t lda, const int64\_t \*BlockB, size\_t ldb, int64\_t \*BlockW)
- void [BlockingFactor](#) (size\_t &m, size\_t &n, size\_t &k)

## 13.111 igemm\_tools.inl File Reference

```
#include "fflas-ffpack/fflas/fflas_simd.h"
```

## Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::details](#)

## Macros

- `#define` [\\_\\_FFLASFFPACK\\_fflas\\_igemm\\_igemm\\_tools\\_INL](#)

## Functions

- `template<size_t k, bool transpose>`  
void [pack\\_rhs](#) (int64\_t \*XX, const int64\_t \*X, size\_t ldx, size\_t rows, size\_t cols)
- `template<size_t k, bool transpose>`  
void [pack\\_lhs](#) (int64\_t \*XX, const int64\_t \*X, size\_t ldx, size\_t rows, size\_t cols)
- void [BlockingFactor](#) (size\_t &m, size\_t &n, size\_t &k)

### 13.111.1 Macro Definition Documentation

#### 13.111.1.1 \_\_FFLASFFPACK\_fflas\_igemm\_igemm\_tools\_INL

```
#define __FFLASFFPACK_fflas_igemm_igemm_tools_INL
```

## 13.112 fflas\_level1.inl File Reference

## Namespaces

- namespace [FFLAS](#)

## Macros

- `#define` [\\_\\_FFLASFFPACK\\_fflas\\_fflas\\_level1\\_INL](#)

## Functions

- template<class [Field](#) >  
void [freduce](#) (const [Field](#) &F, const size\_t n, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*freduce*  $x \leftarrow x \bmod F$ .
- template<class [Field](#) >  
void [freduce](#) (const [Field](#) &F, const size\_t n, typename [Field::ConstElement\\_ptr](#) Y, const size\_t incY, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*freduce*  $x \leftarrow y \bmod F$ .
- template<class [Field](#), class OtherElement\_ptr >  
void [finit](#) (const [Field](#) &F, const size\_t n, const OtherElement\_ptr Y, const size\_t incY, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*finit*  $x \leftarrow y \bmod F$ .
- template<class [Field](#) >  
void [finit](#) (const [Field](#) &F, const size\_t n, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*finit* Initializes  $X$  in  $F$ .
- template<class [Field](#), class OtherElement\_ptr >  
void [fconvert](#) (const [Field](#) &F, const size\_t n, OtherElement\_ptr X, const size\_t incX, typename [Field::ConstElement\\_ptr](#) Y, const size\_t incY)  
*fconvert*  $x \leftarrow y \bmod F$ .
- template<class [Field](#) >  
void [fnegin](#) (const [Field](#) &F, const size\_t n, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*fnegin*  $x \leftarrow -x$ .
- template<class [Field](#) >  
void [fneg](#) (const [Field](#) &F, const size\_t n, typename [Field::ConstElement\\_ptr](#) Y, const size\_t incY, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*fneg*  $x \leftarrow -y$ .
- template<class [Field](#) >  
void [fzero](#) (const [Field](#) &F, const size\_t n, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*fzero* :  $A \leftarrow 0$ .
- template<class [Field](#), class RandIter >  
void [frand](#) (const [Field](#) &F, RandIter &G, const size\_t n, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*frand* :  $A \leftarrow random$ .
- template<class [Field](#) >  
bool [fiszero](#) (const [Field](#) &F, const size\_t n, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX)  
*fiszero* : test  $X = 0$ .
- template<class [Field](#) >  
bool [fequal](#) (const [Field](#) &F, const size\_t n, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, typename [Field::ConstElement\\_ptr](#) Y, const size\_t incY)  
*fequal* : test  $X = Y$ .
- template<class [Field](#) >  
void [fassign](#) (const [Field](#) &F, const size\_t N, typename [Field::ConstElement\\_ptr](#) Y, const size\_t incY, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*fassign* :  $x \leftarrow y$ .
- template<class [Field](#) >  
void [fscal](#) (const [Field](#) &F, const size\_t n, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*fscal*  $x \leftarrow \alpha \cdot x$ .
- template<class [Field](#) >  
void [fscal](#) (const [Field](#) &F, const size\_t n, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, typename [Field::Element\\_ptr](#) Y, const size\_t incY)  
*fscal*  $y \leftarrow \alpha \cdot x$ .
- template<class [Field](#) >  
void [faxpy](#) (const [Field](#) &F, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, typename [Field::Element\\_ptr](#) Y, const size\_t incY)

- $$faxpy : y \leftarrow \alpha \cdot x + y.$$
  - template<class `Field` >  
void `faxpby` (const `Field` &F, const `size_t` N, const typename `Field::Element` alpha, typename `Field::ConstElement_ptr` X, const `size_t` incX, const typename `Field::Element` beta, typename `Field::Element_ptr` Y, const `size_t` incY)  

$$faxpby : y \leftarrow \alpha \cdot x + \beta \cdot y.$$
- template<class `Field` >  
`Field::Element` `fdot` (const `Field` &F, const `size_t` N, typename `Field::ConstElement_ptr` X, const `size_t` incX, typename `Field::ConstElement_ptr` Y, const `size_t` incY)  

$$fdot: \text{dot product } x^T y.$$
- template<class `Field` >  
`Field::Element` `fdot` (const `Field` &F, const `size_t` N, typename `Field::ConstElement_ptr` x, const `size_t` incx, typename `Field::ConstElement_ptr` y, const `size_t` incy, const `ParSeqHelper::Sequential` seq)
- template<typename `Field` , class `Cut` , class `Param` >  
`Field::Element` `fdot` (const `Field` &F, const `size_t` N, typename `Field::ConstElement_ptr` X, const `size_t` incX, typename `Field::ConstElement_ptr` Y, const `size_t` incY, const `ParSeqHelper::Parallel`< `Cut`, `Param` > par)
- template<class `Field` >  
void `fswap` (const `Field` &F, const `size_t` N, typename `Field::Element_ptr` X, const `size_t` incX, typename `Field::Element_ptr` Y, const `size_t` incY)  

$$fswap: X \leftrightarrow Y.$$
- template<class `Field` >  
void `pfadd` (const `Field` &F, const `size_t` M, const `size_t` N, typename `Field::ConstElement_ptr` A, const `size_t` lda, typename `Field::ConstElement_ptr` B, const `size_t` ldb, typename `Field::Element_ptr` C, const `size_t` ldc, const `size_t` numths)
- template<class `Field` >  
void `pfsub` (const `Field` &F, const `size_t` M, const `size_t` N, typename `Field::ConstElement_ptr` A, const `size_t` lda, typename `Field::ConstElement_ptr` B, const `size_t` ldb, typename `Field::Element_ptr` C, const `size_t` ldc, const `size_t` numths)
- template<class `Field` >  
void `pfaddin` (const `Field` &F, const `size_t` M, const `size_t` N, typename `Field::ConstElement_ptr` B, const `size_t` ldb, typename `Field::Element_ptr` C, const `size_t` ldc, `size_t` numths)
- template<class `Field` >  
void `pfsubin` (const `Field` &F, const `size_t` M, const `size_t` N, typename `Field::ConstElement_ptr` B, const `size_t` ldb, typename `Field::Element_ptr` C, const `size_t` ldc, `size_t` numths)
- template<class `Field` >  
void `fadd` (const `Field` &F, const `size_t` N, typename `Field::ConstElement_ptr` A, const `size_t` inca, typename `Field::ConstElement_ptr` B, const `size_t` incb, typename `Field::Element_ptr` C, const `size_t` incc)
- template<class `Field` >  
void `fsub` (const `Field` &F, const `size_t` N, typename `Field::ConstElement_ptr` A, const `size_t` inca, typename `Field::ConstElement_ptr` B, const `size_t` incb, typename `Field::Element_ptr` C, const `size_t` incc)
- template<class `Field` >  
void `faddin` (const `Field` &F, const `size_t` N, typename `Field::ConstElement_ptr` B, const `size_t` incb, typename `Field::Element_ptr` C, const `size_t` incc)
- template<class `Field` >  
void `fsubin` (const `Field` &F, const `size_t` N, typename `Field::ConstElement_ptr` B, const `size_t` incb, typename `Field::Element_ptr` C, const `size_t` incc)
- template<class `Field` >  
void `fadd` (const `Field` &F, const `size_t` N, typename `Field::ConstElement_ptr` A, const `size_t` inca, const typename `Field::Element` alpha, typename `Field::ConstElement_ptr` B, const `size_t` incb, typename `Field::Element_ptr` C, const `size_t` incc)

### 13.112.1 Macro Definition Documentation

#### 13.112.1.1 `__FFLASFFPACK_fflas_fflas_level1_INL`

```
#define __FFLASFFPACK_fflas_fflas_level1_INL
```

## 13.113 fflas\_level2.inl File Reference

```
#include "givaro/zring.h"
```

### Namespaces

- namespace [FFLAS](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fflas\\_fflas\\_level2\\_INL](#)

### Functions

- template<class [Field](#) >  
void [fassign](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
*fassign :  $A \leftarrow B$ .*
- template<class [Field](#) >  
void [fzero](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
*fzero :  $A \leftarrow 0$ .*
- template<class [Field](#) >  
void [fzero](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) shape, const [FFLAS\\_DIAG](#) diag, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
*fzero :  $A \leftarrow 0$  for a triangular matrix.*
- template<class [Field](#), class Randlter >  
void [frand](#) (const [Field](#) &F, Randlter &G, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
*frand :  $A \leftarrow \text{random}$ .*
- template<class [Field](#) >  
bool [fequal](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb)  
*fequal : test  $A = B$ .*
- template<class [Field](#) >  
bool [fiszero](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda)  
*fiszero : test  $A = 0$ .*
- template<class [Field](#) >  
void [fidentity](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda, const typename [Field::Element](#) &d)  
*creates a diagonal matrix*
- template<class [Field](#) >  
void [fidentity](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
*creates a diagonal matrix*
- template<class [Field](#) >  
void [freduce](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
*freduce  $A \leftarrow A \bmod F$ .*
- template<class [Field](#) >  
void [freduce](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) uplo, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
*freduce for square symmetric matrices*
- template<class [Field](#) >  
void [freduce](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
*freduce  $A \leftarrow B \bmod F$ .*

- template<class [Field](#) , class OtherElement\_ptr >  
void [finit](#) (const [Field](#) &F, const size\_t m, const size\_t n, const OtherElement\_ptr B, const size\_t ldb, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
 $finit\ A \leftarrow B \bmod F.$
- template<class [Field](#) , class OtherElement\_ptr >  
void [finit](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
 $finit\ \text{Initializes } A \text{ in } F\mathbb{Z}.$
- template<class [Field](#) , class OtherElement\_ptr >  
void [fconvert](#) (const [Field](#) &F, const size\_t m, const size\_t n, OtherElement\_ptr A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb)  
 $fconvert\ A \leftarrow B \bmod F.$
- template<class [Field](#) >  
void [fnegin](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
 $fnegin\ A \leftarrow -A.$
- template<class [Field](#) >  
void [fneg](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
 $fneg\ A \leftarrow -B.$
- template<class [Field](#) >  
void [fscaln](#) (const [Field](#) &F, const size\_t m, const size\_t n, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
 $fscaln\ A \leftarrow a \cdot A.$
- template<class [Field](#) >  
void [fscal](#) (const [Field](#) &F, const size\_t m, const size\_t n, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) B, const size\_t ldb)  
 $fscal\ B \leftarrow a \cdot A.$
- template<class [Field](#) >  
void [faxpy](#) (const [Field](#) &F, const size\_t m, const size\_t n, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) X, const size\_t ldx, typename [Field::Element\\_ptr](#) Y, const size\_t ldy)  
 $faxpy : y \leftarrow \alpha \cdot x + y.$
- template<class [Field](#) >  
void [faxpby](#) (const [Field](#) &F, const size\_t m, const size\_t n, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) X, const size\_t ldx, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) Y, const size\_t ldy)  
 $faxpby : y \leftarrow \alpha \cdot x + \beta \cdot y.$
- template<class [Field](#) >  
void [fmove](#) (const [Field](#) &F, const size\_t m, const size\_t n, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) B, const size\_t ldb)  
 $fmove : A \leftarrow B \text{ and } B \leftarrow 0.$
- template<class [Field](#) >  
void [fadd](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, typename [Field::Element\\_ptr](#) C, const size\_t ldc)  
 $fadd : \text{matrix addition.}$
- template<class [Field](#) >  
void [fsub](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, typename [Field::Element\\_ptr](#) C, const size\_t ldc)  
 $fsub : \text{matrix subtraction.}$
- template<class [Field](#) >  
void [fsubin](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, typename [Field::Element\\_ptr](#) C, const size\_t ldc)  
 $fsubin\ C = C - B$
- template<class [Field](#) >  
void [fadd](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, typename [Field::Element\\_ptr](#) C, const size\_t ldc)



- fadd* : matrix addition with scaling.
- template<class [Field](#) >  
void [faddin](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, typename [Field::Element\\_ptr](#) C, const size\_t ldc)  
*faddin*
  - template<class [Field](#) >  
void [faddin](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) uplo, const size\_t N, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, typename [Field::Element\\_ptr](#) C, const size\_t ldc)  
*fadding for symmetric matrices*
  - template<class [Field](#) >  
[Field::Element\\_ptr](#) [fgemv](#) (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) TransA, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) X, const size\_t incX, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) Y, const size\_t incY)  
*finite prime Field GEneral Matrix Vector multiplication.*
  - template<class [Field](#) >  
void [fger](#) (const [Field](#) &F, const size\_t M, const size\_t N, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) x, const size\_t incx, typename [Field::ConstElement\\_ptr](#) y, const size\_t incy, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
*fger: rank one update of a general matrix*
  - template<class [Field](#) >  
void [ftrsv](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) Uplo, const [FFLAS\\_TRANSPOSE](#) TransA, const [FFLAS\\_DIAG](#) Diag, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) X, int incX)  
*ftrsv: TRIangular System solve with Vector Computes  $X \leftarrow \text{op}(A^{-1})X$*
  - template<class [Field](#) >  
size\_t [bitsize](#) (const [Field](#) &F, size\_t M, size\_t N, const typename [Field::ConstElement\\_ptr](#) A, size\_t lda)  
*bitsize: Computes the largest bitsize of the matrix' coefficients.*
  - template<> size\_t [bitsize](#)< [Givaro::ZRing](#)< [Givaro::Integer](#) > > (const [Givaro::ZRing](#)< [Givaro::Integer](#) > &F, size\_t M, size\_t N, const [Givaro::Integer](#) \*A, size\_t lda)
  - template<class [Field](#) >  
void [ftrmv](#) (const [Field](#) &F, const [FFLAS\\_UPLO](#) Uplo, const [FFLAS\\_TRANSPOSE](#) TransA, const [FFLAS\\_DIAG](#) Diag, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) X, int incX)  
*ftrsm: TRIangular Matrix Vector prodcut Computes  $X \leftarrow \text{op}(A)X$*

### 13.113.1 Macro Definition Documentation

#### 13.113.1.1 \_\_FFLASFFPACK\_fflas\_fflas\_level2\_INL

```
#define __FFLASFFPACK_fflas_fflas_level2_INL
```

## 13.114 fflas\_level3.inl File Reference

```
#include "fflas_bounds.inl"
#include "fflas_helpers.inl"
#include "fflas-ffpack/paladin/parallel.h"
```

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::Protected](#)

## Macros

- `#define __FFLASFFPACK_fflas_fflas_level3_INL`
- `#define __FFLAS__TRSM_READONLY`

## Functions

- `template<class Field >`  
`void MatF2MatD_Triangular (const Field &F, Givaro::DoubleDomain::Element_ptr S, const size_t lds, type-`  
`name Field::ConstElement_ptr const E, const size_t lde, const size_t m, const size_t n)`
- `template<class Field >`  
`void MatF2MatFI_Triangular (const Field &F, Givaro::FloatDomain::Element_ptr S, const size_t lds, typename`  
`Field::ConstElement_ptr const E, const size_t lde, const size_t m, const size_t n)`
- `template<class Field >`  
`void ftrsm (const Field &F, const FFLAS_SIDE Side, const FFLAS_UPLO Uplo, const FFLAS_TRANSPOSE`  
`TransA, const FFLAS_DIAG Diag, const size_t M, const size_t N, const typename Field::Element alpha,`  
`typename Field::ConstElement_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb)`  
*ftrsm: **TR**angular **S**ystem solve with **M**atrix.*
- `template<class Field >`  
`void ftrmm (const Field &F, const FFLAS_SIDE Side, const FFLAS_UPLO Uplo, const FFLAS_TRANSPOSE`  
`TransA, const FFLAS_DIAG Diag, const size_t M, const size_t N, const typename Field::Element alpha,`  
`typename Field::ConstElement_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb)`  
*ftrmm: **TR**angular **M**atrix **M**ultiply.*
- `template<class Field >`  
`void ftrmm (const Field &F, const FFLAS_SIDE Side, const FFLAS_UPLO Uplo, const FFLAS_TRANSPOSE`  
`TransA, const FFLAS_DIAG Diag, const size_t M, const size_t N, const typename Field::Element alpha,`  
`typename Field::ConstElement_ptr A, const size_t lda, typename Field::ConstElement_ptr B, const size_t`  
`ldb, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc)`  
*ftrmm: **TR**angular **M**atrix **M**ultiply with 3 operands Computes  $C \leftarrow \alpha \text{op}(A)B + \text{beta}C$  or  $C \leftarrow \alpha B \text{op}(A) + \text{beta}C$ .*
- `template<class Field >`  
`Field::Element_ptr fsyrk (const Field &F, const FFLAS_UPLO UpLo, const FFLAS_TRANSPOSE trans, const`  
`size_t n, const size_t k, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const`  
`size_t lda, const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc)`  
*fsyrk: Symmetric Rank K update*
- `template<class Field , typename FieldTrait >`  
`Field::Element_ptr fsyrk_strassen (const Field &F, const FFLAS_UPLO UpLo, const FFLAS_TRANSPOSE`  
`trans, const size_t N, const size_t K, const typename Field::Element y1, const typename Field::Element`  
`y2, const typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, const`  
`typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field,`  
`MMHelperAlgo::Winograd, FieldTrait > &H)`
- `template<class Field >`  
`Field::Element_ptr fsyr2k (const Field &F, const FFLAS_UPLO UpLo, const FFLAS_TRANSPOSE trans,`  
`const size_t n, const size_t k, const typename Field::Element alpha, typename Field::ConstElement_ptr A,`  
`const size_t lda, typename Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta,`  
`typename Field::Element_ptr C, const size_t ldc)`  
*fsyr2k: Symmetric Rank 2K update*
- `template<class Field >`  
`Field::Element_ptr fsyrk (const Field &F, const FFLAS_UPLO UpLo, const FFLAS_TRANSPOSE trans, const`  
`size_t n, const size_t k, const typename Field::Element alpha, typename Field::Element_ptr A, const size_t`  
`lda, typename Field::ConstElement_ptr D, const size_t incD, const typename Field::Element beta, typename`  
`Field::Element_ptr C, const size_t ldc, const size_t threshold=__FFLASFFPACK_FSYRK_THRESHOLD)`  
*fsyrk: Symmetric Rank K update with diagonal scaling*
- `template<class Field >`  
`Field::Element_ptr fsyrk (const Field &F, const FFLAS_UPLO UpLo, const FFLAS_TRANSPOSE trans, const`  
`size_t N, const size_t K, const typename Field::Element alpha, typename Field::Element_ptr A, const size_t`  
`lda, typename Field::ConstElement_ptr D, const size_t incD, const typename Field::Element beta, typename`  
`Field::Element_ptr C, const size_t ldc, const ParSeqHelper::Sequential seq, const size_t threshold)`

- template<class [Field](#) , class [Cut](#) , class [Param](#) >  
[Field::Element\\_ptr](#) fsyrk (const [Field](#) &F, const [FFLAS\\_UPLO](#) UpLo, const [FFLAS\\_TRANSPOSE](#) trans, const size\_t N, const size\_t K, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) D, const size\_t incD, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, const [ParSeqHelper::Parallel](#)< [Cut](#), [Param](#) > par, const size\_t threshold)  
*fsyrk: Symmetric Rank K update with diagonal scaling*
- template<class [Field](#) >  
[Field::Element\\_ptr](#) fsyrk (const [Field](#) &F, const [FFLAS\\_UPLO](#) UpLo, const [FFLAS\\_TRANSPOSE](#) trans, const size\_t n, const size\_t k, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) D, const size\_t incD, const std::vector< bool > &two←Block, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, const size\_t threshold=\_\_FFLASFFPACK\_FSYRK\_THRESHOLD)  
*fsyrk: Symmetric Rank K update with diagonal scaling*
- template<typename [Field](#) >  
[Field::Element\\_ptr](#) fgemm (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc)  
*fgemm: Field GENERAL Matrix Multiply.*
- template<typename [Field](#) >  
[Field::Element\\_ptr](#) fgemm (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, const [ParSeqHelper::Sequential](#) seq)
- template<typename [Field](#) , class [Cut](#) , class [Param](#) >  
[Field::Element\\_ptr](#) fgemm (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, const [ParSeqHelper::Parallel](#)< [Cut](#), [Param](#) > par)
- template<typename [Field](#) >  
[Field::Element\\_ptr](#) pfgemm (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [Field::Element](#) alpha, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, size\_t numthreads=0)
- template<class [Field](#) >  
[Field::Element](#) \* pfgemm\_1D\_rec (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [Field::Element](#) alpha, const typename [Field::Element\\_ptr](#) A, const size\_t lda, const typename [Field::Element\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element](#) \*C, const size\_t ldc, size\_t seuil)
- template<class [Field](#) >  
[Field::Element](#) \* pfgemm\_2D\_rec (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [Field::Element](#) alpha, const typename [Field::Element\\_ptr](#) A, const size\_t lda, const typename [Field::Element\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element](#) \*C, const size\_t ldc, size\_t seuil)
- template<class [Field](#) >  
[Field::Element](#) \* pfgemm\_3D\_rec (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [Field::Element](#) alpha, const typename [Field::Element\\_ptr](#) A, const size\_t lda, const typename [Field::Element\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, size\_t seuil, size\_t \*x)
- template<class [Field](#) >  
[Field::Element\\_ptr](#) pfgemm\_3D\_rec2 (const [Field](#) &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const typename [Field::Element](#) alpha, const typename [Field::Element\\_ptr](#) A, const size\_t lda, const typename [Field::Element\\_ptr](#) B, const size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) C, const size\_t ldc, size\_t seuil, size\_t \*x)

- `template<class Field >`  
`Field::Element_ptr fsquare (const Field &F, const FFLAS_TRANSPOSE ta, const size_t n, const typename`  
`Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, const typename Field::Element`  
`beta, typename Field::Element_ptr C, const size_t ldc)`

*fsquare: Squares a matrix.*

### 13.114.1 Macro Definition Documentation

#### 13.114.1.1 \_\_FFLASFFPACK\_fflas\_fflas\_level3\_INL

```
#define __FFLASFFPACK_fflas_fflas_level3_INL
```

#### 13.114.1.2 \_\_FFLAS\_\_TRSM\_READONLY

```
#define __FFLAS__TRSM_READONLY
```

## 13.115 fflas\_pfgemm.inl File Reference

```
#include "fflas-ffpack/paladin/blockcuts.inl"
#include "fflas-ffpack/paladin/parallel.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/paladin/pfgemm_variants.inl"
```

### Namespaces

- namespace [FFLAS](#)

### Macros

- `#define __FFLASFFPACK_fflas_pfgemm_INL`
- `#define __FFLASFFPACK_SEQPARTHRESHOLD 220`
- `#define __FFLASFFPACK_DIMKPENALTY 1`

### Functions

- `template<class Field , class ModeTrait , class Strat , class Param >`  
`std::enable_if<!std::is_same< ModeTrait, ModeCategories::ConvertTo< ElementCategories::RNSElementTag`  
`> >::value, typename Field::Element_ptr >::type fgemm (const Field &F, const FFLAS::FFLAS_TRANSPOSE`  
`ta, const FFLAS::FFLAS_TRANSPOSE tb, const size_t m, const size_t n, const size_t k, const`  
`typename Field::Element alpha, typename Field::ConstElement_ptr A, const size_t lda, typename`  
`Field::ConstElement_ptr B, const size_t ldb, const typename Field::Element beta, typename Field::Element_ptr`  
`C, const size_t ldc, MMHelper< Field, MMHelperAlgo::Winograd, ModeTrait, ParSeqHelper::Parallel< Strat,`  
`Param > > &H)`

### 13.115.1 Macro Definition Documentation

#### 13.115.1.1 \_\_FFLASFFPACK\_fflas\_pfgemm\_INL

```
#define __FFLASFFPACK_fflas_pfgemm_INL
```

#### 13.115.1.2 \_\_FFLASFFPACK\_SEQPARTHRESHOLD

```
#define __FFLASFFPACK_SEQPARTHRESHOLD 220
```

#### 13.115.1.3 \_\_FFLASFFPACK\_DIMKPENALTY

```
#define __FFLASFFPACK_DIMKPENALTY 1
```

## 13.116 fflas\_pftrsm.inl File Reference

```
#include "fflas-ffpack/paladin/parallel.h"
```

### Namespaces

- namespace [FFLAS](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fflas\\_pftrsm\\_INL](#)
- #define [PTRSM\\_HYBRID\\_THRESHOLD](#) 256

### Functions

- template<class [Field](#), class Cut, class Param >  
[Field::Element\\_ptr](#) ftrsm (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const [FFLAS::FFLAS\\_UPLO](#) UpLo, const [FFLAS::FFLAS\\_TRANSPOSE](#) TA, const [FFLAS::FFLAS\\_DIAG](#) Diag, const size\_t m, const size\_t n, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) B, const size\_t ldb, [TRSMHelper](#)< [StructureHelper::Iterative](#), [ParSeqHelper::Parallel](#)< Cut, Param > > &H)
- template<class [Field](#), class Cut, class Param >  
[Field::Element\\_ptr](#) ftrsm (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const [FFLAS::FFLAS\\_UPLO](#) UpLo, const [FFLAS::FFLAS\\_TRANSPOSE](#) TA, const [FFLAS::FFLAS\\_DIAG](#) Diag, const size\_t m, const size\_t n, const typename [Field::Element](#) alpha, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) B, const size\_t ldb, [TRSMHelper](#)< [StructureHelper::Hybrid](#), [ParSeqHelper::Parallel](#)< Cut, Param > > &H)

### 13.116.1 Macro Definition Documentation

#### 13.116.1.1 [\\_\\_FFLASFFPACK\\_fflas\\_pftrsm\\_INL](#)

```
#define __FFLASFFPACK_fflas_pftrsm_INL
```

#### 13.116.1.2 [PTRSM\\_HYBRID\\_THRESHOLD](#)

```
#define PTRSM_HYBRID_THRESHOLD 256
```

## 13.117 fflas\_simd.h File Reference

```
#include "fflas-ffpack/utils/fflas_intrinsic.h"
#include <iostream>
#include <type_traits>
#include <limits>
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "fflas-ffpack/utils/debug.h"
#include "fflas-ffpack/utils/align-allocator.h"
#include <vector>
#include "givaro/givtypestring.h"
#include <fflas-ffpack/fflas/fflas_simd/simd_modular.inl>
```

### Data Structures

- struct [support\\_simd](#)< T >
- struct [is\\_simd](#)< T >
- struct [NoSimd](#)< T >

- struct [SimdChooser](#)< T, bool, bool >
- struct [SimdChooser](#)< T, false, b >
- struct [SimdChooser](#)< T, true, false >
- struct [SimdChooser](#)< T, true, true >

## Namespaces

- namespace [FFLAS](#)

## Macros

- `#define` [SIMD\\_INT](#) 1
- `#define` [INLINE](#) inline
- `#define` [CONST](#)
- `#define` [PURE](#)
- `#define` [NORML\\_MOD](#)(C, P, NEGP, MIN, MAX, Q, T)
- `#define` [FLOAT\\_MOD](#)(C, P, INVP, Q)

## Typedefs

- `template<class T >`  
using [Simd](#) = typename [SimdChooser](#)<T>::value

## 13.117.1 Macro Definition Documentation

### 13.117.1.1 SIMD\_INT

```
#define SIMD_INT 1
```

### 13.117.1.2 INLINE

```
#define INLINE inline
```

### 13.117.1.3 CONST

```
#define CONST
```

### 13.117.1.4 PURE

```
#define PURE
```

### 13.117.1.5 NORML\_MOD

```
#define NORML_MOD(
    C,
    P,
    NEGP,
    MIN,
    MAX,
    Q,
    T)

```

#### Value:

```
{
    \
    Q = greater(C, MAX);
    \
    T = lesser(C, MIN);
    \
    Q = vand(Q, NEGP);
    \
    T = vand(T, P);
    \
}
```

```

    Q = vor(Q, T);
    \
    C = add(C, Q);
    \
}

```

### 13.117.1.6 FLOAT\_MOD

```

#define FLOAT_MOD(
    C,
    P,
    INVP,
    Q)

```

**Value:**

```

{
    \
    Q = mul(C, INVP);
    \
    Q = floor(Q);
    \
    C = fnmadd(C, Q, P);
    \
}

```

## 13.117.2 Typedef Documentation

### 13.117.2.1 Simd

```

template<class T >
using Simd = typename SimdChooser<T>::value

```

## 13.118 simd.doxy File Reference

## 13.119 simd128.inl File Reference

```

#include "simd128_float.inl"
#include "simd128_double.inl"

```

### Data Structures

- struct [Simd128i\\_base](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fflas\\_ffpack\\_utils\\_simd128\\_INL](#)

### Typedefs

- template<class T >  
using [Simd128](#)

## 13.119.1 Macro Definition Documentation

### 13.119.1.1 \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd128\_INL

```

#define __FFLASFFPACK_fflas_ffpack_utils_simd128_INL

```

## 13.119.2 Typedef Documentation

### 13.119.2.1 Simd128

```

template<class T >
using Simd128

```

**Initial value:**

```
Simd128_impl<std::is_arithmetic<T>::value, std::is_integral<T>::value, std::is_signed<T>::value, sizeof(T)>
```

**13.120 simd128\_double.inl File Reference**

```
#include "givaro/givtypestring.h"
#include "fflas-ffpack/utils/align-allocator.h"
#include <vector>
#include <type_traits>
```

**Data Structures**

- struct [Simd128\\_impl< true, false, true, 8 >](#)

**Macros**

- [#define \\_\\_FFLASFFPACK\\_fflas\\_ffpack\\_utils\\_simd128\\_double\\_INL](#)

**13.120.1 Macro Definition Documentation****13.120.1.1 \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd128\_double\_INL**

```
#define __FFLASFFPACK_fflas_ffpack_utils_simd128_double_INL
```

**13.121 simd128\_float.inl File Reference**

```
#include "givaro/givtypestring.h"
#include "fflas-ffpack/utils/align-allocator.h"
#include <vector>
#include <type_traits>
```

**Data Structures**

- struct [Simd128\\_impl< true, false, true, 4 >](#)

**Macros**

- [#define \\_\\_FFLASFFPACK\\_fflas\\_ffpack\\_utils\\_simd128\\_float\\_INL](#)

**13.121.1 Macro Definition Documentation****13.121.1.1 \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd128\_float\_INL**

```
#define __FFLASFFPACK_fflas_ffpack_utils_simd128_float_INL
```

**13.122 simd128\_int16.inl File Reference**

```
#include "givaro/givtypestring.h"
#include "fflas-ffpack/utils/align-allocator.h"
#include <vector>
#include <type_traits>
```



**Data Structures**

- struct [Simd128\\_impl< true, true, true, 2 >](#)
- union [Simd128\\_impl< true, true, true, 2 >::Converter](#)
- struct [Simd128\\_impl< true, true, false, 2 >](#)
- union [Simd128\\_impl< true, true, false, 2 >::Converter](#)

**Macros**

- `#define __FFLASFFPACK_fflas_ffpack_utils_simd128_int16_INL`

**13.122.1 Macro Definition Documentation****13.122.1.1 \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd128\_int16\_INL**

```
#define __FFLASFFPACK_fflas_ffpack_utils_simd128_int16_INL
```

**13.123 simd128\_int32.inl File Reference**

```
#include "givaro/givtypestring.h"
#include "fflas-ffpack/utils/align-allocator.h"
#include <vector>
#include <type_traits>
```

**Data Structures**

- struct [Simd128\\_impl< true, true, true, 4 >](#)
- union [Simd128\\_impl< true, true, true, 4 >::Converter](#)
- struct [Simd128\\_impl< true, true, false, 4 >](#)
- union [Simd128\\_impl< true, true, false, 4 >::Converter](#)

**Macros**

- `#define __FFLASFFPACK_fflas_ffpack_utils_simd128_int32_INL`

**13.123.1 Macro Definition Documentation****13.123.1.1 \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd128\_int32\_INL**

```
#define __FFLASFFPACK_fflas_ffpack_utils_simd128_int32_INL
```

**13.124 simd128\_int64.inl File Reference**

```
#include "givaro/givtypestring.h"
#include "fflas-ffpack/utils/align-allocator.h"
#include "fflas-ffpack/utils/bit_manipulation.h"
#include <vector>
#include <type_traits>
```

**Data Structures**

- struct [Simd128\\_impl< true, true, true, 8 >](#)
- union [Simd128\\_impl< true, true, true, 8 >::Converter](#)
- struct [Simd128\\_impl< true, true, false, 8 >](#)
- union [Simd128\\_impl< true, true, false, 8 >::Converter](#)

**Macros**

- `#define __FFLASFFPACK_fflas_ffpack_utils_simd128_int64_INL`
- `#define vect_t Simd128_impl<true,true,true,8>::vect_t`

**13.124.1 Macro Definition Documentation****13.124.1.1 \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd128\_int64\_INL**

```
#define __FFLASFFPACK_fflas_ffpack_utils_simd128_int64_INL
```

**13.124.1.2 vect\_t**

```
#define vect_t Simd128_impl<true,true,true,8>::vect_t
```

**13.125 simd256.inl File Reference**

```
#include "simd256_float.inl"
#include "simd256_double.inl"
```

**Data Structures**

- struct [Simd256fp\\_base](#)
- struct [Simd256i\\_base](#)

**Macros**

- `#define __FFLASFFPACK_fflas_ffpack_utils_simd256_INL`

**Typedefs**

- `template<class T >`  
`using Simd256`

**13.125.1 Macro Definition Documentation****13.125.1.1 \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd256\_INL**

```
#define __FFLASFFPACK_fflas_ffpack_utils_simd256_INL
```

**13.125.2 Typedef Documentation****13.125.2.1 Simd256**

```
template<class T >
using Simd256
```

**Initial value:**

```
Simd256\_impl<std::is_arithmetic<T>::value, std::is_integral<T>::value, std::is_signed<T>::value, sizeof(T)>
```

**13.126 simd256\_double.inl File Reference**

```
#include "givaro/givtypestring.h"
#include "fflas-ffpack/utils/align-allocator.h"
#include <vector>
#include <type_traits>
```

**Data Structures**

- struct [Simd256\\_impl< true, false, true, 8 >](#)
- union [Simd256\\_impl< true, false, true, 8 >::Converter](#)

**Macros**

- `#define __FFLASFFPACK_fflas_ffpack_utils_simd256_double_INL`

**13.126.1 Macro Definition Documentation****13.126.1.1 \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd256\_double\_INL**

```
#define __FFLASFFPACK_fflas_ffpack_utils_simd256_double_INL
```

**13.127 simd256\_float.inl File Reference**

```
#include "givaro/givtypestring.h"
#include "fflas-ffpack/utils/align-allocator.h"
#include <vector>
#include <type_traits>
```

**Data Structures**

- struct [Simd256\\_impl< true, false, true, 4 >](#)

**Macros**

- `#define __FFLASFFPACK_fflas_ffpack_utils_simd256_float_INL`

**13.127.1 Macro Definition Documentation****13.127.1.1 \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd256\_float\_INL**

```
#define __FFLASFFPACK_fflas_ffpack_utils_simd256_float_INL
```

**13.128 simd256\_int16.inl File Reference**

```
#include "givaro/givtypestring.h"
#include "fflas-ffpack/utils/align-allocator.h"
#include <vector>
#include <type_traits>
```

**Data Structures**

- struct [Simd256\\_impl< true, true, true, 2 >](#)
- union [Simd256\\_impl< true, true, true, 2 >::Converter](#)
- struct [Simd256\\_impl< true, true, false, 2 >](#)
- union [Simd256\\_impl< true, true, false, 2 >::Converter](#)

**Macros**

- `#define __FFLASFFPACK_fflas_ffpack_utils_simd256_int16_INL`

### 13.128.1 Macro Definition Documentation

#### 13.128.1.1 \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd256\_int16\_INL

```
#define __FFLASFFPACK_fflas_ffpack_utils_simd256_int16_INL
```

### 13.129 simd256\_int32.inl File Reference

```
#include "givaro/givtypestring.h"
#include "fflas-ffpack/utils/align-allocator.h"
#include <vector>
#include <type_traits>
```

#### Data Structures

- struct [Simd256\\_impl< true, true, true, 4 >](#)
- union [Simd256\\_impl< true, true, true, 4 >::Converter](#)
- struct [Simd256\\_impl< true, true, false, 4 >](#)
- union [Simd256\\_impl< true, true, false, 4 >::Converter](#)

#### Macros

- #define [\\_\\_FFLASFFPACK\\_fflas\\_ffpack\\_utils\\_simd256\\_int32\\_INL](#)

### 13.129.1 Macro Definition Documentation

#### 13.129.1.1 \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd256\_int32\_INL

```
#define __FFLASFFPACK_fflas_ffpack_utils_simd256_int32_INL
```

### 13.130 simd256\_int64.inl File Reference

```
#include "givaro/givtypestring.h"
#include "fflas-ffpack/utils/align-allocator.h"
#include "fflas-ffpack/utils/bit_manipulation.h"
#include <vector>
#include <type_traits>
```

#### Data Structures

- struct [Simd256\\_impl< true, true, true, 8 >](#)
- union [Simd256\\_impl< true, true, true, 8 >::Converter](#)
- struct [Simd256\\_impl< true, true, false, 8 >](#)
- union [Simd256\\_impl< true, true, false, 8 >::Converter](#)

#### Macros

- #define [\\_\\_FFLASFFPACK\\_fflas\\_ffpack\\_utils\\_simd256\\_int64\\_INL](#)
- #define [vect\\_t Simd256\\_impl<true, true, true, 8>::vect\\_t](#)

### 13.130.1 Macro Definition Documentation

#### 13.130.1.1 \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd256\_int64\_INL

```
#define __FFLASFFPACK_fflas_ffpack_utils_simd256_int64_INL
```

### 13.130.1.2 vect\_t

```
#define vect_t Simd256_impl<true, true, true, 8>::vect_t
```

## 13.131 simd512.inl File Reference

```
#include "simd512_float.inl"
#include "simd512_double.inl"
#include "simd512_int64.inl"
```

### Data Structures

- struct [Simd512i\\_base](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_simd512\\_INL](#)

### Typedefs

- template<class T >  
using [Simd512](#)

## 13.131.1 Macro Definition Documentation

### 13.131.1.1 \_\_FFLASFFPACK\_simd512\_INL

```
#define __FFLASFFPACK_simd512_INL
```

## 13.131.2 Typedef Documentation

### 13.131.2.1 Simd512

```
template<class T >
using Simd512
```

#### Initial value:

```
Simd512\_impl<std::is_arithmetic<T>::value, std::is_integral<T>::value, std::is_signed<T>::value, sizeof(T)>
```

## 13.132 simd512\_double.inl File Reference

```
#include "givaro/givtypestring.h"
#include "fflas-ffpack/utils/align-allocator.h"
#include <vector>
#include <type_traits>
```

### Data Structures

- struct [Simd512\\_impl](#)< true, false, true, 8 >

### Macros

- #define [\\_\\_FFLASFFPACK\\_simd512\\_double\\_INL](#)

### 13.132.1 Macro Definition Documentation

#### 13.132.1.1 \_\_FFLASFFPACK\_simd512\_double\_INL

```
#define __FFLASFFPACK_simd512_double_INL
```

### 13.133 simd512\_float.inl File Reference

```
#include "givaro/givtypestring.h"
#include "fflas-ffpack/utils/align-allocator.h"
#include <vector>
#include <type_traits>
```

#### Data Structures

- struct [Simd512\\_impl< true, false, true, 4 >](#)

#### Macros

- #define [\\_\\_FFLASFFPACK\\_simd512\\_float\\_INL](#)

### 13.133.1 Macro Definition Documentation

#### 13.133.1.1 \_\_FFLASFFPACK\_simd512\_float\_INL

```
#define __FFLASFFPACK_simd512_float_INL
```

### 13.134 simd512\_int32.inl File Reference

```
#include "fflas-ffpack/fflas/fflas_simd/simd512_int64.inl"
#include "givaro/givtypestring.h"
#include "fflas-ffpack/utils/align-allocator.h"
#include <vector>
#include <type_traits>
```

#### Data Structures

- struct [Simd256\\_impl< true, true, true, 4 >](#)
- union [Simd256\\_impl< true, true, true, 4 >::Converter](#)
- struct [Simd256\\_impl< true, true, false, 4 >](#)
- union [Simd256\\_impl< true, true, false, 4 >::Converter](#)

#### Macros

- #define [\\_\\_FFLASFFPACK\\_simd512\\_int32\\_INL](#)

### 13.134.1 Macro Definition Documentation

#### 13.134.1.1 \_\_FFLASFFPACK\_simd512\_int32\_INL

```
#define __FFLASFFPACK_simd512_int32_INL
```

## 13.135 simd512\_int64.inl File Reference

```
#include "givaro/givtypestring.h"
#include "fflas-ffpack/utils/align-allocator.h"
#include "fflas-ffpack/utils/bit_manipulation.h"
#include <vector>
#include <type_traits>
```

### Data Structures

- struct [Simd512\\_impl< true, true, true, 8 >](#)
- union [Simd512\\_impl< true, true, true, 8 >::Converter](#)
- struct [Simd512\\_impl< true, true, false, 8 >](#)
- union [Simd512\\_impl< true, true, false, 8 >::Converter](#)

### Macros

- [#define \\_simd512\\_int64\\_INL](#)
- [#define vect\\_t Simd512\\_impl<true, true, true, 8>::vect\\_t](#)

### 13.135.1 Macro Definition Documentation

#### 13.135.1.1 \_simd512\_int64\_INL

```
#define _simd512_int64_INL
```

#### 13.135.1.2 vect\_t

```
#define vect_t Simd512_impl<true, true, true, 8>::vect_t
```

## 13.136 simd\_modular.inl File Reference

### Data Structures

- class [FieldSimd< \\_Field >](#)

## 13.137 fflas\_sparse.h File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "fflas-ffpack/config.h"
#include "fflas-ffpack/config-blas.h"
#include "fflas-ffpack/paladin/parallel.h"
#include <recint/recint.h>
#include <givaro/udl.h>
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/field/field-traits.h"
#include "fflas-ffpack/fflas/fflas_bounds.inl"
#include "fflas-ffpack/utils/fflas_memory.h"
#include <type_traits>
#include <vector>
#include <iostream>
#include "fflas-ffpack/fflas/fflas_sparse/sparse_matrix_traits.h"
#include "fflas-ffpack/fflas/fflas_sparse/utils.h"
#include "fflas-ffpack/fflas/fflas_sparse/csr.h"
#include "fflas-ffpack/fflas/fflas_sparse/coo.h"
#include "fflas-ffpack/fflas/fflas_sparse/ell.h"
#include "fflas-ffpack/fflas/fflas_sparse/sell.h"
```

```
#include "fflas-ffpack/fflas/fflas_sparse/csr_hyb.h"
#include "fflas-ffpack/fflas/fflas_sparse/ell_simd.h"
#include "fflas-ffpack/fflas/fflas_sparse/hyb_zo.h"
#include "fflas-ffpack/fflas/fflas_sparse.inl"
#include "fflas-ffpack/fflas/fflas_sparse/read_sparse.h"
```

## Data Structures

- struct [HelperFlag](#)
- struct [CsrMat< Field >](#)
- struct [CooMat< Field >](#)
- struct [EllMat< Field >](#)
- struct [SpMat< Field, flag >](#)

## Namespaces

- namespace [MKL\\_CONFIG](#)
- namespace [FFLAS](#)
- namespace [FFLAS::sparse\\_details](#)

## Macros

- #define [index\\_t](#) uint32\_t
- #define [ROUND\\_DOWN](#)(x, s)
- #define [\\_\\_FFLASFFPACK\\_CACHE\\_LINE\\_SIZE](#) 64
- #define [assume\\_aligned](#)(pout, pin, v)
- #define [DENSE\\_THRESHOLD](#) 0.5

## Enumerations

- enum class [SparseMatrix\\_t](#) {  
[CSR](#) , [CSR\\_ZO](#) , [CSC](#) , [CSC\\_ZO](#) ,  
[COO](#) , [COO\\_ZO](#) , [ELL](#) , [ELL\\_ZO](#) ,  
[SELL](#) , [SELL\\_ZO](#) , [ELL\\_simd](#) , [ELL\\_simd\\_ZO](#) ,  
[CSR\\_HYB](#) , [HYB\\_ZO](#) }

## Functions

- template<class [Field](#) >  
void [init\\_y](#) (const [Field](#) &F, const size\_t m, const typename [Field::Element](#) b, typename [Field::Element\\_ptr](#) y)
- template<class [Field](#) >  
void [init\\_y](#) (const [Field](#) &F, const size\_t m, const size\_t n, const typename [Field::Element](#) b, typename [Field::Element\\_ptr](#) y, const int ldy)
- template<class [Field](#) , class SM , class FC , class MZO >  
std::enable\_if<!(std::is\_same< typenameElementTraits< typenameField::Element >::value, [ElementCategories::MachineFloat](#)>::value||std::is\_same< typenameElementTraits< typenameField::Element >::value, [ElementCategories::MachineIntTag](#)>::value)>::type [fspmv\\_dispatch](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, FC fc, MZO mzo)
- template<class [Field](#) , class SM , class FC , class MZO >  
std::enable\_if< std::is\_same< typenameElementTraits< typenameField::Element >::value, [ElementCategories::MachineFloat](#)>::value||std::is\_same< typenameElementTraits< typenameField::Element >::value, [ElementCategories::MachineIntTag](#)>::value >::type [fspmv\\_dispatch](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, FC fc, MZO mzo)
- template<class [Field](#) , class SM >  
void [fspmv](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, [FieldCategories::GenericTag](#), [NotZOSparseMatrix](#))



- `template<class Field , class SM >`  
`std::enable_if< !isSparseMatrixSimdFormat< Field, SM >::value >::type fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::UnparametricTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< isSparseMatrixSimdFormat< Field, SM >::value >::type fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::UnparametricTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< !isSparseMatrixSimdFormat< Field, SM >::value >::type fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::ModularTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< isSparseMatrixSimdFormat< Field, SM >::value >::type fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::ModularTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`void fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::GenericTag, ZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< !isSparseMatrixSimdFormat< Field, SM >::value >::type fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::UnparametricTag, ZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< isSparseMatrixSimdFormat< Field, SM >::value >::type fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::UnparametricTag, ZOSparseMatrix)`
- `template<class Field , class SM >`  
`void fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::ModularTag, std::true_type)`
- `template<class Field , class SM , class FCat , class MZO >`  
`std::enable_if< !(std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineFloat >::value) || std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineIntTag >::value) >::type fspmm_dispatch (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FCat, MZO)`
- `template<class Field , class SM , class FCat , class MZO >`  
`std::enable_if< std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineFloat >::value) || std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineIntTag >::value >::type fspmm_dispatch (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FCat, MZO)`
- `template<class Field , class SM >`  
`void fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::GenericTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< support_simd< typenameField::Element >::value >::type fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::UnparametricTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< !support_simd< typenameField::Element >::value >::type fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::UnparametricTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< support_simd< typenameField::Element >::value >::type fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::ModularTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< !support_simd< typenameField::Element >::value >::type fspmm (const Field &F, const SM`

- &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x, int ldx, typename [Field::Element\\_ptr](#) y, int ldy, [FieldCategories::ModularTag](#), [NotZOSparseMatrix](#))
- `template<class Field , class SM >`  
`void fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::GenericTag, ZOSparseMatrix)`
  - `template<class Field , class SM >`  
`std::enable_if< support\_simd< typenameField::Element >::value >::type fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::UnparametricTag, ZOSparseMatrix)`
  - `template<class Field , class SM >`  
`std::enable_if<!support\_simd< typenameField::Element >::value >::type fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::UnparametricTag, ZOSparseMatrix)`
  - `template<class Field , class SM >`  
`void fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::ModularTag, ZOSparseMatrix)`
  - `template<class Field , class SM , class FCat , class MZO >`  
`std::enable_if<!(std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineFloat >::value)||std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineIntTag >::value)>::type pfspmm\_dispatch (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FCat, MZO)`
  - `template<class Field , class SM , class FCat , class MZO >`  
`std::enable_if< std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineFloat >::value)||std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineIntTag >::value >::type pfspmm\_dispatch (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FCat, MZO)`
  - `template<class Field , class SM >`  
`void pfspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::GenericTag, NotZOSparseMatrix)`
  - `template<class Field , class SM >`  
`std::enable_if< support\_simd< typenameField::Element >::value >::type pfspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::UnparametricTag, NotZOSparseMatrix)`
  - `template<class Field , class SM >`  
`std::enable_if<!support\_simd< typenameField::Element >::value >::type pfspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::UnparametricTag, NotZOSparseMatrix)`
  - `template<class Field , class SM >`  
`std::enable_if< support\_simd< typenameField::Element >::value >::type pfspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::ModularTag, NotZOSparseMatrix)`
  - `template<class Field , class SM >`  
`std::enable_if<!support\_simd< typenameField::Element >::value >::type pfspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::ModularTag, NotZOSparseMatrix)`
  - `template<class Field , class SM >`  
`void pfspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::GenericTag, ZOSparseMatrix)`
  - `template<class Field , class SM >`  
`std::enable_if< support\_simd< typenameField::Element >::value >::type pfspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::UnparametricTag, ZOSparseMatrix)`
  - `template<class Field , class SM >`  
`std::enable_if<!support\_simd< typenameField::Element >::value >::type pfspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement\_ptr x, int ldx, typename Field::Element\_ptr y, int ldy, FieldCategories::UnparametricTag, ZOSparseMatrix)`

- template<class [Field](#) , class SM >  
void [pfspmm](#) (const [Field](#) &F, const SM &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x, int ldx, typename [Field::Element\\_ptr](#) y, int ldy, [FieldCategories::ModularTag](#), [ZOSparseMatrix](#))
- template<class [Field](#) , class SM >  
void [pfspmv](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, [FieldCategories::GenericTag](#), std::false\_type)
- template<class [Field](#) , class SM >  
void [pfspmv](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, [FieldCategories::UnparametricTag](#), std::false\_type)
- template<class [Field](#) , class SM >  
void [pfspmv](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, [FieldCategories::ModularTag](#), std::false\_type)
- template<class [Field](#) , class SM >  
void [pfspmv](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, [FieldCategories::GenericTag](#), std::true\_type)
- template<class [Field](#) , class SM >  
void [pfspmv](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, [FieldCategories::UnparametricTag](#), std::true\_type)
- template<class [Field](#) , class SM >  
void [pfspmv](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, [FieldCategories::ModularTag](#), std::true\_type)
- template<class [Field](#) , class SM >  
void [fspmv](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, const typename [Field::Element](#) &beta, typename [Field::Element\\_ptr](#) y)
- template<class [Field](#) , class SM >  
void [fspmm](#) (const [Field](#) &F, const SM &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x, int ldx, const typename [Field::Element](#) &beta, typename [Field::Element\\_ptr](#) y, int ldy)

## 13.137.1 Macro Definition Documentation

### 13.137.1.1 `index_t`

```
#define index_t uint32_t
```

### 13.137.1.2 `ROUND_DOWN`

```
#define ROUND_DOWN(  
    x,  
    s)
```

**Value:**

```
((x) & ~((s)-1))
```

### 13.137.1.3 `__FFLASFFPACK_CACHE_LINE_SIZE`

```
#define __FFLASFFPACK_CACHE_LINE_SIZE 64
```

### 13.137.1.4 `assume_aligned`

```
#define assume_aligned(  
    pout,  
    pin,  
    v)
```

**Value:**

```
decltype(pin) pout = pin;
```

### 13.137.1.5 `DENSE_THRESHOLD`

```
#define DENSE_THRESHOLD 0.5
```

## 13.138 fflas\_sparse.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::sparse\\_details](#)

### Macros

- `#define` [\\_\\_FFLASFFPACK\\_fflas\\_fflas\\_sparse\\_INL](#)

### Functions

- `template<class Field >`  
void [init\\_y](#) (const [Field](#) &F, const size\_t m, const typename [Field::Element](#) b, typename [Field::Element\\_ptr](#) y)
- `template<class Field >`  
void [init\\_y](#) (const [Field](#) &F, const size\_t m, const size\_t n, const typename [Field::Element](#) b, typename [Field::Element\\_ptr](#) y, const int ldy)
- `template<class Field , class SM , class FC , class MZO >`  
std::enable\_if<!std::is\_same< typenameElementTraits< typenameField::Element >::value, [ElementCategories::MachineFloat](#) >::value||std::is\_same< typenameElementTraits< typenameField::Element >::value, [ElementCategories::MachineIntTag](#) >::value>::type [fspmvp\\_dispatch](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, FC fc, MZO mzo)
- `template<class Field , class SM , class FC , class MZO >`  
std::enable\_if< std::is\_same< typenameElementTraits< typenameField::Element >::value, [ElementCategories::MachineFloat](#) >::value||std::is\_same< typenameElementTraits< typenameField::Element >::value, [ElementCategories::MachineIntTag](#) >::value >::type [fspmvp\\_dispatch](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, FC fc, MZO mzo)
- `template<class Field , class SM >`  
void [fspmvp](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, [FieldCategories::GenericTag](#), [NotZOSparseMatrix](#))
- `template<class Field , class SM >`  
std::enable\_if<[isSparseMatrixSimdFormat](#)< [Field](#), SM >::value >::type [fspmvp](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, [FieldCategories::UnparametricTag](#), [NotZOSparseMatrix](#))
- `template<class Field , class SM >`  
std::enable\_if< [isSparseMatrixSimdFormat](#)< [Field](#), SM >::value &&[support\\_simd](#)< typenameField::Element >::value >::type [fspmvp](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, [FieldCategories::UnparametricTag](#), [NotZOSparseMatrix](#))
- `template<class Field , class SM >`  
std::enable\_if<[isSparseMatrixSimdFormat](#)< [Field](#), SM >::value >::type [fspmvp](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, [FieldCategories::ModularTag](#), [NotZOSparseMatrix](#))
- `template<class Field , class SM >`  
std::enable\_if< [isSparseMatrixSimdFormat](#)< [Field](#), SM >::value &&[support\\_simd](#)< typenameField::Element >::value >::type [fspmvp](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, [FieldCategories::ModularTag](#), [NotZOSparseMatrix](#))
- `template<class Field , class SM >`  
void [fspmvp](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, [FieldCategories::GenericTag](#), [ZOSparseMatrix](#))
- `template<class Field , class SM >`  
std::enable\_if<[isSparseMatrixSimdFormat](#)< [Field](#), SM >::value >::type [fspmvp](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, [FieldCategories::UnparametricTag](#), [ZOSparseMatrix](#))
- `template<class Field , class SM >`  
std::enable\_if< [isSparseMatrixSimdFormat](#)< [Field](#), SM >::value &&[support\\_simd](#)< typenameField::Element >::value >::type [fspmvp](#) (const [Field](#) &F, const SM &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, [FieldCategories::UnparametricTag](#), [ZOSparseMatrix](#))

- `template<class Field , class SM >`  
`void fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::ModularTag, std::true_type)`
- `template<class Field , class SM , class FCat , class MZO >`  
`std::enable_if<!(std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineFloat >::value)||std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineIntTag >::value)>::type fspmm_dispatch (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FCat, MZO)`
- `template<class Field , class SM , class FCat , class MZO >`  
`std::enable_if< std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineFloat >::value)||std::is_same< typenameElementTraits< typenameField::Element >::value, ElementCategories::MachineIntTag >::value >::type fspmm_dispatch (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FCat, MZO)`
- `template<class Field , class SM >`  
`void fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::GenericTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< support_simd< typenameField::Element >::value >::type fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::UnparametricTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if<!support_simd< typenameField::Element >::value >::type fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::UnparametricTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< support_simd< typenameField::Element >::value >::type fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::ModularTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if<!support_simd< typenameField::Element >::value >::type fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::ModularTag, NotZOSparseMatrix)`
- `template<class Field , class SM >`  
`void fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::GenericTag, ZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if< support_simd< typenameField::Element >::value >::type fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::UnparametricTag, ZOSparseMatrix)`
- `template<class Field , class SM >`  
`std::enable_if<!support_simd< typenameField::Element >::value >::type fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::UnparametricTag, ZOSparseMatrix)`
- `template<class Field , class SM >`  
`void fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::ModularTag, ZOSparseMatrix)`
- `template<class Field , class SM >`  
`void fspmv (const Field &F, const SM &A, typename Field::ConstElement_ptr x, const typename Field::Element &beta, typename Field::Element_ptr y)`
- `template<class Field , class SM >`  
`void fspmm (const Field &F, const SM &A, size_t blockSize, typename Field::ConstElement_ptr x, int ldx, const typename Field::Element &beta, typename Field::Element_ptr y, int ldy)`

## 13.138.1 Macro Definition Documentation

### 13.138.1.1 \_\_FFLASFFPACK\_fflas\_fflas\_sparse\_INL

```
#define __FFLASFFPACK_fflas_fflas_sparse_INL
```

## 13.139 coo.h File Reference

```
#include "fflas-ffpack/fflas/fflas_sparse/coo/coo_utils.inl"
#include "fflas-ffpack/fflas/fflas_sparse/coo/coo_spmv.inl"
#include "fflas-ffpack/fflas/fflas_sparse/coo/coo_spmmm.inl"
```

### Data Structures

- struct [Sparse< \\_Field, SparseMatrix\\_t::COO >](#)
- struct [Sparse< \\_Field, SparseMatrix\\_t::COO\\_ZO >](#)

### Namespaces

- namespace [FFLAS](#)

### Functions

- template<class [Field](#) , class IndexT >  
void [sparse\\_init](#) (const [Field](#) &F, [Sparse< Field, SparseMatrix\\_t::COO >](#) &A, const IndexT \*row, const IndexT \*col, typename [Field::ConstElement\\_ptr](#) dat, uint64\_t rowdim, uint64\_t coldim, uint64\_t nnz)
- template<class [Field](#) , class IndexT >  
void [sparse\\_init](#) (const [Field](#) &F, [Sparse< Field, SparseMatrix\\_t::COO\\_ZO >](#) &A, const IndexT \*row, const IndexT \*col, typename [Field::ConstElement\\_ptr](#) dat, uint64\_t rowdim, uint64\_t coldim, uint64\_t nnz)
- template<class [Field](#) >  
void [sparse\\_delete](#) (const [Sparse< Field, SparseMatrix\\_t::COO >](#) &A)
- template<class [Field](#) >  
void [sparse\\_delete](#) (const [Sparse< Field, SparseMatrix\\_t::COO\\_ZO >](#) &A)

## 13.140 coo\_spmmm.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::sparse\\_details\\_impl](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fflas\\_sparse\\_coo\\_spmmm\\_INL](#)

### Functions

- template<class [Field](#) >  
void [fspmm](#) (const [Field](#) &F, const [Sparse< Field, SparseMatrix\\_t::COO >](#) &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x\_, int ldx, typename [Field::Element\\_ptr](#) y\_, int ldy, [FieldCategories::GenericTag](#))
- template<class [Field](#) >  
void [fspmm](#) (const [Field](#) &F, const [Sparse< Field, SparseMatrix\\_t::COO >](#) &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x\_, int ldx, typename [Field::Element\\_ptr](#) y\_, int ldy, [FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
void [fspmm](#) (const [Field](#) &F, const [Sparse< Field, SparseMatrix\\_t::COO >](#) &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x\_, int ldx, typename [Field::Element\\_ptr](#) y\_, int ldy, const int64\_t kmax)
- template<class [Field](#) >  
void [fspmm\\_simd\\_aligned](#) (const [Field](#) &F, const [Sparse< Field, SparseMatrix\\_t::COO >](#) &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x\_, int ldx, typename [Field::Element\\_ptr](#) y\_, int ldy, const int64\_t kmax)
- template<class [Field](#) >  
void [fspmm\\_simd\\_unaligned](#) (const [Field](#) &F, const [Sparse< Field, SparseMatrix\\_t::COO >](#) &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x\_, int ldx, typename [Field::Element\\_ptr](#) y\_, int ldy, const int64\_t kmax)



- `template<class Field >`  
`void fspmm_one (const Field &F, const Sparse< Field, SparseMatrix_t::COO_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmm_mone (const Field &F, const Sparse< Field, SparseMatrix_t::COO_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmm_one_simd_aligned (const Field &F, const Sparse< Field, SparseMatrix_t::COO_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_one_simd_unaligned (const Field &F, const Sparse< Field, SparseMatrix_t::COO_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_mone_simd_aligned (const Field &F, const Sparse< Field, SparseMatrix_t::COO_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_mone_simd_unaligned (const Field &F, const Sparse< Field, SparseMatrix_t::COO_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`

### 13.140.1 Macro Definition Documentation

#### 13.140.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_coo\_spmv\_INL

```
#define __FFLASFFPACK_fflas_sparse_coo_spmv_INL
```

## 13.141 coo\_spmv.inl File Reference

### Namespaces

- namespace `FFLAS`
- namespace `FFLAS::sparse_details_impl`

### Macros

- `#define __FFLASFFPACK_fflas_sparse_coo_spmv_INL`

### Functions

- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::COO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::COO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::COO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, const uint64_t kmax)`
- `template<class Field >`  
`void fspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::COO_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`

- `template<class Field >`  
`void fspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::COO_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::COO_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::COO_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`

### 13.141.1 Macro Definition Documentation

#### 13.141.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_coo\_spmv\_INL

```
#define __FFLASFFPACK_fflas_sparse_coo_spmv_INL
```

## 13.142 coo\_utils.inl File Reference

### Namespaces

- namespace [FFLAS](#)

### Macros

- `#define __FFLASFFPACK_fflas_sparse_coo_utils_INL`

### Functions

- `template<class Field >`  
`void sparse_delete (const Sparse< Field, SparseMatrix_t::COO > &A)`
- `template<class Field >`  
`void sparse_delete (const Sparse< Field, SparseMatrix_t::COO_ZO > &A)`
- `template<class Field, class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::COO > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class Field, class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::COO_ZO > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`

### 13.142.1 Macro Definition Documentation

#### 13.142.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_coo\_utils\_INL

```
#define __FFLASFFPACK_fflas_sparse_coo_utils_INL
```

## 13.143 csr.h File Reference

```
#include "fflas-ffpack/fflas/fflas_sparse/csr/csr_utils.inl"
#include "fflas-ffpack/fflas/fflas_sparse/csr/csr_spmv.inl"
#include "fflas-ffpack/fflas/fflas_sparse/csr/csr_spmv.inl"
```

### Data Structures

- struct [Sparse< \\_Field, SparseMatrix\\_t::CSR >](#)
- struct [Sparse< \\_Field, SparseMatrix\\_t::CSR\\_ZO >](#)



## Namespaces

- namespace [FFLAS](#)

## Functions

- template<class [Field](#) , class IndexT >  
void [sparse\\_init](#) (const [Field](#) &F, [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, const IndexT \*row, const IndexT \*col, typename [Field::ConstElement\\_ptr](#) dat, uint64\_t rowdim, uint64\_t coldim, uint64\_t nnz)
- template<class [Field](#) , class IndexT >  
void [sparse\\_init](#) (const [Field](#) &F, [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, const IndexT \*row, const IndexT \*col, typename [Field::ConstElement\\_ptr](#) dat, uint64\_t rowdim, uint64\_t coldim, uint64\_t nnz)
- template<class [Field](#) >  
void [sparse\\_delete](#) (const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A)
- template<class [Field](#) >  
void [sparse\\_delete](#) (const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A)

## 13.144 csr\_pspmm.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::sparse\\_details\\_impl](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fflas\\_sparse\\_CSR\\_pspmm\\_INL](#)

### Functions

- template<class [Field](#) >  
void [pfspmm](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x\_, int ldx, typename [Field::Element\\_ptr](#) y\_, int ldy, [FieldCategories::GenericTag](#))
- template<class [Field](#) >  
void [pfspmm](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x\_, int ldx, typename [Field::Element\\_ptr](#) y\_, int ldy, [FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
void [pfspmm](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x\_, int ldx, typename [Field::Element\\_ptr](#) y\_, int ldy, const int64\_t kmax)
- template<class [Field](#) >  
void [pfspmm\\_one](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x\_, int ldx, typename [Field::Element\\_ptr](#) y\_, int ldy, [FieldCategories::GenericTag](#))
- template<class [Field](#) >  
void [pfspmm\\_mone](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x\_, int ldx, typename [Field::Element\\_ptr](#) y\_, int ldy, [FieldCategories::GenericTag](#))
- template<class [Field](#) >  
void [pfspmm\\_one](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x\_, int ldx, typename [Field::Element\\_ptr](#) y\_, int ldy, [FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
void [pfspmm\\_mone](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x\_, int ldx, typename [Field::Element\\_ptr](#) y\_, int ldy, [FieldCategories::UnparametricTag](#))

### 13.144.1 Macro Definition Documentation

#### 13.144.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_pspmm\_INL

```
#define __FFLASFFPACK_fflas_sparse_CSR_pspmm_INL
```

## 13.145 csr\_pspmv.inl File Reference

```
#include <thread>
```

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::sparse\\_details\\_impl](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fflas\\_sparse\\_CSR\\_pspmv\\_INL](#)

### Functions

- template<class [Field](#) >  
void [pfspmv](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::GenericTag](#))
- template<class [Field](#) >  
void [pfspmv\\_task](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, const [index\\_t](#) iStart, const [index\\_t](#) iStop, [FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
void [pfspmv](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
void [pfspmv](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, const [int64\\_t](#) kmax)
- template<class [Field](#) >  
void [pfspmv\\_one](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::GenericTag](#))
- template<class [Field](#) >  
void [pfspmv\\_mone](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::GenericTag](#))
- template<class [Field](#) >  
void [pfspmv\\_one](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
void [pfspmv\\_mone](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))

### 13.145.1 Macro Definition Documentation

#### 13.145.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_pspmv\_INL

```
#define __FFLASFFPACK_fflas_sparse_CSR_pspmv_INL
```

## 13.146 csr\_spmv.inl File Reference

### Namespaces

- namespace [FFLAS](#)

- namespace [FFLAS::sparse\\_details\\_impl](#)

## Macros

- `#define __FFLASFFPACK_fflas_sparse_CSR_spmml_INL`

## Functions

- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR > &A, index_t blockSize, typename Field::ConstElement_ptr x_, index_t ldx, typename Field::Element_ptr y_, index_t ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_simd_aligned (const Field &F, const Sparse< Field, SparseMatrix_t::CSR > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_simd_unaligned (const Field &F, const Sparse< Field, SparseMatrix_t::CSR > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, const int64_t kmax)`
- `template<class Field >`  
`void fspmm_one (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmm_mone (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmm_one_simd_aligned (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_one_simd_unaligned (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_mone_simd_aligned (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_mone_simd_unaligned (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`

## 13.146.1 Macro Definition Documentation

### 13.146.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_spmml\_INL

```
#define __FFLASFFPACK_fflas_sparse_CSR_spmml_INL
```

## 13.147 csr\_spmv.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::sparse\\_details\\_impl](#)

### Macros

- `#define` [\\_\\_FFLASFFPACK\\_fflas\\_sparse\\_CSR\\_spmv\\_INL](#)

### Functions

- `template<class Field >`  
void [fspmv](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::GenericTag](#))
- `template<class Field >`  
void [fspmv](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))
- `template<class Field >`  
void [fspmv](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, const int64\_t kmax)
- `template<class Field >`  
void [fspmv\\_one](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::GenericTag](#))
- `template<class Field >`  
void [fspmv\\_mone](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::GenericTag](#))
- `template<class Field >`  
void [fspmv\\_one](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))
- `template<class Field >`  
void [fspmv\\_mone](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))

### 13.147.1 Macro Definition Documentation

#### 13.147.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_spmv\_INL

```
#define __FFLASFFPACK_fflas_sparse_CSR_spmv_INL
```

## 13.148 csr\_utils.inl File Reference

### Namespaces

- namespace [FFLAS](#)

### Functions

- `template<class Field >`  
void [sparse\\_delete](#) (const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A)
- `template<class Field >`  
void [sparse\\_delete](#) (const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR\\_ZO](#) > &A)
- `template<class Field >`  
std::ostream & [sparse\\_print](#) (std::ostream &os, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::CSR](#) > &A)
- `template<class IndexT >`  
void [sparse\\_init](#) (const Givaro::Modular< Givaro::Integer > &F, [Sparse](#)< Givaro::Modular< Givaro::Integer >, [SparseMatrix\\_t::CSR](#) > &A, const IndexT \*row, const IndexT \*col, Givaro::Integer \*dat, uint64\_t rowdim, uint64\_t coldim, uint64\_t nnz)

- `template<class IndexT >`  
`void sparse_init (const Givaro::ZRing< Givaro::Integer > &F, Sparse< Givaro::ZRing< Givaro::Integer >, SparseMatrix_t::CSR_ZO > &A, const IndexT *row, const IndexT *col, Givaro::Integer *dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class IndexT, size_t RECINT_SIZE>`  
`void sparse_init (const Givaro::ZRing< RecInt::rmint< RECINT_SIZE > > &F, Sparse< Givaro::ZRing< RecInt::rmint< RECINT_SIZE > >, SparseMatrix_t::CSR_ZO > &A, const IndexT *row, const IndexT *col, typename Givaro::ZRing< RecInt::rmint< RECINT_SIZE > >::Element_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class IndexT, size_t RECINT_SIZE>`  
`void sparse_init (const Givaro::ZRing< RecInt::rmint< RECINT_SIZE > > &F, Sparse< Givaro::ZRing< RecInt::rmint< RECINT_SIZE > >, SparseMatrix_t::CSR > &A, const IndexT *row, const IndexT *col, typename Givaro::ZRing< RecInt::rmint< RECINT_SIZE > >::Element_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class Field, class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::CSR > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class Field, class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::CSR_ZO > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`

## 13.149 csr\_hyb.h File Reference

```
#include "fflas-ffpack/fflas/fflas_sparse/csr_hyb/csr_hyb_utils.inl"
#include "fflas-ffpack/fflas/fflas_sparse/csr_hyb/csr_hyb_spmv.inl"
#include "fflas-ffpack/fflas/fflas_sparse/csr_hyb/csr_hyb_spmmm.inl"
```

### Data Structures

- `struct Sparse< _Field, SparseMatrix_t::CSR_HYB >`

### Namespaces

- namespace `FFLAS`

### Functions

- `template<class Field >`  
`void sparse_delete (const Sparse< Field, SparseMatrix_t::CSR_HYB > &A)`
- `template<class Field, class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::CSR_HYB > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`

## 13.150 csr\_hyb\_pspmm.inl File Reference

### Namespaces

- namespace `FFLAS`
- namespace `FFLAS::sparse_details_impl`

### Macros

- `#define __FFLASFFPACK_fflas_sparse_CSR_HYB_pspmm_INL`

## Functions

- `template<class Field >`  
`void pfsppmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, size_t blockSize, type-`  
`name Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfsppmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, size_t blockSize, type-`  
`name Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfsppmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, size_t blockSize, type-`  
`name Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfsppmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, size_t blockSize, type-`  
`t blockSize, typename Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy,`  
`FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfsppmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, size_t blockSize, type-`  
`name Field::ConstElement_ptr x, typename Field::Element_ptr y, const int64_t kmax)`
- `template<class Field >`  
`void pfsppmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, size_t blockSize, type-`  
`name Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, const int64_t kmax)`

## 13.150.1 Macro Definition Documentation

### 13.150.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_HYB\_pspmm\_INL

```
#define __FFLASFFPACK_fflas_sparse_CSR_HYB_pspmm_INL
```

## 13.151 csr\_hyb\_pspmv.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::sparse\\_details\\_impl](#)

### Macros

- `#define` [\\_\\_FFLASFFPACK\\_fflas\\_sparse\\_CSR\\_HYB\\_pspmv\\_INL](#)

## Functions

- `template<class Field >`  
`void pfsppmv (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, typename`  
`Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfsppmv (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, typename`  
`Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfsppmv (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, typename`  
`Field::ConstElement_ptr x_, typename Field::Element_ptr y_, const int64_t kmax)`

## 13.151.1 Macro Definition Documentation

### 13.151.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_HYB\_pspmv\_INL

```
#define __FFLASFFPACK_fflas_sparse_CSR_HYB_pspmv_INL
```

## 13.152 csr\_hyb\_spmmm.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::sparse\\_details\\_impl](#)

### Macros

- `#define __FFLASFFPACK_fflas_sparse_CSR_HYB_spmmm_INL`

### Functions

- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, size_t blockSize, type-`  
`name Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, size_t blockSize, type-`  
`name Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, size_t blockSize, type-`  
`name Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, const int64_t kmax)`

### 13.152.1 Macro Definition Documentation

#### 13.152.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_HYB\_spmmm\_INL

```
#define __FFLASFFPACK_fflas_sparse_CSR_HYB_spmmm_INL
```

## 13.153 csr\_hyb\_spmv.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::sparse\\_details\\_impl](#)

### Macros

- `#define __FFLASFFPACK_fflas_sparse_CSR_HYB_spmv_INL`

### Functions

- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, typename`  
`Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, typename`  
`Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::CSR_HYB > &A, typename`  
`Field::ConstElement_ptr x_, typename Field::Element_ptr y_, const uint64_t kmax)`

### 13.153.1 Macro Definition Documentation

#### 13.153.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_HYB\_spmv\_INL

```
#define __FFLASFFPACK_fflas_sparse_CSR_HYB_spmv_INL
```

## 13.154 csr\_hyb\_utils.inl File Reference

### Data Structures

- struct [Info](#)
- struct [Coo< ValT, IdxT >](#)

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::csr\\_hyb\\_details](#)

### Macros

- `#define` [\\_\\_FFLASFFPACK\\_fflas\\_sparse\\_CSR\\_HYB\\_utils\\_INL](#)

### Functions

- `template<class Field >`  
void [sparse\\_delete](#) (const [Sparse< Field, SparseMatrix\\_t::CSR\\_HYB >](#) &A)
- `template<class Field , class IndexT >`  
void [sparse\\_init](#) (const [Field](#) &F, [Sparse< Field, SparseMatrix\\_t::CSR\\_HYB >](#) &A, const IndexT \*row, const IndexT \*col, typename [Field::ConstElement\\_ptr](#) dat, uint64\_t rowdim, uint64\_t coldim, uint64\_t nnz)

### 13.154.1 Macro Definition Documentation

#### 13.154.1.1 [\\_\\_FFLASFFPACK\\_fflas\\_sparse\\_CSR\\_HYB\\_utils\\_INL](#)

```
#define __FFLASFFPACK_fflas_sparse_CSR_HYB_utils_INL
```

## 13.155 ell.h File Reference

```
#include "fflas-ffpack/fflas/fflas_sparse/ell/ell_utils.inl"
#include "fflas-ffpack/fflas/fflas_sparse/ell/ell_spmv.inl"
#include "fflas-ffpack/fflas/fflas_sparse/ell/ell_spmv.inl"
```

### Data Structures

- struct [Sparse< \\_Field, SparseMatrix\\_t::ELL >](#)
- struct [Sparse< \\_Field, SparseMatrix\\_t::ELL\\_ZO >](#)

### Namespaces

- namespace [FFLAS](#)

### Functions

- `template<class Field , class IndexT >`  
void [sparse\\_init](#) (const [Field](#) &F, [Sparse< Field, SparseMatrix\\_t::ELL >](#) &A, const IndexT \*row, const IndexT \*col, typename [Field::ConstElement\\_ptr](#) dat, uint64\_t rowdim, uint64\_t coldim, uint64\_t nnz)
- `template<class Field , class IndexT >`  
void [sparse\\_init](#) (const [Field](#) &F, [Sparse< Field, SparseMatrix\\_t::ELL\\_ZO >](#) &A, const IndexT \*row, const IndexT \*col, typename [Field::ConstElement\\_ptr](#) dat, uint64\_t rowdim, uint64\_t coldim, uint64\_t nnz)
- `template<class Field >`  
void [sparse\\_delete](#) (const [Sparse< Field, SparseMatrix\\_t::ELL >](#) &A)
- `template<class Field >`  
void [sparse\\_delete](#) (const [Sparse< Field, SparseMatrix\\_t::ELL\\_ZO >](#) &A)



## 13.156 ell\_pspmm.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::sparse\\_details\\_impl](#)

### Macros

- `#define` [\\_\\_FFLASFFPACK\\_fflas\\_sparse\\_ELL\\_pspmm\\_INL](#)

### Functions

- `template<class Field >`  
void [pfspmm](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, [FieldCategories::GenericTag](#))
- `template<class Field >`  
void [pfspmm](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x, int ldx, typename [Field::Element\\_ptr](#) y, int ldy, [FieldCategories::GenericTag](#))
- `template<class Field >`  
void [pfspmm](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, [FieldCategories::UnparametricTag](#))
- `template<class Field >`  
void [pfspmm](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x, int ldx, typename [Field::Element\\_ptr](#) y, int ldy, [FieldCategories::UnparametricTag](#))
- `template<class Field >`  
void [pfspmm](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, const int64\_t kmax)
- `template<class Field >`  
void [pfspmm](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x, int ldx, typename [Field::Element\\_ptr](#) y, int ldy, const int64\_t kmax)
- `template<class Field , class Func >`  
void [pfspmm\\_zo](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_ZO](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, Func &&func)
- `template<class Field , class Func >`  
void [pfspmm\\_zo](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_ZO](#) > &A, size\_t blockSize, typename [Field::ConstElement\\_ptr](#) x, int ldx, typename [Field::Element\\_ptr](#) y, int ldy, Func &&func)

### 13.156.1 Macro Definition Documentation

#### 13.156.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_pspmm\_INL

```
#define __FFLASFFPACK_fflas_sparse_ELL_pspmm_INL
```

## 13.157 ell\_pspmv.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::sparse\\_details\\_impl](#)

### Macros

- `#define` [\\_\\_FFLASFFPACK\\_fflas\\_sparse\\_ELL\\_pspmv\\_INL](#)

## Functions

- `template<class Field >`  
`void pfspmv (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspmv (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfspmv (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, const int64_t kmax)`
- `template<class Field >`  
`void pfspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`

## 13.157.1 Macro Definition Documentation

### 13.157.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_pspmv\_INL

```
#define __FFLASFFPACK_fflas_sparse_ELL_pspmv_INL
```

## 13.158 ell\_spmv.inl File Reference

### Namespaces

- namespace `FFLAS`
- namespace `FFLAS::sparse_details_impl`

### Macros

- `#define __FFLASFFPACK_fflas_sparse_ELL_spmv_INL`

### Functions

- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, const int64_t kmax)`
- `template<class Field >`  
`void fspmm_mone (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::GenericTag)`

- `template<class Field >`  
`void fspmm_one (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmm_mone (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_one (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_one_simd_aligned (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_one_simd_unaligned (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_mone_simd_aligned (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm_mone_simd_unaligned (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, size_t blockSize, typename Field::ConstElement_ptr x_, int ldx, typename Field::Element_ptr y_, int ldy, FieldCategories::UnparametricTag)`

## 13.158.1 Macro Definition Documentation

### 13.158.1.1 \_\_FflasFfpack\_fflas\_sparse\_ELL\_spmv\_INL

```
#define __FflasFfpack_fflas_sparse_ELL_spmv_INL
```

## 13.159 ell\_spmv.inl File Reference

### Namespaces

- namespace `FFLAS`
- namespace `FFLAS::sparse_details_impl`

### Macros

- `#define __FflasFfpack_fflas_sparse_ELL_spmv_INL`

### Functions

- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::ELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, const uint64_t kmax)`

- `template<class Field >`  
`void fspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::ELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`

### 13.159.1 Macro Definition Documentation

#### 13.159.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_spmv\_INL

```
#define __FFLASFFPACK_fflas_sparse_ELL_spmv_INL
```

## 13.160 ell\_utils.inl File Reference

```
#include <vector>
```

### Namespaces

- namespace [FFLAS](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fflas\\_sparse\\_ELL\\_utils\\_INL](#)

### Functions

- `template<class Field >`  
`void sparse_delete (const Sparse< Field, SparseMatrix_t::ELL > &A)`
- `template<class Field >`  
`void sparse_delete (const Sparse< Field, SparseMatrix_t::ELL_ZO > &A)`
- `template<class Field, class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::ELL > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class Field, class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::ELL_ZO > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`

### 13.160.1 Macro Definition Documentation

#### 13.160.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_utils\_INL

```
#define __FFLASFFPACK_fflas_sparse_ELL_utils_INL
```

## 13.161 ell\_simd.h File Reference

```
#include "fflas-ffpack/fflas/fflas_sparse/ell_simd/ell_simd_utils.inl"
#include "fflas-ffpack/fflas/fflas_sparse/ell_simd/ell_simd_spmv.inl"
```

## Data Structures

- struct [Sparse](#)< [\\_Field](#), [SparseMatrix\\_t::ELL\\_simd](#) >
- struct [Sparse](#)< [\\_Field](#), [SparseMatrix\\_t::ELL\\_simd\\_ZO](#) >

## Namespaces

- namespace [FFLAS](#)

## Functions

- template<class [Field](#) , class [IndexT](#) >  
void [sparse\\_init](#) (const [Field](#) &F, [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd](#) > &A, const [IndexT](#) \*row, const [IndexT](#) \*col, typename [Field::ConstElement\\_ptr](#) dat, [uint64\\_t](#) rowdim, [uint64\\_t](#) coldim, [uint64\\_t](#) nnz)
- template<class [Field](#) , class [IndexT](#) >  
void [sparse\\_init](#) (const [Field](#) &F, [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd\\_ZO](#) > &A, const [IndexT](#) \*row, const [IndexT](#) \*col, typename [Field::ConstElement\\_ptr](#) dat, [uint64\\_t](#) rowdim, [uint64\\_t](#) coldim, [uint64\\_t](#) nnz)
- template<class [Field](#) >  
void [sparse\\_delete](#) (const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd](#) > &A)
- template<class [Field](#) >  
void [sparse\\_delete](#) (const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd\\_ZO](#) > &A)

# 13.162 ell\_simd\_pspmv.inl File Reference

## Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::sparse\\_details\\_impl](#)

## Macros

- #define [\\_\\_FFLASFFPACK\\_fflas\\_sparse\\_ELL\\_simd\\_pspmv\\_INL](#)

## Functions

- template<class [Field](#) >  
void [pfspmv](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::GenericTag](#))
- template<class [Field](#) >  
void [pfspmv](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
void [pfspmv](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, const [uint64\\_t](#) kmax)
- template<class [Field](#) >  
void [pfspmv\\_one](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::GenericTag](#))
- template<class [Field](#) >  
void [pfspmv\\_mone](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::GenericTag](#))
- template<class [Field](#) >  
void [pfspmv\\_one](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
void [pfspmv\\_mone](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))

## 13.162.1 Macro Definition Documentation

### 13.162.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_simd\_pspmv\_INL

```
#define __FFLASFFPACK_fflas_sparse_ELL_simd_pspmv_INL
```

## 13.163 ell\_simd\_spmv.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::sparse\\_details\\_impl](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fflas\\_sparse\\_ELL\\_simd\\_spmv\\_INL](#)

### Functions

- [template<class Field >](#)  
void [fspmv](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::GenericTag](#))
- [template<class Field >](#)  
void [fspmv\\_simd](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))
- [template<class Field >](#)  
void [fspmv](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))
- [template<class Field >](#)  
void [fspmv\\_simd](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, const uint64\_t kmax)
- [template<class Field >](#)  
void [fspmv](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, const uint64\_t kmax)
- [template<class Field >](#)  
void [fspmv\\_one](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::GenericTag](#))
- [template<class Field >](#)  
void [fspmv\\_mone](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::GenericTag](#))
- [template<class Field >](#)  
void [fspmv\\_one](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))
- [template<class Field >](#)  
void [fspmv\\_mone](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))
- [template<class Field >](#)  
void [fspmv\\_one\\_simd](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))
- [template<class Field >](#)  
void [fspmv\\_mone\\_simd](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::ELL\\_simd\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))

## 13.163.1 Macro Definition Documentation

### 13.163.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_simd\_spmv\_INL

```
#define __FFLASFFPACK_fflas_sparse_ELL_simd_spmv_INL
```

## 13.164 ell\_simd\_utils.inl File Reference

### Namespaces

- namespace [FFLAS](#)

### Macros

- `#define __FFLASFFPACK_fflas_sparse_ELL_simd_utils_INL`

### Functions

- `template<class Field >`  
`void sparse_delete (const Sparse< Field, SparseMatrix_t::ELL_simd > &A)`
- `template<class Field >`  
`void sparse_delete (const Sparse< Field, SparseMatrix_t::ELL_simd_ZO > &A)`
- `template<class Field >`  
`void sparse_print (const Sparse< Field, SparseMatrix_t::ELL_simd > &A)`
- `template<class Field , class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::ELL_simd > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`
- `template<class Field , class IndexT >`  
`void sparse_init (const Field &F, Sparse< Field, SparseMatrix_t::ELL_simd_ZO > &A, const IndexT *row, const IndexT *col, typename Field::ConstElement_ptr dat, uint64_t rowdim, uint64_t coldim, uint64_t nnz)`

### 13.164.1 Macro Definition Documentation

#### 13.164.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_simd\_utils\_INL

```
#define __FFLASFFPACK_fflas_sparse_ELL_simd_utils_INL
```

## 13.165 hyb\_zo.h File Reference

```
#include "fflas-ffpack/fflas/fflas_sparse/hyb_zo/hyb_zo_utils.inl"
#include "fflas-ffpack/fflas/fflas_sparse/hyb_zo/hyb_zo_spmv.inl"
#include "fflas-ffpack/fflas/fflas_sparse/hyb_zo/hyb_zo_spmv.inl"
```

### Data Structures

- struct `Sparse< _Field, SparseMatrix_t::HYB_ZO >`

### Namespaces

- namespace [FFLAS](#)

## 13.166 hyb\_zo\_pspmm.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::sparse\\_details\\_impl](#)

### Macros

- `#define __FFLASFFPACK_fflas_sparse_HYB_ZO_pspmm_INL`

## Functions

- `template<class Field >`  
`void pfsppmm (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, size_t blockSize, type-`  
`name Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfsppmm (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, size_t blockSize, type-`  
`name Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfsppmm (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, size_t blockSize, type-`  
`name Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, uint64_t kmax)`

## 13.166.1 Macro Definition Documentation

### 13.166.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_HYB\_ZO\_pspmm\_INL

```
#define __FFLASFFPACK_fflas_sparse_HYB_ZO_pspmm_INL
```

## 13.167 hyb\_zo\_pspmv.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::sparse\\_details\\_impl](#)

### Macros

- `#define __FFLASFFPACK_fflas_sparse_HYB_ZO_pspmv_INL`

## Functions

- `template<class Field >`  
`void pfsppmv (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, typename`  
`Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfsppmv (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, typename`  
`Field::ConstElement_ptr x, typename Field::Element_ptr y, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfsppmv (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, typename`  
`Field::ConstElement_ptr x, typename Field::Element_ptr y, uint64_t kmax)`

## 13.167.1 Macro Definition Documentation

### 13.167.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_HYB\_ZO\_pspmv\_INL

```
#define __FFLASFFPACK_fflas_sparse_HYB_ZO_pspmv_INL
```

## 13.168 hyb\_zo\_spmv.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::sparse\\_details\\_impl](#)

### Macros

- `#define __FFLASFFPACK_fflas_sparse_HYB_ZO_spmv_INL`



## Functions

- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, size_t blockSize, type-`  
`name Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, size_t blockSize, type-`  
`name Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmm (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, size_t blockSize, type-`  
`name Field::ConstElement_ptr x, int ldx, typename Field::Element_ptr y, int ldy, uint64_t kmax)`

## 13.168.1 Macro Definition Documentation

### 13.168.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_HYB\_ZO\_spmv\_INL

```
#define __FFLASFFPACK_fflas_sparse_HYB_ZO_spmv_INL
```

## 13.169 hyb\_zo\_spmv.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::sparse\\_details\\_impl](#)

### Macros

- `#define __FFLASFFPACK_fflas_sparse_HYB_ZO_spmv_INL`

## Functions

- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, typename Field::ConstElement_ptr`  
`x, typename Field::Element_ptr y, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, typename Field::ConstElement_ptr`  
`x, typename Field::Element_ptr y, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::HYB_ZO > &A, typename Field::ConstElement_ptr`  
`x, typename Field::Element_ptr y, uint64_t kmax)`

## 13.169.1 Macro Definition Documentation

### 13.169.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_HYB\_ZO\_spmv\_INL

```
#define __FFLASFFPACK_fflas_sparse_HYB_ZO_spmv_INL
```

## 13.170 hyb\_zo\_utils.inl File Reference

### Namespaces

- namespace [FFLAS](#)

### Macros

- `#define __FFLASFFPACK_fflas_sparse_HYB_ZO_utils_INL`

## Functions

- template<class [Field](#) >  
void [sparse\\_delete](#) (const [Sparse](#)< [Field](#), [SparseMatrix\\_t::HYB\\_ZO](#) > &A)
- template<class [Field](#) , class [IndexT](#) >  
void [sparse\\_init](#) (const [Field](#) &F, [Sparse](#)< [Field](#), [SparseMatrix\\_t::HYB\\_ZO](#) > &A, const [IndexT](#) \*row, const [IndexT](#) \*col, typename [Field::ConstElement\\_ptr](#) dat, [uint64\\_t](#) rowdim, [uint64\\_t](#) coldim, [uint64\\_t](#) nnz)
- template<typename [\\_Field](#) >  
std::ostream & [operator<<](#) (std::ostream &os, const [Sparse](#)< [\\_Field](#), [SparseMatrix\\_t::HYB\\_ZO](#) > &A)

## 13.170.1 Macro Definition Documentation

### 13.170.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_HYB\_ZO\_utils\_INL

```
#define __FFLASFFPACK_fflas_sparse_HYB_ZO_utils_INL
```

## 13.171 read\_sparse.h File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <fstream>
#include <string>
#include <cstdlib>
#include <iterator>
```

## Data Structures

- struct [Coo](#)< [Field](#) >
- struct [readMyMachineType](#)< [Field](#), [T](#) >
- struct [readMyMachineType](#)< [Field](#), [mpz\\_t](#) >

## Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::details\\_spmv](#)

## Macros

- #define [DNS\\_BIN\\_VER](#) 0
- #define [mask\\_t](#) [uint64\\_t](#)

## Functions

- template<class [Field](#) , bool sorted = true, bool read\_integer = false>  
void [readSmsFormat](#) (const std::string &path, const [Field](#) &f, [index\\_t](#) \*&row, [index\\_t](#) \*&col, typename [Field::Element\\_ptr](#) &val, [index\\_t](#) &rowdim, [index\\_t](#) &coldim, [uint64\\_t](#) &nnz)
- template<class [Field](#) >  
void [readSprFormat](#) (const std::string &path, const [Field](#) &f, [index\\_t](#) \*&row, [index\\_t](#) \*&col, typename [Field::Element\\_ptr](#) &val, [index\\_t](#) &rowdim, [index\\_t](#) &coldim, [uint64\\_t](#) &nnz)
- template<class [T](#) >  
std::enable\_if< std::is\_integral< [T](#) >::value, int > [getDataType](#) ()
- template<class [T](#) >  
std::enable\_if< std::is\_floating\_point< [T](#) >::value, int > [getDataType](#) ()
- template<class [T](#) >  
std::enable\_if< std::is\_same< [T](#), [mpz\\_t](#) >::value, int > [getDataType](#) ()
- template<class [T](#) >  
int [getDataType](#) ()

- template<class [Field](#) >  
void [readMachineType](#) (const [Field](#) &F, typename [Field::Element](#) &modulo, typename [Field::Element\\_ptr](#) val, std::ifstream &file, const uint64\_t dims, const [mask\\_t](#) data\_type, const [mask\\_t](#) field\_desc)
- template<class [Field](#) >  
void [readDnsFormat](#) (const std::string &path, const [Field](#) &F, [index\\_t](#) &rowdim, [index\\_t](#) &coldim, typename [Field::Element\\_ptr](#) &val)
- template<class [Field](#) >  
void [writeDnsFormat](#) (const std::string &path, const [Field](#) &F, const [index\\_t](#) &rowdim, const [index\\_t](#) &coldim, typename [Field::Element\\_ptr](#) A, [index\\_t](#) IdA)

### 13.171.1 Macro Definition Documentation

#### 13.171.1.1 DNS\_BIN\_VER

```
#define DNS_BIN_VER 0
```

#### 13.171.1.2 mask\_t

```
#define mask_t uint64_t
```

## 13.172 sell.h File Reference

```
#include "fflas-ffpack/fflas/fflas_sparse/sell/sell_utils.inl"
#include "fflas-ffpack/fflas/fflas_sparse/sell/sell_spmv.inl"
```

### Data Structures

- struct [Sparse](#)< [\\_Field](#), [SparseMatrix\\_t::SELL](#) >
- struct [Sparse](#)< [\\_Field](#), [SparseMatrix\\_t::SELL\\_ZO](#) >

### Namespaces

- namespace [FFLAS](#)

## 13.173 sell\_pspmv.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::sparse\\_details\\_impl](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fflas\\_sparse\\_sell\\_pspmv\\_INL](#)

### Functions

- template<class [Field](#) >  
void [pfspmv](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::SELL](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::GenericTag](#))
- template<class [Field](#) >  
void [pfspmv](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::SELL](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
void [pfspmv](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::SELL](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, const int64\_t kmax)

- `template<class Field >`  
`void pfspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::SELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::SELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void pfspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::SELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void pfspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::SELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`

### 13.173.1 Macro Definition Documentation

#### 13.173.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_sell\_pspmv\_INL

```
#define __FFLASFFPACK_fflas_sparse_sell_pspmv_INL
```

## 13.174 sell\_spmv.inl File Reference

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::sparse\\_details\\_impl](#)

### Macros

- `#define __FFLASFFPACK_fflas_sparse_sell_spmv_INL`

### Functions

- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::SELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv_simd (const Field &F, const Sparse< Field, SparseMatrix_t::SELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::SELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`
- `template<class Field >`  
`void fspmv_simd (const Field &F, const Sparse< Field, SparseMatrix_t::SELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, const uint64_t kmax)`
- `template<class Field >`  
`void fspmv (const Field &F, const Sparse< Field, SparseMatrix_t::SELL > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, const uint64_t kmax)`
- `template<class Field >`  
`void fspmv_one (const Field &F, const Sparse< Field, SparseMatrix_t::SELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv_mone (const Field &F, const Sparse< Field, SparseMatrix_t::SELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::GenericTag)`
- `template<class Field >`  
`void fspmv_one_simd (const Field &F, const Sparse< Field, SparseMatrix_t::SELL_ZO > &A, typename Field::ConstElement_ptr x_, typename Field::Element_ptr y_, FieldCategories::UnparametricTag)`

- template<class [Field](#) >  
void [fspmv\\_mone\\_simd](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::SELL\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
void [fspmv\\_one](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::SELL\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))
- template<class [Field](#) >  
void [fspmv\\_mone](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::SELL\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x\_, typename [Field::Element\\_ptr](#) y\_, [FieldCategories::UnparametricTag](#))

### 13.174.1 Macro Definition Documentation

#### 13.174.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_sell\_spmv\_INL

```
#define __FFLASFFPACK_fflas_sparse_sell_spmv_INL
```

## 13.175 sell\_utils.inl File Reference

### Data Structures

- struct [Info](#)
- struct [Coo](#)< [ValT](#), [IdxT](#) >

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::sell\\_details](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_fflas\\_sparse\\_sell\\_utils\\_INL](#)

### Functions

- template<class [Field](#) >  
void [fspmv](#) (const [Field](#) &F, const [Sparse](#)< [Field](#), [SparseMatrix\\_t::SELL\\_ZO](#) > &A, typename [Field::ConstElement\\_ptr](#) x, typename [Field::Element\\_ptr](#) y, [FieldCategories::ModularTag](#))
- template<class [Field](#) >  
void [sparse\\_delete](#) (const [Sparse](#)< [Field](#), [SparseMatrix\\_t::SELL](#) > &A)
- template<class [Field](#) >  
void [sparse\\_delete](#) (const [Sparse](#)< [Field](#), [SparseMatrix\\_t::SELL\\_ZO](#) > &A)
- template<class [Field](#) >  
void [sparse\\_print](#) (const [Sparse](#)< [Field](#), [SparseMatrix\\_t::SELL](#) > &A)
- template<class [Field](#) , class [IndexT](#) >  
void [sparse\\_init](#) (const [Field](#) &F, [Sparse](#)< [Field](#), [SparseMatrix\\_t::SELL](#) > &A, const [IndexT](#) \*row, const [IndexT](#) \*col, typename [Field::ConstElement\\_ptr](#) dat, [uint64\\_t](#) rowdim, [uint64\\_t](#) coldim, [uint64\\_t](#) nnz, [uint64\\_t](#) sigma=0)
- template<class [Field](#) , class [IndexT](#) >  
void [sparse\\_init](#) (const [Field](#) &F, [Sparse](#)< [Field](#), [SparseMatrix\\_t::SELL\\_ZO](#) > &A, const [IndexT](#) \*row, const [IndexT](#) \*col, typename [Field::ConstElement\\_ptr](#) dat, [uint64\\_t](#) rowdim, [uint64\\_t](#) coldim, [uint64\\_t](#) nnz)

### 13.175.1 Macro Definition Documentation

#### 13.175.1.1 \_\_FFLASFFPACK\_fflas\_sparse\_sell\_utils\_INL

```
#define __FFLASFFPACK_fflas_sparse_sell_utils_INL
```

## 13.176 `sparse_matrix_traits.h` File Reference

```
#include <type_traits>
```

### Data Structures

- struct [isSparseMatrix](#)< Field, M >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::CSR > >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::CSR\_ZO > >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::COO > >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::COO\_ZO > >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::ELL > >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::ELL\_ZO > >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::SELL > >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::SELL\_ZO > >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::ELL\_simd > >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::ELL\_simd\_ZO > >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::CSR\_HYB > >
- struct [isSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::HYB\_ZO > >
- struct [isZOSparseMatrix](#)< F, M >
- struct [isZOSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::CSR\_ZO > >
- struct [isZOSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::COO\_ZO > >
- struct [isZOSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::ELL\_ZO > >
- struct [isZOSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::SELL\_ZO > >
- struct [isZOSparseMatrix](#)< Field, Sparse< Field, SparseMatrix\_t::ELL\_simd\_ZO > >
- struct [isSparseMatrixSimdFormat](#)< F, M >
- struct [isSparseMatrixMKLFormat](#)< F, M >
- struct [tfn\\_plus](#)
- struct [tfn\\_mul](#)
- struct [tfn\\_mul\\_eq](#)
- struct [tfn\\_minus](#)
- struct [tfn\\_plus\\_eq](#)
- struct [tfn\\_minus\\_eq](#)
- struct [has\\_plus\\_impl](#)< C >
- struct [has\\_mul\\_impl](#)< C >
- struct [has\\_mul\\_eq\\_impl](#)< C >
- struct [has\\_plus\\_eq\\_impl](#)< C >
- struct [has\\_minus\\_eq\\_impl](#)< C >
- struct [has\\_minus\\_impl](#)< C >
- struct [has\\_operation](#)< T >

### Namespaces

- namespace [FFLAS](#)

### Typedefs

- using [ZOSparseMatrix](#) = std::true\_type
- using [NotZOSparseMatrix](#) = std::false\_type
- using [SimdSparseMatrix](#) = std::true\_type
- using [NoSimdSparseMatrix](#) = std::false\_type
- using [MKLSparseMatrixFormat](#) = std::true\_type
- using [NotMKLSparseMatrixFormat](#) = std::false\_type
- template<class T >  
using [has\\_plus](#) = typename std::conditional<std::is\_arithmetic<T>::value, std::true\_type, [has\\_plus\\_impl](#)<T>>::type

- `template<class T >`  
using `has_minus` = `typename std::conditional<std::is_arithmetic<T>::value, std::true_type, has_minus_impl<T>>::type`
- `template<class T >`  
using `has_equal` = `typename std::conditional<std::is_arithmetic<T>::value, std::true_type, std::is_copy_assignable<T>>::type`
- `template<class T >`  
using `has_plus_eq` = `typename std::conditional<std::is_arithmetic<T>::value, std::true_type, has_plus_eq_impl<T>>::type`
- `template<class T >`  
using `has_minus_eq` = `typename std::conditional<std::is_arithmetic<T>::value, std::true_type, has_minus_eq_impl<T>>::type`
- `template<class T >`  
using `has_mul` = `typename std::conditional<std::is_arithmetic<T>::value, std::true_type, has_mul_impl<T>>::type`
- `template<class T >`  
using `has_mul_eq` = `typename std::conditional<std::is_arithmetic<T>::value, std::true_type, has_mul_eq_impl<T>>::type`

## 13.177 utils.h File Reference

```
#include <algorithm>
#include <numeric>
#include <vector>
```

### Data Structures

- struct [StatsMatrix](#)

### Namespaces

- namespace [FFLAS](#)

### Functions

- `template<class It >`  
`double computeDeviation` (`It begin`, `It end`)
- `template<class Field >`  
`StatsMatrix getStat` (`const Field &F`, `const index_t *row`, `const index_t *col`, `typename Field::ConstElement_ptr val`, `uint64_t rowdim`, `uint64_t coldim`, `uint64_t nnz`)

## 13.178 fflas\_transpose.h File Reference

transpose the storage of the matrix (switch between row and col major mode)

```
#include "fflas-ffpack/utils/debug.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/fflas_memory.h"
#include "fflas-ffpack/fflas/fflas_simd.h"
```

### Data Structures

- struct [BlockTransposeSIMD< Field, Simd, >](#)

## Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::\\_ftranspose\\_impl](#)

## Macros

- `#define FFLAS_TRANSPOSE_BLOCKSIZE 32`
- `#define LD(i)`
- `#define ST(i)`

## Functions

- `template<size_t bs, typename Field, typename BTSimd >`  
`void not_inplace (const Field &F, const BTSimd &BTS, const size_t m, const size_t n, typename Field::ConstElement_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb)`
- `template<size_t bs, typename Field, typename BTSimd >`  
`void square_inplace (const Field &F, const BTSimd &BTS, const size_t m, typename Field::Element_ptr A, const size_t lda)`
- `template<size_t bs, typename Field, typename BTSimd >`  
`void nonsquare_inplace_v1 (const Field &F, const BTSimd &BTS, const size_t m, const size_t n, typename Field::Element_ptr A)`
- `template<size_t bs, typename Field, typename BTSimd >`  
`void nonsquare_inplace_v2 (const Field &F, const BTSimd &BTS, const size_t m, const size_t n, typename Field::Element_ptr A)`

### 13.178.1 Detailed Description

transpose the storage of the matrix (switch between row and col major mode)

### 13.178.2 Macro Definition Documentation

#### 13.178.2.1 FFLAS\_TRANSPOSE\_BLOCKSIZE

```
#define FFLAS_TRANSPOSE_BLOCKSIZE 32
```

#### 13.178.2.2 LD

```
#define LD(  
    i)
```

##### Value:

```
R##i=Simd::loadu(A+lda*i)
```

#### 13.178.2.3 ST

```
#define ST(  
    i)
```

##### Value:

```
Simd::storeu(B+ldb*i,R##i)
```

## 13.179 ffpack.dox File Reference

## 13.180 ffpack.h File Reference

Set of elimination based routines for dense linear algebra.

```
#include "givaro/givpoly1.h"  
#include <fflas-ffpack/fflas-ffpack-config.h>  
#include "fflas-ffpack/fflas/fflas.h"  
#include "fflas-ffpack/fflas/fflas_helpers.inl"
```



```

#include <list>
#include <vector>
#include <iostream>
#include <algorithm>
#include "fflas-ffpack/checkers/checkers_ffpack.h"
#include "ffpack_fgesv.inl"
#include "ffpack_fgetrs.inl"
#include "fflas-ffpack/checkers/checkers_ffpack.inl"
#include "ffpack_pluq.inl"
#include "ffpack_pluq_mp.inl"
#include "ffpack_ppluq.inl"
#include "ffpack_ludivine.inl"
#include "ffpack_ludivine_mp.inl"
#include "ffpack_echelonforms.inl"
#include "ffpack_fsytrf.inl"
#include "ffpack_invert.inl"
#include "ffpack_ftrtr.inl"
#include "ffpack_ftrstr.inl"
#include "ffpack_ftrssyr2k.inl"
#include "ffpack_charpoly_kglu.inl"
#include "ffpack_charpoly_kgfast.inl"
#include "ffpack_charpoly_kgfastgeneralized.inl"
#include "ffpack_charpoly_danilevski.inl"
#include "ffpack_charpoly.inl"
#include "ffpack_frobenius.inl"
#include "ffpack_minpoly.inl"
#include "ffpack_krylovelim.inl"
#include "ffpack_permutation.inl"
#include "ffpack_rankprofiles.inl"
#include "ffpack_det_mp.inl"
#include "ffpack_bruhatgen.inl"
#include "ffpack.inl"

```

## Data Structures

- class [CharpolyFailed](#)

## Namespaces

- namespace [FFPACK](#)  
*Finite Field PACK Set of elimination based routines for dense linear algebra.*
- namespace [FFPACK::Protected](#)

## Macros

- `#define` [\\_\\_FFLASFFPACK\\_FTRSTR\\_THRESHOLD](#) 64
- `#define` [\\_\\_FFLASFFPACK\\_FTRSSYR2K\\_THRESHOLD](#) 64

## Functions

- void [LAPACKPerm2MathPerm](#) (size\_t \*MathP, const size\_t \*LapackP, const size\_t N)  
*Conversion of a permutation from LAPACK format to Math format.*
- void [MathPerm2LAPACKPerm](#) (size\_t \*LapackP, const size\_t \*MathP, const size\_t N)  
*Conversion of a permutation from Maths format to LAPACK format.*
- template<class [Field](#) >  
void [applyP](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const [FFLAS::FFLAS\\_TRANSPOSE](#) Trans,

const size\_t M, const size\_t ibeg, const size\_t iend, typename Field::Element\_ptr A, const size\_t lda, const size\_t \*P)

*Computes  $P1 \times Diag(I_R, P2)$  where  $P1$  is a LAPACK and  $P2$  a LAPACK permutation and store the result in  $P1$  as a LAPACK permutation.*

- template<class Field >  
void applyP (const Field &F, const FFLAS::FFLAS\_SIDE Side, const FFLAS::FFLAS\_TRANSPOSE Trans, const size\_t m, const size\_t ibeg, const size\_t iend, typename Field::Element\_ptr A, const size\_t lda, const size\_t \*P, const FFLAS::ParSeqHelper::Sequential seq)
  - template<class Field , class Cut , class Param >  
void applyP (const Field &F, const FFLAS::FFLAS\_SIDE Side, const FFLAS::FFLAS\_TRANSPOSE Trans, const size\_t m, const size\_t ibeg, const size\_t iend, typename Field::Element\_ptr A, const size\_t lda, const size\_t \*P, const FFLAS::ParSeqHelper::Parallel< Cut, Param > par)
  - template<class Field >  
void MonotonicApplyP (const Field &F, const FFLAS::FFLAS\_SIDE Side, const FFLAS::FFLAS\_TRANSPOSE Trans, const size\_t M, const size\_t ibeg, const size\_t iend, typename Field::Element\_ptr A, const size\_t lda, const size\_t \*P, const size\_t R)
- Apply a R-monotonically increasing permutation P, to the matrix A.*
- template<class Field >  
void fgetrs (const Field &F, const FFLAS::FFLAS\_SIDE Side, const size\_t M, const size\_t N, const size\_t R, typename Field::Element\_ptr A, const size\_t lda, const size\_t \*P, const size\_t \*Q, typename Field::Element\_ptr B, const size\_t ldb, int \*info)
- Solve the system  $AX = B$  or  $XA = B$ .*
- template<class Field >  
Field::Element\_ptr fgetrs (const Field &F, const FFLAS::FFLAS\_SIDE Side, const size\_t M, const size\_t N, const size\_t NRHS, const size\_t R, typename Field::Element\_ptr A, const size\_t lda, const size\_t \*P, const size\_t \*Q, typename Field::Element\_ptr X, const size\_t ldx, typename Field::ConstElement\_ptr B, const size\_t ldb, int \*info)
- Solve the system  $A X = B$  or  $X A = B$ .*
- template<class Field >  
size\_t fgesv (const Field &F, const FFLAS::FFLAS\_SIDE Side, const size\_t M, const size\_t N, typename Field::Element\_ptr A, const size\_t lda, typename Field::Element\_ptr B, const size\_t ldb, int \*info)
- Square system solver.*
- template<class Field >  
size\_t fgesv (const Field &F, const FFLAS::FFLAS\_SIDE Side, const size\_t M, const size\_t N, const size\_t NRHS, typename Field::Element\_ptr A, const size\_t lda, typename Field::Element\_ptr X, const size\_t ldx, typename Field::ConstElement\_ptr B, const size\_t ldb, int \*info)
- Rectangular system solver.*
- template<class Field >  
void ftrtri (const Field &F, const FFLAS::FFLAS\_UPLO Uplo, const FFLAS::FFLAS\_DIAG Diag, const size\_t N, typename Field::Element\_ptr A, const size\_t lda, const size\_t threshold=\_\_FFLASFFPACK\_FTRTRI\_THRESHOLD)
- Compute the inverse of a triangular matrix.*
- template<class Field >  
void trinv\_left (const Field &F, const size\_t N, typename Field::ConstElement\_ptr L, const size\_t ldl, typename Field::Element\_ptr X, const size\_t ldx)
  - template<class Field >  
void ftrtrm (const Field &F, const FFLAS::FFLAS\_SIDE side, const FFLAS::FFLAS\_DIAG diag, const size\_t N, typename Field::Element\_ptr A, const size\_t lda)
- Compute the product of two triangular matrices of opposite shape.*
- template<class Field >  
void ftrstr (const Field &F, const FFLAS::FFLAS\_SIDE side, const FFLAS::FFLAS\_UPLO Uplo, const FFLAS::FFLAS\_DIAG diagA, const FFLAS::FFLAS\_DIAG diagB, const size\_t N, typename Field::ConstElement\_ptr A, const size\_t lda, typename Field::Element\_ptr B, const size\_t ldb, const size\_t threshold=\_\_FFLASFFPACK\_FTRSTR\_THRESHOLD)
- Solve a triangular system with a triangular right hand side of the same shape.*

- `template<class Field >`  
`void ftrssyr2k (const Field &F, const FFLAS::FFLAS_UPLO Uplo, const FFLAS::FFLAS_DIAG diagA, const size_t N, typename Field::ConstElement_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb, const size_t threshold=__FFLASFFPACK_FTRSSYR2K_THRESHOLD)`  
*Solve a triangular system in a symmetric sum: find B upper/lower triangular such that  $A^T B + B^T A = C$  where C is symmetric.*
- `template<class Field >`  
`bool fsytrf (const Field &F, const FFLAS::FFLAS_UPLO UpLo, const size_t N, typename Field::Element_ptr A, const size_t lda, const size_t threshold=__FFLASFFPACK_FSYTRF_THRESHOLD)`  
*Triangular factorization of symmetric matrices.*
- `template<class Field >`  
`bool fsytrf (const Field &F, const FFLAS::FFLAS_UPLO UpLo, const size_t N, typename Field::Element_ptr A, const size_t lda, const FFLAS::ParSeqHelper::Sequential seq, const size_t threshold=__FFLASFFPACK_FSYTRF_THRESHOLD)`
- `template<class Field , class Cut , class Param >`  
`bool fsytrf (const Field &F, const FFLAS::FFLAS_UPLO UpLo, const size_t N, typename Field::Element_ptr A, const size_t lda, const FFLAS::ParSeqHelper::Parallel< Cut, Param > par, const size_t threshold=__FFLASFFPACK_FSYTRF_THRESHOLD)`
- `template<class Field >`  
`bool fsytrf_nonunit (const Field &F, const FFLAS::FFLAS_UPLO UpLo, const size_t N, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr D, const size_t incD, const size_t threshold=__FFLASFFPACK_FSYTRF_THRESHOLD)`  
*Triangular factorization of symmetric matrices.*
- `template<class Field >`  
`size_t PLUQ (const Field &F, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Q)`  
*Compute a PLUQ factorization of the given matrix.*
- `template<class Field >`  
`size_t pPLUQ (const Field &F, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Q)`
- `template<class Field >`  
`size_t PLUQ (const Field &F, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Q, const FFLAS::ParSeqHelper::Sequential &PHelper, size_t BCThreshold=__FFLASFFPACK_PLUQ_THRESHOLD)`
- `template<class Field , class Cut , class Param >`  
`size_t PLUQ (const Field &F, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Q, const FFLAS::ParSeqHelper::Parallel< Cut, Param > &PHelper)`
- `template<class Field >`  
`size_t LUdivine (const Field &F, const FFLAS::FFLAS_DIAG Diag, const FFLAS::FFLAS_TRANSPOSE trans, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Qt, const FFPACK_LU_TAG LuTag=FpackSlabRecursive, const size_t cutoff=__FFLASFFPACK_LUDIVINE_THRESHOLD)`  
*Compute the CUP or PLE factorization of the given matrix.*
- `template<class Field >`  
`size_t LUdivine_construct (const Field &F, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, typename Field::ConstElement_ptr A, const size_t lda, typename Field::Element_ptr X, const size_t ldx, typename Field::Element_ptr u, const size_t incu, size_t *P, bool computeX, const FFPACK_MINPOLY_TAG MinTag=FpackDense, const size_t kg_mc=0, const size_t kg_mb=0, const size_t kg_j=0)`
- `template<class Field >`  
`size_t ColumnEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Qt, bool transform=false, const FFPACK_LU_TAG LuTag=FpackSlabRecursive)`  
*Compute the Column Echelon form of the input matrix in-place.*
- `template<class Field >`  
`size_t pColumnEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Qt, bool transform=false, size_t numthreads=0, const FFPACK_LU_TAG LuTag=FpackTileRecursive)`

- `template<class Field , class PSHelper >`  
`size_t ColumnEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A,`  
`const size_t lda, size_t *P, size_t *Qt, const bool transform, const FFPACK_LU_TAG LuTag, const PSHelper`  
`&psH)`
- `template<class Field >`  
`size_t RowEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr`  
`A, const size_t lda, size_t *P, size_t *Qt, const bool transform=false, const FFPACK_LU_TAG LuTag=`  
`FfpackSlabRecursive)`  
*Compute the Row Echelon form of the input matrix in-place.*
- `template<class Field >`  
`size_t pRowEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A,`  
`const size_t lda, size_t *P, size_t *Qt, const bool transform=false, size_t numthreads=0, const FFPACK_`  
`LU_TAG LuTag=FfpackTileRecursive)`
- `template<class Field , class PSHelper >`  
`size_t RowEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A,`  
`const size_t lda, size_t *P, size_t *Qt, const bool transform, const FFPACK_LU_TAG LuTag, const PSHelper`  
`&psH)`
- `template<class Field >`  
`size_t ReducedColumnEchelonForm (const Field &F, const size_t M, const size_t N, typename`  
`Field::Element_ptr A, const size_t lda, size_t *P, size_t *Qt, const bool transform=false, const FFPACK_`  
`LU_TAG LuTag=FfpackSlabRecursive)`  
*Compute the Reduced Column Echelon form of the input matrix in-place.*
- `template<class Field >`  
`size_t pReducedColumnEchelonForm (const Field &F, const size_t M, const size_t N, typename`  
`Field::Element_ptr A, const size_t lda, size_t *P, size_t *Qt, const bool transform=false, size_t numthreads=0,`  
`const FFPACK_LU_TAG LuTag=FfpackTileRecursive)`
- `template<class Field , class PSHelper >`  
`size_t ReducedColumnEchelonForm (const Field &F, const size_t M, const size_t N, typename`  
`Field::Element_ptr A, const size_t lda, size_t *P, size_t *Qt, const bool transform, const FFPACK_LU_`  
`_TAG LuTag, const PSHelper &psH)`
- `template<class Field >`  
`size_t ReducedRowEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr`  
`A, const size_t lda, size_t *P, size_t *Qt, const bool transform=false, const FFPACK_LU_TAG LuTag=`  
`FfpackSlabRecursive)`  
*Compute the Reduced Row Echelon form of the input matrix in-place.*
- `template<class Field >`  
`size_t pReducedRowEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr`  
`A, const size_t lda, size_t *P, size_t *Qt, const bool transform=false, size_t numthreads=0, const FFPACK_`  
`_LU_TAG LuTag=FfpackTileRecursive)`
- `template<class Field , class PSHelper >`  
`size_t ReducedRowEchelonForm (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr`  
`A, const size_t lda, size_t *P, size_t *Qt, const bool transform, const FFPACK_LU_TAG LuTag, const`  
`PSHelper &psH)`
- `template<class Field >`  
`size_t GaussJordan (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const`  
`size_t lda, const size_t colbeg, const size_t rowbeg, const size_t colsize, size_t *P, size_t *Q, const`  
`FFPACK::FFPACK_LU_TAG LuTag)`  
*Gauss-Jordan algorithm computing the Reduced Row echelon form and its transform matrix.*
- `template<class Field >`  
`Field::Element_ptr Invert (const Field &F, const size_t M, typename Field::Element_ptr A, const size_t lda, int`  
`&nullity)`  
*Invert the given matrix in place or computes its nullity if it is singular.*
- `template<class Field >`  
`Field::Element_ptr Invert (const Field &F, const size_t M, typename Field::ConstElement_ptr A, const size_t`  
`lda, typename Field::Element_ptr X, const size_t idx, int &nullity)`  
*Invert the given matrix or computes its nullity if it is singular.*

- `template<class Field >`  
`Field::Element_ptr Invert2` (const `Field` &F, const `size_t` M, typename `Field::Element_ptr` A, const `size_t` Ida, typename `Field::Element_ptr` X, const `size_t` Idx, int &nullity)  
*Invert the given matrix or computes its nullity if it is singular.*
- `template<class PolRing >`  
`std::list< typename PolRing::Element > & CharPoly` (const `PolRing` &R, `std::list< typename PolRing::Element > &charp`, const `size_t` N, typename `PolRing::Domain_t::Element_ptr` A, const `size_t` Ida, typename `PolRing::Domain_t::Randlter` &G, const `FFPACK_CHARPOLY_TAG` CharpTag=`FfpackAuto`, const `size_t` degree=`__FFLASFFPACK_ARITHPROG_THRESHOLD`)  
*Compute the characteristic polynomial of the matrix A.*
- `template<class PolRing >`  
`PolRing::Element & CharPoly` (const `PolRing` &R, typename `PolRing::Element` &charp, const `size_t` N, typename `PolRing::Domain_t::Element_ptr` A, const `size_t` Ida, typename `PolRing::Domain_t::Randlter` &G, const `FFPACK_CHARPOLY_TAG` CharpTag=`FfpackAuto`, const `size_t` degree=`__FFLASFFPACK_ARITHPROG_THRESHOLD`)  
*Compute the characteristic polynomial of the matrix A.*
- `template<class PolRing >`  
`PolRing::Element & CharPoly` (const `PolRing` &R, typename `PolRing::Element` &charp, const `size_t` N, typename `PolRing::Domain_t::Element_ptr` A, const `size_t` Ida, const `FFPACK_CHARPOLY_TAG` CharpTag=`FfpackAuto`, const `size_t` degree=`__FFLASFFPACK_ARITHPROG_THRESHOLD`)  
*Compute the characteristic polynomial of the matrix A.*
- `template<class Field , class Polynomial >`  
`std::list< Polynomial > & KellerGehrig` (const `Field` &F, `std::list< Polynomial > &charp`, const `size_t` N, typename `Field::ConstElement_ptr` A, const `size_t` Ida)
- `template<class Field , class Polynomial >`  
`int KGFast` (const `Field` &F, `std::list< Polynomial > &charp`, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` Ida, `size_t` \*kg\_mc, `size_t` \*kg\_mb, `size_t` \*kg\_j)
- `template<class Field , class Polynomial >`  
`std::list< Polynomial > & KGFast_generalized` (const `Field` &F, `std::list< Polynomial > &charp`, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` Ida)
- `template<class Field >`  
`void fgemv_kgf` (const `Field` &F, const `size_t` N, typename `Field::ConstElement_ptr` A, const `size_t` Ida, typename `Field::ConstElement_ptr` X, const `size_t` incX, typename `Field::Element_ptr` Y, const `size_t` incY, const `size_t` kg\_mc, const `size_t` kg\_mb, const `size_t` kg\_j)
- `template<class Field , class Polynomial , class Randlter >`  
`std::list< Polynomial > & LUKrylov` (const `Field` &F, `std::list< Polynomial > &charp`, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` Ida, typename `Field::Element_ptr` U, const `size_t` ldu, `Randlter` &G)
- `template<class Field , class Polynomial >`  
`std::list< Polynomial > & Danilevski` (const `Field` &F, `std::list< Polynomial > &charp`, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` Ida)
- `template<class PolRing >`  
`void RandomKrylovPrecond` (const `PolRing` &PR, `std::list< typename PolRing::Element > &completedFactors`, const `size_t` N, typename `PolRing::Domain_t::Element_ptr` A, const `size_t` Ida, `size_t` &Nb, typename `PolRing::Domain_t::Element_ptr` &B, `size_t` &ldb, typename `PolRing::Domain_t::Randlter` &g, const `size_t` degree=`__FFLASFFPACK_ARITHPROG_THRESHOLD`)
- `template<class PolRing >`  
`std::list< typename PolRing::Element > & ArithProg` (const `PolRing` &PR, `std::list< typename PolRing::Element > &frobeniusForm`, const `size_t` N, typename `PolRing::Domain_t::Element_ptr` A, const `size_t` Ida, const `size_t` degree)
- `template<class Field , class Polynomial >`  
`std::list< Polynomial > & LUKrylov_KGFast` (const `Field` &F, `std::list< Polynomial > &charp`, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` Ida, typename `Field::Element_ptr` X, const `size_t` Idx)
- `template<class Field , class Polynomial >`  
`Polynomial & MinPoly` (const `Field` &F, `Polynomial` &minP, const `size_t` N, typename `Field::ConstElement_ptr` A, const `size_t` Ida)  
*Compute the minimal polynomial of the matrix A.*

- template<class [Field](#) , class Polynomial , class RandIter >  
Polynomial & [MinPoly](#) (const [Field](#) &F, Polynomial &minP, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, RandIter &G)  
*Compute the minimal polynomial of the matrix A.*
- template<class [Field](#) , class Polynomial >  
Polynomial & [MatVecMinPoly](#) (const [Field](#) &F, Polynomial &minP, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) v, const size\_t incv)  
*Compute the minimal polynomial of the matrix A and a vector v, namely the first linear dependency relation in the Krylov basis  $(v, Av, \dots, A^N v)$ .*
- template<class [Field](#) , class Polynomial >  
Polynomial & [MatVecMinPoly](#) (const [Field](#) &F, Polynomial &minP, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) v, const size\_t incv, typename [Field::Element\\_ptr](#) K, const size\_t ldk, size\_t \*P)  
*Compute the minimal polynomial of the matrix A and a vector v, namely the first linear dependency relation in the Krylov basis  $(v, Av, \dots, A^N v)$ .*
- template<class [Field](#) , class Polynomial >  
Polynomial & [Hybrid\\_KGF\\_LUK\\_MinPoly](#) (const [Field](#) &F, Polynomial &minP, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) X, const size\_t ldx, size\_t \*P, const FFPACK\_MINPOLY\_TAG MinTag=FFPACK::FfpackDense, const size\_t kg\_mc=0, const size\_t kg\_↔ mb=0, const size\_t kg\_j=0)
- template<class [Field](#) >  
size\_t [Rank](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
*Computes the rank of the given matrix using a PLUQ factorization.*
- template<class [Field](#) >  
size\_t [pRank](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t numthreads=0)
- template<class [Field](#) , class PSHelper >  
size\_t [Rank](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, const PSHelper &psH)
- template<class [Field](#) >  
bool [IsSingular](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
*Returns true if the given matrix is singular.*
- template<class [Field](#) >  
[Field::Element](#) & [Det](#) (const [Field](#) &F, typename [Field::Element](#) &det, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*P=NULL, size\_t \*Q=NULL)  
*Returns the determinant of the given square matrix.*
- template<class [Field](#) >  
[Field::Element](#) & [pDet](#) (const [Field](#) &F, typename [Field::Element](#) &det, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t numthreads=0, size\_t \*P=NULL, size\_t \*Q=NULL)
- template<class [Field](#) , class PSHelper >  
[Field::Element](#) & [Det](#) (const [Field](#) &F, typename [Field::Element](#) &det, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, const PSHelper &psH, size\_t \*P=NULL, size\_t \*Q=NULL)
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [Solve](#) (const [Field](#) &F, const size\_t M, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) x, const int incx, typename [Field::ConstElement\\_ptr](#) b, const int incb)  
*Solves a linear system  $AX = b$  using PLUQ factorization.*
- template<class [Field](#) , class PSHelper >  
[Field::Element\\_ptr](#) [Solve](#) (const [Field](#) &F, const size\_t M, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) x, const int incx, typename [Field::ConstElement\\_ptr](#) b, const int incb, PSHelper &psH)
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [pSolve](#) (const [Field](#) &F, const size\_t M, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) x, const int incx, typename [Field::ConstElement\\_ptr](#) b, const int incb, size\_t numthreads=0)
- template<class [Field](#) >  
\*void [RandomNullSpaceVector](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) X, const size\_t incX)



*Solve  $LX = B$  or  $XL = B$  in place.*

- template<class [Field](#) >  
size\_t [NullSpaceBasis](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) &NS, size\_t &ldn, size\_t &NSdim)

*Computes a basis of the Left/Right nullspace of the matrix A.*

- template<class [Field](#) >  
size\_t [RowRankProfile](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*rkprofile, const FFPACK\_LU\_TAG LuTag=[FfpackSlabRecursive](#))

*Computes the row rank profile of A.*

- template<class [Field](#) >  
size\_t [pRowRankProfile](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*rkprofile, size\_t numthreads=0, const FFPACK\_LU\_TAG LuTag=[FfpackTileRecursive](#))
- template<class [Field](#), class PSHelper >  
size\_t [RowRankProfile](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*rkprofile, const FFPACK\_LU\_TAG LuTag, PSHelper &psH)
- template<class [Field](#) >  
size\_t [ColumnRankProfile](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*rkprofile, const FFPACK\_LU\_TAG LuTag=[FfpackSlabRecursive](#))

*Computes the column rank profile of A.*

- template<class [Field](#) >  
size\_t [pColumnRankProfile](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*rkprofile, size\_t numthreads=0, const FFPACK\_LU\_TAG LuTag=[FfpackTileRecursive](#))
- template<class [Field](#), class PSHelper >  
size\_t [ColumnRankProfile](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*rkprofile, const FFPACK\_LU\_TAG LuTag, PSHelper &psH)
- void [RankProfileFromLU](#) (const size\_t \*P, const size\_t N, const size\_t R, size\_t \*rkprofile, const FFPACK\_LU\_TAG LuTag)

*Recovers the column/row rank profile from the permutation of an LU decomposition.*

- size\_t [LeadingSubmatrixRankProfiles](#) (const size\_t M, const size\_t N, const size\_t R, const size\_t LSm, const size\_t LSn, const size\_t \*P, const size\_t \*Q, size\_t \*RRP, size\_t \*CRP)

*Recovers the row and column rank profiles of any leading submatrix from the PLUQ decomposition.*

- template<class [Field](#) >  
size\_t [RowRankProfileSubmatrixIndices](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*&rowindices, size\_t \*&colindices, size\_t &R)

*RowRankProfileSubmatrixIndices.*

- template<class [Field](#) >  
size\_t [ColRankProfileSubmatrixIndices](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*&rowindices, size\_t \*&colindices, size\_t &R)

*Computes the indices of the submatrix  $r \times r$  X of A whose columns correspond to the column rank profile of A.*

- template<class [Field](#) >  
size\_t [RowRankProfileSubmatrix](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) &X, size\_t &R)

*Computes the  $r \times r$  submatrix X of A, by picking the row rank profile rows of A.*

- template<class [Field](#) >  
size\_t [ColRankProfileSubmatrix](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) &X, size\_t &R)

*Compute the  $r \times r$  submatrix X of A, by picking the row rank profile rows of A.*

- template<class [Field](#) >  
void [getTriangular](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_UPLO](#) Uplo, const [FFLAS::FFLAS\\_DIAG](#) diag, const size\_t M, const size\_t N, const size\_t R, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) T, const size\_t ldt, const bool OnlyNonZeroVectors=false)

*Extracts a triangular matrix from a compact storage  $A=L\backslash U$  of rank R.*

- `template<class Field >`  
`void getTriangular (const Field &F, const FFLAS::FFLAS_UPLO Uplo, const FFLAS::FFLAS_DIAG diag, const size_t M, const size_t N, const size_t R, typename Field::Element_ptr A, const size_t Ida)`  
*Cleans up a compact storage  $A=L\backslash U$  to reveal a triangular matrix of rank  $R$ .*
- `template<class Field >`  
`void getEchelonForm (const Field &F, const FFLAS::FFLAS_UPLO Uplo, const FFLAS::FFLAS_DIAG diag, const size_t M, const size_t N, const size_t R, const size_t *P, typename Field::ConstElement_ptr A, const size_t Ida, typename Field::Element_ptr T, const size_t Idt, const bool OnlyNonZeroVectors=false, const FFPACK_LU_TAG LuTag=FpackSlabRecursive)`  
*Extracts a matrix in echelon form from a compact storage  $A=L\backslash U$  of rank  $R$  obtained by RowEchelonForm or ColumnEchelonForm.*
- `template<class Field >`  
`void getEchelonForm (const Field &F, const FFLAS::FFLAS_UPLO Uplo, const FFLAS::FFLAS_DIAG diag, const size_t M, const size_t N, const size_t R, const size_t *P, typename Field::Element_ptr A, const size_t Ida, const FFPACK_LU_TAG LuTag=FpackSlabRecursive)`  
*Cleans up a compact storage  $A=L\backslash U$  obtained by RowEchelonForm or ColumnEchelonForm to reveal an echelon form of rank  $R$ .*
- `template<class Field >`  
`void getEchelonTransform (const Field &F, const FFLAS::FFLAS_UPLO Uplo, const FFLAS::FFLAS_DIAG diag, const size_t M, const size_t N, const size_t R, const size_t *P, const size_t *Q, typename Field::ConstElement_ptr A, const size_t Ida, typename Field::Element_ptr T, const size_t Idt, const FFPACK_LU_TAG LuTag=FpackSlabRecursive)`  
*Extracts a transformation matrix to echelon form from a compact storage  $A=L\backslash U$  of rank  $R$  obtained by RowEchelonForm or ColumnEchelonForm.*
- `template<class Field >`  
`void getReducedEchelonForm (const Field &F, const FFLAS::FFLAS_UPLO Uplo, const size_t M, const size_t N, const size_t R, const size_t *P, typename Field::ConstElement_ptr A, const size_t Ida, typename Field::Element_ptr T, const size_t Idt, const bool OnlyNonZeroVectors=false, const FFPACK_LU_TAG LuTag=FpackSlabRecursive)`  
*Extracts a matrix in echelon form from a compact storage  $A=L\backslash U$  of rank  $R$  obtained by ReducedRowEchelonForm or ReducedColumnEchelonForm with transform = true.*
- `template<class Field >`  
`void getReducedEchelonForm (const Field &F, const FFLAS::FFLAS_UPLO Uplo, const size_t M, const size_t N, const size_t R, const size_t *P, typename Field::Element_ptr A, const size_t Ida, const FFPACK_LU_TAG LuTag=FpackSlabRecursive)`  
*Cleans up a compact storage  $A=L\backslash U$  of rank  $R$  obtained by ReducedRowEchelonForm or ReducedColumnEchelonForm with transform = true.*
- `template<class Field >`  
`void getReducedEchelonTransform (const Field &F, const FFLAS::FFLAS_UPLO Uplo, const size_t M, const size_t N, const size_t R, const size_t *P, const size_t *Q, typename Field::ConstElement_ptr A, const size_t Ida, typename Field::Element_ptr T, const size_t Idt, const FFPACK_LU_TAG LuTag=FpackSlabRecursive)`  
*Extracts a transformation matrix to echelon form from a compact storage  $A=L\backslash U$  of rank  $R$  obtained by RowEchelonForm or ColumnEchelonForm.*
- `void PLUQtoEchelonPermutation (const size_t N, const size_t R, const size_t *P, size_t *outPerm)`  
*Auxiliary routine: determines the permutation that changes a PLUQ decomposition into a echelon form revealing PLUQ decomposition.*
- `template<class Field >`  
`size_t LTBruhatGen (const Field &Fi, const FFLAS::FFLAS_DIAG diag, const size_t N, typename Field::Element_ptr A, const size_t Ida, size_t *P, size_t *Q)`  
*LTBruhatGen Suppose A is Left Triangular Matrix This procedure computes the Bruhat Representation of A and return the rank of A.*
- `template<class Field >`  
`void getLTBruhatGen (const Field &Fi, const size_t N, const size_t r, const size_t *P, const size_t *Q, typename Field::Element_ptr R, const size_t ldr)`  
*GetLTBruhatGen This procedure Computes the Rank Revealing Matrix based on the Bruhta representation of a Matrix.*



- template<class [Field](#) >  
void [getLTBruhatGen](#) (const [Field](#) &Fi, const [FFLAS::FFLAS\\_UPLO](#) Uplo, const [FFLAS::FFLAS\\_DIAG](#) diag, const size\_t N, const size\_t r, const size\_t \*P, const size\_t \*Q, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) T, const size\_t ldt)  
*GetLTBruhatGen This procedure computes the matrix L or U of the Bruhat Representation Suppose that A is the bruhat representation of a matrix.*
- size\_t [LTQSorder](#) (const size\_t N, const size\_t r, const size\_t \*P, const size\_t \*Q)  
*LTQSorder This procedure computes the order of quasiseparability of a matrix.*
- template<class [Field](#) >  
size\_t [CompressToBlockBiDiagonal](#) (const [Field](#) &Fi, const [FFLAS::FFLAS\\_UPLO](#) Uplo, size\_t N, size\_t s, size\_t r, const size\_t \*P, const size\_t \*Q, typename [Field::Element\\_ptr](#) A, size\_t lda, typename [Field::Element\\_ptr](#) X, size\_t ldx, size\_t \*K, size\_t \*M, size\_t \*T)  
*CompressToBlockBiDiagonal This procedure compress a compact representation of a row echelon form or column echelon form.*
- template<class [Field](#) >  
void [ExpandBlockBiDiagonalToBruhat](#) (const [Field](#) &Fi, const [FFLAS::FFLAS\\_UPLO](#) Uplo, size\_t N, size\_t s, size\_t r, typename [Field::Element\\_ptr](#) A, size\_t lda, typename [Field::Element\\_ptr](#) X, size\_t ldx, size\_t NbBlocks, size\_t \*K, size\_t \*M, size\_t \*T)  
*ExpandBlockBiDiagonal This procedure expand a compact representation of a row echelon form or column echelon form.*
- void [Bruhat2EchelonPermutation](#) (size\_t N, size\_t R, const size\_t \*P, const size\_t \*Q, size\_t \*M)  
*Bruhat2EchelonPermutation (N,R,P,Q) Compute M such that LM or MU is in echelon form where L or U are factors of the Bruhat Representation.*
- size\_t \* [TInverter](#) (size\_t \*T, size\_t r)
- template<class [Field](#) >  
void [ComputeRPermutation](#) (const [Field](#) &Fi, size\_t N, size\_t r, const size\_t \*P, const size\_t \*Q, size\_t \*R, size\_t \*MU, size\_t \*ML)
- template<class [Field](#) >  
void [productBruhatxTS](#) (const [Field](#) &Fi, size\_t N, size\_t s, size\_t r, const size\_t \*P, const size\_t \*Q, const typename [Field::Element\\_ptr](#) Xu, size\_t ldu, size\_t NbBlocksU, size\_t \*Ku, size\_t \*Tu, size\_t \*MU, const typename [Field::Element\\_ptr](#) XI, size\_t ldl, size\_t NbBlocksL, size\_t \*KI, size\_t \*TI, size\_t \*ML, typename [Field::Element\\_ptr](#) B, size\_t t, size\_t ldb, typename [Field::Element\\_ptr](#) C, size\_t ldc)  
*productBruhatxTS Compute the product between the CRE compact representation of a matrix A and B a tall matrix*
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [LQUPtoInverseOfFullRankMinor](#) (const [Field](#) &F, const size\_t rank, typename [Field::Element\\_ptr](#) A\_factors, const size\_t lda, const size\_t \*QtPointer, typename [Field::Element\\_ptr](#) X, const size\_t ldx)  
*LQUPtoInverseOfFullRankMinor.*

## 13.180.1 Detailed Description

Set of elimination based routines for dense linear algebra.

Matrices are supposed over finite prime field of characteristic less than  $2^{26}$ .

## 13.180.2 Macro Definition Documentation

### 13.180.2.1 \_\_FFLASFFPACK\_FTRSTR\_THRESHOLD

```
#define __FFLASFFPACK_FTRSTR_THRESHOLD 64
```

### 13.180.2.2 \_\_FFLASFFPACK\_FTRSSYR2K\_THRESHOLD

```
#define __FFLASFFPACK_FTRSSYR2K_THRESHOLD 64
```

## 13.181 ffpack.inl File Reference

### Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

### Macros

- #define [\\_\\_FFLASFFPACK\\_ffpack\\_INL](#)

### Functions

- template<class [Field](#) >  
size\_t [Rank](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t Ida)  
*Computes the rank of the given matrix using a PLUQ factorization.*
- template<class [Field](#) >  
size\_t [pRank](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t Ida, size\_t numthreads=0)
- template<class [Field](#) , class PSHelper >  
size\_t [Rank](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t Ida, const PSHelper &psH)
- template<class [Field](#) >  
bool [IsSingular](#) (const [Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t Ida)  
*Returns true if the given matrix is singular.*
- template<class [Field](#) >  
[Field::Element](#) & [Det](#) (const [Field](#) &F, typename [Field::Element](#) &det, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t Ida, size\_t \*P=NULL, size\_t \*Q=NULL)  
*Returns the determinant of the given square matrix.*
- template<class [Field](#) >  
[Field::Element](#) & [pDet](#) (const [Field](#) &F, typename [Field::Element](#) &det, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t Ida, size\_t numthreads=0, size\_t \*P=NULL, size\_t \*Q=NULL)
- template<class [Field](#) , class PSHelper >  
[Field::Element](#) & [Det](#) (const [Field](#) &F, typename [Field::Element](#) &det, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t Ida, const PSHelper &psH, size\_t \*P=NULL, size\_t \*Q=NULL)
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [Solve](#) (const [Field](#) &F, const size\_t M, typename [Field::Element\\_ptr](#) A, const size\_t Ida, typename [Field::Element\\_ptr](#) x, const int incx, typename [Field::ConstElement\\_ptr](#) b, const int incb)  
*Solves a linear system  $AX = b$  using PLUQ factorization.*
- template<class [Field](#) , class PSHelper >  
[Field::Element\\_ptr](#) [Solve](#) (const [Field](#) &F, const size\_t M, typename [Field::Element\\_ptr](#) A, const size\_t Ida, typename [Field::Element\\_ptr](#) x, const int incx, typename [Field::ConstElement\\_ptr](#) b, const int incb, PSHelper &psH)
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [pSolve](#) (const [Field](#) &F, const size\_t M, typename [Field::Element\\_ptr](#) A, const size\_t Ida, typename [Field::Element\\_ptr](#) x, const int incx, typename [Field::ConstElement\\_ptr](#) b, const int incb, size\_t numthreads=0)
- template<class [Field](#) >  
void [RandomNullSpaceVector](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t Ida, typename [Field::Element\\_ptr](#) X, const size\_t incX)  
*Solve  $LX = B$  or  $XL = B$  in place.*
- template<class [Field](#) >  
size\_t [NullSpaceBasis](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t Ida, typename [Field::Element\\_ptr](#) &NS, size\_t &Idn, size\_t &NSdim)  
*Computes a basis of the Left/Right nullspace of the matrix A.*

- template<class [Field](#) >  
void [solveLB](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, const size\_t R, typename [Field::Element\\_ptr](#) L, const size\_t ldl, const size\_t \*Q, typename [Field::Element\\_ptr](#) B, const size\_t ldb)
- template<class [Field](#) >  
void [solveLB2](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, const size\_t R, typename [Field::Element\\_ptr](#) L, const size\_t ldl, const size\_t \*Q, typename [Field::Element\\_ptr](#) B, const size\_t ldb)

### 13.181.1 Macro Definition Documentation

#### 13.181.1.1 \_\_FFLASFFPACK\_ffpack\_INL

```
#define __FFLASFFPACK_ffpack_INL
```

## 13.182 ffpack\_bruhatgen.inl File Reference

### Namespaces

- namespace [FFPACK](#)  
*Finite Field PACK Set of elimination based routines for dense linear algebra.*

### Macros

- #define [\\_\\_FFLASFFPACK\\_ffpack\\_bruhatgen\\_inl](#)

### Functions

- template<class [Field](#) >  
size\_t [LTBruhatGen](#) (const [Field](#) &Fi, const [FFLAS::FFLAS\\_DIAG](#) diag, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*P, size\_t \*Q)  
*LTBruhatGen Suppose A is Left Triangular Matrix This procedure computes the Bruhat Representation of A and return the rank of A.*
- template<class [Field](#) >  
void [getLTBruhatGen](#) (const [Field](#) &Fi, const size\_t N, const size\_t r, const size\_t \*P, const size\_t \*Q, type-name [Field::Element\\_ptr](#) R, const size\_t ldr)  
*GetLTBruhatGen This procedure Computes the Rank Revealing Matrix based on the Bruhta representation of a Matrix.*
- template<class [Field](#) >  
void [getLTBruhatGen](#) (const [Field](#) &Fi, const [FFLAS::FFLAS\\_UPLO](#) Uplo, const [FFLAS::FFLAS\\_DIAG](#) diag, const size\_t N, const size\_t r, const size\_t \*P, const size\_t \*Q, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) T, const size\_t ldt)  
*GetLTBruhatGen This procedure computes the matrix L or U f the Bruhat Representation Suppose that A is the bruhat representation of a matrix.*
- size\_t [LTQSorder](#) (const size\_t N, const size\_t r, const size\_t \*P, const size\_t \*Q)  
*LTQSorder This procedure computes the order of quasiseparability of a matrix.*
- template<class [Field](#) >  
size\_t [CompressToBlockBiDiagonal](#) (const [Field](#) &Fi, const [FFLAS::FFLAS\\_UPLO](#) Uplo, size\_t N, size\_t s, size\_t r, const size\_t \*P, const size\_t \*Q, typename [Field::Element\\_ptr](#) A, size\_t lda, typename [Field::Element\\_ptr](#) X, size\_t ldx, size\_t \*K, size\_t \*M, size\_t \*T)  
*CompressToBlockBiDiagonal This procedure compress a compact representation of a row echelon form or column echelon form.*
- template<class [Field](#) >  
void [ExpandBlockBiDiagonalToBruhat](#) (const [Field](#) &Fi, const [FFLAS::FFLAS\\_UPLO](#) Uplo, size\_t N, size\_t s, size\_t r, typename [Field::Element\\_ptr](#) A, size\_t lda, typename [Field::Element\\_ptr](#) X, size\_t ldx, size\_t NbBlocks, size\_t \*K, size\_t \*M, size\_t \*T)

*ExpandBlockBiDiagonal* This procedure expand a compact representation of a row echelon form or column echelon form.

- void [Bruhat2EchelonPermutation](#) (size\_t N, size\_t R, const size\_t \*P, const size\_t \*Q, size\_t \*M)  
*Bruhat2EchelonPermutation (N,R,P,Q)* Compute M such that LM or MU is in echelon form where L or U are factors of the Bruhat Representation.
- size\_t \* [TInverter](#) (const size\_t \*T, size\_t r)
- template<class [Field](#) >  
void [ComputeRPermutation](#) (const [Field](#) &Fi, size\_t N, size\_t r, const size\_t \*P, const size\_t \*Q, size\_t \*R, const size\_t \*MU, const size\_t \*ML)
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [expandLCRE](#) (const [Field](#) &Fi, size\_t N, size\_t s, size\_t r, size\_t \*R, size\_t i, typename [Field::ConstElement\\_ptr](#) Xu, size\_t ldu, size\_t NbBlocksU, const size\_t \*Ku, const size\_t \*Tuinv, typename [Field::ConstElement\\_ptr](#) Xl, size\_t ldl, size\_t NbBlocksL, const size\_t \*Kl, const size\_t \*Tlinv, typename [Field::Element\\_ptr](#) CRE, size\_t ldcre)  
*Expands an anti-diagonal block of a left triangular matrix from its compact Bruhat representation.*
- template<class [Field](#) >  
void [productBruhatxTS](#) (const [Field](#) &Fi, size\_t N, size\_t s, size\_t r, size\_t t, const size\_t \*P, const size\_t \*Q, typename [Field::ConstElement\\_ptr](#) Xu, size\_t ldu, size\_t NbBlocksU, const size\_t \*Ku, const size\_t \*Tu, const size\_t \*MU, typename [Field::ConstElement\\_ptr](#) Xl, size\_t ldl, size\_t NbBlocksL, const size\_t \*Kl, const size\_t \*Tl, const size\_t \*ML, typename [Field::Element\\_ptr](#) B, size\_t ldb, const typename [Field::Element](#) beta, typename [Field::Element\\_ptr](#) D, size\_t ldd)  
*Compute the product of a left-triangular quasi-separable matrix A, represented by a compact Bruhat generator, with a dense rectangular matrix B:  $C \leftarrow A \times B + \text{beta}C$ .*

## 13.182.1 Macro Definition Documentation

### 13.182.1.1 \_\_FFLASFFPACK\_ffpack\_bruhatgen\_inl

```
#define __FFLASFFPACK_ffpack_bruhatgen_inl
```

## 13.183 ffpack\_charpoly.inl File Reference

```
#include "fflas-ffpack/utils/fflas_randommatrix.h"
#include "ffpack_charpoly_mp.inl"
```

### Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*
- namespace [FFPACK::Protected](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_charpoly\\_INL](#)

### Functions

- template<class [PolRing](#) >  
std::list< typename [PolRing::Element](#) > & [CharPoly](#) (const [PolRing](#) &R, std::list< typename [PolRing::Element](#) > &charp, const size\_t N, typename [PolRing::Domain\\_t::Element\\_ptr](#) A, const size\_t lda, typename [PolRing::Domain\\_t::RandIter](#) &G, const [FFPACK\\_CHARPOLY\\_TAG](#) CharpTag=FpackAuto, const size\_t degree=[\\_\\_FFLASFFPACK\\_ARITHPROG\\_THRESHOLD](#))  
*Compute the characteristic polynomial of the matrix A.*
- template<class [PolRing](#) >  
[PolRing::Element](#) & [CharPoly](#) (const [PolRing](#) &R, typename [PolRing::Element](#) &charp, const size\_t N, typename [PolRing::Domain\\_t::Element\\_ptr](#) A, const size\_t lda, typename [PolRing::Domain\\_t::RandIter](#) &G, const [FFPACK\\_CHARPOLY\\_TAG](#) CharpTag=FpackAuto, const size\_t degree=[\\_\\_FFLASFFPACK\\_ARITHPROG\\_THRESHOLD](#))

*Compute the characteristic polynomial of the matrix A.*

- template<class [Field](#) , class Polynomial , class RandIter >  
std::list< Polynomial > & [LUKrylov](#) (const [Field](#) &F, std::list< Polynomial > &charp, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) U, const size\_t ldu, RandIter &G)
- template<class [Field](#) , class Polynomial >  
std::list< Polynomial > & [LUKrylov\\_KGFast](#) (const [Field](#) &F, std::list< Polynomial > &charp, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) X, const size\_t ldx)

### 13.183.1 Macro Definition Documentation

#### 13.183.1.1 \_\_FFLASFFPACK\_charpoly\_INL

```
#define __FFLASFFPACK_charpoly_INL
```

## 13.184 ffpack\_charpoly\_danilevski.inl File Reference

### Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

### Macros

- #define [\\_\\_FFLASFFPACK\\_ffpack\\_charpoly\\_danilveski\\_INL](#)

### Functions

- template<class [Field](#) , class Polynomial >  
std::list< Polynomial > & [Danilevski](#) (const [Field](#) &F, std::list< Polynomial > &charp, const size\_t N, type-  
name [Field::Element\\_ptr](#) A, const size\_t lda)

### 13.184.1 Macro Definition Documentation

#### 13.184.1.1 \_\_FFLASFFPACK\_ffpack\_charpoly\_danilveski\_INL

```
#define __FFLASFFPACK_ffpack_charpoly_danilveski_INL
```

## 13.185 ffpack\_charpoly\_kgfast.inl File Reference

### Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*
- namespace [FFPACK::Protected](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_ffpack\\_charpoly\\_kgfast\\_INL](#)

### Functions

- template<class [Field](#) , class Polynomial >  
int [KGFast](#) (const [Field](#) &F, std::list< Polynomial > &charp, const size\_t N, typename [Field::Element\\_ptr](#) A,  
const size\_t lda, size\_t \*kg\_mc, size\_t \*kg\_mb, size\_t \*kg\_j)
- template<class [Field](#) >  
void [fgemv\\_kgf](#) (const [Field](#) &F, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, type-  
name [Field::ConstElement\\_ptr](#) X, const size\_t incX, typename [Field::Element\\_ptr](#) Y, const size\_t incY, const  
size\_t kg\_mc, const size\_t kg\_mb, const size\_t kg\_j)

### 13.185.1 Macro Definition Documentation

#### 13.185.1.1 \_\_FflasFFPACK\_ffpack\_charpoly\_kgfast\_INL

```
#define __FflasFFPACK_ffpack_charpoly_kgfast_INL
```

### 13.186 fpack\_charpoly\_kgfastgeneralized.inl File Reference

```
#include <iostream>
#include "fflas-ffpack/utils/fflas_io.h"
```

#### Namespaces

- namespace [FFPACK](#)  
*Finite Field PACK Set of elimination based routines for dense linear algebra.*
- namespace [FFPACK::Protected](#)

#### Macros

- #define [\\_\\_FflasFFPACK\\_ffpack\\_charpoly\\_kgfastgeneralized\\_INL](#)

#### Functions

- template<class [Field](#) >  
[Field::Element\\_ptr buildMatrix](#) (const [Field](#) &F, typename [Field::ConstElement\\_ptr](#) E, typename [Field::ConstElement\\_ptr](#) C, const size\_t lda, const size\_t \*B, const size\_t \*T, const size\_t me, const size\_t mc, const size\_t lambda, const size\_t mu)
- template<class [Field](#) , class Polynomial >  
std::list< Polynomial > & [KGFast\\_generalized](#) (const [Field](#) &F, std::list< Polynomial > &charp, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda)

### 13.186.1 Macro Definition Documentation

#### 13.186.1.1 \_\_FflasFFPACK\_ffpack\_charpoly\_kgfastgeneralized\_INL

```
#define __FflasFFPACK_ffpack_charpoly_kgfastgeneralized_INL
```

### 13.187 fpack\_charpoly\_kglu.inl File Reference

#### Namespaces

- namespace [FFPACK](#)  
*Finite Field PACK Set of elimination based routines for dense linear algebra.*
- namespace [FFPACK::Protected](#)

#### Macros

- #define [\\_\\_FflasFFPACK\\_ffpack\\_charpoly\\_kglu\\_INL](#)

#### Functions

- template<class [Field](#) >  
size\_t [updateD](#) (const [Field](#) &F, size\_t \*d, size\_t k, std::vector< std::vector< typename [Field::Element](#) > > &minpt)
- template<class [Field](#) >  
size\_t [newD](#) (const [Field](#) &F, size\_t \*d, bool &KeepOn, const size\_t l, const size\_t N, typename [Field::Element\\_ptr](#) X, const size\_t \*Q, std::vector< std::vector< typename [Field::Element](#) > > &minpt)

- template<class [Field](#) , class Polynomial >  
std::list< Polynomial > & [KellerGehrig](#) (const [Field](#) &F, std::list< Polynomial > &charp, const size\_t N, type-  
name [Field::ConstElement\\_ptr](#) A, const size\_t lda)

### 13.187.1 Macro Definition Documentation

#### 13.187.1.1 \_\_FFLASFFPACK\_ffpack\_charpoly\_kglu\_INL

```
#define __FFLASFFPACK_ffpack_charpoly_kglu_INL
```

## 13.188 ffpack\_charpoly\_mp.inl File Reference

```
#include <givaro/zring.h>
#include "givaro/givinteger.h"
#include "givaro/givpoly1.h"
#include "fflas-ffpack/field/rns-integer.h"
#include "fflas-ffpack/fflas-ffpack.h"
```

### Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

### Macros

- #define [\\_\\_FFPACK\\_charpoly\\_mp\\_INL](#)

### Functions

- [FFPACK::RNSInteger< FFPACK::rns\\_double >::Element\\_ptr CharPoly](#) (const [FFPACK::RNSInteger< FFPACK::rns\\_double > &F](#), typename [FFPACK::RNSInteger< FFPACK::rns\\_double >::Element\\_ptr](#) charp, const size\_t N, typename [FFPACK::RNSInteger< FFPACK::rns\\_double >::Element\\_ptr](#) A, const size\_t lda, [Givaro::ZRing< Givaro::Integer >::Randlter](#) &G, const [FFPACK\\_CHARPOLY\\_TAG](#) CharpTag, size\_t degree)
- template<> [Givaro::Poly1Dom< Givaro::ZRing< Givaro::Integer > >::Element & CharPoly](#) (const [Givaro::Poly1Dom< Givaro::ZRing< Givaro::Integer > > &R](#), [Givaro::Poly1Dom< Givaro::ZRing< Givaro::Integer > >::Element](#) &charp, const size\_t N, [Givaro::Integer](#) \*A, const size\_t lda, [Givaro::ZRing< Givaro::Integer >::Randlter](#) &G, const [FFPACK\\_CHARPOLY\\_TAG](#) CharpTag, size\_t degree)

### 13.188.1 Macro Definition Documentation

#### 13.188.1.1 \_\_FFPACK\_charpoly\_mp\_INL

```
#define __FFPACK_charpoly_mp_INL
```

## 13.189 ffpack\_det\_mp.inl File Reference

```
#include <givaro/zring.h>
#include "givaro/givinteger.h"
#include "fflas-ffpack/field/rns-integer.h"
#include "fflas-ffpack/fflas-ffpack.h"
```

### Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

## Macros

- `#define __FFPACK_det_mp_INL`

## Functions

- `template<class PSHelper >`  
`FFPACK::RNSInteger< FFPACK::rns_double >::Element_ptr & Det (const FFPACK::RNSInteger<`  
`FFPACK::rns_double > &F, typename FFPACK::RNSInteger< FFPACK::rns_double >::Element_ptr &det,`  
`const size_t N, typename FFPACK::RNSInteger< FFPACK::rns_double >::Element_ptr A, const size_t lda,`  
`const PSHelper &psH)`
- `template<class PSHelper >`  
`Givaro::Integer & Det (const Givaro::ZRing< Givaro::Integer > &F, Givaro::Integer &det, const size_t N,`  
`Givaro::Integer *A, const size_t lda, const PSHelper &psH, size_t *P, size_t *Q)`

## 13.189.1 Macro Definition Documentation

### 13.189.1.1 \_\_FFPACK\_det\_mp\_INL

```
#define __FFPACK_det_mp_INL
```

## 13.190 ffpack\_echelonforms.inl File Reference

### Namespaces

- namespace `FFPACK`  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

### Macros

- `#define __FFLASFFPACK_ffpack_echelon_forms_INL`
- `#define __FFLASFFPACK_GAUSSJORDAN_BASECASE 256`

### Functions

- `template<class Field >`  
`void getTriangular (const Field &F, const FFLAS::FFLAS_UPLO Uplo, const FFLAS::FFLAS_DIAG diag, const`  
`size_t M, const size_t N, const size_t R, typename Field::ConstElement_ptr A, const size_t lda, typename`  
`Field::Element_ptr T, const size_t ldt, const bool OnlyNonZeroVectors=false)`  
*Extracts a triangular matrix from a compact storage  $A=L\backslash U$  of rank  $R$ .*
- `template<class Field >`  
`void getTriangular (const Field &F, const FFLAS::FFLAS_UPLO Uplo, const FFLAS::FFLAS_DIAG diag, const`  
`size_t M, const size_t N, const size_t R, typename Field::Element_ptr A, const size_t lda)`  
*Cleans up a compact storage  $A=L\backslash U$  to reveal a triangular matrix of rank  $R$ .*
- `void PLUQtoEchelonPermutation (const size_t N, const size_t R, const size_t *P, size_t *outPerm)`  
*Auxiliary routine: determines the permutation that changes a PLUQ decomposition into a echelon form revealing PLUQ decomposition.*
- `template<class Field >`  
`void getEchelonForm (const Field &F, const FFLAS::FFLAS_UPLO Uplo, const FFLAS::FFLAS_DIAG diag,`  
`const size_t M, const size_t N, const size_t R, const size_t *P, typename Field::ConstElement_ptr A, const`  
`size_t lda, typename Field::Element_ptr T, const size_t ldt, const bool OnlyNonZeroVectors=false, const`  
`FFPACK_LU_TAG LuTag=FpackSlabRecursive)`  
*Extracts a matrix in echelon form from a compact storage  $A=L\backslash U$  of rank  $R$  obtained by RowEchelonForm or Column↔EchelonForm.*
- `template<class Field >`  
`void getEchelonForm (const Field &F, const FFLAS::FFLAS_UPLO Uplo, const FFLAS::FFLAS_DIAG diag,`  
`const size_t M, const size_t N, const size_t R, const size_t *P, typename Field::Element_ptr A, const size_t`  
`lda, const FFPACK_LU_TAG LuTag=FpackSlabRecursive)`



*Cleans up a compact storage  $A=L\backslash U$  obtained by RowEchelonForm or ColumnEchelonForm to reveal an echelon form of rank  $R$ .*

- template<class [Field](#) >  
void [getEchelonTransform](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_UPLO](#) Uplo, const [FFLAS::FFLAS\\_DIAG](#) diag, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, const size\_t \*Q, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) T, const size\_t ldt, const [FFPACK\\_LU\\_TAG](#) LuTag=[FfpackSlabRecursive](#))

*Extracts a transformation matrix to echelon form from a compact storage  $A=L\backslash U$  of rank  $R$  obtained by RowEchelonForm or ColumnEchelonForm.*

- template<class [Field](#) >  
void [getReducedEchelonForm](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_UPLO](#) Uplo, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) T, const size\_t ldt, const bool OnlyNonZeroVectors=false, const [FFPACK\\_LU\\_TAG](#) LuTag=[FfpackSlabRecursive](#))

*Extracts a matrix in echelon form from a compact storage  $A=L\backslash U$  of rank  $R$  obtained by ReducedRowEchelonForm or ReducedColumnEchelonForm with transform = true.*

- template<class [Field](#) >  
void [getReducedEchelonForm](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_UPLO](#) Uplo, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, typename [Field::Element\\_ptr](#) A, const size\_t lda, const [FFPACK\\_LU\\_TAG](#) LuTag=[FfpackSlabRecursive](#))

*Cleans up a compact storage  $A=L\backslash U$  of rank  $R$  obtained by ReducedRowEchelonForm or ReducedColumnEchelonForm with transform = true.*

- template<class [Field](#) >  
void [getReducedEchelonTransform](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_UPLO](#) Uplo, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, const size\_t \*Q, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) T, const size\_t ldt, const [FFPACK\\_LU\\_TAG](#) LuTag=[FfpackSlabRecursive](#))

*Extracts a transformation matrix to echelon form from a compact storage  $A=L\backslash U$  of rank  $R$  obtained by RowEchelonForm or ColumnEchelonForm.*

## 13.190.1 Macro Definition Documentation

### 13.190.1.1 \_\_FFLASFFPACK\_ffpack\_echelon\_forms\_INL

```
#define __FFLASFFPACK_ffpack_echelon_forms_INL
```

### 13.190.1.2 \_\_FFLASFFPACK\_GAUSSJORDAN\_BASECASE

```
#define __FFLASFFPACK_GAUSSJORDAN_BASECASE 256
```

## 13.191 ffpack\_fgesv.inl File Reference

### Namespaces

- namespace [FFPACK](#)  
*Finite **Field** **PACK** Set of elimination based routines for dense linear algebra.*

### Macros

- #define [\\_\\_FFLASFFPACK\\_ffpack\\_fgesv\\_INL](#)

### Functions

- template<class [Field](#) >  
size\_t [fgesv](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) B, const size\_t ldb, int \*info)  
*Square system solver.*

- template<class [Field](#) >  
size\_t [fgesv](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, const size\_t NRHS, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) X, const size\_t ldx, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, int \*info)

*Rectangular system solver.*

## 13.191.1 Macro Definition Documentation

### 13.191.1.1 \_\_FFLASFFPACK\_ffpack\_fgesv\_INL

```
#define __FFLASFFPACK_ffpack_fgesv_INL
```

## 13.192 ffpack\_fgetrs.inl File Reference

### Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

### Macros

- #define [\\_\\_FFLASFFPACK\\_ffpack\\_fgetrs\\_INL](#)

### Functions

- template<class [Field](#) >  
void [fgetrs](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, const size\_t R, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t \*P, const size\_t \*Q, typename [Field::Element\\_ptr](#) B, const size\_t ldb, int \*info)  
*Solve the system  $AX = B$  or  $XA = B$ .*
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [fgetrs](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, const size\_t NRHS, const size\_t R, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t \*P, const size\_t \*Q, typename [Field::Element\\_ptr](#) X, const size\_t ldx, typename [Field::ConstElement\\_ptr](#) B, const size\_t ldb, int \*info)  
*Solve the system  $A X = B$  or  $X A = B$ .*

## 13.192.1 Macro Definition Documentation

### 13.192.1.1 \_\_FFLASFFPACK\_ffpack\_fgetrs\_INL

```
#define __FFLASFFPACK_ffpack_fgetrs_INL
```

## 13.193 ffpack\_frobenius.inl File Reference

```
#include <givaro/givranditer.h>
```

### Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*
- namespace [FFPACK::Protected](#)

## Functions

- template<class [Field](#) >  
void [CompressRows](#) ([Field](#) &F, const size\_t M, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) tmp, const size\_t ldtmp, const size\_t \*d, const size\_t nb\_blocs)
- template<class [Field](#) >  
void [CompressRowsQK](#) ([Field](#) &F, const size\_t M, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) tmp, const size\_t ldtmp, const size\_t \*d, const size\_t deg, const size\_t nb\_blocs)
- template<class [Field](#) >  
void [DeCompressRows](#) ([Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) tmp, const size\_t ldtmp, const size\_t \*d, const size\_t nb\_blocs)
- template<class [Field](#) >  
void [DeCompressRowsQK](#) ([Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) tmp, const size\_t ldtmp, const size\_t \*d, const size\_t deg, const size\_t nb\_blocs)
- template<class [Field](#) >  
void [CompressRowsQA](#) ([Field](#) &F, const size\_t M, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) tmp, const size\_t ldtmp, const size\_t \*d, const size\_t nb\_blocs)
- template<class [Field](#) >  
void [DeCompressRowsQA](#) ([Field](#) &F, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) tmp, const size\_t ldtmp, const size\_t \*d, const size\_t nb\_blocs)
- template<class [PolRing](#) >  
void [RandomKrylovPrecond](#) (const [PolRing](#) &PR, std::list< typename [PolRing::Element](#) > &completedFactors, const size\_t N, typename [PolRing::Domain\\_t::Element\\_ptr](#) A, const size\_t lda, size\_t &Nb, typename [PolRing::Domain\\_t::Element\\_ptr](#) &B, size\_t &ldb, typename [PolRing::Domain\\_t::RandIter](#) &g, const size\_t degree=\_\_FFLASFFPACK\_ARITHPROG\_THRESHOLD)
- template<class [PolRing](#) >  
std::list< typename [PolRing::Element](#) > & [ArithProg](#) (const [PolRing](#) &PR, std::list< typename [PolRing::Element](#) > &frobeniusForm, const size\_t N, typename [PolRing::Domain\\_t::Element\\_ptr](#) A, const size\_t lda, const size\_t degree)

## 13.194 ffpack\_fsytrf.inl File Reference

```
#include "fflas-ffpack/utils/fflas_io.h"
```

## Namespaces

- namespace [FFPACK](#)  
*Finite **Field** **PACK** Set of elimination based routines for dense linear algebra.*

## Macros

- #define [\\_\\_FFLASFFPACK\\_ffpack\\_fsytrf\\_INL](#)

## Functions

- template<class [Field](#) >  
bool [fsytrf\\_BC\\_Crout](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_UPLO](#) UpLo, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) Din, const size\_t incDin)
- template<class [Field](#) >  
size\_t [fsytrf\\_BC\\_RL](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_UPLO](#) UpLo, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) Din, const size\_t incDin)
- template<class [Field](#) >  
size\_t [fsytrf\\_UP\\_RPM\\_BC\\_RL](#) (const [Field](#) &F, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) Din, const size\_t incDin, size\_t \*P)

- `template<class Field >`  
`size_t fsytrf_LOW_RPM_BC_Crout` (const `Field` &F, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` lda, typename `Field::Element_ptr` Dinv, const `size_t` incDinv, `size_t` \*P)
- `template<class Field >`  
`size_t fsytrf_UP_RPM_BC_Crout` (const `Field` &F, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` lda, typename `Field::Element_ptr` Dinv, const `size_t` incDinv, `size_t` \*P)
- `template<class Field >`  
`size_t fsytrf_UP_RPM` (const `Field` &F, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` lda, typename `Field::Element_ptr` Dinv, const `size_t` incDinv, `size_t` \*P, `size_t` BCThreshold)
- `template<class Field >`  
`bool fsytrf_nonunit` (const `Field` &F, const `FFLAS::FFLAS_UPLO` UpLo, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` lda, typename `Field::Element_ptr` Dinv, const `size_t` incDinv, `FFLAS::ParSeqHelper::Sequential` seq, `size_t` threshold)
- `template<class Field, class Cut, class Param >`  
`bool fsytrf_nonunit` (const `Field` &F, const `FFLAS::FFLAS_UPLO` UpLo, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` lda, typename `Field::Element_ptr` Dinv, const `size_t` incDinv, `FFLAS::ParSeqHelper::Parallel`< Cut, Param > par, `size_t` threshold)
- `template<class Field >`  
`bool fsytrf` (const `Field` &F, const `FFLAS::FFLAS_UPLO` UpLo, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` lda, const `size_t` threshold=\_\_FFLASFFPACK\_FSYTRF\_THRESHOLD)  
*Triangular factorization of symmetric matrices.*
- `template<class Field >`  
`bool fsytrf` (const `Field` &F, const `FFLAS::FFLAS_UPLO` UpLo, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` lda, const `FFLAS::ParSeqHelper::Sequential` seq, const `size_t` threshold=\_\_FFLASFFPACK\_FSYTRF\_THRESHOLD)
- `template<class Field, class Cut, class Param >`  
`bool fsytrf` (const `Field` &F, const `FFLAS::FFLAS_UPLO` UpLo, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` lda, const `FFLAS::ParSeqHelper::Parallel`< Cut, Param > par, const `size_t` threshold=\_\_FFLASFFPACK\_FSYTRF\_THRESHOLD)
- `template<class Field >`  
`size_t fsytrf_RPM` (const `Field` &F, const `FFLAS::FFLAS_UPLO` UpLo, const `size_t` N, typename `Field::Element_ptr` A, const `size_t` lda, `size_t` \*P, `size_t` threshold)
- `template<class Field >`  
`void getTridiagonal` (const `Field` &F, const `size_t` N, const `size_t` R, typename `Field::ConstElement_ptr` A, const `size_t` lda, `size_t` \*P, typename `Field::Element_ptr` T, const `size_t` ldt)

## 13.194.1 Macro Definition Documentation

### 13.194.1.1 \_\_FFLASFFPACK\_ffpack\_fsytrf\_INL

```
#define __FFLASFFPACK_ffpack_fsytrf_INL
```

## 13.195 ffpack\_ftrssyr2k.inl File Reference

```
#include "fflas-ffpack/utils/fflas_io.h"
```

### Namespaces

- namespace `FFPACK`  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

### Macros

- #define `__FFLASFFPACK_ffpack_ftrssyr2k_INL`

## Functions

- `template<class Field >`  
`void ftrssyr2k (const Field &F, const FFLAS::FFLAS_UPLO Uplo, const FFLAS::FFLAS_DIAG diagA, const size_t N, typename Field::ConstElement_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb, const size_t threshold=__FFLASFFPACK_FTRSSYR2K_THRESHOLD)`  
*Solve a triangular system in a symmetric sum: find B upper/lower triangular such that  $A^T B + B^T A = C$  where C is symmetric.*

## 13.195.1 Macro Definition Documentation

### 13.195.1.1 \_\_FFLASFFPACK\_ffpack\_ftrssyr2k\_INL

```
#define __FFLASFFPACK_ffpack_ftrssyr2k_INL
```

## 13.196 ffpack\_ftrstr.inl File Reference

```
#include "fflas-ffpack/utils/fflas_io.h"
```

## Namespaces

- namespace `FFPACK`  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

## Macros

- `#define __FFLASFFPACK_ffpack_ftrstr_INL`

## Functions

- `template<class Field >`  
`void ftrstr (const Field &F, const FFLAS::FFLAS_SIDE side, const FFLAS::FFLAS_UPLO Uplo, const FFLAS::FFLAS_DIAG diagA, const FFLAS::FFLAS_DIAG diagB, const size_t N, typename Field::ConstElement_ptr A, const size_t lda, typename Field::Element_ptr B, const size_t ldb, const size_t threshold=__FFLASFFPACK_FTRSTR_THRESHOLD)`  
*Solve a triangular system with a triangular right hand side of the same shape.*

## 13.196.1 Macro Definition Documentation

### 13.196.1.1 \_\_FFLASFFPACK\_ffpack\_ftrstr\_INL

```
#define __FFLASFFPACK_ffpack_ftrstr_INL
```

## 13.197 ffpack\_ftrtr.inl File Reference

## Namespaces

- namespace `FFPACK`  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

## Macros

- `#define ENABLE_ALL_CHECKINGS 1`
- `#define __FFLASFFPACK_ffpack_ftrtr_INL`

## Functions

- template<class [Field](#) >  
void [ftrtri](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_UPLO](#) Uplo, const [FFLAS::FFLAS\\_DIAG](#) Diag, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t threshold=[\\_\\_FFLASFFPACK\\_FTRTRI\\_THRESHOLD](#))  
*Compute the inverse of a triangular matrix.*
- template<class [Field](#) >  
void [ftrrm](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) side, const [FFLAS::FFLAS\\_DIAG](#) diag, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda)  
*Compute the product of two triangular matrices of opposite shape.*
- template<class [Field](#) >  
void [trinv\\_left](#) (const [Field](#) &F, const size\_t N, typename [Field::ConstElement\\_ptr](#) L, const size\_t ldl, typename [Field::Element\\_ptr](#) X, const size\_t ldx)

## 13.197.1 Macro Definition Documentation

### 13.197.1.1 [ENABLE\\_ALL\\_CHECKINGS](#)

```
#define ENABLE\_ALL\_CHECKINGS 1
```

### 13.197.1.2 [\\_\\_FFLASFFPACK\\_ffpack\\_ftrtr\\_INL](#)

```
#define \_\_FFLASFFPACK\_ffpack\_ftrtr\_INL
```

## 13.198 [ffpack\\_invert.inl](#) File Reference

### Namespaces

- namespace [FFPACK](#)  
*Finite **Field** **PACK** Set of elimination based routines for dense linear algebra.*

### Macros

- #define [\\_\\_FFLASFFPACK\\_ffpack\\_invert\\_INL](#)

### Functions

- template<class [Field](#) >  
[Field::Element\\_ptr](#) [Invert](#) (const [Field](#) &F, const size\_t M, typename [Field::Element\\_ptr](#) A, const size\_t lda, int &nullity)  
*Invert the given matrix in place or computes its nullity if it is singular.*
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [Invert](#) (const [Field](#) &F, const size\_t M, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) X, const size\_t ldx, int &nullity)  
*Invert the given matrix or computes its nullity if it is singular.*
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [Invert2](#) (const [Field](#) &F, const size\_t M, typename [Field::Element\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) X, const size\_t ldx, int &nullity)  
*Invert the given matrix or computes its nullity if it is singular.*

## 13.198.1 Macro Definition Documentation

### 13.198.1.1 [\\_\\_FFLASFFPACK\\_ffpack\\_invert\\_INL](#)

```
#define \_\_FFLASFFPACK\_ffpack\_invert\_INL
```

## 13.199 ffpack\_krylovelim.inl File Reference

### Macros

- `#define __FFLASFFPACK_ffpack_krylovelim_INL`

### 13.199.1 Macro Definition Documentation

#### 13.199.1.1 \_\_FFLASFFPACK\_ffpack\_krylovelim\_INL

```
#define __FFLASFFPACK_ffpack_krylovelim_INL
```

## 13.200 ffpack\_ludivine.inl File Reference

```
#include "fflas-ffpack/fflas/fflas_bounds.inl"
```

### Data Structures

- class `callLUdivine_small< Element >`
- class `callLUdivine_small< double >`
- class `callLUdivine_small< float >`

### Namespaces

- namespace `FFPACK`  
*Finite Field PACK Set of elimination based routines for dense linear algebra.*
- namespace `FFPACK::Protected`

### Macros

- `#define __FFLASFFPACK_ffpack_ludivine_INL`

### Functions

- `template<class Field >`  
`size_t LUdivine_gauss (const Field &F, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Q, const FFPACK::FFPACK_LU_TAG LuTag)`
- `template<class Field >`  
`size_t LUdivine_small (const Field &F, const FFLAS::FFLAS_DIAG Diag, const FFLAS::FFLAS_TRANSPOSE trans, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Q, const FFPACK::FFPACK_LU_TAG LuTag)`
- `template<class Field >`  
`size_t LUdivine (const Field &F, const FFLAS::FFLAS_DIAG Diag, const FFLAS::FFLAS_TRANSPOSE trans, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Q, const FFPACK::FFPACK_LU_TAG LuTag, const size_t cutoff)`
- `template<class Field >`  
`size_t LUdivine_construct (const Field &F, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, typename Field::ConstElement_ptr A, const size_t lda, typename Field::Element_ptr X, const size_t ldx, typename Field::Element_ptr u, const size_t incu, size_t *P, bool computeX, const FFPACK::FFPACK_MINPOLY_TAG MinTag, const size_t kg_mc, const size_t kg_mb, const size_t kg_j)`

### 13.200.1 Macro Definition Documentation

#### 13.200.1.1 \_\_FFLASFFPACK\_ffpack\_ludivine\_INL

```
#define __FFLASFFPACK_ffpack_ludivine_INL
```

## 13.201 ffpack\_ludivine\_mp.inl File Reference

```
#include <givaro/modular-integer.h>
#include <givaro/givinteger.h>
#include "fflas-ffpack/field/rns-integer-mod.h"
#include "fflas-ffpack/field/rns-integer.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/ffpack/ffpack_ludivine.inl"
```

### Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

### Macros

- #define [\\_\\_FFPACK\\_ludivine\\_mp\\_INL](#)

### Functions

- template<> size\_t [LUdivine](#) (const Givaro::Modular< Givaro::Integer > &F, const [FFLAS::FFLAS\\_DIAG](#) Diag, const [FFLAS::FFLAS\\_TRANSPOSE](#) trans, const size\_t M, const size\_t N, typename Givaro::Integer \*A, const size\_t lda, size\_t \*P, size\_t \*Q, const FFPACK::FFPACK\_LU\_TAG LuTag, const size\_t cutoff)

## 13.201.1 Macro Definition Documentation

### 13.201.1.1 \_\_FFPACK\_ludivine\_mp\_INL

```
#define __FFPACK_ludivine_mp_INL
```

## 13.202 ffpack\_minpoly.inl File Reference

### Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*
- namespace [FFPACK::Protected](#)

### Macros

- #define [\\_\\_FFLASFFPACK\\_ffpack\\_minpoly\\_INL](#)

### Functions

- template<class [Field](#) , class Polynomial >  
Polynomial & [MinPoly](#) (const [Field](#) &F, Polynomial &minP, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda)  
*Compute the minimal polynomial of the matrix A.*
- template<class [Field](#) , class Polynomial , class RandIter >  
Polynomial & [MinPoly](#) (const [Field](#) &F, Polynomial &minP, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, RandIter &G)  
*Compute the minimal polynomial of the matrix A.*
- template<class [Field](#) , class Polynomial >  
Polynomial & [MatVecMinPoly](#) (const [Field](#) &F, Polynomial &minP, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::ConstElement\\_ptr](#) v, const size\_t incv)  
*Compute the minimal polynomial of the matrix A and a vector v, namely the first linear dependency relation in the Krylov basis  $(v, Av, \dots, A^N v)$ .*



- template<class [Field](#) , class Polynomial >  
Polynomial & [MatVecMinPoly](#) (const [Field](#) &F, Polynomial &minP, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) v, const size\_t incv, typename [Field::Element\\_ptr](#) K, const size\_t ldk, size\_t \*P)
- template<class [Field](#) , class Polynomial >  
Polynomial & [Hybrid\\_KGF\\_LUK\\_MinPoly](#) (const [Field](#) &F, Polynomial &minP, const size\_t N, typename [Field::ConstElement\\_ptr](#) A, const size\_t lda, typename [Field::Element\\_ptr](#) X, const size\_t ldx, size\_t \*P, const FFPACK\_MINPOLY\_TAG MinTag=FFPACK::FfpackDense, const size\_t kg\_mc=0, const size\_t kg\_←mb=0, const size\_t kg\_j=0)

## 13.202.1 Macro Definition Documentation

### 13.202.1.1 \_\_FFLASFFPACK\_ffpack\_minpoly\_INL

```
#define __FFLASFFPACK_ffpack_minpoly_INL
```

## 13.203 ffpack\_permutation.inl File Reference

```
#include <givaro/zring.h>
#include "fflas-ffpack/fflas/fflas_fassign.h"
```

### Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

### Macros

- #define [\\_\\_FFLASFFPACK\\_ffpack\\_permutation\\_INL](#)
- #define [FFLASFFPACK\\_PERM\\_BKSIZE](#) 32

### Functions

- template<class [Field](#) >  
void [MonotonicApplyP](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const [FFLAS::FFLAS\\_TRANSPOSE](#) Trans, const size\_t M, const size\_t ibeg, const size\_t iend, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t \*P, const size\_t R)
- Apply a R-monotonically increasing permutation P, to the matrix A.*
- template<class [Field](#) >  
void [MonotonicCompress](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t incA, const size\_t \*MathP, const size\_t R, const size\_t maxpiv, const size\_t rowstomove, const std::vector< bool > &ispiv)
- template<class [Field](#) >  
void [MonotonicCompressMorePivots](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t incA, const size\_t \*MathP, const size\_t R, const size\_t rowstomove, const size\_t lenP)
- template<class [Field](#) >  
void [MonotonicCompressCycles](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t incA, const size\_t \*MathP, const size\_t lenP)
- template<class [Field](#) >  
void [MonotonicExpand](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t incA, const size\_t \*MathP, const size\_t R, const size\_t maxpiv, const size\_t rowstomove, const std::vector< bool > &ispiv)
- template<class [Field](#) >  
void [applyP\\_block](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const [FFLAS::FFLAS\\_TRANSPOSE](#) Trans, const size\_t M, const size\_t ibeg, const size\_t iend, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t \*P)

- `template<class Field >`  
`void applyP (const Field &F, const FFLAS::FFLAS_SIDE Side, const FFLAS::FFLAS_TRANSPOSE Trans,`  
`const size_t m, const size_t ibeg, const size_t iend, typename Field::Element_ptr A, const size_t lda, const`  
`size_t *P, const FFLAS::ParSeqHelper::Sequential seq)`
- `template<class Field >`  
`void doApplyS (const Field &F, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr`  
`tmp, const size_t width, const size_t M2, const size_t R1, const size_t R2, const size_t R3, const size_t R4)`
- `template<class Field >`  
`void MatrixApplyS (const Field &F, typename Field::Element_ptr A, const size_t lda, const size_t width, const`  
`size_t M2, const size_t R1, const size_t R2, const size_t R3, const size_t R4)`
- `template<class Field >`  
`void MatrixApplyS (const Field &F, typename Field::Element_ptr A, const size_t lda, const size_t ↵`  
`t width, const size_t M2, const size_t R1, const size_t R2, const size_t R3, const size_t R4, const`  
`FFLAS::ParSeqHelper::Sequential seq)`
- `template<class Field, class Cut, class Param >`  
`void MatrixApplyS (const Field &F, typename Field::Element_ptr A, const size_t lda, const size_t ↵`  
`t width, const size_t M2, const size_t R1, const size_t R2, const size_t R3, const size_t R4, const`  
`FFLAS::ParSeqHelper::Parallel< Cut, Param > par)`
- `template<class T >`  
`void PermApplyS (T *A, const size_t lda, const size_t width, const size_t M2, const size_t R1, const size_t`  
`R2, const size_t R3, const size_t R4)`
- `template<class Field >`  
`void doApplyT (const Field &F, typename Field::Element_ptr A, const size_t lda, typename Field::Element_ptr`  
`tmp, const size_t width, const size_t N2, const size_t R1, const size_t R2, const size_t R3, const size_t R4)`
- `template<class Field >`  
`void MatrixApplyT (const Field &F, typename Field::Element_ptr A, const size_t lda, const size_t width, const`  
`size_t N2, const size_t R1, const size_t R2, const size_t R3, const size_t R4)`
- `template<class Field >`  
`void MatrixApplyT (const Field &F, typename Field::Element_ptr A, const size_t lda, const size_t ↵`  
`t width, const size_t N2, const size_t R1, const size_t R2, const size_t R3, const size_t R4, const`  
`FFLAS::ParSeqHelper::Sequential seq)`
- `template<class Field, class Cut, class Param >`  
`void MatrixApplyT (const Field &F, typename Field::Element_ptr A, const size_t lda, const size_t ↵`  
`t width, const size_t N2, const size_t R1, const size_t R2, const size_t R3, const size_t R4, const`  
`FFLAS::ParSeqHelper::Parallel< Cut, Param > par)`
- `template<class T >`  
`void PermApplyT (T *A, const size_t lda, const size_t width, const size_t N2, const size_t R1, const size_t`  
`R2, const size_t R3, const size_t R4)`
- `void LAPACKPerm2MathPerm (size_t *MathP, const size_t *LapackP, const size_t N)`  
*Conversion of a permutation from LAPACK format to Math format.*
- `void MathPerm2LAPACKPerm (size_t *LapackP, const size_t *MathP, const size_t N)`  
*Conversion of a permutation from Maths format to LAPACK format.*
- `void composePermutationsLLL (size_t *P1, const size_t *P2, const size_t R, const size_t N)`  
*Computes  $P1 \times \text{Diag}(I_R, P2)$  where  $P1$  is a LAPACK and  $P2$  a LAPACK permutation and store the result in  $P1$  as a LAPACK permutation.*
- `void composePermutationsLLM (size_t *MathP, const size_t *P1, const size_t *P2, const size_t R, const`  
`size_t N)`  
*Computes  $P1 \times \text{Diag}(I_R, P2)$  where  $P1$  is a LAPACK and  $P2$  a LAPACK permutation and store the result in  $\text{MathP}$  as a MathPermutation format.*
- `void composePermutationsMLM (size_t *MathP1, const size_t *P2, const size_t R, const size_t N)`  
*Computes  $\text{MathP1} \times \text{Diag}(I_R, P2)$  where  $\text{MathP1}$  is a MathPermutation and  $P2$  a LAPACK permutation and store the result in  $\text{MathP1}$  as a MathPermutation format.*
- `void cyclic_shift_mathPerm (size_t *P, const size_t s)`
- `template<class Field >`  
`void cyclic_shift_row_col (const Field &F, typename Field::Element_ptr A, size_t m, size_t n, size_t lda)`

- template<class [Field](#) >  
void [cyclic\\_shift\\_row](#) (const [Field](#) &F, typename [Field::Element\\_ptr](#) A, size\_t m, size\_t n, size\_t lda)
- template<typename T >  
void [cyclic\\_shift\\_row](#) (const [RNSIntegerMod](#)< T > &F, typename T::Element\_ptr A, size\_t m, size\_t n, size\_t lda)
- template<class [Field](#) >  
void [cyclic\\_shift\\_col](#) (const [Field](#) &F, typename [Field::Element\\_ptr](#) A, size\_t m, size\_t n, size\_t lda)
- template<typename T >  
void [cyclic\\_shift\\_col](#) (const [RNSIntegerMod](#)< T > &F, typename T::Element\_ptr A, size\_t m, size\_t n, size\_t lda)
- template<class [Field](#) >  
void [applyP](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const [FFLAS::FFLAS\\_TRANSPOSE](#) Trans, const size\_t M, const size\_t ibeg, const size\_t iend, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t \*P)  
*Computes  $P1 \times \text{Diag}(L_R, P2)$  where  $P1$  is a LAPACK and  $P2$  a LAPACK permutation and store the result in  $P1$  as a LAPACK permutation.*
- template<class [Field](#) , class Cut , class Param >  
void [applyP](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const [FFLAS::FFLAS\\_TRANSPOSE](#) Trans, const size\_t m, const size\_t ibeg, const size\_t iend, typename [Field::Element\\_ptr](#) A, const size\_t lda, const size\_t \*P, const [FFLAS::ParSeqHelper::Parallel](#)< Cut, Param > par)

### 13.203.1 Macro Definition Documentation

#### 13.203.1.1 \_\_FFLASFFPACK\_ffpack\_permutation\_INL

```
#define __FFLASFFPACK_ffpack_permutation_INL
```

#### 13.203.1.2 FFLASFFPACK\_PERM\_BKSIZE

```
#define FFLASFFPACK_PERM_BKSIZE 32
```

## 13.204 ffpack\_pluq.inl File Reference

### Namespaces

- namespace [FFPACK](#)  
*Finite **Field** **PACK** Set of elimination based routines for dense linear algebra.*

### Macros

- #define [\\_\\_FFLASFFPACK\\_ffpack\\_pluq\\_INL](#)
- #define [CROUT](#)

### Functions

- template<class [Field](#) >  
size\_t [PLUQ\\_basecaseV3](#) (const [Field](#) &Fi, const [FFLAS::FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, typename [Field::Element](#) \*A, const size\_t lda, size\_t \*P, size\_t \*Q)
- template<class [Field](#) >  
size\_t [PLUQ\\_basecaseV2](#) (const [Field](#) &Fi, const [FFLAS::FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, typename [Field::Element](#) \*A, const size\_t lda, size\_t \*P, size\_t \*Q)
- template<class [Field](#) >  
size\_t [PLUQ\\_basecaseCROUT](#) (const [Field](#) &Fi, const [FFLAS::FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*P, size\_t \*Q)
- template<class [Field](#) >  
size\_t [\\_PLUQ](#) (const [Field](#) &Fi, const [FFLAS::FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*P, size\_t \*Q, size\_t BCThreshold)

- template<class [Field](#) >  
size\_t [PLUQ](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*P, size\_t \*Q, const [FFLAS::ParSeqHelper::Sequential](#) &PHelper, size\_t BCThreshold=[\\_\\_FFLASFFPACK\\_PLUQ\\_THRESHOLD](#))
- template<class [Field](#) >  
size\_t [PLUQ](#) (const [Field](#) &F, const [FFLAS::FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, typename [Field::Element\\_ptr](#) A, const size\_t lda, size\_t \*P, size\_t \*Q)

*Compute a PLUQ factorization of the given matrix.*

### 13.204.1 Macro Definition Documentation

#### 13.204.1.1 [\\_\\_FFLASFFPACK\\_ffpack\\_pluq\\_INL](#)

```
#define __FFLASFFPACK_ffpack_pluq_INL
```

#### 13.204.1.2 CROUT

```
#define CROUT
```

## 13.205 [ffpack\\_pluq\\_mp.inl](#) File Reference

```
#include "fflas-ffpack/field/rns-integer-mod.h"
#include "fflas-ffpack/field/rns-integer.h"
#include "fflas-ffpack/fflas-ffpack.h"
#include "givaro/givinteger.h"
#include "givaro/modular-integer.h"
```

### Namespaces

- namespace [FFPACK](#)  
*Finite **Field** **PACK** Set of elimination based routines for dense linear algebra.*

### Macros

- #define [\\_\\_FFPACK\\_pluq\\_mp\\_INL](#)

### Functions

- template<class Cut, class Param >  
size\_t [PLUQ](#) (const [Givaro::Modular](#)< [Givaro::Integer](#) > &F, const [FFLAS::FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, typename [Givaro::Integer](#) \*A, const size\_t lda, size\_t \*P, size\_t \*Q, size\_t BCThreshold, [FFLAS::ParSeqHelper::Parallel](#)< Cut, Param > &PHelper)

### 13.205.1 Macro Definition Documentation

#### 13.205.1.1 [\\_\\_FFPACK\\_pluq\\_mp\\_INL](#)

```
#define __FFPACK_pluq_mp_INL
```

## 13.206 [ffpack\\_ppluq.inl](#) File Reference

### Namespaces

- namespace [FFPACK](#)  
*Finite **Field** **PACK** Set of elimination based routines for dense linear algebra.*

## Macros

- `#define __FFLASFFPACK_ffpack_ppluq_INL`
- `#define __FFLAS__TRSM_READONLY`
- `#define PBASECASE_K 256`

## Functions

- `template<class Field >`  
`void threads_fgemm (const size_t m, const size_t n, const size_t r, int nbthreads, size_t *W1, size_t *W2, size_t *W3, size_t gamma)`
- `template<class Field >`  
`void threads_ftrsm (const size_t m, const size_t n, int nbthreads, size_t *t1, size_t *t2)`
- `template<class Field >`  
`size_t PLUQ (const Field &Fi, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Q, const FFLAS::ParSeqHelper::Parallel< FFLAS::CuttingStrategy::Recursive, FFLAS::StrategyParameter::Threads > &PSHelper)`
- `template<class Field >`  
`size_t pPLUQ (const Field &F, const FFLAS::FFLAS_DIAG Diag, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *P, size_t *Q)`

### 13.206.1 Macro Definition Documentation

#### 13.206.1.1 \_\_FFLASFFPACK\_ffpack\_ppluq\_INL

```
#define __FFLASFFPACK_ffpack_ppluq_INL
```

#### 13.206.1.2 \_\_FFLAS\_\_TRSM\_READONLY

```
#define __FFLAS__TRSM_READONLY
```

#### 13.206.1.3 PBASECASE\_K

```
#define PBASECASE_K 256
```

## 13.207 ffpack\_rankprofiles.inl File Reference

### Namespaces

- namespace `FFPACK`  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

### Macros

- `#define __FFLASFFPACK_ffpack_rank_profiles_INL`

### Functions

- `template<class Field >`  
`size_t RowRankProfile (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *rkprofile, const FFPACK_LU_TAG LuTag=FfpackSlabRecursive)`  
*Computes the row rank profile of A.*
- `template<class Field >`  
`size_t pRowRankProfile (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *rkprofile, size_t numthreads=0, const FFPACK_LU_TAG LuTag=FfpackTileRecursive)`
- `template<class Field, class PSHelper >`  
`size_t RowRankProfile (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A, const size_t lda, size_t *rkprofile, const FFPACK_LU_TAG LuTag, PSHelper &psH)`

- `template<class Field >`  
`size_t ColumnRankProfile (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A,`  
`const size_t lda, size_t *rkprofile, const FFPACK_LU_TAG LuTag=FfpackSlabRecursive)`  
*Computes the column rank profile of A.*
- `template<class Field >`  
`size_t pColumnRankProfile (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A,`  
`const size_t lda, size_t *rkprofile, size_t numthreads=0, const FFPACK_LU_TAG LuTag=FfpackTileRecursive)`
- `template<class Field , class PSHelper >`  
`size_t ColumnRankProfile (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr A,`  
`const size_t lda, size_t *rkprofile, const FFPACK_LU_TAG LuTag, PSHelper &psH)`
- `void RankProfileFromLU (const size_t *P, const size_t N, const size_t R, size_t *rkprofile, const FFPACK_LU_TAG LuTag)`  
*Recovers the column/row rank profile from the permutation of an LU decomposition.*
- `size_t LeadingSubmatrixRankProfiles (const size_t M, const size_t N, const size_t R, const size_t LSm, const`  
`size_t LSn, const size_t *P, const size_t *Q, size_t *RRP, size_t *CRP)`  
*Recovers the row and column rank profiles of any leading submatrix from the PLUQ decomposition.*
- `template<class Field >`  
`size_t RowRankProfileSubmatrixIndices (const Field &F, const size_t M, const size_t N, typename`  
`Field::Element_ptr A, const size_t lda, size_t *rowindices, size_t *colindices, size_t &R)`  
*RowRankProfileSubmatrixIndices.*
- `template<class Field >`  
`size_t ColRankProfileSubmatrixIndices (const Field &F, const size_t M, const size_t N, typename`  
`Field::Element_ptr A, const size_t lda, size_t *rowindices, size_t *colindices, size_t &R)`  
*Computes the indices of the submatrix  $r \times r$  X of A whose columns correspond to the column rank profile of A.*
- `template<class Field >`  
`size_t RowRankProfileSubmatrix (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr`  
`A, const size_t lda, typename Field::Element_ptr &X, size_t &R)`  
*Computes the  $r \times r$  submatrix X of A, by picking the row rank profile rows of A.*
- `template<class Field >`  
`size_t ColRankProfileSubmatrix (const Field &F, const size_t M, const size_t N, typename Field::Element_ptr`  
`A, const size_t lda, typename Field::Element_ptr &X, size_t &R)`  
*Compute the  $r \times r$  submatrix X of A, by picking the row rank profile rows of A.*
- `template<class Field >`  
`Field::Element_ptr LQUPtoInverseOfFullRankMinor (const Field &F, const size_t rank, typename`  
`Field::Element_ptr A_factors, const size_t lda, const size_t *QtPointer, typename Field::Element_ptr X,`  
`const size_t ldx)`  
*LQUPtoInverseOfFullRankMinor.*

### 13.207.1 Macro Definition Documentation

#### 13.207.1.1 \_\_FFLASFFPACK\_ffpack\_rank\_profiles\_INL

```
#define __FFLASFFPACK_ffpack_rank_profiles_INL
```

## 13.208 field-traits.h File Reference

Field Traits.

```
#include <type_traits>
#include "fflas-ffpack/field/rns-double-elt.h"
#include "recint/rmint.h"
#include "givaro/modular-general.h"
#include "givaro/zring.h"
```

## Data Structures

- struct [GenericTag](#)  
*generic ring.*
- struct [ModularTag](#)  
*This is a modular field like e.g. `Modular<T>` or `ModularBalanced<T>`*
- struct [UnparametricTag](#)  
*If the field uses a representation with infix operators.*
- struct [DefaultTag](#)  
*No specific mode of action: use standard field operations.*
- struct [DefaultBoundedTag](#)  
*Use standard field operations, but keeps track of bounds on input and output.*
- struct [ConvertTo< T >](#)  
*Force conversion to appropriate element type of `ElementCategory T`.*
- struct [DelayedTag](#)  
*Performs field operations with delayed mod reductions. Ensures result is reduced.*
- struct [LazyTag](#)  
*Performs field operations with delayed mod only when necessary. Result may not be reduced.*
- struct [GenericTag](#)  
*default is generic*
- struct [MachineFloatTag](#)  
*float or double*
- struct [MachineIntTag](#)  
*short, int, long, long long, and unsigned variants*
- struct [FixedPrecIntTag](#)  
*Fixed precision integers above machine precision: `Givaro::reclnt`.*
- struct [ArbitraryPrecIntTag](#)  
*Arbitrary precision integers: `GMP`.*
- struct [RNSElementTag](#)  
*Representation in a Residue Number System.*
- struct [ElementTraits< Element >](#)  
*[ElementTraits](#).*
- struct [ElementTraits< float >](#)
- struct [ElementTraits< double >](#)
- struct [ElementTraits< int8\\_t >](#)
- struct [ElementTraits< int16\\_t >](#)
- struct [ElementTraits< int32\\_t >](#)
- struct [ElementTraits< int64\\_t >](#)
- struct [ElementTraits< uint8\\_t >](#)
- struct [ElementTraits< uint16\\_t >](#)
- struct [ElementTraits< uint32\\_t >](#)
- struct [ElementTraits< uint64\\_t >](#)
- struct [ElementTraits< Givaro::Integer >](#)
- struct [ElementTraits< Reclnt::rint< K > >](#)
- struct [ElementTraits< Reclnt::ruint< K > >](#)
- struct [ElementTraits< Reclnt::rmint< K, MG > >](#)
- struct [ElementTraits< FFPACK::rns\\_double\\_elt >](#)
- struct [ModeTraits< Field >](#)  
*[ModeTraits](#).*
- struct [ModeTraits< Givaro::Modular< Element, Compute > >](#)
- struct [ModeTraits< Givaro::Modular< int64\\_t, uint64\\_t > >](#)
- struct [ModeTraits< Givaro::Modular< int8\\_t, Compute > >](#)
- struct [ModeTraits< Givaro::Modular< int16\\_t, Compute > >](#)

- struct [ModeTraits](#)< Givaro::Modular< int32\_t, Compute > >
- struct [ModeTraits](#)< Givaro::Modular< uint8\_t, Compute > >
- struct [ModeTraits](#)< Givaro::Modular< uint16\_t, Compute > >
- struct [ModeTraits](#)< Givaro::Modular< uint32\_t, Compute > >
- struct [ModeTraits](#)< Givaro::Modular< Givaro::Integer, Compute > >
- struct [ModeTraits](#)< Givaro::Modular< ReclInt::ruint< K >, Compute > >
- struct [ModeTraits](#)< Givaro::ModularBalanced< Element > >
- struct [ModeTraits](#)< Givaro::ModularBalanced< int8\_t > >
- struct [ModeTraits](#)< Givaro::ModularBalanced< int16\_t > >
- struct [ModeTraits](#)< Givaro::ModularBalanced< int32\_t > >
- struct [ModeTraits](#)< Givaro::ModularBalanced< Givaro::Integer > >
- struct [ModeTraits](#)< Givaro::ZRing< Givaro::Integer > >
- struct [ModeTraits](#)< Givaro::ZRing< float > >
- struct [ModeTraits](#)< Givaro::ZRing< double > >
- struct [ModeTraits](#)< Givaro::Montgomery< T > >
- struct [FieldTraits](#)< Field >

*FieldTrait.*

- struct [FieldTraits](#)< Givaro::ZRing< ReclInt::ruint< K > > >
- struct [FieldTraits](#)< Givaro::Modular< Element > >
- struct [FieldTraits](#)< Givaro::ModularBalanced< Element > >
- struct [FieldTraits](#)< Givaro::ZRing< double > >
- struct [FieldTraits](#)< Givaro::ZRing< float > >
- struct [FieldTraits](#)< Givaro::ZRing< int16\_t > >
- struct [FieldTraits](#)< Givaro::ZRing< uint16\_t > >
- struct [FieldTraits](#)< Givaro::ZRing< int32\_t > >
- struct [FieldTraits](#)< Givaro::ZRing< uint32\_t > >
- struct [FieldTraits](#)< Givaro::ZRing< int64\_t > >
- struct [FieldTraits](#)< Givaro::ZRing< uint64\_t > >
- struct [FieldTraits](#)< Givaro::ZRing< Givaro::Integer > >
- struct [FieldTraits](#)< FFPACK::RNSInteger< T > >
- struct [FieldTraits](#)< FFPACK::RNSIntegerMod< T > >
- struct [associatedDelayedField](#)< Field >
- struct [associatedDelayedField](#)< const Givaro::Modular< T, X > >
- struct [associatedDelayedField](#)< const Givaro::ModularBalanced< T > >
- struct [associatedDelayedField](#)< const Givaro::ZRing< T > >
- struct [associatedDelayedField](#)< const FFPACK::RNSIntegerMod< RNS > >

## Namespaces

- namespace [ReclInt](#)
- namespace [Givaro](#)
- namespace [FFPACK](#)

*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

- namespace [FFLAS](#)
- namespace [FFLAS::FieldCategories](#)

*Traits and categories will need to be placed in a proper file later.*

- namespace [FFLAS::ModeCategories](#)

*Specifies the mode of action for an algorithm w.r.t.*

- namespace [FFLAS::ElementCategories](#)



## Functions

- template<class [Field](#) , class enable = void>  
Field::Residu\_t [maxCardinality](#) ()
- template<> uint64\_t [maxCardinality](#)< Givaro::Modular< int64\_t > > ()
- template<> uint32\_t [maxCardinality](#)< Givaro::Modular< int32\_t > > ()
- template<class [Field](#) >  
Field::Residu\_t [minCardinality](#) ()

### 13.208.1 Detailed Description

Field Traits.

## 13.209 field.doxy File Reference

### 13.210 rns-double-elt.h File Reference

rns elt structure with double support

```
#include "fflas-ffpack/utils/fflas_memory.h"
#include "fflas-ffpack/utils/cast.h"
```

## Data Structures

- struct [rns\\_double\\_elt](#)
- struct [rns\\_double\\_elt\\_ptr](#)
- struct [rns\\_double\\_elt\\_cstptr](#)

## Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

## Functions

- template<> [rns\\_double\\_elt\\_ptr](#) fflas\_const\_cast ([rns\\_double\\_elt\\_cstptr](#) x)
- template<> [rns\\_double\\_elt\\_cstptr](#) fflas\_const\_cast ([rns\\_double\\_elt\\_ptr](#) x)

### 13.210.1 Detailed Description

rns elt structure with double support

### 13.211 rns-double-recint.inl File Reference

```
#include "fflas-ffpack/fflas/fflas_freduce.h"
```

## Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

## Macros

- #define [\\_\\_FFLASFFPACK\\_field\\_rns\\_double\\_recint\\_INL](#)

### 13.211.1 Macro Definition Documentation

#### 13.211.1.1 \_\_FFLASFFPACK\_field\_rns\_double\_recint\_INL

```
#define __FFLASFFPACK_field_rns_double_recint_INL
```

## 13.212 rns-double.h File Reference

rns structure with double support

```
#include <iterator>
#include <vector>
#include <givaro/modular-floating.h>
#include <givaro/givinteger.h>
#include <givaro/givintprime.h>
#include "givaro/modular-extended.h"
#include <recint/ruint.h>
#include "fflas-ffpack/config-blas.h"
#include "fflas-ffpack/utils/fflas_memory.h"
#include "fflas-ffpack/utils/align-allocator.h"
#include "fflas-ffpack/field/rns-double-elt.h"
#include "rns-double.inl"
#include "rns-double-recint.inl"
```

### Data Structures

- struct [rns\\_double](#)
- struct [rns\\_double\\_extended](#)
- class [rnsRandIter](#)< [RNS](#) >

### Namespaces

- namespace [FFPACK](#)  
*Finite Field PACK Set of elimination based routines for dense linear algebra.*
- namespace [FFLAS](#)

### Macros

- #define [ROUND\\_DOWN](#)(x, s)

### Functions

- template<> void [fflas\\_delete](#) ([FFPACK::rns\\_double\\_elt\\_ptr](#) A)
- template<> void [fflas\\_delete](#) ([FFPACK::rns\\_double\\_elt\\_cstptr](#) A)

### 13.212.1 Detailed Description

rns structure with double support

### 13.212.2 Macro Definition Documentation

#### 13.212.2.1 ROUND\_DOWN

```
#define ROUND_DOWN (
    x,
    s)
```

**Value:**

```
((x) & ~((s)-1))
```

## 13.213 rns-double.inl File Reference

```
#include "fflas-ffpack/fflas/fflas_freduce.h"
```

### Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

### Macros

- #define [\\_\\_FFLASFFPACK\\_field\\_rns\\_double\\_INL](#)

### 13.213.1 Macro Definition Documentation

#### 13.213.1.1 [\\_\\_FFLASFFPACK\\_field\\_rns\\_double\\_INL](#)

```
#define __FFLASFFPACK_field_rns_double_INL
```

## 13.214 rns-integer-mod.h File Reference

representation of  $\mathbb{Z}/p\mathbb{Z}$  using RNS representation (note: fixed precision)

```
#include <vector>
#include <cmath>
#include <recint/recint.h>
#include <givaro/modular-integer.h>
#include <givaro/givinteger.h>
#include <givaro/udl.h>
#include "givaro/modular-extended.h"
#include "fflas-ffpack/field/rns-double.h"
#include "fflas-ffpack/field/rns-integer.h"
#include "fflas-ffpack/fflas/fflas_level1.inl"
#include "fflas-ffpack/fflas/fflas_level2.inl"
#include "fflas-ffpack/fflas/fflas_level3.inl"
#include "fflas-ffpack/fflas/fflas_enum.h"
#include "fflas-ffpack/fflas/fflas_fscal_mp.inl"
```

### Data Structures

- class [RNSIntegerMod< RNS >](#)
- class [RNSIntegerMod< RNS >::RandIter](#)

### Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*
- namespace [FFLAS](#)

### Functions

- template<> [FFPACK::rns\\_double\\_elt\\_ptr fflas\\_new](#) (const [FFPACK::RNSIntegerMod< FFPACK::rns\\_double >](#) &F, const size\_t m, const Alignment align)
- template<> [FFPACK::rns\\_double\\_elt\\_ptr fflas\\_new](#) (const [FFPACK::RNSIntegerMod< FFPACK::rns\\_double >](#) &F, const size\_t m, const size\_t n, const Alignment align)

- template<typename [RNS](#) >  
void [finit\\_rns](#) (const [FFPACK::RNSIntegerMod](#)< [RNS](#) > &F, const size\_t m, const size\_t n, size\_t k, const Givaro::Integer \*B, const size\_t ldb, typename [RNS::Element\\_ptr](#) A)
- template<typename [RNS](#) >  
void [finit\\_trans\\_rns](#) (const [FFPACK::RNSIntegerMod](#)< [RNS](#) > &F, const size\_t m, const size\_t n, size\_t k, const Givaro::Integer \*B, const size\_t ldb, typename [RNS::Element\\_ptr](#) A)
- template<typename [RNS](#) >  
void [fconvert\\_rns](#) (const [FFPACK::RNSIntegerMod](#)< [RNS](#) > &F, const size\_t m, const size\_t n, Givaro::Integer alpha, Givaro::Integer \*B, const size\_t ldb, typename [RNS::ConstElement\\_ptr](#) A)
- template<typename [RNS](#) >  
void [fconvert\\_trans\\_rns](#) (const [FFPACK::RNSIntegerMod](#)< [RNS](#) > &F, const size\_t m, const size\_t n, Givaro::Integer alpha, Givaro::Integer \*B, const size\_t ldb, typename [RNS::ConstElement\\_ptr](#) A)

### 13.214.1 Detailed Description

representation of  $\mathbb{Z}/p\mathbb{Z}$  using RNS representation (note: fixed precision)

## 13.215 rns-integer.h File Reference

representation of  $\mathbb{Z}$  using RNS representation (note: fixed precision)

```
#include <givaro/givinteger.h>
#include "fflas-ffpack/field/rns-double.h"
```

### Data Structures

- class [RNSInteger](#)< [RNS](#) >
- class [RNSInteger](#)< [RNS](#) >::RandIter

### Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*
- namespace [FFLAS](#)

### Functions

- template<> [FFPACK::rns\\_double\\_elt\\_ptr fflas\\_new](#) (const [FFPACK::RNSInteger](#)< [FFPACK::rns\\_double](#) > &F, const size\_t m, const Alignment align)
- template<> [FFPACK::rns\\_double\\_elt\\_ptr fflas\\_new](#) (const [FFPACK::RNSInteger](#)< [FFPACK::rns\\_double](#) > &F, const size\_t m, const size\_t n, const Alignment align)
- template<typename [RNS](#) >  
void [finit\\_rns](#) (const [FFPACK::RNSInteger](#)< [RNS](#) > &F, const size\_t m, const size\_t n, size\_t k, const Givaro::Integer \*B, const size\_t ldb, typename [FFPACK::RNSInteger](#)< [RNS](#) >::Element\_ptr A)
- template<typename [RNS](#) >  
void [fconvert\\_rns](#) (const [FFPACK::RNSInteger](#)< [RNS](#) > &F, const size\_t m, const size\_t n, Givaro::Integer alpha, Givaro::Integer \*B, const size\_t ldb, typename [FFPACK::RNSInteger](#)< [RNS](#) >::ConstElement\_ptr A)

### 13.215.1 Detailed Description

representation of  $\mathbb{Z}$  using RNS representation (note: fixed precision)

## 13.216 rns.h File Reference

### Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

## 13.217 rns.inl File Reference

```
#include "rns-double.h"
#include "rns-integer.h"
#include "rns-integer-mod.h"
```

### Macros

- #define [\\_\\_FFLASFFPACK\\_field\\_rns\\_INL](#)

### 13.217.1 Macro Definition Documentation

#### 13.217.1.1 \_\_FFLASFFPACK\_field\_rns\_INL

```
#define __FFLASFFPACK_field_rns_INL
```

## 13.218 interfaces.doxy File Reference

## 13.219 fflas\_c.h File Reference

```
#include <stdbool.h>
#include <stdlib.h>
#include <inttypes.h>
```

### Macros

- #define [FFLAS\\_COMPILED](#)

### Enumerations

- enum [FFLAS\\_C\\_ORDER](#) { [FflasRowMajor](#) = 101 , [FflasColMajor](#) = 102 }  
*Storage by row or col ?*
- enum [FFLAS\\_C\\_TRANSPOSE](#) { [FflasNoTrans](#) = 111 , [FflasTrans](#) = 112 }  
*Is matrix transposed ?*
- enum [FFLAS\\_C\\_UPLO](#) { [FflasUpper](#) = 121 , [FflasLower](#) = 122 }  
*Is triangular matrix's shape upper ?*
- enum [FFLAS\\_C\\_DIAG](#) { [FflasNonUnit](#) = 131 , [FflasUnit](#) = 132 }  
*Is the triangular matrix implicitly unit diagonal ?*
- enum [FFLAS\\_C\\_SIDE](#) { [FflasLeft](#) = 141 , [FflasRight](#) = 142 }  
*On what side ?*
- enum [FFLAS\\_C\\_BASE](#) { [FflasDouble](#) = 151 , [FflasFloat](#) = 152 , [FflasGeneric](#) = 153 }  
*FFLAS\_C\_BASE determines the type of the element representation for Matrix Mult kernel.*

### Functions

- void [freducein\\_1\\_modular\\_double](#) (const double p, const size\_t n, double \*X, const size\_t incX, bool positive)
- void [freduce\\_1\\_modular\\_double](#) (const double F, const size\_t n, const double \*Y, const size\_t incY, double \*X, const size\_t incX, bool positive)
- void [fnegin\\_1\\_modular\\_double](#) (const double F, const size\_t n, double \*X, const size\_t incX, bool positive)
- void [fneg\\_1\\_modular\\_double](#) (const double p, const size\_t n, const double \*Y, const size\_t incY, double \*X, const size\_t incX, bool positive)
- void [fzero\\_1\\_modular\\_double](#) (const double p, const size\_t n, double \*X, const size\_t incX, bool positive)
- bool [fiszero\\_1\\_modular\\_double](#) (const double p, const size\_t n, const double \*X, const size\_t incX, bool positive)

- bool [fequal\\_1\\_modular\\_double](#) (const double p, const size\_t n, const double \*X, const size\_t incX, const double \*Y, const size\_t incY, bool positive)
- void [fassign\\_1\\_modular\\_double](#) (const double p, const size\_t n, const double \*Y, const size\_t incY, double \*X, const size\_t incX, bool positive)
- void [fscalin\\_1\\_modular\\_double](#) (const double p, const size\_t n, const double alpha, double \*X, const size\_t incX, bool positive)
- void [fscal\\_1\\_modular\\_double](#) (const double p, const size\_t n, const double alpha, const double \*X, const size\_t incX, double \*Y, const size\_t incY, bool positive)
- void [faxpy\\_1\\_modular\\_double](#) (const double p, const size\_t n, const double alpha, const double \*X, const size\_t incX, double \*Y, const size\_t incY, bool positive)
- double [fdot\\_1\\_modular\\_double](#) (const double p, const size\_t n, const double \*X, const size\_t incX, const double \*Y, const size\_t incY, bool positive)
- void [fswap\\_1\\_modular\\_double](#) (const double p, const size\_t n, double \*X, const size\_t incX, double \*Y, const size\_t incY, bool positive)
- void [fadd\\_1\\_modular\\_double](#) (const double p, const size\_t n, const double \*A, const size\_t incA, const double \*B, const size\_t incB, double \*C, const size\_t incC, bool positive)
- void [fsub\\_1\\_modular\\_double](#) (const double p, const size\_t n, const double \*A, const size\_t incA, const double \*B, const size\_t incB, double \*C, const size\_t incC, bool positive)
- void [faddin\\_1\\_modular\\_double](#) (const double p, const size\_t n, const double \*B, const size\_t incB, double \*C, const size\_t incC, bool positive)
- void [fsubin\\_1\\_modular\\_double](#) (const double p, const size\_t n, const double \*B, const size\_t incB, double \*C, const size\_t incC, bool positive)
- void [fassign\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double \*B, const size\_t incB, double \*A, const size\_t incA, bool positive)
- void [fzero\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, double \*A, const size\_t incA, bool positive)
- bool [fequal\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double \*A, const size\_t incA, const double \*B, const size\_t incB, bool positive)
- bool [fiszero\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double \*A, const size\_t incA, bool positive)
- void [fidentity\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, double \*A, const size\_t incA, const double d, bool positive)
- void [freducein\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, double \*A, const size\_t incA, bool positive)
- void [freduce\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double \*B, const size\_t incB, double \*A, const size\_t incA, bool positive)
- void [fnegin\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, double \*A, const size\_t incA, bool positive)
- void [fneg\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double \*B, const size\_t incB, double \*A, const size\_t incA, bool positive)
- void [fscalin\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double alpha, double \*A, const size\_t incA, bool positive)
- void [fscal\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double alpha, const double \*A, const size\_t incA, double \*B, const size\_t incB, bool positive)
- void [faxpy\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double alpha, const double \*X, const size\_t incX, double \*Y, const size\_t incY, bool positive)
- void [fmove\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, double \*A, const size\_t incA, double \*B, const size\_t incB, bool positive)
- void [fadd\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double \*A, const size\_t incA, const double \*B, const size\_t incB, double \*C, const size\_t incC, bool positive)
- void [fsub\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double \*A, const size\_t incA, const double \*B, const size\_t incB, double \*C, const size\_t incC, bool positive)
- void [fsubin\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double \*B, const size\_t incB, double \*C, const size\_t incC, bool positive)
- void [faddin\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double \*B, const size\_t incB, double \*C, const size\_t incC, bool positive)

- double \* [fgemv\\_2\\_modular\\_double](#) (const double p, const enum [FFLAS\\_C\\_TRANSPOSE](#) TransA, const size\_t m, const size\_t n, const double alpha, const double \*A, const size\_t ldA, const double \*X, const size\_t incX, const double betA, double \*Y, const size\_t incY, bool positive)
- void [fger\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double alpha, const double \*x, const size\_t incX, const double \*y, const size\_t incY, double \*A, const size\_t ldA, bool positive)
- void [ftrsv\\_2\\_modular\\_double](#) (const double p, const enum [FFLAS\\_C\\_UPLO](#) Uplo, const enum [FFLAS\\_C\\_TRANSPOSE](#) TransA, const enum [FFLAS\\_C\\_DIAG](#) Diag, const size\_t n, const double \*A, const size\_t ldA, double \*X, int incX, bool positive)
- void [ftrsm\\_3\\_modular\\_double](#) (const double p, const enum [FFLAS\\_C\\_SIDE](#) Side, const enum [FFLAS\\_C\\_UPLO](#) Uplo, const enum [FFLAS\\_C\\_TRANSPOSE](#) TransA, const enum [FFLAS\\_C\\_DIAG](#) Diag, const size\_t m, const size\_t n, const double alpha, const double \*A, const size\_t ldA, double \*B, const size\_t ldB, bool positive)
- void [ftrmm\\_3\\_modular\\_double](#) (const double p, const enum [FFLAS\\_C\\_SIDE](#) Side, const enum [FFLAS\\_C\\_UPLO](#) Uplo, const enum [FFLAS\\_C\\_TRANSPOSE](#) TransA, const enum [FFLAS\\_C\\_DIAG](#) Diag, const size\_t m, const size\_t n, const double alpha, double \*A, const size\_t ldA, double \*B, const size\_t ldB, bool positive)
- double \* [fgemm\\_3\\_modular\\_double](#) (const double p, const enum [FFLAS\\_C\\_TRANSPOSE](#) tA, const enum [FFLAS\\_C\\_TRANSPOSE](#) tB, const size\_t m, const size\_t n, const size\_t k, const double alpha, const double \*A, const size\_t ldA, const double \*B, const size\_t ldB, const double betA, double \*C, const size\_t ldC, bool positive)
- double \* [fsquare\\_3\\_modular\\_double](#) (const double p, const enum [FFLAS\\_C\\_TRANSPOSE](#) tA, const size\_t n, const double alpha, const double \*A, const size\_t ldA, const double betA, double \*C, const size\_t ldC, bool positive)

## 13.219.1 Macro Definition Documentation

### 13.219.1.1 FFLAS\_COMPILED

```
#define FFLAS_COMPILED
```

## 13.219.2 Enumeration Type Documentation

### 13.219.2.1 FFLAS\_C\_ORDER

```
enum FFLAS\_C\_ORDER
```

Storage by row or col ?

Enumerator

|                               |           |
|-------------------------------|-----------|
| <a href="#">FflasRowMajor</a> | row major |
| <a href="#">FflasColMajor</a> | col major |

### 13.219.2.2 FFLAS\_C\_TRANSPOSE

```
enum FFLAS\_C\_TRANSPOSE
```

Is matrix transposed ?

Enumerator

|                              |                           |
|------------------------------|---------------------------|
| <a href="#">FflasNoTrans</a> | Matrix is not transposed. |
| <a href="#">FflasTrans</a>   | Matrix is transposed.     |

### 13.219.2.3 FFLAS\_C\_UPLO

```
enum FFLAS\_C\_UPLO
```

Is triangular matrix's shape upper ?

## Enumerator

|            |                                                                        |
|------------|------------------------------------------------------------------------|
| FflasUpper | Triangular matrix is Upper triangular (if $i > j$ then $T_{i,j} = 0$ ) |
| FflasLower | Triangular matrix is Lower triangular (if $i < j$ then $T_{i,j} = 0$ ) |

**13.219.2.4 FFLAS\_C\_DIAG**enum [FFLAS\\_C\\_DIAG](#)

Is the triangular matrix implicitly unit diagonal ?

## Enumerator

|              |                                                                   |
|--------------|-------------------------------------------------------------------|
| FflasNonUnit | Triangular matrix has an explicit arbitrary diagonal.             |
| FflasUnit    | Triangular matrix has an implicit unit diagonal ( $T_{i,i} = 1$ ) |

**13.219.2.5 FFLAS\_C\_SIDE**enum [FFLAS\\_C\\_SIDE](#)

On what side ?

## Enumerator

|            |                                 |
|------------|---------------------------------|
| FflasLeft  | Operator applied on the left.   |
| FflasRight | Operator applied on the righth. |

**13.219.2.6 FFLAS\_C\_BASE**enum [FFLAS\\_C\\_BASE](#)

FFLAS\_C\_BASE determines the type of the element representation for Matrix Mult kernel.  
(deprecated, should not be used)

## Enumerator

|              |                                                                            |
|--------------|----------------------------------------------------------------------------|
| FflasDouble  | to use the double precision BLAS                                           |
| FflasFloat   | to use the single precision BLAS                                           |
| FflasGeneric | for any other domain, that can not be converted to floating point integers |

**13.219.3 Function Documentation****13.219.3.1 freducein\_1\_modular\_double()**

```
void freducein_1_modular_double (
    const double p,
    const size_t n,
    double * X,
    const size_t incX,
    bool positive)
```



### 13.219.3.2 `freduce_1_modular_double()`

```
void freduce_1_modular_double (
    const double F,
    const size_t n,
    const double * Y,
    const size_t incY,
    double * X,
    const size_t incX,
    bool positive)
```

### 13.219.3.3 `fnegin_1_modular_double()`

```
void fnegin_1_modular_double (
    const double F,
    const size_t n,
    double * X,
    const size_t incX,
    bool positive)
```

### 13.219.3.4 `fneg_1_modular_double()`

```
void fneg_1_modular_double (
    const double p,
    const size_t n,
    const double * Y,
    const size_t incY,
    double * X,
    const size_t incX,
    bool positive)
```

### 13.219.3.5 `fzero_1_modular_double()`

```
void fzero_1_modular_double (
    const double p,
    const size_t n,
    double * X,
    const size_t incX,
    bool positive)
```

### 13.219.3.6 `fiszero_1_modular_double()`

```
bool fiszero_1_modular_double (
    const double p,
    const size_t n,
    const double * X,
    const size_t incX,
    bool positive)
```

### 13.219.3.7 `fequal_1_modular_double()`

```
bool fequal_1_modular_double (
    const double p,
    const size_t n,
    const double * X,
    const size_t incX,
    const double * Y,
    const size_t incY,
    bool positive)
```

**13.219.3.8 fassign\_1\_modular\_double()**

```
void fassign_1_modular_double (
    const double p,
    const size_t n,
    const double * Y,
    const size_t incY,
    double * X,
    const size_t incX,
    bool positive)
```

**13.219.3.9 fscaln\_1\_modular\_double()**

```
void fscaln_1_modular_double (
    const double p,
    const size_t n,
    const double alpha,
    double * X,
    const size_t incX,
    bool positive)
```

**13.219.3.10 fscal\_1\_modular\_double()**

```
void fscal_1_modular_double (
    const double p,
    const size_t n,
    const double alpha,
    const double * X,
    const size_t incX,
    double * Y,
    const size_t incY,
    bool positive)
```

**13.219.3.11 faxpy\_1\_modular\_double()**

```
void faxpy_1_modular_double (
    const double p,
    const size_t n,
    const double alpha,
    const double * X,
    const size_t incX,
    double * Y,
    const size_t incY,
    bool positive)
```

**13.219.3.12 fdot\_1\_modular\_double()**

```
double fdot_1_modular_double (
    const double p,
    const size_t n,
    const double * X,
    const size_t incX,
    const double * Y,
    const size_t incY,
    bool positive)
```

**13.219.3.13 fswap\_1\_modular\_double()**

```
void fswap_1_modular_double (
    const double p,
```

```
    const size_t n,  
    double * X,  
    const size_t incX,  
    double * Y,  
    const size_t incY,  
    bool positive)
```

#### 13.219.3.14 fadd\_1\_modular\_double()

```
void fadd_1_modular_double (  
    const double p,  
    const size_t n,  
    const double * A,  
    const size_t incA,  
    const double * B,  
    const size_t incB,  
    double * C,  
    const size_t incC,  
    bool positive)
```

#### 13.219.3.15 fsub\_1\_modular\_double()

```
void fsub_1_modular_double (  
    const double p,  
    const size_t n,  
    const double * A,  
    const size_t incA,  
    const double * B,  
    const size_t incB,  
    double * C,  
    const size_t incC,  
    bool positive)
```

#### 13.219.3.16 faddin\_1\_modular\_double()

```
void faddin_1_modular_double (  
    const double p,  
    const size_t n,  
    const double * B,  
    const size_t incB,  
    double * C,  
    const size_t incC,  
    bool positive)
```

#### 13.219.3.17 fsubin\_1\_modular\_double()

```
void fsubin_1_modular_double (  
    const double p,  
    const size_t n,  
    const double * B,  
    const size_t incB,  
    double * C,  
    const size_t incC,  
    bool positive)
```

#### 13.219.3.18 fassign\_2\_modular\_double()

```
void fassign_2_modular_double (  
    const double p,
```

```

    const size_t m,
    const size_t n,
    const double * B,
    const size_t ldB,
    double * A,
    const size_t ldA,
    bool positive)

```

### 13.219.3.19 fzero\_2\_modular\_double()

```

void fzero_2_modular_double (
    const double p,
    const size_t m,
    const size_t n,
    double * A,
    const size_t ldA,
    bool positive)

```

### 13.219.3.20 fequal\_2\_modular\_double()

```

bool fequal_2_modular_double (
    const double p,
    const size_t m,
    const size_t n,
    const double * A,
    const size_t ldA,
    const double * B,
    const size_t ldB,
    bool positive)

```

### 13.219.3.21 fiszero\_2\_modular\_double()

```

bool fiszero_2_modular_double (
    const double p,
    const size_t m,
    const size_t n,
    const double * A,
    const size_t ldA,
    bool positive)

```

### 13.219.3.22 fidentity\_2\_modular\_double()

```

void fidentity_2_modular_double (
    const double p,
    const size_t m,
    const size_t n,
    double * A,
    const size_t ldA,
    const double d,
    bool positive)

```

### 13.219.3.23 freducein\_2\_modular\_double()

```

void freducein_2_modular_double (
    const double p,
    const size_t m,
    const size_t n,
    double * A,

```

```
    const size_t ldA,  
    bool positive)
```

#### 13.219.3.24 freduce\_2\_modular\_double()

```
void freduce_2_modular_double (  
    const double p,  
    const size_t m,  
    const size_t n,  
    const double * B,  
    const size_t ldB,  
    double * A,  
    const size_t ldA,  
    bool positive)
```

#### 13.219.3.25 fnegin\_2\_modular\_double()

```
void fnegin_2_modular_double (  
    const double p,  
    const size_t m,  
    const size_t n,  
    double * A,  
    const size_t ldA,  
    bool positive)
```

#### 13.219.3.26 fneg\_2\_modular\_double()

```
void fneg_2_modular_double (  
    const double p,  
    const size_t m,  
    const size_t n,  
    const double * B,  
    const size_t ldB,  
    double * A,  
    const size_t ldA,  
    bool positive)
```

#### 13.219.3.27 fscaln\_2\_modular\_double()

```
void fscaln_2_modular_double (  
    const double p,  
    const size_t m,  
    const size_t n,  
    const double alpha,  
    double * A,  
    const size_t ldA,  
    bool positive)
```

#### 13.219.3.28 fscal\_2\_modular\_double()

```
void fscal_2_modular_double (  
    const double p,  
    const size_t m,  
    const size_t n,  
    const double alpha,  
    const double * A,  
    const size_t ldA,  
    double * B,
```

```
    const size_t ldB,  
    bool positive)
```

#### 13.219.3.29 faxpy\_2\_modular\_double()

```
void faxpy_2_modular_double (  
    const double p,  
    const size_t m,  
    const size_t n,  
    const double alpha,  
    const double * X,  
    const size_t ldX,  
    double * Y,  
    const size_t ldY,  
    bool positive)
```

#### 13.219.3.30 fmove\_2\_modular\_double()

```
void fmove_2_modular_double (  
    const double p,  
    const size_t m,  
    const size_t n,  
    double * A,  
    const size_t ldA,  
    double * B,  
    const size_t ldB,  
    bool positive)
```

#### 13.219.3.31 fadd\_2\_modular\_double()

```
void fadd_2_modular_double (  
    const double p,  
    const size_t m,  
    const size_t n,  
    const double * A,  
    const size_t ldA,  
    const double * B,  
    const size_t ldB,  
    double * C,  
    const size_t ldC,  
    bool positive)
```

#### 13.219.3.32 fsub\_2\_modular\_double()

```
void fsub_2_modular_double (  
    const double p,  
    const size_t m,  
    const size_t n,  
    const double * A,  
    const size_t ldA,  
    const double * B,  
    const size_t ldB,  
    double * C,  
    const size_t ldC,  
    bool positive)
```

#### 13.219.3.33 fsubin\_2\_modular\_double()

```
void fsubin_2_modular_double (  

```

```

    const double p,
    const size_t m,
    const size_t n,
    const double * B,
    const size_t ldB,
    double * C,
    const size_t ldC,
    bool positive)

```

#### 13.219.3.34 faddin\_2\_modular\_double()

```

void faddin_2_modular_double (
    const double p,
    const size_t m,
    const size_t n,
    const double * B,
    const size_t ldB,
    double * C,
    const size_t ldC,
    bool positive)

```

#### 13.219.3.35 fgemv\_2\_modular\_double()

```

double * fgemv_2_modular_double (
    const double p,
    const enum FFLAS_C_TRANSPOSE TransA,
    const size_t m,
    const size_t n,
    const double alpha,
    const double * A,
    const size_t ldA,
    const double * X,
    const size_t incX,
    const double betA,
    double * Y,
    const size_t incY,
    bool positive)

```

#### 13.219.3.36 fger\_2\_modular\_double()

```

void fger_2_modular_double (
    const double p,
    const size_t m,
    const size_t n,
    const double alpha,
    const double * x,
    const size_t incX,
    const double * y,
    const size_t incY,
    double * A,
    const size_t ldA,
    bool positive)

```

#### 13.219.3.37 ftrsv\_2\_modular\_double()

```

void ftrsv_2_modular_double (
    const double p,
    const enum FFLAS_C_UPLO Uplo,
    const enum FFLAS_C_TRANSPOSE TransA,

```

```

    const enum FFLAS_C_DIAG Diag,
    const size_t n,
    const double * A,
    const size_t ldA,
    double * X,
    int incX,
    bool positive)

```

### 13.219.3.38 ftrsm\_3\_modular\_double()

```

void ftrsm_3_modular_double (
    const double p,
    const enum FFLAS_C_SIDE Side,
    const enum FFLAS_C_UPLO Uplo,
    const enum FFLAS_C_TRANSPOSE TransA,
    const enum FFLAS_C_DIAG Diag,
    const size_t m,
    const size_t n,
    const double alpha,
    const double * A,
    const size_t ldA,
    double * B,
    const size_t ldB,
    bool positive)

```

### 13.219.3.39 ftrmm\_3\_modular\_double()

```

void ftrmm_3_modular_double (
    const double p,
    const enum FFLAS_C_SIDE Side,
    const enum FFLAS_C_UPLO Uplo,
    const enum FFLAS_C_TRANSPOSE TransA,
    const enum FFLAS_C_DIAG Diag,
    const size_t m,
    const size_t n,
    const double alpha,
    double * A,
    const size_t ldA,
    double * B,
    const size_t ldB,
    bool positive)

```

### 13.219.3.40 fgemm\_3\_modular\_double()

```

double * fgemm_3_modular_double (
    const double p,
    const enum FFLAS_C_TRANSPOSE tA,
    const enum FFLAS_C_TRANSPOSE tB,
    const size_t m,
    const size_t n,
    const size_t k,
    const double alpha,
    const double * A,
    const size_t ldA,
    const double * B,
    const size_t ldB,
    const double betaA,
    double * C,

```



```
const size_t ldC,
bool positive)
```

### 13.219.3.41 fsquare\_3\_modular\_double()

```
double * fsquare_3_modular_double (
    const double p,
    const enum FFLAS_C_TRANSPOSE tA,
    const size_t n,
    const double alpha,
    const double * A,
    const size_t ldA,
    const double betA,
    double * C,
    const size_t ldC,
    bool positive)
```

## 13.220 fflas\_L1\_inst.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "givaro/modular.h"
#include "givaro/modular-balanced.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/fflas/fflas_helpers.inl"
#include "fflas_L1_inst_implem.inl"
```

### Macros

- #define `__FFLAS_L1_INST_C`
- #define `INST_OR_DECL`
- #define `FFLAS_FIELD Givaro::ModularBalanced`
- #define `FFLAS_ELT double`
- #define `FFLAS_ELT float`
- #define `FFLAS_ELT int64_t`
- #define `FFLAS_FIELD Givaro::Modular`
- #define `FFLAS_ELT double`
- #define `FFLAS_ELT float`
- #define `FFLAS_ELT int64_t`

### 13.220.1 Macro Definition Documentation

#### 13.220.1.1 \_\_FFLAS\_L1\_INST\_C

```
#define __FFLAS_L1_INST_C
```

#### 13.220.1.2 INST\_OR\_DECL

```
#define INST_OR_DECL
```

#### 13.220.1.3 FFLAS\_FIELD [1/2]

```
#define FFLAS_FIELD Givaro::ModularBalanced
```

#### 13.220.1.4 FFLAS\_ELT [1/6]

```
#define FFLAS_ELT double
```

**13.220.1.5 FFLAS\_ELT [2/6]**

```
#define FFLAS_ELT float
```

**13.220.1.6 FFLAS\_ELT [3/6]**

```
#define FFLAS_ELT int64_t
```

**13.220.1.7 FFLAS\_FIELD [2/2]**

```
#define FFLAS_FIELD Givaro::Modular
```

**13.220.1.8 FFLAS\_ELT [4/6]**

```
#define FFLAS_ELT double
```

**13.220.1.9 FFLAS\_ELT [5/6]**

```
#define FFLAS_ELT float
```

**13.220.1.10 FFLAS\_ELT [6/6]**

```
#define FFLAS_ELT int64_t
```

**13.221 fflas\_L1\_inst.h File Reference**

```
#include "givaro/modular.h"
#include "givaro/modular-balanced.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/fflas/fflas_helpers.inl"
#include "fflas_L1_inst_implem.inl"
```

**Macros**

- `#define INST_OR_DECL <>`
- `#define FFLAS_FIELD Givaro::ModularBalanced`
- `#define FFLAS_ELT double`
- `#define FFLAS_ELT float`
- `#define FFLAS_ELT int64_t`
- `#define FFLAS_FIELD Givaro::Modular`
- `#define FFLAS_ELT double`
- `#define FFLAS_ELT float`
- `#define FFLAS_ELT int64_t`

**13.221.1 Macro Definition Documentation****13.221.1.1 INST\_OR\_DECL**

```
#define INST_OR_DECL <>
```

**13.221.1.2 FFLAS\_FIELD [1/2]**

```
#define FFLAS_FIELD Givaro::ModularBalanced
```

**13.221.1.3 FFLAS\_ELT [1/6]**

```
#define FFLAS_ELT double
```

**13.221.1.4 FFLAS\_ELT [2/6]**

```
#define FFLAS_ELT float
```

**13.221.1.5 FFLAS\_ELT [3/6]**

```
#define FFLAS_ELT int64_t
```

**13.221.1.6 FFLAS\_FIELD [2/2]**

```
#define FFLAS_FIELD Givaro::Modular
```

**13.221.1.7 FFLAS\_ELT [4/6]**

```
#define FFLAS_ELT double
```

**13.221.1.8 FFLAS\_ELT [5/6]**

```
#define FFLAS_ELT float
```

**13.221.1.9 FFLAS\_ELT [6/6]**

```
#define FFLAS_ELT int64_t
```

**13.222 fflas\_L1\_inst\_implem.inl File Reference****Namespaces**

- namespace [FFLAS](#)

**Functions**

- template [INST\\_OR\\_DECL](#) void [freduce](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const size\_t n, [FFLAS\\_ELT](#) \*X, const size\_t incX)  

$$\text{freduce } x \leftarrow x \bmod F.$$
- template [INST\\_OR\\_DECL](#) void [freduce](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const size\_t n, const [FFLAS\\_ELT](#) \*Y, const size\_t incY, [FFLAS\\_ELT](#) \*X, const size\_t incX)  

$$\text{freduce } x \leftarrow y \bmod F.$$
- template [INST\\_OR\\_DECL](#) void [finit](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const size\_t n, const [FFLAS\\_ELT](#) \*Y, const size\_t incY, [FFLAS\\_ELT](#) \*X, const size\_t incX)  

$$\text{finit } x \leftarrow y \bmod F.$$
- template [INST\\_OR\\_DECL](#) void [fconvert](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const size\_t n, [FFLAS\\_ELT](#) \*X, const size\_t incX, const [FFLAS\\_ELT](#) \*Y, const size\_t incY)  

$$\text{fconvert } x \leftarrow y \bmod F.$$
- template [INST\\_OR\\_DECL](#) void [fnegin](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const size\_t n, [FFLAS\\_ELT](#) \*X, const size\_t incX)  

$$\text{fnegin } x \leftarrow -x.$$
- template [INST\\_OR\\_DECL](#) void [fneg](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const size\_t n, const [FFLAS\\_ELT](#) \*Y, const size\_t incY, [FFLAS\\_ELT](#) \*X, const size\_t incX)  

$$\text{fneg } x \leftarrow -y.$$
- template [INST\\_OR\\_DECL](#) void [fzero](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const size\_t n, [FFLAS\\_ELT](#) \*X, const size\_t incX)  

$$\text{fzero} : A \leftarrow 0.$$
- template [INST\\_OR\\_DECL](#) bool [fiszero](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const size\_t n, const [FFLAS\\_ELT](#) \*X, const size\_t incX)  

$$\text{fiszero} : \text{test } X = 0.$$

- template `INST_OR_DECL` bool `fequal` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t n, const `FFLAS_ELT` \*X, const size\_t incX, const `FFLAS_ELT` \*Y, const size\_t incY)  
 $fequal : test X = Y.$
- template `INST_OR_DECL` void `fassign` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t N, const `FFLAS_ELT` \*Y, const size\_t incY, `FFLAS_ELT` \*X, const size\_t incX)  
 $fassign : x \leftarrow y.$
- template `INST_OR_DECL` void `fscaln` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t n, const `FFLAS_ELT` alpha, `FFLAS_ELT` \*X, const size\_t incX)  
 $fscaln x \leftarrow \alpha \cdot x.$
- template `INST_OR_DECL` void `fscal` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t n, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*X, const size\_t incX, `FFLAS_ELT` \*Y, const size\_t incY)  
 $fscal y \leftarrow \alpha \cdot x.$
- template `INST_OR_DECL` void `faxpy` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t N, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*X, const size\_t incX, `FFLAS_ELT` \*Y, const size\_t incY)  
 $faxpy : y \leftarrow \alpha \cdot x + y.$
- template `INST_OR_DECL` `FFLAS_ELT` `fdot` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t N, const `FFLAS_ELT` \*X, const size\_t incX, const `FFLAS_ELT` \*Y, const size\_t incY)  
 $fdot : y \leftarrow \alpha \cdot x + \beta \cdot y.$
- template `INST_OR_DECL` void `fswap` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t N, `FFLAS_ELT` \*X, const size\_t incX, `FFLAS_ELT` \*Y, const size\_t incY)  
 $fswap : X \leftrightarrow Y.$
- template `INST_OR_DECL` void `fadd` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t N, const `FFLAS_ELT` \*A, const size\_t inca, const `FFLAS_ELT` \*B, const size\_t incb, `FFLAS_ELT` \*C, const size\_t incc)
- template `INST_OR_DECL` void `fsub` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t N, const `FFLAS_ELT` \*A, const size\_t inca, const `FFLAS_ELT` \*B, const size\_t incb, `FFLAS_ELT` \*C, const size\_t incc)
- template `INST_OR_DECL` void `faddin` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t N, const `FFLAS_ELT` \*B, const size\_t incb, `FFLAS_ELT` \*C, const size\_t incc)
- template `INST_OR_DECL` void `fadd` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t N, const `FFLAS_ELT` \*A, const size\_t inca, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*B, const size\_t incb, `FFLAS_ELT` \*C, const size\_t incc)

### 13.223 fflas\_L2\_inst.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "givaro/modular.h"
#include "givaro/modular-balanced.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/fflas/fflas_helpers.inl"
#include "fflas_L2_inst_implem.inl"
```

#### Macros

- #define `__FFLAS_L2_INST_C`
- #define `INST_OR_DECL`
- #define `FFLAS_FIELD` Givaro::ModularBalanced
- #define `FFLAS_ELT` double
- #define `FFLAS_ELT` float
- #define `FFLAS_ELT` int64\_t
- #define `FFLAS_FIELD` Givaro::Modular
- #define `FFLAS_ELT` double
- #define `FFLAS_ELT` float
- #define `FFLAS_ELT` int64\_t

### 13.223.1 Macro Definition Documentation

#### 13.223.1.1 \_\_FFLAS\_L2\_INST\_C

```
#define __FFLAS_L2_INST_C
```

#### 13.223.1.2 INST\_OR\_DECL

```
#define INST_OR_DECL
```

#### 13.223.1.3 FFLAS\_FIELD [1/2]

```
#define FFLAS_FIELD Givaro::ModularBalanced
```

#### 13.223.1.4 FFLAS\_ELT [1/6]

```
#define FFLAS_ELT double
```

#### 13.223.1.5 FFLAS\_ELT [2/6]

```
#define FFLAS_ELT float
```

#### 13.223.1.6 FFLAS\_ELT [3/6]

```
#define FFLAS_ELT int64_t
```

#### 13.223.1.7 FFLAS\_FIELD [2/2]

```
#define FFLAS_FIELD Givaro::Modular
```

#### 13.223.1.8 FFLAS\_ELT [4/6]

```
#define FFLAS_ELT double
```

#### 13.223.1.9 FFLAS\_ELT [5/6]

```
#define FFLAS_ELT float
```

#### 13.223.1.10 FFLAS\_ELT [6/6]

```
#define FFLAS_ELT int64_t
```

## 13.224 fflas\_L2\_inst.h File Reference

```
#include "givaro/modular.h"
#include "givaro/modular-balanced.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/fflas/fflas_helpers.inl"
#include "fflas_L2_inst_implem.inl"
```

### Macros

- #define [INST\\_OR\\_DECL](#) <>
- #define [FFLAS\\_FIELD](#) [Givaro::ModularBalanced](#)
- #define [FFLAS\\_ELT](#) double
- #define [FFLAS\\_ELT](#) float
- #define [FFLAS\\_ELT](#) int64\_t
- #define [FFLAS\\_FIELD](#) [Givaro::Modular](#)

- `#define FFLAS_ELT double`
- `#define FFLAS_ELT float`
- `#define FFLAS_ELT int64_t`

## 13.224.1 Macro Definition Documentation

### 13.224.1.1 INST\_OR\_DECL

```
#define INST_OR_DECL <>
```

### 13.224.1.2 FFLAS\_FIELD [1/2]

```
#define FFLAS_FIELD Givaro::ModularBalanced
```

### 13.224.1.3 FFLAS\_ELT [1/6]

```
#define FFLAS_ELT double
```

### 13.224.1.4 FFLAS\_ELT [2/6]

```
#define FFLAS_ELT float
```

### 13.224.1.5 FFLAS\_ELT [3/6]

```
#define FFLAS_ELT int64_t
```

### 13.224.1.6 FFLAS\_FIELD [2/2]

```
#define FFLAS_FIELD Givaro::Modular
```

### 13.224.1.7 FFLAS\_ELT [4/6]

```
#define FFLAS_ELT double
```

### 13.224.1.8 FFLAS\_ELT [5/6]

```
#define FFLAS_ELT float
```

### 13.224.1.9 FFLAS\_ELT [6/6]

```
#define FFLAS_ELT int64_t
```

## 13.225 fflas\_L2\_inst\_implem.inl File Reference

### Namespaces

- namespace [FFLAS](#)

### Functions

- template [INST\\_OR\\_DECL](#) void [fassign](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const size\_t m, const size\_t n, const [FFLAS\\_ELT](#) \*B, const size\_t ldb, [FFLAS\\_ELT](#) \*A, const size\_t lda)  
 $fassign : A \leftarrow B.$
- template [INST\\_OR\\_DECL](#) void [fzero](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const size\_t m, const size\_t n, [FFLAS\\_ELT](#) \*A, const size\_t lda)  
 $fzero : A \leftarrow 0.$
- template [INST\\_OR\\_DECL](#) bool [fequal](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const size\_t m, const size\_t n, const [FFLAS\\_ELT](#) \*A, const size\_t lda, const [FFLAS\\_ELT](#) \*B, const size\_t ldb)  
 $fequal : test A = B.$

- template `INST_OR_DECL` bool `fiszero` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, const `FFLAS_ELT` \*A, const size\_t lda)  

$$\text{fiszero} : \text{test } A = 0.$$
- template `INST_OR_DECL` void `fidentity` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, `FFLAS_ELT` \*A, const size\_t lda, const `FFLAS_ELT` &d)  

$$\text{creates a diagonal matrix}$$
- template `INST_OR_DECL` void `fidentity` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, `FFLAS_ELT` \*A, const size\_t lda)  

$$\text{creates a diagonal matrix}$$
- template `INST_OR_DECL` void `freduce` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, `FFLAS_ELT` \*A, const size\_t lda)  

$$\text{freduce } A \leftarrow A \bmod F.$$
- template `INST_OR_DECL` void `freduce` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, const `FFLAS_ELT` \*B, const size\_t ldb, `FFLAS_ELT` \*A, const size\_t lda)  

$$\text{freduce } A \leftarrow B \bmod F.$$
- template `INST_OR_DECL` void `finit` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, const `FFLAS_ELT` \*B, const size\_t ldb, `FFLAS_ELT` \*A, const size\_t lda)  

$$\text{finit } A \leftarrow B \bmod F.$$
- template `INST_OR_DECL` void `fnegin` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, `FFLAS_ELT` \*A, const size\_t lda)  

$$\text{fnegin } A \leftarrow -A.$$
- template `INST_OR_DECL` void `fneg` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, const `FFLAS_ELT` \*B, const size\_t ldb, `FFLAS_ELT` \*A, const size\_t lda)  

$$\text{fneg } A \leftarrow -B.$$
- template `INST_OR_DECL` void `fscaln` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, const `FFLAS_ELT` alpha, `FFLAS_ELT` \*A, const size\_t lda)  

$$\text{fscaln } A \leftarrow a \cdot A.$$
- template `INST_OR_DECL` void `fscal` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*A, const size\_t lda, `FFLAS_ELT` \*B, const size\_t ldb)  

$$\text{fscal } B \leftarrow a \cdot A.$$
- template `INST_OR_DECL` void `faxpy` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*X, const size\_t ldx, `FFLAS_ELT` \*Y, const size\_t ldy)  

$$\text{faxpy} : y \leftarrow \alpha \cdot x + y.$$
- template `INST_OR_DECL` void `fmove` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t m, const size\_t n, `FFLAS_ELT` \*A, const size\_t lda, `FFLAS_ELT` \*B, const size\_t ldb)  

$$\text{faxpby} : y \leftarrow \alpha \cdot x + \beta \cdot y.$$
- template `INST_OR_DECL` void `fadd` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t M, const size\_t N, const `FFLAS_ELT` \*A, const size\_t lda, const `FFLAS_ELT` \*B, const size\_t ldb, `FFLAS_ELT` \*C, const size\_t ldc)  

$$\text{fadd} : \text{matrix addition.}$$
- template `INST_OR_DECL` void `fsub` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t M, const size\_t N, const `FFLAS_ELT` \*A, const size\_t lda, const `FFLAS_ELT` \*B, const size\_t ldb, `FFLAS_ELT` \*C, const size\_t ldc)  

$$\text{fsub} : \text{matrix subtraction.}$$
- template `INST_OR_DECL` void `fsubin` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t M, const size\_t N, const `FFLAS_ELT` \*B, const size\_t ldb, `FFLAS_ELT` \*C, const size\_t ldc)  

$$\text{fsubin } C = C - B$$
- template `INST_OR_DECL` void `fadd` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t M, const size\_t N, const `FFLAS_ELT` \*A, const size\_t lda, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*B, const size\_t ldb, `FFLAS_ELT` \*C, const size\_t ldc)  

$$\text{fadd} : \text{matrix addition with scaling.}$$
- template `INST_OR_DECL` void `faddin` (const `FFLAS_FIELD`< `FFLAS_ELT` > &F, const size\_t M, const size\_t N, const `FFLAS_ELT` \*B, const size\_t ldb, `FFLAS_ELT` \*C, const size\_t ldc)

*faddin*

- template `INST_OR_DECL FFLAS_ELT * fgemv` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS_TRANSPOSE` TransA, const `size_t` M, const `size_t` N, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*A, const `size_t` lda, const `FFLAS_ELT` \*X, const `size_t` incX, const `FFLAS_ELT` beta, `FFLAS_ELT` \*Y, const `size_t` incY)

*finite prime FFLAS\_FIELD<FFLAS\_ELT> GEneral Matrix Vector multiplication.*

- template `INST_OR_DECL void fger` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` M, const `size_t` N, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*x, const `size_t` incx, const `FFLAS_ELT` \*y, const `size_t` incy, `FFLAS_ELT` \*A, const `size_t` lda)

*fger: rank one update of a general matrix*

- template `INST_OR_DECL void ftrsv` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS_UPLO` Uplo, const `FFLAS_TRANSPOSE` TransA, const `FFLAS_DIAG` Diag, const `size_t` N, const `FFLAS_ELT` \*A, const `size_t` lda, `FFLAS_ELT` \*X, int incX)

*ftrsv: TRIangular System solve with Vector Computes  $X \leftarrow \text{op}(A^{-1})X$*

## 13.226 fflas\_L3\_inst.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "givaro/modular.h"
#include "givaro/modular-balanced.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/fflas/fflas_helpers.inl"
#include "fflas_L3_inst_implem.inl"
```

### Macros

- #define `__FFLAS_L3_INST_C`
- #define `INST_OR_DECL`
- #define `FFLAS_FIELD` `Givaro::ModularBalanced`
- #define `FFLAS_ELT` `double`
- #define `FFLAS_ELT` `float`
- #define `FFLAS_ELT` `int64_t`
- #define `FFLAS_FIELD` `Givaro::Modular`
- #define `FFLAS_ELT` `double`
- #define `FFLAS_ELT` `float`
- #define `FFLAS_ELT` `int64_t`

### 13.226.1 Macro Definition Documentation

#### 13.226.1.1 \_\_FFLAS\_L3\_INST\_C

```
#define __FFLAS_L3_INST_C
```

#### 13.226.1.2 INST\_OR\_DECL

```
#define INST_OR_DECL
```

#### 13.226.1.3 FFLAS\_FIELD [1/2]

```
#define FFLAS_FIELD Givaro::ModularBalanced
```

#### 13.226.1.4 FFLAS\_ELT [1/6]

```
#define FFLAS_ELT double
```



**13.226.1.5 FFLAS\_ELT [2/6]**

```
#define FFLAS_ELT float
```

**13.226.1.6 FFLAS\_ELT [3/6]**

```
#define FFLAS_ELT int64_t
```

**13.226.1.7 FFLAS\_FIELD [2/2]**

```
#define FFLAS_FIELD Givaro::Modular
```

**13.226.1.8 FFLAS\_ELT [4/6]**

```
#define FFLAS_ELT double
```

**13.226.1.9 FFLAS\_ELT [5/6]**

```
#define FFLAS_ELT float
```

**13.226.1.10 FFLAS\_ELT [6/6]**

```
#define FFLAS_ELT int64_t
```

**13.227 fflas\_L3\_inst.h File Reference**

```
#include "givaro/modular.h"
#include "givaro/modular-balanced.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/fflas/fflas_helpers.inl"
#include "fflas_L3_inst_implem.inl"
```

**Macros**

- `#define INST_OR_DECL <>`
- `#define FFLAS_FIELD Givaro::ModularBalanced`
- `#define FFLAS_ELT double`
- `#define FFLAS_ELT float`
- `#define FFLAS_ELT int64_t`
- `#define FFLAS_FIELD Givaro::Modular`
- `#define FFLAS_ELT double`
- `#define FFLAS_ELT float`
- `#define FFLAS_ELT int64_t`

**13.227.1 Macro Definition Documentation****13.227.1.1 INST\_OR\_DECL**

```
#define INST_OR_DECL <>
```

**13.227.1.2 FFLAS\_FIELD [1/2]**

```
#define FFLAS_FIELD Givaro::ModularBalanced
```

**13.227.1.3 FFLAS\_ELT [1/6]**

```
#define FFLAS_ELT double
```

**13.227.1.4 FFLAS\_ELT [2/6]**

```
#define FFLAS_ELT float
```

**13.227.1.5 FFLAS\_ELT [3/6]**

```
#define FFLAS_ELT int64_t
```

**13.227.1.6 FFLAS\_FIELD [2/2]**

```
#define FFLAS_FIELD Givaro::Modular
```

**13.227.1.7 FFLAS\_ELT [4/6]**

```
#define FFLAS_ELT double
```

**13.227.1.8 FFLAS\_ELT [5/6]**

```
#define FFLAS_ELT float
```

**13.227.1.9 FFLAS\_ELT [6/6]**

```
#define FFLAS_ELT int64_t
```

**13.228 fflas\_L3\_inst\_implem.inl File Reference****Namespaces**

- namespace [FFLAS](#)

**Macros**

- #define [\\_\\_FFLAS\\_TRSM\\_READONLY](#)

**Functions**

- template [INST\\_OR\\_DECL](#) void [ftrsm](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const [FFLAS\\_SIDE](#) Side, const [FFLAS\\_UPLO](#) Uplo, const [FFLAS\\_TRANSPOSE](#) TransA, const [FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, const [FFLAS\\_ELT](#) alpha, const [FFLAS\\_ELT](#) \*A, const size\_t lda, [FFLAS\\_ELT](#) \*B, const size\_t ldb)  
*ftrsm: **TR**iangular **S**ystem solve with **M**atrix.*
- template [INST\\_OR\\_DECL](#) void [ftrmm](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const [FFLAS\\_SIDE](#) Side, const [FFLAS\\_UPLO](#) Uplo, const [FFLAS\\_TRANSPOSE](#) TransA, const [FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, const [FFLAS\\_ELT](#) alpha, const [FFLAS\\_ELT](#) \*A, const size\_t lda, [FFLAS\\_ELT](#) \*B, const size\_t ldb)  
*ftrmm: **TR**iangular **M**atrix **M**ultiply.*
- template [INST\\_OR\\_DECL](#) [FFLAS\\_ELT](#) \* [fgemm](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const [FFLAS\\_ELT](#) alpha, const [FFLAS\\_ELT](#) \*A, const size\_t lda, const [FFLAS\\_ELT](#) \*B, const size\_t ldb, const [FFLAS\\_ELT](#) beta, [FFLAS\\_ELT](#) \*C, const size\_t ldc)  
*fgemm: **F**ield **GE**neral **M**atrix **M**ultiply.*
- template [INST\\_OR\\_DECL](#) [FFLAS\\_ELT](#) \* [fgemm](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const [FFLAS\\_TRANSPOSE](#) ta, const [FFLAS\\_TRANSPOSE](#) tb, const size\_t m, const size\_t n, const size\_t k, const [FFLAS\\_ELT](#) alpha, const [FFLAS\\_ELT](#) \*A, const size\_t lda, const [FFLAS\\_ELT](#) \*B, const size\_t ldb, const [FFLAS\\_ELT](#) beta, [FFLAS\\_ELT](#) \*C, const size\_t ldc, const [ParSeqHelper::Sequential](#) seq)

- template `INST_OR_DECL FFLAS_ELT * fgemm` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS_TRANSPOSE` ta, const `FFLAS_TRANSPOSE` tb, const `size_t` m, const `size_t` n, const `size_t` k, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*A, const `size_t` lda, const `FFLAS_ELT` \*B, const `size_t` ldb, const `FFLAS_ELT` beta, `FFLAS_ELT` \*C, const `size_t` ldc, const `ParSeqHelper::Parallel< CuttingStrategy::Recursive, StrategyParameter::TwoDAdaptive >` par)
- template `INST_OR_DECL FFLAS_ELT * fgemm` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS_TRANSPOSE` ta, const `FFLAS_TRANSPOSE` tb, const `size_t` m, const `size_t` n, const `size_t` k, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*A, const `size_t` lda, const `FFLAS_ELT` \*B, const `size_t` ldb, const `FFLAS_ELT` beta, `FFLAS_ELT` \*C, const `size_t` ldc, const `ParSeqHelper::Parallel< CuttingStrategy::Block, StrategyParameter::Threads >` par)
- template `INST_OR_DECL FFLAS_ELT * fsquare` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS_TRANSPOSE` ta, const `size_t` n, const `FFLAS_ELT` alpha, const `FFLAS_ELT` \*A, const `size_t` lda, const `FFLAS_ELT` beta, `FFLAS_ELT` \*C, const `size_t` ldc)

*fsquare: Squares a matrix.*

## 13.228.1 Macro Definition Documentation

### 13.228.1.1 \_\_FFLAS\_\_TRSM\_READONLY

```
#define __FFLAS__TRSM_READONLY
```

## 13.229 fflas\_lvl1.C File Reference

C functions calls for level 1 `FFLAS` in `fflas-c.h`.

```
#include "fflas-ffpack/interfaces/libs/fflas_c.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "givaro//modular-balanced.h"
#include "givaro//modular.h"
```

## Functions

- void `freducein_1_modular_double` (const double p, const `size_t` n, double \*X, const `size_t` incX, bool positive)
- void `freduce_1_modular_double` (const double p, const `size_t` n, const double \*Y, const `size_t` incY, double \*X, const `size_t` incX, bool positive)
- void `fnegin_1_modular_double` (const double p, const `size_t` n, double \*X, const `size_t` incX, bool positive)
- void `fneg_1_modular_double` (const double p, const `size_t` n, const double \*Y, const `size_t` incY, double \*X, const `size_t` incX, bool positive)
- void `fzero_1_modular_double` (const double p, const `size_t` n, double \*X, const `size_t` incX, bool positive)
- bool `fiszero_1_modular_double` (const double p, const `size_t` n, const double \*X, const `size_t` incX, bool positive)
- bool `fequal_1_modular_double` (const double p, const `size_t` n, const double \*X, const `size_t` incX, const double \*Y, const `size_t` incY, bool positive)
- void `fassign_1_modular_double` (const double p, const `size_t` n, const double \*Y, const `size_t` incY, double \*X, const `size_t` incX, bool positive)
- void `fscal_1_modular_double` (const double p, const `size_t` n, const double alpha, double \*X, const `size_t` incX, bool positive)
- void `fscale_1_modular_double` (const double p, const `size_t` n, const double alpha, const double \*X, const `size_t` incX, double \*Y, const `size_t` incY, bool positive)
- void `faxpy_1_modular_double` (const double p, const `size_t` n, const double alpha, const double \*X, const `size_t` incX, double \*Y, const `size_t` incY, bool positive)
- double `fdot_1_modular_double` (const double p, const `size_t` n, const double \*X, const `size_t` incX, const double \*Y, const `size_t` incY, bool positive)
- void `fswap_1_modular_double` (const double p, const `size_t` n, double \*X, const `size_t` incX, double \*Y, const `size_t` incY, bool positive)
- void `fadd_1_modular_double` (const double p, const `size_t` n, const double \*A, const `size_t` incA, const double \*B, const `size_t` incB, double \*C, const `size_t` incC, bool positive)

- void [fsub\\_1\\_modular\\_double](#) (const double p, const size\_t n, const double \*A, const size\_t incA, const double \*B, const size\_t incB, double \*C, const size\_t incC, bool positive)
- void [faddin\\_1\\_modular\\_double](#) (const double p, const size\_t n, const double \*B, const size\_t incB, double \*C, const size\_t incC, bool positive)
- void [fsubin\\_1\\_modular\\_double](#) (const double p, const size\_t n, const double \*B, const size\_t incB, double \*C, const size\_t incC, bool positive)

### 13.229.1 Detailed Description

C functions calls for level 1 [FFLAS](#) in [fflas-c.h](#).

Author

Brice Boyer

See also

[fflas/fflas\\_level1.inl](#)

### 13.229.2 Function Documentation

#### 13.229.2.1 [freducein\\_1\\_modular\\_double\(\)](#)

```
void freducein_1_modular_double (
    const double p,
    const size_t n,
    double * X,
    const size_t incX,
    bool positive)
```

#### 13.229.2.2 [freduce\\_1\\_modular\\_double\(\)](#)

```
void freduce_1_modular_double (
    const double p,
    const size_t n,
    const double * Y,
    const size_t incY,
    double * X,
    const size_t incX,
    bool positive)
```

#### 13.229.2.3 [fnegin\\_1\\_modular\\_double\(\)](#)

```
void fnegin_1_modular_double (
    const double p,
    const size_t n,
    double * X,
    const size_t incX,
    bool positive)
```

#### 13.229.2.4 [fneg\\_1\\_modular\\_double\(\)](#)

```
void fneg_1_modular_double (
    const double p,
    const size_t n,
    const double * Y,
    const size_t incY,
    double * X,
    const size_t incX,
    bool positive)
```

**13.229.2.5 fzero\_1\_modular\_double()**

```
void fzero_1_modular_double (
    const double p,
    const size_t n,
    double * X,
    const size_t incX,
    bool positive)
```

**13.229.2.6 fiszero\_1\_modular\_double()**

```
bool fiszero_1_modular_double (
    const double p,
    const size_t n,
    const double * X,
    const size_t incX,
    bool positive)
```

**13.229.2.7 fequal\_1\_modular\_double()**

```
bool fequal_1_modular_double (
    const double p,
    const size_t n,
    const double * X,
    const size_t incX,
    const double * Y,
    const size_t incY,
    bool positive)
```

**13.229.2.8 fassign\_1\_modular\_double()**

```
void fassign_1_modular_double (
    const double p,
    const size_t n,
    const double * Y,
    const size_t incY,
    double * X,
    const size_t incX,
    bool positive)
```

**13.229.2.9 fscal\_1\_modular\_double()**

```
void fscal_1_modular_double (
    const double p,
    const size_t n,
    const double alpha,
    double * X,
    const size_t incX,
    bool positive)
```

**13.229.2.10 fsca\_1\_modular\_double()**

```
void fsca_1_modular_double (
    const double p,
    const size_t n,
    const double alpha,
    const double * X,
    const size_t incX,
    double * Y,
```

```
    const size_t incY,  
    bool positive)
```

#### 13.229.2.11 faxpy\_1\_modular\_double()

```
void faxpy_1_modular_double (  
    const double p,  
    const size_t n,  
    const double alpha,  
    const double * X,  
    const size_t incX,  
    double * Y,  
    const size_t incY,  
    bool positive)
```

#### 13.229.2.12 fdot\_1\_modular\_double()

```
double fdot_1_modular_double (  
    const double p,  
    const size_t n,  
    const double * X,  
    const size_t incX,  
    const double * Y,  
    const size_t incY,  
    bool positive)
```

#### 13.229.2.13 fswap\_1\_modular\_double()

```
void fswap_1_modular_double (  
    const double p,  
    const size_t n,  
    double * X,  
    const size_t incX,  
    double * Y,  
    const size_t incY,  
    bool positive)
```

#### 13.229.2.14 fadd\_1\_modular\_double()

```
void fadd_1_modular_double (  
    const double p,  
    const size_t n,  
    const double * A,  
    const size_t incA,  
    const double * B,  
    const size_t incB,  
    double * C,  
    const size_t incC,  
    bool positive)
```

#### 13.229.2.15 fsub\_1\_modular\_double()

```
void fsub_1_modular_double (  
    const double p,  
    const size_t n,  
    const double * A,  
    const size_t incA,  
    const double * B,  
    const size_t incB,
```

```
double * C,
const size_t incC,
bool positive)
```

### 13.229.2.16 faddin\_1\_modular\_double()

```
void faddin_1_modular_double (
    const double p,
    const size_t n,
    const double * B,
    const size_t incB,
    double * C,
    const size_t incC,
    bool positive)
```

### 13.229.2.17 fsubin\_1\_modular\_double()

```
void fsubin_1_modular_double (
    const double p,
    const size_t n,
    const double * B,
    const size_t incB,
    double * C,
    const size_t incC,
    bool positive)
```

## 13.230 fflas\_lvl2.C File Reference

C functions calls for level 2 [FFLAS](#) in fflas-c.h.

```
#include "fflas-ffpack/interfaces/libs/fflas_c.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "givaro//modular-balanced.h"
#include "givaro//modular.h"
```

### Functions

- void [fassign\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double \*A, const size\_t lda, double \*B, const size\_t ldb, bool positive)
- void [fzero\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, double \*A, const size\_t lda, bool positive)
- bool [fequal\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double \*A, const size\_t lda, const double \*B, const size\_t ldb, bool positive)
- bool [fiszero\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double \*A, const size\_t lda, bool positive)
- void [fidentity\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, double \*A, const size\_t lda, const double d, bool positive)
- void [freducein\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, double \*A, const size\_t lda, bool positive)
- void [freduce\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double \*A, const size\_t lda, double \*B, const size\_t ldb, bool positive)
- void [fnegin\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, double \*A, const size\_t lda, bool positive)
- void [fneg\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double \*A, const size\_t lda, double \*B, const size\_t ldb, bool positive)
- void [fscaln\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double alpha, double \*A, const size\_t lda, bool positive)

- void [fscal\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double alpha, const double \*A, const size\_t lda, double \*B, const size\_t ldb, bool positive)
- void [faxpy\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double alpha, const double \*A, const size\_t lda, double \*B, const size\_t ldb, bool positive)
- void [fmove\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, double \*A, const size\_t lda, double \*B, const size\_t ldb, bool positive)
- void [fadd\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double \*A, const size\_t lda, const double \*B, const size\_t ldb, double \*C, const size\_t ldc, bool positive)
- void [fsub\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double \*A, const size\_t lda, const double \*B, const size\_t ldb, double \*C, const size\_t ldc, bool positive)
- void [fsubin\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double \*B, const size\_t ldb, double \*C, const size\_t ldc, bool positive)
- void [faddin\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double \*B, const size\_t ldb, double \*C, const size\_t ldc, bool positive)
- double \* [fgemv\\_2\\_modular\\_double](#) (const double p, const enum [FFLAS\\_C\\_TRANSPOSE](#) TransA, const size\_t m, const size\_t n, const double alpha, const double \*A, const size\_t lda, const double \*X, const size\_t incX, const double beta, double \*Y, const size\_t incY, bool positive)
- void [fger\\_2\\_modular\\_double](#) (const double p, const size\_t m, const size\_t n, const double alpha, const double \*X, const size\_t incX, const double \*Y, const size\_t incY, double \*A, const size\_t lda, bool positive)
- void [ftrsv\\_2\\_modular\\_double](#) (const double p, const enum [FFLAS\\_C\\_UPLO](#) Uplo, const enum [FFLAS\\_C\\_TRANSPOSE](#) TransA, const enum [FFLAS\\_C\\_DIAG](#) Diag, const size\_t n, const double \*A, const size\_t lda, double \*X, int incX, bool positive)

### 13.230.1 Detailed Description

C functions calls for level 2 [FFLAS](#) in [fflas-c.h](#).

Author

Brice Boyer

See also

[fflas/fflas\\_level2.inl](#)

### 13.230.2 Function Documentation

#### 13.230.2.1 fassign\_2\_modular\_double()

```
void fassign_2_modular_double (
    const double p,
    const size_t m,
    const size_t n,
    const double * A,
    const size_t lda,
    double * B,
    const size_t ldb,
    bool positive)
```

#### 13.230.2.2 fzero\_2\_modular\_double()

```
void fzero_2_modular_double (
    const double p,
    const size_t m,
    const size_t n,
    double * A,
    const size_t lda,
    bool positive)
```



### 13.230.2.3 fequal\_2\_modular\_double()

```
bool fequal_2_modular_double (
    const double p,
    const size_t m,
    const size_t n,
    const double * A,
    const size_t lda,
    const double * B,
    const size_t ldb,
    bool positive)
```

### 13.230.2.4 fiszero\_2\_modular\_double()

```
bool fiszero_2_modular_double (
    const double p,
    const size_t m,
    const size_t n,
    const double * A,
    const size_t lda,
    bool positive)
```

### 13.230.2.5 fidentity\_2\_modular\_double()

```
void fidentity_2_modular_double (
    const double p,
    const size_t m,
    const size_t n,
    double * A,
    const size_t lda,
    const double d,
    bool positive)
```

### 13.230.2.6 freducein\_2\_modular\_double()

```
void freducein_2_modular_double (
    const double p,
    const size_t m,
    const size_t n,
    double * A,
    const size_t lda,
    bool positive)
```

### 13.230.2.7 freduce\_2\_modular\_double()

```
void freduce_2_modular_double (
    const double p,
    const size_t m,
    const size_t n,
    const double * A,
    const size_t lda,
    double * B,
    const size_t ldb,
    bool positive)
```

### 13.230.2.8 fnegin\_2\_modular\_double()

```
void fnegin_2_modular_double (
    const double p,
```

```
    const size_t m,  
    const size_t n,  
    double * A,  
    const size_t lda,  
    bool positive)
```

#### 13.230.2.9 fneg\_2\_modular\_double()

```
void fneg_2_modular_double (  
    const double p,  
    const size_t m,  
    const size_t n,  
    const double * A,  
    const size_t lda,  
    double * B,  
    const size_t ldb,  
    bool positive)
```

#### 13.230.2.10 fscaln\_2\_modular\_double()

```
void fscaln_2_modular_double (  
    const double p,  
    const size_t m,  
    const size_t n,  
    const double alpha,  
    double * A,  
    const size_t lda,  
    bool positive)
```

#### 13.230.2.11 fscal\_2\_modular\_double()

```
void fscal_2_modular_double (  
    const double p,  
    const size_t m,  
    const size_t n,  
    const double alpha,  
    const double * A,  
    const size_t lda,  
    double * B,  
    const size_t ldb,  
    bool positive)
```

#### 13.230.2.12 faxpy\_2\_modular\_double()

```
void faxpy_2_modular_double (  
    const double p,  
    const size_t m,  
    const size_t n,  
    const double alpha,  
    const double * A,  
    const size_t lda,  
    double * B,  
    const size_t ldb,  
    bool positive)
```

#### 13.230.2.13 fmove\_2\_modular\_double()

```
void fmove_2_modular_double (  
    const double p,
```

```
    const size_t m,  
    const size_t n,  
    double * A,  
    const size_t lda,  
    double * B,  
    const size_t ldb,  
    bool positive)
```

#### 13.230.2.14 fadd\_2\_modular\_double()

```
void fadd_2_modular_double (  
    const double p,  
    const size_t m,  
    const size_t n,  
    const double * A,  
    const size_t lda,  
    const double * B,  
    const size_t ldb,  
    double * C,  
    const size_t ldc,  
    bool positive)
```

#### 13.230.2.15 fsub\_2\_modular\_double()

```
void fsub_2_modular_double (  
    const double p,  
    const size_t m,  
    const size_t n,  
    const double * A,  
    const size_t lda,  
    const double * B,  
    const size_t ldb,  
    double * C,  
    const size_t ldc,  
    bool positive)
```

#### 13.230.2.16 fsubin\_2\_modular\_double()

```
void fsubin_2_modular_double (  
    const double p,  
    const size_t m,  
    const size_t n,  
    const double * B,  
    const size_t ldb,  
    double * C,  
    const size_t ldc,  
    bool positive)
```

#### 13.230.2.17 faddin\_2\_modular\_double()

```
void faddin_2_modular_double (  
    const double p,  
    const size_t m,  
    const size_t n,  
    const double * B,  
    const size_t ldb,  
    double * C,  
    const size_t ldc,  
    bool positive)
```

**13.230.2.18 fgemv\_2\_modular\_double()**

```
double * fgemv_2_modular_double (
    const double p,
    const enum FFLAS_C_TRANSPOSE TransA,
    const size_t m,
    const size_t n,
    const double alpha,
    const double * A,
    const size_t lda,
    const double * X,
    const size_t incX,
    const double beta,
    double * Y,
    const size_t incY,
    bool positive)
```

**13.230.2.19 fger\_2\_modular\_double()**

```
void fger_2_modular_double (
    const double p,
    const size_t m,
    const size_t n,
    const double alpha,
    const double * X,
    const size_t incX,
    const double * Y,
    const size_t incY,
    double * A,
    const size_t lda,
    bool positive)
```

**13.230.2.20 ftrsv\_2\_modular\_double()**

```
void ftrsv_2_modular_double (
    const double p,
    const enum FFLAS_C_UPLO Uplo,
    const enum FFLAS_C_TRANSPOSE TransA,
    const enum FFLAS_C_DIAG Diag,
    const size_t n,
    const double * A,
    const size_t lda,
    double * X,
    int incX,
    bool positive)
```

**13.231 fflas\_lvl3.C File Reference**

C functions calls for level 3 [FFLAS](#) in `fflas-c.h`.

```
#include "fflas-ffpack/interfaces/libs/fflas_c.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "givaro/modular-balanced.h"
#include "givaro/modular.h"
```

**Functions**

- void [ftrsm\\_3\\_modular\\_double](#) (const double p, const enum [FFLAS\\_C\\_SIDE](#) Side, const enum [FFLAS\\_C\\_UPLO](#) Uplo, const enum [FFLAS\\_C\\_TRANSPOSE](#) tA, const enum [FFLAS\\_C\\_DIAG](#) Diag, const

- size\_t m, const size\_t n, const double alpha, const double \*A, const size\_t ldA, double \*B, const size\_t ldB, bool positive)
- void [ftrmm\\_3\\_modular\\_double](#) (const double p, const enum [FFLAS\\_C\\_SIDE](#) Side, const enum [FFLAS\\_C\\_UPLO](#) Uplo, const enum [FFLAS\\_C\\_TRANSPOSE](#) tA, const enum [FFLAS\\_C\\_DIAG](#) Diag, const size\_t m, const size\_t n, const double alpha, double \*A, const size\_t ldA, double \*B, const size\_t ldB, bool positive)
  - double \* [fgemm\\_3\\_modular\\_double](#) (const double p, const enum [FFLAS\\_C\\_TRANSPOSE](#) tA, const enum [FFLAS\\_C\\_TRANSPOSE](#) tB, const size\_t m, const size\_t n, const size\_t k, const double alpha, const double \*A, const size\_t ldA, const double \*B, const size\_t ldB, const double betA, double \*C, const size\_t ldC, bool positive)
  - double \* [fsquare\\_3\\_modular\\_double](#) (const double p, const enum [FFLAS\\_C\\_TRANSPOSE](#) tA, const size\_t n, const double alpha, const double \*A, const size\_t ldA, const double betA, double \*C, const size\_t ldC, bool positive)

### 13.231.1 Detailed Description

C functions calls for level 3 [FFLAS](#) in fflas-c.h.

Author

Brice Boyer

See also

[fflas/fflas\\_level3.inl](#)

### 13.231.2 Function Documentation

#### 13.231.2.1 ftrsm\_3\_modular\_double()

```
void ftrsm_3_modular_double (
    const double p,
    const enum FFLAS\_C\_SIDE Side,
    const enum FFLAS\_C\_UPLO Uplo,
    const enum FFLAS\_C\_TRANSPOSE tA,
    const enum FFLAS\_C\_DIAG Diag,
    const size_t m,
    const size_t n,
    const double alpha,
    const double * A,
    const size_t ldA,
    double * B,
    const size_t ldB,
    bool positive)
```

#### 13.231.2.2 ftrmm\_3\_modular\_double()

```
void ftrmm_3_modular_double (
    const double p,
    const enum FFLAS\_C\_SIDE Side,
    const enum FFLAS\_C\_UPLO Uplo,
    const enum FFLAS\_C\_TRANSPOSE tA,
    const enum FFLAS\_C\_DIAG Diag,
    const size_t m,
    const size_t n,
    const double alpha,
    double * A,
    const size_t ldA,
    double * B,
    const size_t ldB,
    bool positive)
```

### 13.231.2.3 fgemm\_3\_modular\_double()

```
double * fgemm_3_modular_double (
    const double p,
    const enum FFLAS_C_TRANSPOSE tA,
    const enum FFLAS_C_TRANSPOSE tB,
    const size_t m,
    const size_t n,
    const size_t k,
    const double alpha,
    const double * A,
    const size_t ldA,
    const double * B,
    const size_t ldB,
    const double betaA,
    double * C,
    const size_t ldC,
    bool positive)
```

### 13.231.2.4 fsquare\_3\_modular\_double()

```
double * fsquare_3_modular_double (
    const double p,
    const enum FFLAS_C_TRANSPOSE tA,
    const size_t n,
    const double alpha,
    const double * A,
    const size_t ldA,
    const double betaA,
    double * C,
    const size_t ldC,
    bool positive)
```

## 13.232 fflas\_sparse.C File Reference

C functions calls for level 1.5 and 2.5 [FFLAS](#) in fflas-c.h.

### 13.232.1 Detailed Description

C functions calls for level 1.5 and 2.5 [FFLAS](#) in fflas-c.h.

#### Author

Brice Boyer

#### See also

[fflas/fflas\\_sparse.h](#)

## 13.233 ffpack.C File Reference

C functions calls for [FFPACK](#) in ffpack-c.h.

```
#include "fflas-ffpack/interfaces/libs/ffpack_c.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/ffpack/ffpack.h"
#include "givaro/modular-balanced.h"
#include "givaro/modular.h"
```

## Functions

- void [LAPACKPerm2MathPerm](#) (size\_t \*MathP, const size\_t \*LapackP, const size\_t N)
- void [MathPerm2LAPACKPerm](#) (size\_t \*LapackP, const size\_t \*MathP, const size\_t N)
- void [MatrixApplyS\\_modular\\_double](#) (const double p, double \*A, const size\_t lda, const size\_t width, const size\_t M2, const size\_t R1, const size\_t R2, const size\_t R3, const size\_t R4, bool positive)
- void [PermApplyS\\_double](#) (double \*A, const size\_t lda, const size\_t width, const size\_t M2, const size\_t R1, const size\_t R2, const size\_t R3, const size\_t R4)
- void [MatrixApplyT\\_modular\\_double](#) (const double p, double \*A, const size\_t lda, const size\_t width, const size\_t N2, const size\_t R1, const size\_t R2, const size\_t R3, const size\_t R4, bool positive)
- void [PermApplyT\\_double](#) (double \*A, const size\_t lda, const size\_t width, const size\_t N2, const size\_t R1, const size\_t R2, const size\_t R3, const size\_t R4)
- void [composePermutationsLLM](#) (size\_t \*MathP, const size\_t \*P1, const size\_t \*P2, const size\_t R, const size\_t N)
- void [composePermutationsLLL](#) (size\_t \*P1, const size\_t \*P2, const size\_t R, const size\_t N)
- void [composePermutationsMLM](#) (size\_t \*MathP1, const size\_t \*P2, const size\_t R, const size\_t N)
- void [cyclic\\_shift\\_mathPerm](#) (size\_t \*P, const size\_t s)
- void [cyclic\\_shift\\_row\\_modular\\_double](#) (const double p, double \*A, size\_t m, size\_t n, size\_t lda, bool positive)
- void [cyclic\\_shift\\_col\\_modular\\_double](#) (const double p, double \*A, size\_t m, size\_t n, size\_t lda, bool positive)
- void [applyP\\_modular\\_double](#) (const double p, const enum [FFLAS::FFLAS\\_SIDE](#) Side, const enum [FFLAS::FFLAS\\_TRANSPOSE](#) Trans, const size\_t M, const size\_t ibeg, const size\_t iend, double \*A, const size\_t lda, const size\_t \*P, bool positive)
- void [fgetrsin\\_modular\\_double](#) (const double p, const enum [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, const size\_t R, double \*A, const size\_t lda, const size\_t \*P, const size\_t \*Q, double \*B, const size\_t ldb, int \*info, bool positive)
- double \* [fgetrsv\\_modular\\_double](#) (const double p, const enum [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, const size\_t NRHS, const size\_t R, double \*A, const size\_t lda, const size\_t \*P, const size\_t \*Q, double \*X, const size\_t ldx, const double \*B, const size\_t ldb, int \*info, bool positive)
- size\_t [fgesvin\\_modular\\_double](#) (const double p, const enum [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, double \*A, const size\_t lda, double \*B, const size\_t ldb, int \*info, bool positive)
- size\_t [fgesv\\_modular\\_double](#) (const double p, const enum [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, const size\_t NRHS, double \*A, const size\_t lda, double \*X, const size\_t ldx, const double \*B, const size\_t ldb, int \*info, bool positive)
- void [ftrtri\\_modular\\_double](#) (const double p, const enum [FFLAS::FFLAS\\_UPLO](#) Uplo, const enum [FFLAS::FFLAS\\_DIAG](#) Diag, const size\_t N, double \*A, const size\_t lda, bool positive)
- void [trinv\\_left\\_modular\\_double](#) (const double p, const size\_t N, const double \*L, const size\_t ldl, double \*X, const size\_t ldx, bool positive)
- void [ftrtm\\_modular\\_double](#) (const double p, const [FFLAS::FFLAS\\_SIDE](#) side, const enum [FFLAS::FFLAS\\_DIAG](#) Diag, const size\_t N, double \*A, const size\_t lda, bool positive)
- size\_t [PLUQ\\_modular\\_double](#) (const double p, const enum [FFLAS::FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, double \*A, const size\_t lda, size\_t \*P, size\_t \*Q, bool positive)
- size\_t [LUdivine\\_modular\\_double](#) (const double p, const enum [FFLAS::FFLAS\\_DIAG](#) Diag, const enum [FFLAS::FFLAS\\_TRANSPOSE](#) Trans, const size\_t M, const size\_t N, double \*A, const size\_t lda, size\_t \*P, size\_t \*Qt, const enum [FFPACK\\_C\\_LU\\_TAG](#) LuTag, const size\_t cutoff, bool positive)
- size\_t [ColumnEchelonForm\\_modular\\_double](#) (const double p, const size\_t M, const size\_t N, double \*A, const size\_t lda, size\_t \*P, size\_t \*Qt, bool transform, const enum [FFPACK\\_C\\_LU\\_TAG](#) LuTag, bool positive)
- size\_t [RowEchelonForm\\_modular\\_double](#) (const double p, const size\_t M, const size\_t N, double \*A, const size\_t lda, size\_t \*P, size\_t \*Qt, const bool transform, const enum [FFPACK\\_C\\_LU\\_TAG](#) LuTag, bool positive)
- size\_t [ReducedColumnEchelonForm\\_modular\\_double](#) (const double p, const size\_t M, const size\_t N, double \*A, const size\_t lda, size\_t \*P, size\_t \*Qt, const bool transform, const enum [FFPACK\\_C\\_LU\\_TAG](#) LuTag, bool positive)
- size\_t [ReducedRowEchelonForm\\_modular\\_double](#) (const double p, const size\_t M, const size\_t N, double \*A, const size\_t lda, size\_t \*P, size\_t \*Qt, const bool transform, const enum [FFPACK\\_C\\_LU\\_TAG](#) LuTag, bool positive)
- size\_t [ColumnEchelonForm\\_modular\\_float](#) (const float p, const size\_t M, const size\_t N, float \*A, const size\_t lda, size\_t \*P, size\_t \*Qt, bool transform, const enum [FFPACK\\_C\\_LU\\_TAG](#) LuTag, bool positive)





- `size_t Rank_modular_double` (const double p, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, bool positive)
- `bool IsSingular_modular_double` (const double p, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, bool positive)
- `double Det_modular_double` (const double p, const `size_t` N, double \*A, const `size_t` lda, bool positive)
- `double * Solve_modular_double` (const double p, const `size_t` M, double \*A, const `size_t` lda, double \*x, const int incx, const double \*b, const int incb, bool positive)
- `void solveLB_modular_double` (const double p, const enum `FFLAS::FFLAS_SIDE` Side, const `size_t` M, const `size_t` N, const `size_t` R, double \*L, const `size_t` ldl, const `size_t` \*Q, double \*B, const `size_t` ldb, bool positive)
- `void solveLB2_modular_double` (const double p, const enum `FFLAS::FFLAS_SIDE` Side, const `size_t` M, const `size_t` N, const `size_t` R, double \*L, const `size_t` ldl, const `size_t` \*Q, double \*B, const `size_t` ldb, bool positive)
- `void RandomNullSpaceVector_modular_double` (const double p, const enum `FFLAS::FFLAS_SIDE` Side, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, double \*X, const `size_t` incX, bool positive)
- `size_t NullSpaceBasis_modular_double` (const double p, const enum `FFLAS::FFLAS_SIDE` Side, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, double \*\*NS, `size_t` \*ldn, `size_t` \*NSdim, bool positive)
- `size_t RowRankProfile_modular_double` (const double p, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, `size_t` \*\*rkprofile, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `size_t ColumnRankProfile_modular_double` (const double p, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, `size_t` \*\*rkprofile, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `void RankProfileFromLU` (const `size_t` \*P, const `size_t` N, const `size_t` R, `size_t` \*\*rkprofile, const enum `FFPACK_C_LU_TAG` LuTag)
- `size_t LeadingSubmatrixRankProfiles` (const `size_t` M, const `size_t` N, const `size_t` R, const `size_t` LSm, const `size_t` LSn, const `size_t` \*P, const `size_t` \*Q, `size_t` \*RRP, `size_t` \*CRP)
- `size_t RowRankProfileSubmatrixIndices_modular_double` (const double p, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, `size_t` \*\*rowindices, `size_t` \*\*colindices, `size_t` \*R, bool positive)
- `size_t ColRankProfileSubmatrixIndices_modular_double` (const double p, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, `size_t` \*\*rowindices, `size_t` \*\*colindices, `size_t` \*R, bool positive)
- `size_t RowRankProfileSubmatrix_modular_double` (const double p, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, double \*\*X, `size_t` \*R, bool positive)
- `size_t ColRankProfileSubmatrix_modular_double` (const double p, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, double \*\*X, `size_t` \*R, bool positive)
- `void getTriangular_modular_double` (const double p, const enum `FFLAS::FFLAS_UPLO` Uplo, const enum `FFLAS::FFLAS_DIAG` Diag, const `size_t` M, const `size_t` N, const `size_t` R, const double \*A, const `size_t` lda, double \*T, const `size_t` ldt, const bool OnlyNonZeroVectors, bool positive)
- `void getTriangularin_modular_double` (const double p, const enum `FFLAS::FFLAS_UPLO` Uplo, const enum `FFLAS::FFLAS_DIAG` Diag, const `size_t` M, const `size_t` N, const `size_t` R, double \*A, const `size_t` lda, bool positive)
- `void getEchelonForm_modular_double` (const double p, const enum `FFLAS::FFLAS_UPLO` Uplo, const enum `FFLAS::FFLAS_DIAG` Diag, const `size_t` M, const `size_t` N, const `size_t` R, const `size_t` \*P, const double \*A, const `size_t` lda, double \*T, const `size_t` ldt, const bool OnlyNonZeroVectors, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `void getEchelonFormin_modular_double` (const double p, const enum `FFLAS::FFLAS_UPLO` Uplo, const enum `FFLAS::FFLAS_DIAG` Diag, const `size_t` M, const `size_t` N, const `size_t` R, const `size_t` \*P, double \*A, const `size_t` lda, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `void getEchelonTransform_modular_double` (const double p, const enum `FFLAS::FFLAS_UPLO` Uplo, const enum `FFLAS::FFLAS_DIAG` Diag, const `size_t` M, const `size_t` N, const `size_t` R, const `size_t` \*P, const `size_t` \*Q, const double \*A, const `size_t` lda, double \*T, const `size_t` ldt, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `void getReducedEchelonForm_modular_double` (const double p, const enum `FFLAS::FFLAS_UPLO` Uplo, const `size_t` M, const `size_t` N, const `size_t` R, const `size_t` \*P, const double \*A, const `size_t` lda, double \*T, const `size_t` ldt, const bool OnlyNonZeroVectors, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `void getReducedEchelonFormin_modular_double` (const double p, const enum `FFLAS::FFLAS_UPLO` Uplo, const `size_t` M, const `size_t` N, const `size_t` R, const `size_t` \*P, double \*A, const `size_t` lda, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)

- void [getReducedEchelonTransform\\_modular\\_double](#) (const double p, const enum [FFLAS::FFLAS\\_UPLO](#) Uplo, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, const size\_t \*Q, const double \*A, const size\_t lda, double \*T, const size\_t ldt, const enum [FFPACK\\_C\\_LU\\_TAG](#) LuTag, bool positive)
- void [PLUQtoEchelonPermutation](#) (const size\_t N, const size\_t R, const size\_t \*P, size\_t \*outPerm)

### 13.233.1 Detailed Description

C functions calls for [FFPACK](#) in `ffpack-c.h`.

Author

Brice Boyer

See also

[ffpack/ffpack.h](#)

### 13.233.2 Function Documentation

#### 13.233.2.1 LAPACKPerm2MathPerm()

```
void LAPACKPerm2MathPerm (
    size_t * MathP,
    const size_t * LapackP,
    const size_t N)
```

#### 13.233.2.2 MathPerm2LAPACKPerm()

```
void MathPerm2LAPACKPerm (
    size_t * LapackP,
    const size_t * MathP,
    const size_t N)
```

#### 13.233.2.3 MatrixApplyS\_modular\_double()

```
void MatrixApplyS_modular_double (
    const double p,
    double * A,
    const size_t lda,
    const size_t width,
    const size_t M2,
    const size_t R1,
    const size_t R2,
    const size_t R3,
    const size_t R4,
    bool positive)
```

#### 13.233.2.4 PermApplyS\_double()

```
void PermApplyS_double (
    double * A,
    const size_t lda,
    const size_t width,
    const size_t M2,
    const size_t R1,
    const size_t R2,
    const size_t R3,
    const size_t R4)
```

### 13.233.2.5 MatrixApplyT\_modular\_double()

```
void MatrixApplyT_modular_double (
    const double p,
    double * A,
    const size_t lda,
    const size_t width,
    const size_t N2,
    const size_t R1,
    const size_t R2,
    const size_t R3,
    const size_t R4,
    bool positive)
```

### 13.233.2.6 PermApplyT\_double()

```
void PermApplyT_double (
    double * A,
    const size_t lda,
    const size_t width,
    const size_t N2,
    const size_t R1,
    const size_t R2,
    const size_t R3,
    const size_t R4)
```

### 13.233.2.7 composePermutationsLLM()

```
void composePermutationsLLM (
    size_t * MathP,
    const size_t * P1,
    const size_t * P2,
    const size_t R,
    const size_t N)
```

### 13.233.2.8 composePermutationsLLL()

```
void composePermutationsLLL (
    size_t * P1,
    const size_t * P2,
    const size_t R,
    const size_t N)
```

### 13.233.2.9 composePermutationsMLM()

```
void composePermutationsMLM (
    size_t * MathP1,
    const size_t * P2,
    const size_t R,
    const size_t N)
```

### 13.233.2.10 cyclic\_shift\_mathPerm()

```
void cyclic_shift_mathPerm (
    size_t * P,
    const size_t s)
```

**13.233.2.11 cyclic\_shift\_row\_modular\_double()**

```
void cyclic_shift_row_modular_double (
    const double p,
    double * A,
    size_t m,
    size_t n,
    size_t lda,
    bool positive)
```

**13.233.2.12 cyclic\_shift\_col\_modular\_double()**

```
void cyclic_shift_col_modular_double (
    const double p,
    double * A,
    size_t m,
    size_t n,
    size_t lda,
    bool positive)
```

**13.233.2.13 applyP\_modular\_double()**

```
void applyP_modular_double (
    const double p,
    const enum FFLAS::FFLAS_SIDE Side,
    const enum FFLAS::FFLAS_TRANSPOSE Trans,
    const size_t M,
    const size_t ibeg,
    const size_t iend,
    double * A,
    const size_t lda,
    const size_t * P,
    bool positive)
```

**13.233.2.14 fgetrsin\_modular\_double()**

```
void fgetrsin_modular_double (
    const double p,
    const enum FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    const size_t R,
    double * A,
    const size_t lda,
    const size_t * P,
    const size_t * Q,
    double * B,
    const size_t ldb,
    int * info,
    bool positive)
```

**13.233.2.15 fgetrsv\_modular\_double()**

```
double * fgetrsv_modular_double (
    const double p,
    const enum FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    const size_t NRHS,
```

```
const size_t R,  
double * A,  
const size_t lda,  
const size_t * P,  
const size_t * Q,  
double * X,  
const size_t ldX,  
const double * B,  
const size_t ldb,  
int * info,  
bool positive)
```

#### 13.233.2.16 fgesvin\_modular\_double()

```
size_t fgesvin_modular_double (  
    const double p,  
    const enum FFLAS::FFLAS_SIDE Side,  
    const size_t M,  
    const size_t N,  
    double * A,  
    const size_t lda,  
    double * B,  
    const size_t ldb,  
    int * info,  
    bool positive)
```

#### 13.233.2.17 fgesv\_modular\_double()

```
size_t fgesv_modular_double (  
    const double p,  
    const enum FFLAS::FFLAS_SIDE Side,  
    const size_t M,  
    const size_t N,  
    const size_t NRHS,  
    double * A,  
    const size_t lda,  
    double * X,  
    const size_t ldX,  
    const double * B,  
    const size_t ldb,  
    int * info,  
    bool positive)
```

#### 13.233.2.18 ftrtri\_modular\_double()

```
void ftrtri_modular_double (  
    const double p,  
    const enum FFLAS::FFLAS_UPLO Uplo,  
    const enum FFLAS::FFLAS_DIAG Diag,  
    const size_t N,  
    double * A,  
    const size_t lda,  
    bool positive)
```

#### 13.233.2.19 trinv\_left\_modular\_double()

```
void trinv_left_modular_double (  
    const double p,  
    const size_t N,
```

```

    const double * L,
    const size_t ldl,
    double * X,
    const size_t ldx,
    bool positive)

```

#### 13.233.2.20 ftrtrm\_modular\_double()

```

void ftrtrm_modular_double (
    const double p,
    const FFLAS::FFLAS_SIDE side,
    const enum FFLAS::FFLAS_DIAG Diag,
    const size_t N,
    double * A,
    const size_t lda,
    bool positive)

```

#### 13.233.2.21 PLUQ\_modular\_double()

```

size_t PLUQ_modular_double (
    const double p,
    const enum FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t * P,
    size_t * Q,
    bool positive)

```

#### 13.233.2.22 LUdivine\_modular\_double()

```

size_t LUdivine_modular_double (
    const double p,
    const enum FFLAS::FFLAS_DIAG Diag,
    const enum FFLAS::FFLAS_TRANSPOSE Trans,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const enum FFPACK_C_LU_TAG LuTag,
    const size_t cutoff,
    bool positive)

```

#### 13.233.2.23 ColumnEchelonForm\_modular\_double()

```

size_t ColumnEchelonForm_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

**13.233.2.24 RowEchelonForm\_modular\_double()**

```
size_t RowEchelonForm_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)
```

**13.233.2.25 ReducedColumnEchelonForm\_modular\_double()**

```
size_t ReducedColumnEchelonForm_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)
```

**13.233.2.26 ReducedRowEchelonForm\_modular\_double()**

```
size_t ReducedRowEchelonForm_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)
```

**13.233.2.27 ColumnEchelonForm\_modular\_float()**

```
size_t ColumnEchelonForm_modular_float (
    const float p,
    const size_t M,
    const size_t N,
    float * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)
```

**13.233.2.28 RowEchelonForm\_modular\_float()**

```
size_t RowEchelonForm_modular_float (
    const float p,
```

```

    const size_t M,
    const size_t N,
    float * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

### 13.233.2.29 ReducedColumnEchelonForm\_modular\_float()

```

size_t ReducedColumnEchelonForm_modular_float (
    const float p,
    const size_t M,
    const size_t N,
    float * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

### 13.233.2.30 ReducedRowEchelonForm\_modular\_float()

```

size_t ReducedRowEchelonForm_modular_float (
    const float p,
    const size_t M,
    const size_t N,
    float * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

### 13.233.2.31 ColumnEchelonForm\_modular\_int32\_t()

```

size_t ColumnEchelonForm_modular_int32_t (
    const int32_t p,
    const size_t M,
    const size_t N,
    int32_t * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

### 13.233.2.32 RowEchelonForm\_modular\_int32\_t()

```

size_t RowEchelonForm_modular_int32_t (
    const int32_t p,
    const size_t M,
    const size_t N,
    int32_t * A,

```



```

    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

### 13.233.2.33 ReducedColumnEchelonForm\_modular\_int32\_t()

```

size_t ReducedColumnEchelonForm_modular_int32_t (
    const int32_t p,
    const size_t M,
    const size_t N,
    int32_t * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

### 13.233.2.34 ReducedRowEchelonForm\_modular\_int32\_t()

```

size_t ReducedRowEchelonForm_modular_int32_t (
    const int32_t p,
    const size_t M,
    const size_t N,
    int32_t * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

### 13.233.2.35 pColumnEchelonForm\_modular\_double()

```

size_t pColumnEchelonForm_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

### 13.233.2.36 pRowEchelonForm\_modular\_double()

```

size_t pRowEchelonForm_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,

```

```

    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

### 13.233.2.37 pReducedColumnEchelonForm\_modular\_double()

```

size_t pReducedColumnEchelonForm_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

### 13.233.2.38 pReducedRowEchelonForm\_modular\_double()

```

size_t pReducedRowEchelonForm_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

### 13.233.2.39 pColumnEchelonForm\_modular\_float()

```

size_t pColumnEchelonForm_modular_float (
    const float p,
    const size_t M,
    const size_t N,
    float * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

### 13.233.2.40 pRowEchelonForm\_modular\_float()

```

size_t pRowEchelonForm_modular_float (
    const float p,
    const size_t M,
    const size_t N,
    float * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

**13.233.2.41 pReducedColumnEchelonForm\_modular\_float()**

```
size_t pReducedColumnEchelonForm_modular_float (
    const float p,
    const size_t M,
    const size_t N,
    float * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)
```

**13.233.2.42 pReducedRowEchelonForm\_modular\_float()**

```
size_t pReducedRowEchelonForm_modular_float (
    const float p,
    const size_t M,
    const size_t N,
    float * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)
```

**13.233.2.43 pColumnEchelonForm\_modular\_int32\_t()**

```
size_t pColumnEchelonForm_modular_int32_t (
    const int32_t p,
    const size_t M,
    const size_t N,
    int32_t * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)
```

**13.233.2.44 pRowEchelonForm\_modular\_int32\_t()**

```
size_t pRowEchelonForm_modular_int32_t (
    const int32_t p,
    const size_t M,
    const size_t N,
    int32_t * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)
```

**13.233.2.45 pReducedColumnEchelonForm\_modular\_int32\_t()**

```
size_t pReducedColumnEchelonForm_modular_int32_t (
    const int32_t p,
```

```

    const size_t M,
    const size_t N,
    int32_t * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

#### 13.233.2.46 pReducedRowEchelonForm\_modular\_int32\_t()

```

size_t pReducedRowEchelonForm_modular_int32_t (
    const int32_t p,
    const size_t M,
    const size_t N,
    int32_t * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

#### 13.233.2.47 Invertin\_modular\_double()

```

double * Invertin_modular_double (
    const double p,
    const size_t M,
    double * A,
    const size_t lda,
    int * nullity,
    bool positive)

```

#### 13.233.2.48 Invert\_modular\_double()

```

double * Invert_modular_double (
    const double p,
    const size_t M,
    const double * A,
    const size_t lda,
    double * X,
    const size_t ldx,
    int * nullity,
    bool positive)

```

#### 13.233.2.49 Invert2\_modular\_double()

```

double * Invert2_modular_double (
    const double p,
    const size_t M,
    double * A,
    const size_t lda,
    double * X,
    const size_t ldx,
    int * nullity,
    bool positive)

```

**13.233.2.50 KrylovElim\_modular\_double()**

```
size_t KrylovElim_modular_double (  
    const double p,  
    const size_t M,  
    const size_t N,  
    double * A,  
    const size_t lda,  
    size_t * P,  
    size_t * Q,  
    const size_t deg,  
    size_t * iterates,  
    size_t * inviterates,  
    const size_t maxit,  
    size_t virt,  
    bool positive)
```

**13.233.2.51 SpecRankProfile\_modular\_double()**

```
size_t SpecRankProfile_modular_double (  
    const double p,  
    const size_t M,  
    const size_t N,  
    double * A,  
    const size_t lda,  
    const size_t deg,  
    size_t * rankProfile,  
    bool positive)
```

**13.233.2.52 Rank\_modular\_double()**

```
size_t Rank_modular_double (  
    const double p,  
    const size_t M,  
    const size_t N,  
    double * A,  
    const size_t lda,  
    bool positive)
```

**13.233.2.53 IsSingular\_modular\_double()**

```
bool IsSingular_modular_double (  
    const double p,  
    const size_t M,  
    const size_t N,  
    double * A,  
    const size_t lda,  
    bool positive)
```

**13.233.2.54 Det\_modular\_double()**

```
double Det_modular_double (  
    const double p,  
    const size_t N,  
    double * A,  
    const size_t lda,  
    bool positive)
```

**13.233.2.55 Solve\_modular\_double()**

```
double * Solve_modular_double (
    const double p,
    const size_t M,
    double * A,
    const size_t lda,
    double * x,
    const int incx,
    const double * b,
    const int incb,
    bool positive)
```

**13.233.2.56 solveLB\_modular\_double()**

```
void solveLB_modular_double (
    const double p,
    const enum FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    const size_t R,
    double * L,
    const size_t ldl,
    const size_t * Q,
    double * B,
    const size_t ldb,
    bool positive)
```

**13.233.2.57 solveLB2\_modular\_double()**

```
void solveLB2_modular_double (
    const double p,
    const enum FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    const size_t R,
    double * L,
    const size_t ldl,
    const size_t * Q,
    double * B,
    const size_t ldb,
    bool positive)
```

**13.233.2.58 RandomNullSpaceVector\_modular\_double()**

```
void RandomNullSpaceVector_modular_double (
    const double p,
    const enum FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    double * X,
    const size_t incX,
    bool positive)
```

**13.233.2.59 NullSpaceBasis\_modular\_double()**

```
size_t NullSpaceBasis_modular_double (
    const double p,
```

```

    const enum FFLAS::FFLAS_SIDE Side,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    double ** NS,
    size_t * ldn,
    size_t * NSdim,
    bool positive)

```

#### 13.233.2.60 RowRankProfile\_modular\_double()

```

size_t RowRankProfile_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t ** rkprofile,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

#### 13.233.2.61 ColumnRankProfile\_modular\_double()

```

size_t ColumnRankProfile_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t ** rkprofile,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

#### 13.233.2.62 RankProfileFromLU()

```

void RankProfileFromLU (
    const size_t * P,
    const size_t N,
    const size_t R,
    size_t * rkprofile,
    const enum FFPACK_C_LU_TAG LuTag)

```

#### 13.233.2.63 LeadingSubmatrixRankProfiles()

```

size_t LeadingSubmatrixRankProfiles (
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t LSm,
    const size_t LSn,
    const size_t * P,
    const size_t * Q,
    size_t * RRP,
    size_t * CRP)

```

#### 13.233.2.64 RowRankProfileSubmatrixIndices\_modular\_double()

```

size_t RowRankProfileSubmatrixIndices_modular_double (

```

```

    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t ** rowindices,
    size_t ** colindices,
    size_t * R,
    bool positive)

```

### 13.233.2.65 ColRankProfileSubmatrixIndices\_modular\_double()

```

size_t ColRankProfileSubmatrixIndices_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t ** rowindices,
    size_t ** colindices,
    size_t * R,
    bool positive)

```

### 13.233.2.66 RowRankProfileSubmatrix\_modular\_double()

```

size_t RowRankProfileSubmatrix_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    double ** X,
    size_t * R,
    bool positive)

```

### 13.233.2.67 ColRankProfileSubmatrix\_modular\_double()

```

size_t ColRankProfileSubmatrix_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    double ** X,
    size_t * R,
    bool positive)

```

### 13.233.2.68 getTriangular\_modular\_double()

```

void getTriangular_modular_double (
    const double p,
    const enum FFLAS::FFLAS_UPLO Uplo,
    const enum FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    const size_t R,
    const double * A,
    const size_t lda,
    double * T,

```



```

    const size_t ldt,
    const bool OnlyNonZeroVectors,
    bool positive)

```

### 13.233.2.69 getTriangularin\_modular\_double()

```

void getTriangularin_modular_double (
    const double p,
    const enum FFLAS::FFLAS_UPLO Uplo,
    const enum FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    const size_t R,
    double * A,
    const size_t lda,
    bool positive)

```

### 13.233.2.70 getEchelonForm\_modular\_double()

```

void getEchelonForm_modular_double (
    const double p,
    const enum FFLAS::FFLAS_UPLO Uplo,
    const enum FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    const double * A,
    const size_t lda,
    double * T,
    const size_t ldt,
    const bool OnlyNonZeroVectors,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

### 13.233.2.71 getEchelonFormin\_modular\_double()

```

void getEchelonFormin_modular_double (
    const double p,
    const enum FFLAS::FFLAS_UPLO Uplo,
    const enum FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    double * A,
    const size_t lda,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

### 13.233.2.72 getEchelonTransform\_modular\_double()

```

void getEchelonTransform_modular_double (
    const double p,
    const enum FFLAS::FFLAS_UPLO Uplo,
    const enum FFLAS::FFLAS_DIAG Diag,
    const size_t M,
    const size_t N,
    const size_t R,

```

```

    const size_t * P,
    const size_t * Q,
    const double * A,
    const size_t lda,
    double * T,
    const size_t ldt,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

### 13.233.2.73 getReducedEchelonForm\_modular\_double()

```

void getReducedEchelonForm_modular_double (
    const double p,
    const enum FFLAS::FFLAS_UPLO Uplo,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    const double * A,
    const size_t lda,
    double * T,
    const size_t ldt,
    const bool OnlyNonZeroVectors,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

### 13.233.2.74 getReducedEchelonFormin\_modular\_double()

```

void getReducedEchelonFormin_modular_double (
    const double p,
    const enum FFLAS::FFLAS_UPLO Uplo,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    double * A,
    const size_t lda,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

### 13.233.2.75 getReducedEchelonTransform\_modular\_double()

```

void getReducedEchelonTransform_modular_double (
    const double p,
    const enum FFLAS::FFLAS_UPLO Uplo,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    const size_t * Q,
    const double * A,
    const size_t lda,
    double * T,
    const size_t ldt,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

**13.233.2.76 PLUQtoEchelonPermutation()**

```
void PLUQtoEchelonPermutation (
    const size_t N,
    const size_t R,
    const size_t * P,
    size_t * outPerm)
```

**13.234 ffpack\_c.h File Reference**

```
#include <stdbool.h>
#include <stdlib.h>
#include <inttypes.h>
```

**Macros**

- `#define FFPACK_COMPILED`

**Enumerations**

- enum `FFLAS_C_ORDER` { `FflasRowMajor` =101 , `FflasColMajor` =102 }
- enum `FFLAS_C_TRANSPOSE` { `FflasNoTrans` = 111 , `FflasTrans` = 112 }
- enum `FFLAS_C_UPLO` { `FflasUpper` = 121 , `FflasLower` = 122 }
- enum `FFLAS_C_DIAG` { `FflasNonUnit` = 131 , `FflasUnit` = 132 }
- enum `FFLAS_C_SIDE` { `FflasLeft` = 141 , `FflasRight` = 142 }
- enum `FFPACK_C_LU_TAG` { `FfpackSlabRecursive` = 1 , `FfpackTileRecursive` = 2 , `FfpackSingular` = 3 }
- enum `FFPACK_C_CHARPOLY_TAG` {  
`FfpackLUK` =1 , `FfpackKG` =2 , `FfpackHybrid` =3 , `FfpackKGFast` =4 ,  
`FfpackDanilevski` =5 , `FfpackArithProg` =6 , `FfpackKGFastG` =7 }
- enum `FFPACK_C_MINPOLY_TAG` { `FfpackDense` =1 , `FfpackKGF` =2 }

**Functions**

- void `LAPACKPerm2MathPerm` (size\_t \*MathP, const size\_t \*LapackP, const size\_t N)
- void `MathPerm2LAPACKPerm` (size\_t \*LapackP, const size\_t \*MathP, const size\_t N)
- void `MatrixApplyS_modular_double` (const double p, double \*A, const size\_t lda, const size\_t width, const size\_t M2, const size\_t R1, const size\_t R2, const size\_t R3, const size\_t R4, bool positive)
- void `PermApplyS_double` (double \*A, const size\_t lda, const size\_t width, const size\_t M2, const size\_t R1, const size\_t R2, const size\_t R3, const size\_t R4)
- void `MatrixApplyT_modular_double` (const double p, double \*A, const size\_t lda, const size\_t width, const size\_t N2, const size\_t R1, const size\_t R2, const size\_t R3, const size\_t R4, bool positive)
- void `PermApplyT_double` (double \*A, const size\_t lda, const size\_t width, const size\_t N2, const size\_t R1, const size\_t R2, const size\_t R3, const size\_t R4)
- void `composePermutationsLLM` (size\_t \*MathP, const size\_t \*P1, const size\_t \*P2, const size\_t R, const size\_t N)
- void `composePermutationsLLL` (size\_t \*P1, const size\_t \*P2, const size\_t R, const size\_t N)
- void `composePermutationsMLM` (size\_t \*MathP1, const size\_t \*P2, const size\_t R, const size\_t N)
- void `cyclic_shift_mathPerm` (size\_t \*P, const size\_t s)
- void `cyclic_shift_row_modular_double` (const double p, double \*A, size\_t m, size\_t n, size\_t lda, bool positive)
- void `cyclic_shift_col_modular_double` (const double p, double \*A, size\_t m, size\_t n, size\_t lda, bool positive)
- void `applyP_modular_double` (const double p, const enum `FFLAS_C_SIDE` Side, const enum `FFLAS_C_TRANSPOSE` Trans, const size\_t M, const size\_t ibeg, const size\_t iend, double \*A, const size\_t lda, const size\_t \*P, bool positive)
- void `fgetsrsin_modular_double` (const double p, const enum `FFLAS_C_SIDE` Side, const size\_t M, const size\_t N, const size\_t R, double \*A, const size\_t lda, const size\_t \*P, const size\_t \*Q, double \*B, const size\_t ldb, int \*info, bool positive)

- `double * fgetrs_modular_double` (const double p, const enum `FFLAS_C_SIDE` Side, const `size_t` M, const `size_t` N, const `size_t` NRHS, const `size_t` R, double \*A, const `size_t` lda, const `size_t` \*P, const `size_t` \*Q, double \*X, const `size_t` ldx, const double \*B, const `size_t` ldb, int \*info, bool positive)
- `size_t fgesvin_modular_double` (const double p, const enum `FFLAS_C_SIDE` Side, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, double \*B, const `size_t` ldb, int \*info, bool positive)
- `size_t fgesv_modular_double` (const double p, const enum `FFLAS_C_SIDE` Side, const `size_t` M, const `size_t` N, const `size_t` NRHS, double \*A, const `size_t` lda, double \*X, const `size_t` ldx, const double \*B, const `size_t` ldb, int \*info)
- `void ftrtri_modular_double` (const double p, const enum `FFLAS_C_UPLO` Uplo, const enum `FFLAS_C_DIAG` Diag, const `size_t` N, double \*A, const `size_t` lda, bool positive)
- `void trinv_left_modular_double` (const double p, const `size_t` N, const double \*L, const `size_t` ldl, double \*X, const `size_t` ldx, bool positive)
- `void ftrrm_modular_double` (const double p, const enum `FFLAS_C_DIAG` diag, const `size_t` N, double \*A, const `size_t` lda, bool positive)
- `size_t PLUQ_modular_double` (const double p, const enum `FFLAS_C_DIAG` Diag, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Q, bool positive)
- `size_t LUdivine_modular_double` (const double p, const enum `FFLAS_C_DIAG` Diag, const enum `FFLAS_C_TRANSPOSE` trans, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Qt, const enum `FFPACK_C_LU_TAG` LuTag, const `size_t` cutoff, bool positive)
- `size_t LUdivine_small_modular_double` (const double p, const enum `FFLAS_C_DIAG` Diag, const enum `FFLAS_C_TRANSPOSE` trans, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Q, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `size_t LUdivine_gauss_modular_double` (const double p, const enum `FFLAS_C_DIAG` Diag, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Q, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `size_t ColumnEchelonForm_modular_double` (const double p, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Qt, bool transform, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `size_t RowEchelonForm_modular_double` (const double p, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Qt, const bool transform, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `size_t ColumnEchelonForm_modular_float` (const float p, const `size_t` M, const `size_t` N, float \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Qt, bool transform, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `size_t RowEchelonForm_modular_float` (const float p, const `size_t` M, const `size_t` N, float \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Qt, const bool transform, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `size_t ColumnEchelonForm_modular_int32_t` (const `int32_t` p, const `size_t` M, const `size_t` N, `int32_t` \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Qt, bool transform, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `size_t RowEchelonForm_modular_int32_t` (const `int32_t` p, const `size_t` M, const `size_t` N, `int32_t` \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Qt, const bool transform, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `size_t ReducedColumnEchelonForm_modular_double` (const double p, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Qt, const bool transform, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `size_t ReducedRowEchelonForm_modular_double` (const double p, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Qt, const bool transform, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `size_t ReducedColumnEchelonForm_modular_float` (const float p, const `size_t` M, const `size_t` N, float \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Qt, const bool transform, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `size_t ReducedRowEchelonForm_modular_float` (const float p, const `size_t` M, const `size_t` N, float \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Qt, const bool transform, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `size_t ReducedColumnEchelonForm_modular_int32_t` (const `int32_t` p, const `size_t` M, const `size_t` N, `int32_t` \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Qt, const bool transform, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `size_t ReducedRowEchelonForm_modular_int32_t` (const `int32_t` p, const `size_t` M, const `size_t` N, `int32_t` \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Qt, const bool transform, const enum `FFPACK_C_LU_TAG` LuTag, bool positive)
- `size_t ReducedRowEchelonForm2_modular_double` (const double p, const `size_t` M, const `size_t` N, double \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Qt, const bool transform, bool positive)

- `size_t REF_modular_double` (const double p, const size\_t M, const size\_t N, double \*A, const size\_t lda, const size\_t colbeg, const size\_t rowbeg, const size\_t colsize, size\_t \*Qt, size\_t \*P, bool positive)
- `double * Invertin_modular_double` (const double p, const size\_t M, double \*A, const size\_t lda, int \*nullity, bool positive)
- `double * Invert_modular_double` (const double p, const size\_t M, const double \*A, const size\_t lda, double \*X, const size\_t ldx, int \*nullity, bool positive)
- `double * Invert2_modular_double` (const double p, const size\_t M, double \*A, const size\_t lda, double \*X, const size\_t ldx, int \*nullity, bool positive)
- `size_t KrylovElim_modular_double` (const double p, const size\_t M, const size\_t N, double \*A, const size\_t lda, size\_t \*P, size\_t \*Q, const size\_t deg, size\_t \*iterates, size\_t \*inviterates, const size\_t maxit, size\_t virt, bool positive)
- `size_t SpecRankProfile_modular_double` (const double p, const size\_t M, const size\_t N, double \*A, const size\_t lda, const size\_t deg, size\_t \*rankProfile, bool positive)
- `size_t Rank_modular_double` (const double p, const size\_t M, const size\_t N, double \*A, const size\_t lda, bool positive)
- `bool IsSingular_modular_double` (const double p, const size\_t M, const size\_t N, double \*A, const size\_t lda, bool positive)
- `double Det_modular_double` (const double p, const size\_t N, double \*A, const size\_t lda, bool positive)
- `double * Solve_modular_double` (const double p, const size\_t M, double \*A, const size\_t lda, double \*x, const int incx, const double \*b, const int incb, bool positive)
- `void solveLB_modular_double` (const double p, const enum FFLAS\_C\_SIDE Side, const size\_t M, const size\_t N, const size\_t R, double \*L, const size\_t ldl, const size\_t \*Q, double \*B, const size\_t ldb)
- `void solveLB2_modular_double` (const double p, const enum FFLAS\_C\_SIDE Side, const size\_t M, const size\_t N, const size\_t R, double \*L, const size\_t ldl, const size\_t \*Q, double \*B, const size\_t ldb, bool positive)
- `void RandomNullSpaceVector_modular_double` (const double p, const enum FFLAS\_C\_SIDE Side, const size\_t M, const size\_t N, double \*A, const size\_t lda, double \*X, const size\_t incX, bool positive)
- `size_t NullSpaceBasis_modular_double` (const double p, const enum FFLAS\_C\_SIDE Side, const size\_t M, const size\_t N, double \*A, const size\_t lda, double \*\*NS, size\_t \*ldn, size\_t \*NSdim, bool positive)
- `size_t RowRankProfile_modular_double` (const double p, const size\_t M, const size\_t N, double \*A, const size\_t lda, size\_t \*\*rkprofile, const enum FFPACK\_C\_LU\_TAG LuTag, bool positive)
- `size_t ColumnRankProfile_modular_double` (const double p, const size\_t M, const size\_t N, double \*A, const size\_t lda, size\_t \*\*rkprofile, const enum FFPACK\_C\_LU\_TAG LuTag, bool positive)
- `void RankProfileFromLU` (const size\_t \*P, const size\_t N, const size\_t R, size\_t \*rkprofile, const enum FFPACK\_C\_LU\_TAG LuTag)
- `size_t LeadingSubmatrixRankProfiles` (const size\_t M, const size\_t N, const size\_t R, const size\_t LSm, const size\_t LSn, const size\_t \*P, const size\_t \*Q, size\_t \*RRP, size\_t \*CRP)
- `size_t RowRankProfileSubmatrixIndices_modular_double` (const double p, const size\_t M, const size\_t N, double \*A, const size\_t lda, size\_t \*\*rowindices, size\_t \*\*colindices, size\_t \*R, bool positive)
- `size_t ColRankProfileSubmatrixIndices_modular_double` (const double p, const size\_t M, const size\_t N, double \*A, const size\_t lda, size\_t \*\*rowindices, size\_t \*\*colindices, size\_t \*R, bool positive)
- `size_t RowRankProfileSubmatrix_modular_double` (const double p, const size\_t M, const size\_t N, double \*A, const size\_t lda, double \*\*X, size\_t \*R, bool positive)
- `size_t ColRankProfileSubmatrix_modular_double` (const double p, const size\_t M, const size\_t N, double \*A, const size\_t lda, double \*\*X, size\_t \*R, bool positive)
- `void getTriangular_modular_double` (const double p, const enum FFLAS\_C\_UPLO Uplo, const enum FFLAS\_C\_DIAG diag, const size\_t M, const size\_t N, const size\_t R, const double \*A, const size\_t lda, double \*T, const size\_t ldt, const bool OnlyNonZeroVectors, bool positive)
- `void getTriangularin_modular_double` (const double p, const enum FFLAS\_C\_UPLO Uplo, const enum FFLAS\_C\_DIAG diag, const size\_t M, const size\_t N, const size\_t R, double \*A, const size\_t lda, bool positive)
- `void getEchelonForm_modular_double` (const double p, const enum FFLAS\_C\_UPLO Uplo, const enum FFLAS\_C\_DIAG diag, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, const double \*A, const size\_t lda, double \*T, const size\_t ldt, const bool OnlyNonZeroVectors, const enum FFPACK\_C\_LU\_TAG LuTag, bool positive)
- `void getEchelonFormin_modular_double` (const double p, const enum FFLAS\_C\_UPLO Uplo, const enum FFLAS\_C\_DIAG diag, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, double \*A, const size\_t lda, const enum FFPACK\_C\_LU\_TAG LuTag, bool positive)

- void [getEchelonTransform\\_modular\\_double](#) (const double p, const enum [FFLAS\\_C\\_UPLO](#) Uplo, const enum [FFLAS\\_C\\_DIAG](#) diag, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, const size\_t \*Q, const double \*A, const size\_t lda, double \*T, const size\_t ldt, const enum [FFPACK\\_C\\_LU\\_TAG](#) LuTag, bool positive)
- void [getReducedEchelonForm\\_modular\\_double](#) (const double p, const enum [FFLAS\\_C\\_UPLO](#) Uplo, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, const double \*A, const size\_t lda, double \*T, const size\_t ldt, const bool OnlyNonZeroVectors, const enum [FFPACK\\_C\\_LU\\_TAG](#) LuTag, bool positive)
- void [getReducedEchelonFormin\\_modular\\_double](#) (const double p, const enum [FFLAS\\_C\\_UPLO](#) Uplo, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, double \*A, const size\_t lda, const enum [FFPACK\\_C\\_LU\\_TAG](#) LuTag, bool positive)
- void [getReducedEchelonTransform\\_modular\\_double](#) (const double p, const enum [FFLAS\\_C\\_UPLO](#) Uplo, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, const size\_t \*Q, const double \*A, const size\_t lda, double \*T, const size\_t ldt, const enum [FFPACK\\_C\\_LU\\_TAG](#) LuTag, bool positive)
- void [PLUQtoEchelonPermutation](#) (const size\_t N, const size\_t R, const size\_t \*P, size\_t \*outPerm)

## 13.234.1 Macro Definition Documentation

### 13.234.1.1 FFPACK\_COMPILED

```
#define FFPACK_COMPILED
```

## 13.234.2 Enumeration Type Documentation

### 13.234.2.1 FFLAS\_C\_ORDER

```
enum FFLAS\_C\_ORDER
```

Enumerator

|               |  |
|---------------|--|
| FflasRowMajor |  |
| FflasColMajor |  |

### 13.234.2.2 FFLAS\_C\_TRANSPOSE

```
enum FFLAS\_C\_TRANSPOSE
```

Enumerator

|              |  |
|--------------|--|
| FflasNoTrans |  |
| FflasTrans   |  |

### 13.234.2.3 FFLAS\_C\_UPLO

```
enum FFLAS\_C\_UPLO
```

Enumerator

|            |  |
|------------|--|
| FflasUpper |  |
| FflasLower |  |

### 13.234.2.4 FFLAS\_C\_DIAG

```
enum FFLAS\_C\_DIAG
```

Enumerator

|              |  |
|--------------|--|
| FflasNonUnit |  |
| FflasUnit    |  |

### 13.234.2.5 FFLAS\_C\_SIDE

enum [FFLAS\\_C\\_SIDE](#)

#### Enumerator

|            |  |
|------------|--|
| FflasLeft  |  |
| FflasRight |  |

### 13.234.2.6 FFPACK\_C\_LU\_TAG

enum [FFPACK\\_C\\_LU\\_TAG](#)

#### Enumerator

|                     |  |
|---------------------|--|
| FfpackSlabRecursive |  |
| FfpackTileRecursive |  |
| FfpackSingular      |  |

### 13.234.2.7 FFPACK\_C\_CHARPOLY\_TAG

enum [FFPACK\\_C\\_CHARPOLY\\_TAG](#)

#### Enumerator

|                  |  |
|------------------|--|
| FfpackLUK        |  |
| FfpackKG         |  |
| FfpackHybrid     |  |
| FfpackKGFast     |  |
| FfpackDanilevski |  |
| FfpackArithProg  |  |
| FfpackKGFastG    |  |

### 13.234.2.8 FFPACK\_C\_MINPOLY\_TAG

enum [FFPACK\\_C\\_MINPOLY\\_TAG](#)

#### Enumerator

|             |  |
|-------------|--|
| FfpackDense |  |
| FfpackKGF   |  |

## 13.234.3 Function Documentation

### 13.234.3.1 LAPACKPerm2MathPerm()

```
void LAPACKPerm2MathPerm (  
    size_t * MathP,  
    const size_t * LapackP,  
    const size_t N)
```

### 13.234.3.2 MathPerm2LAPACKPerm()

```
void MathPerm2LAPACKPerm (
    size_t * LapackP,
    const size_t * MathP,
    const size_t N)
```

### 13.234.3.3 MatrixApplyS\_modular\_double()

```
void MatrixApplyS_modular_double (
    const double p,
    double * A,
    const size_t lda,
    const size_t width,
    const size_t M2,
    const size_t R1,
    const size_t R2,
    const size_t R3,
    const size_t R4,
    bool positive)
```

### 13.234.3.4 PermApplyS\_double()

```
void PermApplyS_double (
    double * A,
    const size_t lda,
    const size_t width,
    const size_t M2,
    const size_t R1,
    const size_t R2,
    const size_t R3,
    const size_t R4)
```

### 13.234.3.5 MatrixApplyT\_modular\_double()

```
void MatrixApplyT_modular_double (
    const double p,
    double * A,
    const size_t lda,
    const size_t width,
    const size_t N2,
    const size_t R1,
    const size_t R2,
    const size_t R3,
    const size_t R4,
    bool positive)
```

### 13.234.3.6 PermApplyT\_double()

```
void PermApplyT_double (
    double * A,
    const size_t lda,
    const size_t width,
    const size_t N2,
    const size_t R1,
    const size_t R2,
    const size_t R3,
    const size_t R4)
```



**13.234.3.7 composePermutationsLLM()**

```
void composePermutationsLLM (  
    size_t * MathP,  
    const size_t * P1,  
    const size_t * P2,  
    const size_t R,  
    const size_t N)
```

**13.234.3.8 composePermutationsLLL()**

```
void composePermutationsLLL (  
    size_t * P1,  
    const size_t * P2,  
    const size_t R,  
    const size_t N)
```

**13.234.3.9 composePermutationsMLM()**

```
void composePermutationsMLM (  
    size_t * MathP1,  
    const size_t * P2,  
    const size_t R,  
    const size_t N)
```

**13.234.3.10 cyclic\_shift\_mathPerm()**

```
void cyclic_shift_mathPerm (  
    size_t * P,  
    const size_t s)
```

**13.234.3.11 cyclic\_shift\_row\_modular\_double()**

```
void cyclic_shift_row_modular_double (  
    const double p,  
    double * A,  
    size_t m,  
    size_t n,  
    size_t lda,  
    bool positive)
```

**13.234.3.12 cyclic\_shift\_col\_modular\_double()**

```
void cyclic_shift_col_modular_double (  
    const double p,  
    double * A,  
    size_t m,  
    size_t n,  
    size_t lda,  
    bool positive)
```

**13.234.3.13 applyP\_modular\_double()**

```
void applyP_modular_double (  
    const double p,  
    const enum FFLAS_C_SIDE Side,  
    const enum FFLAS_C_TRANSPOSE Trans,  
    const size_t M,  
    const size_t ibeg,  
    const size_t iend,
```

```
double * A,  
const size_t lda,  
const size_t * P,  
bool positive)
```

#### 13.234.3.14 fgetrsin\_modular\_double()

```
void fgetrsin_modular_double (  
    const double p,  
    const enum FFLAS_C_SIDE Side,  
    const size_t M,  
    const size_t N,  
    const size_t R,  
    double * A,  
    const size_t lda,  
    const size_t * P,  
    const size_t * Q,  
    double * B,  
    const size_t ldb,  
    int * info,  
    bool positive)
```

#### 13.234.3.15 fgetrs\_modular\_double()

```
double * fgetrs_modular_double (  
    const double p,  
    const enum FFLAS_C_SIDE Side,  
    const size_t M,  
    const size_t N,  
    const size_t NRHS,  
    const size_t R,  
    double * A,  
    const size_t lda,  
    const size_t * P,  
    const size_t * Q,  
    double * X,  
    const size_t ldx,  
    const double * B,  
    const size_t ldb,  
    int * info,  
    bool positive)
```

#### 13.234.3.16 fgesvin\_modular\_double()

```
size_t fgesvin_modular_double (  
    const double p,  
    const enum FFLAS_C_SIDE Side,  
    const size_t M,  
    const size_t N,  
    double * A,  
    const size_t lda,  
    double * B,  
    const size_t ldb,  
    int * info,  
    bool positive)
```

#### 13.234.3.17 fgesv\_modular\_double()

```
size_t fgesv_modular_double (  

```

```

    const double p,
    const enum FFLAS_C_SIDE Side,
    const size_t M,
    const size_t N,
    const size_t NRHS,
    double * A,
    const size_t lda,
    double * X,
    const size_t ldx,
    const double * B,
    const size_t ldb,
    int * info)

```

#### 13.234.3.18 ftrtri\_modular\_double()

```

void ftrtri_modular_double (
    const double p,
    const enum FFLAS_C_UPLO Uplo,
    const enum FFLAS_C_DIAG Diag,
    const size_t N,
    double * A,
    const size_t lda,
    bool positive)

```

#### 13.234.3.19 trinv\_left\_modular\_double()

```

void trinv_left_modular_double (
    const double p,
    const size_t N,
    const double * L,
    const size_t ldl,
    double * X,
    const size_t ldx,
    bool positive)

```

#### 13.234.3.20 ftrtrm\_modular\_double()

```

void ftrtrm_modular_double (
    const double p,
    const enum FFLAS_C_DIAG diag,
    const size_t N,
    double * A,
    const size_t lda,
    bool positive)

```

#### 13.234.3.21 PLUQ\_modular\_double()

```

size_t PLUQ_modular_double (
    const double p,
    const enum FFLAS_C_DIAG Diag,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t * P,
    size_t * Q,
    bool positive)

```

**13.234.3.22 LUdivine\_modular\_double()**

```

size_t LUdivine_modular_double (
    const double p,
    const enum FFLAS_C_DIAG Diag,
    const enum FFLAS_C_TRANSPOSE trans,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const enum FFPACK_C_LU_TAG LuTag,
    const size_t cutoff,
    bool positive)

```

**13.234.3.23 LUdivine\_small\_modular\_double()**

```

size_t LUdivine_small_modular_double (
    const double p,
    const enum FFLAS_C_DIAG Diag,
    const enum FFLAS_C_TRANSPOSE trans,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t * P,
    size_t * Q,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

**13.234.3.24 LUdivine\_gauss\_modular\_double()**

```

size_t LUdivine_gauss_modular_double (
    const double p,
    const enum FFLAS_C_DIAG Diag,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t * P,
    size_t * Q,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

**13.234.3.25 ColumnEchelonForm\_modular\_double()**

```

size_t ColumnEchelonForm_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

**13.234.3.26 RowEchelonForm\_modular\_double()**

```
size_t RowEchelonForm_modular_double (  
    const double p,  
    const size_t M,  
    const size_t N,  
    double * A,  
    const size_t lda,  
    size_t * P,  
    size_t * Qt,  
    const bool transform,  
    const enum FFPACK_C_LU_TAG LuTag,  
    bool positive)
```

**13.234.3.27 ColumnEchelonForm\_modular\_float()**

```
size_t ColumnEchelonForm_modular_float (  
    const float p,  
    const size_t M,  
    const size_t N,  
    float * A,  
    const size_t lda,  
    size_t * P,  
    size_t * Qt,  
    bool transform,  
    const enum FFPACK_C_LU_TAG LuTag,  
    bool positive)
```

**13.234.3.28 RowEchelonForm\_modular\_float()**

```
size_t RowEchelonForm_modular_float (  
    const float p,  
    const size_t M,  
    const size_t N,  
    float * A,  
    const size_t lda,  
    size_t * P,  
    size_t * Qt,  
    const bool transform,  
    const enum FFPACK_C_LU_TAG LuTag,  
    bool positive)
```

**13.234.3.29 ColumnEchelonForm\_modular\_int32\_t()**

```
size_t ColumnEchelonForm_modular_int32_t (  
    const int32_t p,  
    const size_t M,  
    const size_t N,  
    int32_t * A,  
    const size_t lda,  
    size_t * P,  
    size_t * Qt,  
    bool transform,  
    const enum FFPACK_C_LU_TAG LuTag,  
    bool positive)
```

**13.234.3.30 RowEchelonForm\_modular\_int32\_t()**

```
size_t RowEchelonForm_modular_int32_t (  
    const int32_t p,
```

```

    const size_t M,
    const size_t N,
    int32_t * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

#### 13.234.3.31 ReducedColumnEchelonForm\_modular\_double()

```

size_t ReducedColumnEchelonForm_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

#### 13.234.3.32 ReducedRowEchelonForm\_modular\_double()

```

size_t ReducedRowEchelonForm_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

#### 13.234.3.33 ReducedColumnEchelonForm\_modular\_float()

```

size_t ReducedColumnEchelonForm_modular_float (
    const float p,
    const size_t M,
    const size_t N,
    float * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

#### 13.234.3.34 ReducedRowEchelonForm\_modular\_float()

```

size_t ReducedRowEchelonForm_modular_float (
    const float p,
    const size_t M,
    const size_t N,
    float * A,

```

```

    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

#### 13.234.3.35 ReducedColumnEchelonForm\_modular\_int32\_t()

```

size_t ReducedColumnEchelonForm_modular_int32_t (
    const int32_t p,
    const size_t M,
    const size_t N,
    int32_t * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

#### 13.234.3.36 ReducedRowEchelonForm\_modular\_int32\_t()

```

size_t ReducedRowEchelonForm_modular_int32_t (
    const int32_t p,
    const size_t M,
    const size_t N,
    int32_t * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

#### 13.234.3.37 ReducedRowEchelonForm2\_modular\_double()

```

size_t ReducedRowEchelonForm2_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t * P,
    size_t * Qt,
    const bool transform,
    bool positive)

```

#### 13.234.3.38 REF\_modular\_double()

```

size_t REF_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    const size_t colbeg,
    const size_t rowbeg,
    const size_t colsize,

```

```

    size_t * Qt,
    size_t * P,
    bool positive)

```

#### 13.234.3.39 Invertin\_modular\_double()

```

double * Invertin_modular_double (
    const double p,
    const size_t M,
    double * A,
    const size_t lda,
    int * nullity,
    bool positive)

```

#### 13.234.3.40 Invert\_modular\_double()

```

double * Invert_modular_double (
    const double p,
    const size_t M,
    const double * A,
    const size_t lda,
    double * X,
    const size_t ldx,
    int * nullity,
    bool positive)

```

#### 13.234.3.41 Invert2\_modular\_double()

```

double * Invert2_modular_double (
    const double p,
    const size_t M,
    double * A,
    const size_t lda,
    double * X,
    const size_t ldx,
    int * nullity,
    bool positive)

```

#### 13.234.3.42 KrylovElim\_modular\_double()

```

size_t KrylovElim_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t * P,
    size_t * Q,
    const size_t deg,
    size_t * iterates,
    size_t * inviterates,
    const size_t maxit,
    size_t virt,
    bool positive)

```

#### 13.234.3.43 SpecRankProfile\_modular\_double()

```

size_t SpecRankProfile_modular_double (
    const double p,

```



```

    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    const size_t deg,
    size_t * rankProfile,
    bool positive)

```

#### 13.234.3.44 Rank\_modular\_double()

```

size_t Rank_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    bool positive)

```

#### 13.234.3.45 IsSingular\_modular\_double()

```

bool IsSingular_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    bool positive)

```

#### 13.234.3.46 Det\_modular\_double()

```

double Det_modular_double (
    const double p,
    const size_t N,
    double * A,
    const size_t lda,
    bool positive)

```

#### 13.234.3.47 Solve\_modular\_double()

```

double * Solve_modular_double (
    const double p,
    const size_t M,
    double * A,
    const size_t lda,
    double * x,
    const int incx,
    const double * b,
    const int incb,
    bool positive)

```

#### 13.234.3.48 solveLB\_modular\_double()

```

void solveLB_modular_double (
    const double p,
    const enum FFLAS_C_SIDE Side,
    const size_t M,
    const size_t N,
    const size_t R,
    double * L,

```

```

    const size_t ldl,
    const size_t * Q,
    double * B,
    const size_t ldb)

```

#### 13.234.3.49 solveLB2\_modular\_double()

```

void solveLB2_modular_double (
    const double p,
    const enum FFLAS_C_SIDE Side,
    const size_t M,
    const size_t N,
    const size_t R,
    double * L,
    const size_t ldl,
    const size_t * Q,
    double * B,
    const size_t ldb,
    bool positive)

```

#### 13.234.3.50 RandomNullSpaceVector\_modular\_double()

```

void RandomNullSpaceVector_modular_double (
    const double p,
    const enum FFLAS_C_SIDE Side,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    double * X,
    const size_t incX,
    bool positive)

```

#### 13.234.3.51 NullSpaceBasis\_modular\_double()

```

size_t NullSpaceBasis_modular_double (
    const double p,
    const enum FFLAS_C_SIDE Side,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    double ** NS,
    size_t * ldn,
    size_t * NSdim,
    bool positive)

```

#### 13.234.3.52 RowRankProfile\_modular\_double()

```

size_t RowRankProfile_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t ** rkprofile,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

**13.234.3.53 ColumnRankProfile\_modular\_double()**

```
size_t ColumnRankProfile_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t ** rkprofile,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)
```

**13.234.3.54 RankProfileFromLU()**

```
void RankProfileFromLU (
    const size_t * P,
    const size_t N,
    const size_t R,
    size_t * rkprofile,
    const enum FFPACK_C_LU_TAG LuTag)
```

**13.234.3.55 LeadingSubmatrixRankProfiles()**

```
size_t LeadingSubmatrixRankProfiles (
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t LSm,
    const size_t LSn,
    const size_t * P,
    const size_t * Q,
    size_t * RRP,
    size_t * CRP)
```

**13.234.3.56 RowRankProfileSubmatrixIndices\_modular\_double()**

```
size_t RowRankProfileSubmatrixIndices_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t ** rowindices,
    size_t ** colindices,
    size_t * R,
    bool positive)
```

**13.234.3.57 ColRankProfileSubmatrixIndices\_modular\_double()**

```
size_t ColRankProfileSubmatrixIndices_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    size_t ** rowindices,
    size_t ** colindices,
    size_t * R,
    bool positive)
```

**13.234.3.58 RowRankProfileSubmatrix\_modular\_double()**

```
size_t RowRankProfileSubmatrix_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    double ** X,
    size_t * R,
    bool positive)
```

**13.234.3.59 ColRankProfileSubmatrix\_modular\_double()**

```
size_t ColRankProfileSubmatrix_modular_double (
    const double p,
    const size_t M,
    const size_t N,
    double * A,
    const size_t lda,
    double ** X,
    size_t * R,
    bool positive)
```

**13.234.3.60 getTriangular\_modular\_double()**

```
void getTriangular_modular_double (
    const double p,
    const enum FFLAS_C_UPLO Uplo,
    const enum FFLAS_C_DIAG diag,
    const size_t M,
    const size_t N,
    const size_t R,
    const double * A,
    const size_t lda,
    double * T,
    const size_t ldt,
    const bool OnlyNonZeroVectors,
    bool positive)
```

**13.234.3.61 getTriangularin\_modular\_double()**

```
void getTriangularin_modular_double (
    const double p,
    const enum FFLAS_C_UPLO Uplo,
    const enum FFLAS_C_DIAG diag,
    const size_t M,
    const size_t N,
    const size_t R,
    double * A,
    const size_t lda,
    bool positive)
```

**13.234.3.62 getEchelonForm\_modular\_double()**

```
void getEchelonForm_modular_double (
    const double p,
    const enum FFLAS_C_UPLO Uplo,
    const enum FFLAS_C_DIAG diag,
```

```

    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    const double * A,
    const size_t lda,
    double * T,
    const size_t ldt,
    const bool OnlyNonZeroVectors,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

#### 13.234.3.63 getEchelonFormin\_modular\_double()

```

void getEchelonFormin_modular_double (
    const double p,
    const enum FFLAS_C_UPLO Uplo,
    const enum FFLAS_C_DIAG diag,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    double * A,
    const size_t lda,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

#### 13.234.3.64 getEchelonTransform\_modular\_double()

```

void getEchelonTransform_modular_double (
    const double p,
    const enum FFLAS_C_UPLO Uplo,
    const enum FFLAS_C_DIAG diag,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    const size_t * Q,
    const double * A,
    const size_t lda,
    double * T,
    const size_t ldt,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)

```

#### 13.234.3.65 getReducedEchelonForm\_modular\_double()

```

void getReducedEchelonForm_modular_double (
    const double p,
    const enum FFLAS_C_UPLO Uplo,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    const double * A,
    const size_t lda,
    double * T,
    const size_t ldt,
    const bool OnlyNonZeroVectors,

```

```
const enum FFPACK_C_LU_TAG LuTag,
bool positive)
```

### 13.234.3.66 getReducedEchelonFormin\_modular\_double()

```
void getReducedEchelonFormin_modular_double (
    const double p,
    const enum FFLAS_C_UPLO Uplo,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    double * A,
    const size_t lda,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)
```

### 13.234.3.67 getReducedEchelonTransform\_modular\_double()

```
void getReducedEchelonTransform_modular_double (
    const double p,
    const enum FFLAS_C_UPLO Uplo,
    const size_t M,
    const size_t N,
    const size_t R,
    const size_t * P,
    const size_t * Q,
    const double * A,
    const size_t lda,
    double * T,
    const size_t ldt,
    const enum FFPACK_C_LU_TAG LuTag,
    bool positive)
```

### 13.234.3.68 PLUQtoEchelonPermutation()

```
void PLUQtoEchelonPermutation (
    const size_t N,
    const size_t R,
    const size_t * P,
    size_t * outPerm)
```

## 13.235 ffpack\_inst.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "givaro/modular.h"
#include "givaro/modular-balanced.h"
#include "fflas-ffpack/ffpack/ffpack.h"
#include "ffpack_inst_implem.inl"
```

### Macros

- #define \_\_FFPACK\_INST\_C
- #define FFLAS\_COMPILED
- #define INST\_OR\_DECL
- #define FFLAS\_FIELD Givaro::ModularBalanced
- #define FFLAS\_ELT double

- `#define FFLAS_ELT float`
- `#define FFLAS_ELT int64_t`
- `#define FFLAS_FIELD Givaro::Modular`
- `#define FFLAS_ELT double`
- `#define FFLAS_ELT float`
- `#define FFLAS_ELT int64_t`

## 13.235.1 Macro Definition Documentation

### 13.235.1.1 \_\_FFPACK\_INST\_C

```
#define __FFPACK_INST_C
```

### 13.235.1.2 FFLAS\_COMPILED

```
#define FFLAS_COMPILED
```

### 13.235.1.3 INST\_OR\_DECL

```
#define INST_OR_DECL
```

### 13.235.1.4 FFLAS\_FIELD [1/2]

```
#define FFLAS_FIELD Givaro::ModularBalanced
```

### 13.235.1.5 FFLAS\_ELT [1/6]

```
#define FFLAS_ELT double
```

### 13.235.1.6 FFLAS\_ELT [2/6]

```
#define FFLAS_ELT float
```

### 13.235.1.7 FFLAS\_ELT [3/6]

```
#define FFLAS_ELT int64_t
```

### 13.235.1.8 FFLAS\_FIELD [2/2]

```
#define FFLAS_FIELD Givaro::Modular
```

### 13.235.1.9 FFLAS\_ELT [4/6]

```
#define FFLAS_ELT double
```

### 13.235.1.10 FFLAS\_ELT [5/6]

```
#define FFLAS_ELT float
```

### 13.235.1.11 FFLAS\_ELT [6/6]

```
#define FFLAS_ELT int64_t
```

## 13.236 ffpack\_inst.h File Reference

```
#include "givaro/modular.h"
#include "givaro/modular-balanced.h"
#include "fflas-ffpack/ffpack/ffpack.h"
#include "ffpack_inst_implem.inl"
```

## Macros

- `#define FFLAS_COMPILED`
- `#define INST_OR_DECL <>`
- `#define FFLAS_FIELD Givaro::ModularBalanced`
- `#define FFLAS_ELT double`
- `#define FFLAS_ELT float`
- `#define FFLAS_ELT int64_t`
- `#define FFLAS_FIELD Givaro::Modular`
- `#define FFLAS_ELT double`
- `#define FFLAS_ELT float`
- `#define FFLAS_ELT int64_t`

## 13.236.1 Macro Definition Documentation

### 13.236.1.1 FFLAS\_COMPILED

```
#define FFLAS_COMPILED
```

### 13.236.1.2 INST\_OR\_DECL

```
#define INST_OR_DECL <>
```

### 13.236.1.3 FFLAS\_FIELD [1/2]

```
#define FFLAS_FIELD Givaro::ModularBalanced
```

### 13.236.1.4 FFLAS\_ELT [1/6]

```
#define FFLAS_ELT double
```

### 13.236.1.5 FFLAS\_ELT [2/6]

```
#define FFLAS_ELT float
```

### 13.236.1.6 FFLAS\_ELT [3/6]

```
#define FFLAS_ELT int64_t
```

### 13.236.1.7 FFLAS\_FIELD [2/2]

```
#define FFLAS_FIELD Givaro::Modular
```

### 13.236.1.8 FFLAS\_ELT [4/6]

```
#define FFLAS_ELT double
```

### 13.236.1.9 FFLAS\_ELT [5/6]

```
#define FFLAS_ELT float
```

### 13.236.1.10 FFLAS\_ELT [6/6]

```
#define FFLAS_ELT int64_t
```



## 13.237 ffpack\_inst\_implem.inl File Reference

### Namespaces

- namespace [FFPACK](#)

*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

### Functions

- void [composePermutationsLLM](#) (size\_t \*MathP, const size\_t \*P1, const size\_t \*P2, const size\_t R, const size\_t N)  
*Computes  $P1 \times \text{Diag}(I_R, P2)$  where  $P1$  is a LAPACK and  $P2$  a LAPACK permutation and store the result in  $\text{MathP}$  as a  $\text{MathPermutation}$  format.*
- void [composePermutationsLLL](#) (size\_t \*P1, const size\_t \*P2, const size\_t R, const size\_t N)  
*Computes  $P1 \times \text{Diag}(I_R, P2)$  where  $P1$  is a LAPACK and  $P2$  a LAPACK permutation and store the result in  $P1$  as a LAPACK permutation.*
- void [composePermutationsMLM](#) (size\_t \*MathP1, const size\_t \*P2, const size\_t R, const size\_t N)  
*Computes  $\text{MathP1} \times \text{Diag}(I_R, P2)$  where  $\text{MathP1}$  is a  $\text{MathPermutation}$  and  $P2$  a LAPACK permutation and store the result in  $\text{MathP1}$  as a  $\text{MathPermutation}$  format.*
- void [cyclic\\_shift\\_mathPerm](#) (size\_t \*P, const size\_t s)
- template<typename Base\_t >  
void [cyclic\\_shift\\_row\\_col](#) (Base\_t \*A, size\_t m, size\_t n, size\_t lda)
- template [INST\\_OR\\_DECL](#) void [cyclic\\_shift\\_row](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, [FFLAS\\_ELT](#) \*A, size\_t m, size\_t n, size\_t lda)
- template [INST\\_OR\\_DECL](#) void [cyclic\\_shift\\_col](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, [FFLAS\\_ELT](#) \*A, size\_t m, size\_t n, size\_t lda)
- template [INST\\_OR\\_DECL](#) void [applyP](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const [FFLAS::FFLAS\\_TRANSPOSE](#) Trans, const size\_t M, const size\_t ibeg, const size\_t iend, [FFLAS\\_ELT](#) \*A, const size\_t lda, const size\_t \*P)
- template [INST\\_OR\\_DECL](#) void [fgetrs](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, const size\_t R, [FFLAS\\_ELT](#) \*A, const size\_t lda, const size\_t \*P, const size\_t \*Q, [FFLAS\\_ELT](#) \*B, const size\_t ldb, int \*info)
- template [INST\\_OR\\_DECL](#) [FFLAS\\_ELT](#) \* [fgetrs](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, const size\_t NRHS, const size\_t R, [FFLAS\\_ELT](#) \*A, const size\_t lda, const size\_t \*P, const size\_t \*Q, [FFLAS\\_ELT](#) \*X, const size\_t ldx, const [FFLAS\\_ELT](#) \*B, const size\_t ldb, int \*info)
- template [INST\\_OR\\_DECL](#) size\_t [fgesv](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, [FFLAS\\_ELT](#) \*A, const size\_t lda, [FFLAS\\_ELT](#) \*B, const size\_t ldb, int \*info)
- template [INST\\_OR\\_DECL](#) size\_t [fgesv](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const [FFLAS::FFLAS\\_SIDE](#) Side, const size\_t M, const size\_t N, const size\_t NRHS, [FFLAS\\_ELT](#) \*A, const size\_t lda, [FFLAS\\_ELT](#) \*X, const size\_t ldx, const [FFLAS\\_ELT](#) \*B, const size\_t ldb, int \*info)
- template [INST\\_OR\\_DECL](#) void [ftrtri](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const [FFLAS::FFLAS\\_UPLO](#) Uplo, const [FFLAS::FFLAS\\_DIAG](#) Diag, const size\_t N, [FFLAS\\_ELT](#) \*A, const size\_t lda, const size\_t threshold)
- template [INST\\_OR\\_DECL](#) void [trinv\\_left](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const size\_t N, const [FFLAS\\_ELT](#) \*L, const size\_t ldl, [FFLAS\\_ELT](#) \*X, const size\_t ldx)
- template [INST\\_OR\\_DECL](#) void [ftrtrm](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const [FFLAS::FFLAS\\_SIDE](#) side, const [FFLAS::FFLAS\\_DIAG](#) diag, const size\_t N, [FFLAS\\_ELT](#) \*A, const size\_t lda)
- template [INST\\_OR\\_DECL](#) size\_t [PLUQ](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const [FFLAS::FFLAS\\_DIAG](#) Diag, const size\_t M, const size\_t N, [FFLAS\\_ELT](#) \*A, const size\_t lda, size\_t \*P, size\_t \*Q)
- template [INST\\_OR\\_DECL](#) size\_t [LUdivine](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const [FFLAS::FFLAS\\_DIAG](#) Diag, const [FFLAS::FFLAS\\_TRANSPOSE](#) trans, const size\_t M, const size\_t N, [FFLAS\\_ELT](#) \*A, const size\_t lda, size\_t \*P, size\_t \*Qt, const [FFPACK\\_LU\\_TAG](#) LuTag, const size\_t cutoff)
- template [INST\\_OR\\_DECL](#) size\_t [LUdivine\\_small](#) (const [FFLAS\\_FIELD](#)< [FFLAS\\_ELT](#) > &F, const [FFLAS::FFLAS\\_DIAG](#) Diag, const [FFLAS::FFLAS\\_TRANSPOSE](#) trans, const size\_t M, const size\_t N, [FFLAS\\_ELT](#) \*A, const size\_t lda, size\_t \*P, size\_t \*Q, const [FFPACK\\_LU\\_TAG](#) LuTag)

- template `INST_OR_DECL` `size_t` `LUdivine_gauss` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS::FFLAS_DIAG` Diag, const `size_t` M, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Q, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL` `size_t` `RowEchelonForm` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` M, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Qt, const bool transform, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL` `size_t` `ReducedRowEchelonForm` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` M, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Qt, const bool transform, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL` `size_t` `ColumnEchelonForm` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` M, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Qt, const bool transform, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL` `size_t` `ReducedColumnEchelonForm` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` M, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Qt, const bool transform, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL` `FFLAS_ELT` \* `Invert` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` M, `FFLAS_ELT` \*A, const `size_t` lda, int &nullity)
- template `INST_OR_DECL` `FFLAS_ELT` \* `Invert` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` M, const `FFLAS_ELT` \*A, const `size_t` lda, `FFLAS_ELT` \*X, const `size_t` idx, int &nullity)
- template `INST_OR_DECL` `FFLAS_ELT` \* `Invert2` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` M, `FFLAS_ELT` \*A, const `size_t` lda, `FFLAS_ELT` \*X, const `size_t` idx, int &nullity)
- template `INST_OR_DECL` `std::list< Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > >::Element > & CharPoly` (const `Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > > &R`, `std::list< Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > >::Element > &charp`, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, `FFLAS_FIELD< FFLAS_ELT >::RandIter &G`, const `FFPACK_CHARPOLY_TAG` CharpTag, const `size_t` degree)
- template `INST_OR_DECL` `Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > >::Element & CharPoly` (const `Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > > &R`, `Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > >::Element &charp`, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, `FFLAS_FIELD< FFLAS_ELT >::RandIter &G`, const `FFPACK_CHARPOLY_TAG` CharpTag, const `size_t` degree)
- template `INST_OR_DECL` `Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > >::Element & CharPoly` (const `Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > > &R`, `Givaro::Poly1Dom< FFLAS_FIELD< FFLAS_ELT > >::Element &charp`, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, const `FFPACK_CHARPOLY_TAG` CharpTag, const `size_t` degree)
- template `INST_OR_DECL` `std::vector< FFLAS_ELT > & MinPoly` (const `FFLAS_FIELD< FFLAS_ELT >` &F, `std::vector< FFLAS_ELT > &minP`, const `size_t` N, const `FFLAS_ELT` \*A, const `size_t` lda, `FFLAS_FIELD< FFLAS_ELT >::RandIter &G`)
- template `INST_OR_DECL` `std::vector< FFLAS_ELT > & MinPoly` (const `FFLAS_FIELD< FFLAS_ELT >` &F, `std::vector< FFLAS_ELT > &minP`, const `size_t` N, const `FFLAS_ELT` \*A, const `size_t` lda)
- template `INST_OR_DECL` `std::vector< FFLAS_ELT > & MatVecMinPoly` (const `FFLAS_FIELD< FFLAS_ELT >` &F, `std::vector< FFLAS_ELT > &minP`, const `size_t` N, const `FFLAS_ELT` \*A, const `size_t` lda, const `FFLAS_ELT` \*V, const `size_t` incv)
- template `INST_OR_DECL` `size_t` `KrylovElim` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` M, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Q, const `size_t` deg, `size_t` \*iterates, `size_t` \*inviterates, const `size_t` maxit, `size_t` virt)
- template `INST_OR_DECL` `size_t` `SpecRankProfile` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` M, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, const `size_t` deg, `size_t` \*rankProfile)
- template `INST_OR_DECL` `size_t` `Rank` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` M, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda)
- template `INST_OR_DECL` bool `IsSingular` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` M, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda)
- template `INST_OR_DECL` `FFLAS_ELT` & `Det` (const `FFLAS_FIELD< FFLAS_ELT >` &F, `FFLAS_ELT` &det, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, `size_t` \*P, `size_t` \*Q)
- template `INST_OR_DECL` `FFLAS_ELT` & `Det` (const `FFLAS_FIELD< FFLAS_ELT >` &F, `FFLAS_ELT` &det, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, const `FFLAS::ParSeqHelper::Parallel< FFLAS::CuttingStrategy::Recursive, FFLAS::StrategyParameter::Threads >` &parH, `size_t` \*P, `size_t` \*Q)

- template `INST_OR_DECL FFLAS_ELT * Solve` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` M, `FFLAS_ELT` \*A, const `size_t` lda, `FFLAS_ELT` \*x, const `int` incx, const `FFLAS_ELT` \*b, const `int` incb)
- template `INST_OR_DECL void solveLB` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS::FFLAS_SIDE` Side, const `size_t` M, const `size_t` N, const `size_t` R, `FFLAS_ELT` \*L, const `size_t` ldL, const `size_t` \*Q, `FFLAS_ELT` \*B, const `size_t` ldb)
- template `INST_OR_DECL void solveLB2` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS::FFLAS_SIDE` Side, const `size_t` M, const `size_t` N, const `size_t` R, `FFLAS_ELT` \*L, const `size_t` ldL, const `size_t` \*Q, `FFLAS_ELT` \*B, const `size_t` ldb)
- template `INST_OR_DECL void RandomNullSpaceVector` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS::FFLAS_SIDE` Side, const `size_t` M, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, `FFLAS_ELT` \*X, const `size_t` incX)
- template `INST_OR_DECL size_t NullSpaceBasis` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS::FFLAS_SIDE` Side, const `size_t` M, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, `FFLAS_ELT` \*&NS, `size_t` &ldn, `size_t` &NSdim)
- template `INST_OR_DECL size_t RowRankProfile` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` M, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, `size_t` \*&rkprofile, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL size_t ColumnRankProfile` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` M, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, `size_t` \*&rkprofile, const `FFPACK_LU_TAG` LuTag)
- void `RankProfileFromLU` (const `size_t` \*P, const `size_t` N, const `size_t` R, `size_t` \*&rkprofile, const `FFPACK_LU_TAG` LuTag)  
*Recovers the column/row rank profile from the permutation of an LU decomposition.*
- `size_t LeadingSubmatrixRankProfiles` (const `size_t` M, const `size_t` N, const `size_t` R, const `size_t` LSm, const `size_t` LSn, const `size_t` \*P, const `size_t` \*Q, `size_t` \*RRP, `size_t` \*CRP)  
*Recovers the row and column rank profiles of any leading submatrix from the PLUQ decomposition.*
- template `INST_OR_DECL size_t RowRankProfileSubmatrixIndices` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` M, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, `size_t` \*&rowindices, `size_t` \*&colindices, `size_t` &R)
- template `INST_OR_DECL size_t ColRankProfileSubmatrixIndices` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` M, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, `size_t` \*&rowindices, `size_t` \*&colindices, `size_t` &R)
- template `INST_OR_DECL size_t RowRankProfileSubmatrix` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` M, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, `FFLAS_ELT` \*&X, `size_t` &R)
- template `INST_OR_DECL size_t ColRankProfileSubmatrix` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `size_t` M, const `size_t` N, `FFLAS_ELT` \*A, const `size_t` lda, `FFLAS_ELT` \*&X, `size_t` &R)
- template `INST_OR_DECL void getTriangular< FFLAS_FIELD< FFLAS_ELT > >` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS::FFLAS_UPLO` Uplo, const `FFLAS::FFLAS_DIAG` diag, const `size_t` M, const `size_t` N, const `size_t` R, const `FFLAS_ELT` \*A, const `size_t` lda, `FFLAS_ELT` \*T, const `size_t` ldT, const `bool` OnlyNonZeroVectors)
- template `INST_OR_DECL void getTriangular< FFLAS_FIELD< FFLAS_ELT > >` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS::FFLAS_UPLO` Uplo, const `FFLAS::FFLAS_DIAG` diag, const `size_t` M, const `size_t` N, const `size_t` R, `FFLAS_ELT` \*A, const `size_t` lda)
- template `INST_OR_DECL void getEchelonForm< FFLAS_FIELD< FFLAS_ELT > >` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS::FFLAS_UPLO` Uplo, const `FFLAS::FFLAS_DIAG` diag, const `size_t` M, const `size_t` N, const `size_t` R, const `size_t` \*P, const `FFLAS_ELT` \*A, const `size_t` lda, `FFLAS_ELT` \*T, const `size_t` ldT, const `bool` OnlyNonZeroVectors, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL void getEchelonForm< FFLAS_FIELD< FFLAS_ELT > >` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS::FFLAS_UPLO` Uplo, const `FFLAS::FFLAS_DIAG` diag, const `size_t` M, const `size_t` N, const `size_t` R, const `size_t` \*P, `FFLAS_ELT` \*A, const `size_t` lda, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL void getEchelonTransform< FFLAS_FIELD< FFLAS_ELT > >` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS::FFLAS_UPLO` Uplo, const `FFLAS::FFLAS_DIAG` diag, const `size_t` M, const `size_t` N, const `size_t` R, const `size_t` \*P, const `size_t` \*Q, const `FFLAS_ELT` \*A, const `size_t` lda, `FFLAS_ELT` \*T, const `size_t` ldT, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL void getReducedEchelonForm< FFLAS_FIELD< FFLAS_ELT > >` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS::FFLAS_UPLO` Uplo, const `size_t` M, const `size_t` N, const `size_t` R, const `size_t` \*P, const `FFLAS_ELT` \*A, const `size_t` lda, `FFLAS_ELT` \*T, const `size_t` ldT, const `bool` OnlyNonZeroVectors, const `FFPACK_LU_TAG` LuTag)

- template `INST_OR_DECL` void `getReducedEchelonForm< FFLAS_FIELD< FFLAS_ELT > >` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS::FFLAS_UPLO` Uplo, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, `FFLAS_ELT` \*A, const size\_t lda, const `FFPACK_LU_TAG` LuTag)
- template `INST_OR_DECL` void `getReducedEchelonTransform< FFLAS_FIELD< FFLAS_ELT > >` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const `FFLAS::FFLAS_UPLO` Uplo, const size\_t M, const size\_t N, const size\_t R, const size\_t \*P, const size\_t \*Q, const `FFLAS_ELT` \*A, const size\_t lda, `FFLAS_ELT` \*T, const size\_t ldt, const `FFPACK_LU_TAG` LuTag)
- void `PLUQtoEchelonPermutation` (const size\_t N, const size\_t R, const size\_t \*P, size\_t \*outPerm)  
*Auxiliary routine: determines the permutation that changes a PLUQ decomposition into a echelon form revealing PLUQ decomposition.*
- template `INST_OR_DECL` `FFLAS_ELT` \* `LQUPtoInverseOfFullRankMinor` (const `FFLAS_FIELD< FFLAS_ELT >` &F, const size\_t rank, `FFLAS_ELT` \*A\_factors, const size\_t lda, const size\_t \*QtPointer, `FFLAS_ELT` \*X, const size\_t ldx)

## 13.238 blockcuts.inl File Reference

```
#include <fflas-ffpack/fflas/fflas_enum.h>
#include <math.h>
#include <cassert>
```

### Data Structures

- struct [Single](#)
- struct [Row](#)
- struct [Column](#)
- struct [Block](#)
- struct [Recursive](#)
- struct [Fixed](#)
- struct [Threads](#)
- struct [Grain](#)
- struct [TwoD](#)
- struct [TwoDAdaptive](#)
- struct [ThreeD](#)
- struct [ThreeDInPlace](#)
- struct [ThreeDAdaptive](#)
- struct [Parallel< C, P >](#)
- struct [Sequential](#)
- struct [Compose< H1, H2 >](#)
- struct [ForStrategy1D< blocksize\\_t, Cut, Param >](#)
- struct [ForStrategy2D< blocksize\\_t, Cut, Param >](#)

### Namespaces

- namespace [FFLAS](#)
- namespace [FFLAS::CuttingStrategy](#)
- namespace [FFLAS::StrategyParameter](#)
- namespace [FFLAS::ParSeqHelper](#)  
*ParSeqHelper for both fgemm and ftrsm.*

### Macros

- #define `__FFLASFFPACK_fflas_blockcuts_INL`
- #define `__FFLASFFPACK_MINBLOCKCUTS` ((size\_t)256)

## Typedefs

- typedef [Row](#) [RNSModulus](#)

## Functions

- template<class Cut = CuttingStrategy::Block, class Strat = StrategyParameter::Threads>  
void [BlockCuts](#) (size\_t &RBLOCKSIZE, size\_t &CBLOCKSIZE, const size\_t m, const size\_t n, const size\_t numthreads)
- template<> void [BlockCuts](#)< [CuttingStrategy::Single](#), [StrategyParameter::Threads](#) > (size\_t &RBLOCKSIZE, size\_t &CBLOCKSIZE, const size\_t m, const size\_t n, const size\_t numthreads)
- template<> void [BlockCuts](#)< [CuttingStrategy::Row](#), [StrategyParameter::Fixed](#) > (size\_t &RBLOCKSIZE, size\_t &CBLOCKSIZE, const size\_t m, const size\_t n, const size\_t numthreads)
- template<> void [BlockCuts](#)< [CuttingStrategy::Row](#), [StrategyParameter::Grain](#) > (size\_t &RBLOCKSIZE, size\_t &CBLOCKSIZE, const size\_t m, const size\_t n, const size\_t grainsize)
- template<> void [BlockCuts](#)< [CuttingStrategy::Block](#), [StrategyParameter::Grain](#) > (size\_t &RBLOCKSIZE, size\_t &CBLOCKSIZE, const size\_t m, const size\_t n, const size\_t grainsize)
- template<> void [BlockCuts](#)< [CuttingStrategy::Column](#), [StrategyParameter::Fixed](#) > (size\_t &RBLOCKSIZE, size\_t &CBLOCKSIZE, const size\_t m, const size\_t n, const size\_t numthreads)
- template<> void [BlockCuts](#)< [CuttingStrategy::Column](#), [StrategyParameter::Grain](#) > (size\_t &RBLOCKSIZE, size\_t &CBLOCKSIZE, const size\_t m, const size\_t n, const size\_t grainsize)
- template<> void [BlockCuts](#)< [CuttingStrategy::Block](#), [StrategyParameter::Fixed](#) > (size\_t &RBLOCKSIZE, size\_t &CBLOCKSIZE, const size\_t m, const size\_t n, const size\_t numthreads)
- template<> void [BlockCuts](#)< [CuttingStrategy::Row](#), [StrategyParameter::Threads](#) > (size\_t &RBLOCKSIZE, size\_t &CBLOCKSIZE, const size\_t m, const size\_t n, const size\_t numthreads)
- template<> void [BlockCuts](#)< [CuttingStrategy::Column](#), [StrategyParameter::Threads](#) > (size\_t &RBLOCKSIZE, size\_t &CBLOCKSIZE, const size\_t m, const size\_t n, const size\_t numthreads)
- template<> void [BlockCuts](#)< [CuttingStrategy::Block](#), [StrategyParameter::Threads](#) > (size\_t &RBLOCKSIZE, size\_t &CBLOCKSIZE, const size\_t m, const size\_t n, const size\_t numthreads)
- template<class Cut = CuttingStrategy::Block, class Param = StrategyParameter::Threads>  
void [BlockCuts](#) (size\_t &rowBlockSize, size\_t &colBlockSize, size\_t &lastRBS, size\_t &lastCBS, size\_t &changeRBS, size\_t &changeCBS, size\_t &numRowBlock, size\_t &numColBlock, size\_t m, size\_t n, const size\_t numthreads)

## 13.238.1 Macro Definition Documentation

### 13.238.1.1 \_\_FFLASFFPACK\_fflas\_blockcuts\_INL

```
#define __FFLASFFPACK_fflas_blockcuts_INL
```

### 13.238.1.2 \_\_FFLASFFPACK\_MINBLOCKCUTS

```
#define __FFLASFFPACK_MINBLOCKCUTS ((size_t)256)
```

## 13.239 fflas\_plevel1.h File Reference

```
#include "fflas-ffpack/paladin/parallel.h"
```

## Namespaces

- namespace [FFLAS](#)

## Functions

- template<class [Field](#) >  
void [pfzero](#) (const [Field](#) &F, size\_t m, size\_t n, typename [Field::Element\\_ptr](#) C, size\_t BS=0)

- `template<class Field , class RandIter >`  
`void pfrand (const Field &F, RandIter &G, size_t m, size_t n, typename Field::Element_ptr C, size_t BS=0)`
- `template<class Field , class Cut , class Param >`  
`Field::Element & fdot (const Field &F, const size_t N, typename Field::ConstElement_ptr x, const size_t incx, typename Field::ConstElement_ptr y, const size_t incy, typename Field::Element &d, const ParSeqHelper::Parallel< Cut, Param > par)`
- `template<typename Field , class Cut , class Param >`  
`Field::Element fdot (const Field &F, const size_t N, typename Field::ConstElement_ptr X, const size_t incX, typename Field::ConstElement_ptr Y, const size_t incY, const ParSeqHelper::Parallel< Cut, Param > par)`

## 13.240 kaapi\_routines.inl File Reference

### Macros

- `#define __FFLASFFPACK_KAAPI_ROUTINES_INL`

### 13.240.1 Macro Definition Documentation

#### 13.240.1.1 \_\_FFLASFFPACK\_KAAPI\_ROUTINES\_INL

```
#define __FFLASFFPACK_KAAPI_ROUTINES_INL
```

## 13.241 parallel.h File Reference

```
#include "fflas-ffpack/config.h"
#include "fflas-ffpack/paladin/blockcuts.inl"
```

### Macros

- `#define __FFLASFFPACK_SEQUENTIAL`
- `#define index_t size_t`
- `#define TASK(M, l)`
- `#define WAIT`
- `#define CHECK_DEPENDENCIES`
- `#define BARRIER`
- `#define PAR_BLOCK`
- `#define SYNCH_GROUP(Args...)`
- `#define THREAD_INDEX 0`
- `#define NUM_THREADS 1`
- `#define SET_THREADS(num_threads)`
- `#define MAX_THREADS 1`
- `#define READ(Args...)`
- `#define WRITE(Args...)`
- `#define READWRITE(Args...)`
- `#define CONSTREFERENCE(...)`
- `#define VALUE(...)`
- `#define BEGIN_PARALLEL_MAIN(Args...)`
- `#define END_PARALLEL_MAIN(void)`
- `#define FORBLOCK1D(iter, m, Helper, Args...)`
- `#define FOR1D(i, m, Helper, Args...)`
- `#define PARFORBLOCK1D(iter, m, Helper, Args...)`
- `#define PARFOR1D(iter, m, Helper, Args...)`
- `#define FORBLOCK2D(iter, m, n, Helper, Args...)`
- `#define FOR2D(i, j, m, n, Helper, Args...)`
- `#define PARFORBLOCK2D(iter, m, n, Helper, Args...)`

- #define [PARFOR2D](#)(i, j, m, n, Helper, Args...)
- #define [COMMA](#) ,
- #define [MODE](#)(...)
- #define [RETURNPARAM](#)(f, P1, Args...)
- #define [NUMARGS](#)(...)
- #define [PP\\_NARG](#)(...)
- #define [PP\\_ARG\\_N](#)( \_1, \_2, \_3, \_4, \_5, \_6, \_7, \_8, \_9, \_10, \_11, \_12, \_13, \_14, \_15, \_16, \_17, \_18, \_19, \_20, \_21, \_22, \_23, \_24, \_25, \_26, \_27, \_28, \_29, \_30, \_31, \_32, \_33, \_34, \_35, \_36, \_37, \_38, \_39, \_40, \_41, \_42, \_43, \_44, \_45, \_46, \_47, \_48, \_49, \_50, \_51, \_52, \_53, \_54, \_55, \_56, \_57, \_58, \_59, \_60, \_61, \_62, \_63, N, ...)
- #define [PP\\_RSEQ\\_N](#)()
- #define [NOSPLIT](#)()
- #define [splitting\\_0](#)()
- #define [splitting\\_1](#)(a)
- #define [splitting\\_2](#)(a, c)
- #define [splitting\\_3](#)(a, b, c)
- #define [splitt](#)(\_1, \_2, \_3, NAME, ...)
- #define [SPLITTER](#)(...)

## 13.241.1 Macro Definition Documentation

### 13.241.1.1 `__FFLASFFPACK_SEQUENTIAL`

```
#define __FFLASFFPACK_SEQUENTIAL
```

### 13.241.1.2 `index_t`

```
#define index_t size_t
```

### 13.241.1.3 `TASK`

```
#define TASK(  
    M,  
    I)
```

**Value:**

```
{I;}
```

### 13.241.1.4 `WAIT`

```
#define WAIT
```

### 13.241.1.5 `CHECK_DEPENDENCIES`

```
#define CHECK_DEPENDENCIES
```

### 13.241.1.6 `BARRIER`

```
#define BARRIER
```

### 13.241.1.7 `PAR_BLOCK`

```
#define PAR_BLOCK
```

### 13.241.1.8 `SYNCH_GROUP`

```
#define SYNCH_GROUP(  
    Args...)
```

**Value:**

```
{{Args}};
```

#### 13.241.1.9 THREAD\_INDEX

```
#define THREAD_INDEX 0
```

#### 13.241.1.10 NUM\_THREADS

```
#define NUM_THREADS 1
```

#### 13.241.1.11 SET\_THREADS

```
#define SET_THREADS(  
    num_threads)
```

**Value:**

```
{ }
```

#### 13.241.1.12 MAX\_THREADS

```
#define MAX_THREADS 1
```

#### 13.241.1.13 READ

```
#define READ(  
    Args...)
```

#### 13.241.1.14 WRITE

```
#define WRITE(  
    Args...)
```

#### 13.241.1.15 READWRITE

```
#define READWRITE(  
    Args...)
```

#### 13.241.1.16 CONSTREFERENCE

```
#define CONSTREFERENCE(  
    ...)
```

#### 13.241.1.17 VALUE

```
#define VALUE(  
    ...)
```

#### 13.241.1.18 BEGIN\_PARALLEL\_MAIN

```
#define BEGIN_PARALLEL_MAIN(  
    Args...)
```

**Value:**

```
int main(Args) {
```

#### 13.241.1.19 END\_PARALLEL\_MAIN

```
#define END_PARALLEL_MAIN(  
    void)
```

**Value:**

```
return 0; }
```



**13.241.1.20 FORBLOCK1D**

```
#define FORBLOCK1D(
    iter,
    m,
    Helper,
    Args...)

```

**Value:**

```
{ FFLAS::ForStrategy1D<std::remove_const<decltype(m)>::type, typename decltype(Helper)::Cut, typename
  decltype(Helper)::Param> iter(m, Helper); \
  for(iter.initialize(); !iter.isTerminated(); ++iter) \
  {Args; } }

```

**13.241.1.21 FOR1D**

```
#define FOR1D(
    i,
    m,
    Helper,
    Args...)

```

**Value:**

```
FORBLOCK1D(_internal_iterator, m, Helper, \
  for(auto i=_internal_iterator.begin(); i!=_internal_iterator.end(); ++i) \
  { Args; })

```

**13.241.1.22 PARFORBLOCK1D**

```
#define PARFORBLOCK1D(
    iter,
    m,
    Helper,
    Args...)

```

**Value:**

```
for(std::remove_const<decltype(m)>::type iter=0; iter<m; ++iter) \
{ Args; }

```

**13.241.1.23 PARFOR1D**

```
#define PARFOR1D(
    iter,
    m,
    Helper,
    Args...)

```

**Value:**

```
for(std::remove_const<decltype(m)>::type iter=0; iter<m; ++iter) \
{ Args; }

```

**13.241.1.24 FORBLOCK2D**

```
#define FORBLOCK2D(
    iter,
    m,
    n,
    Helper,
    Args...)

```

**Value:**

```
{ FFLAS::ForStrategy2D<std::remove_const<decltype(m)>::type, typename decltype(Helper)::Cut, typename
  decltype(Helper)::Param> iter(m,n,Helper); \
  for(iter.initialize(); !iter.isTerminated(); ++iter) \
  { Args; } }

```

**13.241.1.25 FOR2D**

```
#define FOR2D(
    i,

```

```

        j,
        m,
        n,
        Helper,
        Args...)

```

**Value:**

```

FORBLOCK2D(_internal_iterator, m, n, Helper,
            for(auto i=_internal_iterator.ibegin(); i!=_internal_iterator.iend(); ++i) \
            for(auto j=_internal_iterator.jbegin(); j!=_internal_iterator.jend(); ++j) \
            { Args; })

```

**13.241.1.26 PARFORBLOCK2D**

```

#define PARFORBLOCK2D(
    iter,
    m,
    n,
    Helper,
    Args...)

```

**Value:**

```

FORBLOCK2D(iter, m, n, Helper, Args)

```

**13.241.1.27 PARFOR2D**

```

#define PARFOR2D(
    i,
    j,
    m,
    n,
    Helper,
    Args...)

```

**Value:**

```

FOR2D(i, j, m, n, Helper, Args)

```

**13.241.1.28 COMMA**

```

#define COMMA ,

```

**13.241.1.29 MODE**

```

#define MODE(
    ...)

```

**Value:**

```

__VA_ARGS__

```

**13.241.1.30 RETURNPARAM**

```

#define RETURNPARAM(
    f,
    Pl,
    Args...)

```

**Value:**

```

Pl=f(Args)

```

**13.241.1.31 NUMARGS**

```

#define NUMARGS(
    ...)

```

**Value:**

```

PP_NARG_(__VA_ARGS__, PP_RSEQ_N())

```

### 13.241.1.32 PP\_NARG\_

```
#define PP_NARG_(  
    ...)
```

**Value:**

[PP\\_ARG\\_N](#)(\_\_VA\_ARGS\_\_)

### 13.241.1.33 PP\_ARG\_N

```
#define PP_ARG_N(  
    _1,  
    _2,  
    _3,  
    _4,  
    _5,  
    _6,  
    _7,  
    _8,  
    _9,  
    _10,  
    _11,  
    _12,  
    _13,  
    _14,  
    _15,  
    _16,  
    _17,  
    _18,  
    _19,  
    _20,  
    _21,  
    _22,  
    _23,  
    _24,  
    _25,  
    _26,  
    _27,  
    _28,  
    _29,  
    _30,  
    _31,  
    _32,  
    _33,  
    _34,  
    _35,  
    _36,  
    _37,  
    _38,  
    _39,  
    _40,  
    _41,  
    _42,  
    _43,  
    _44,  
    _45,  
    _46,  
    _47,  
    _48,  
    _49,
```

```

    _50,
    _51,
    _52,
    _53,
    _54,
    _55,
    _56,
    _57,
    _58,
    _59,
    _60,
    _61,
    _62,
    _63,
    N,
    ...)

```

**Value:**

N

#### 13.241.1.34 PP\_RSEQ\_N

```
#define PP_RSEQ_N()
```

**Value:**

```

63, 62, 61, 60, \
59, 58, 57, 56, 55, 54, 53, 52, 51, 50, \
49, 48, 47, 46, 45, 44, 43, 42, 41, 40, \
39, 38, 37, 36, 35, 34, 33, 32, 31, 30, \
29, 28, 27, 26, 25, 24, 23, 22, 21, 20, \
19, 18, 17, 16, 15, 14, 13, 12, 11, 10, \
9, 8, 7, 6, 5, 4, 3, 2, 1, 0

```

#### 13.241.1.35 NOSPLIT

```
#define NOSPLIT()
```

**Value:**

`FFLAS::ParSeqHelper::Sequential()`

#### 13.241.1.36 splitting\_0

```
#define splitting_0()
```

**Value:**

`FFLAS::ParSeqHelper::Parallel<FFLAS::CuttingStrategy::Block, FFLAS::StrategyParameter::Threads>()`

#### 13.241.1.37 splitting\_1

```
#define splitting_1(
    a)

```

**Value:**

`FFLAS::ParSeqHelper::Parallel<FFLAS::CuttingStrategy::Block, FFLAS::StrategyParameter::Threads>(a)`

#### 13.241.1.38 splitting\_2

```
#define splitting_2(
    a,
    c)

```

**Value:**

`FFLAS::ParSeqHelper::Parallel<FFLAS::CuttingStrategy::Block, c>(a)`

#### 13.241.1.39 splitting\_3

```
#define splitting_3(
    a,

```

*b*,  
*c*)

**Value:**

`FFLAS::ParSeqHelper::Parallel<b,c>(a)`

**13.241.1.40 splitt**

```
#define splitt(  
    _1,  
    _2,  
    _3,  
    NAME,  
    ...)
```

**Value:**

NAME

**13.241.1.41 SPLITTER**

```
#define SPLITTER(  
    ...)
```

**Value:**

`splitt(__VA_ARGS__, splitting_3, splitting_2, splitting_1, splitting_0)(__VA_ARGS__)`

**13.242 pfgemm\_variants.inl File Reference****Namespaces**

- namespace [FFLAS](#)

**Functions**

- `template<class Field, class AlgoT, class FieldTrait >`  
`Field::Element * pfgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb,`  
`const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, const typename`  
`Field::ConstElement_ptr A, const size_t lda, const typename Field::ConstElement_ptr B, const size_t ldb,`  
`const typename Field::Element beta, typename Field::Element *C, const size_t ldc, MMHelper< Field, Al-`  
`goT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Block, StrategyParameter::Threads > > &H)`
- `template<class Field, class AlgoT, class FieldTrait >`  
`Field::Element * pfgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb,`  
`const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, const typename`  
`Field::ConstElement_ptr AA, const size_t lda, const typename Field::ConstElement_ptr BB, const size_t`  
`ldb, const typename Field::Element beta, typename Field::Element *C, const size_t ldc, MMHelper< Field,`  
`AlgoT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Recursive, StrategyParameter::ThreeDAdaptive`  
`> > &H)`
- `template<class Field, class AlgoT, class FieldTrait >`  
`Field::Element * pfgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb,`  
`const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, const typename`  
`Field::ConstElement_ptr AA, const size_t lda, const typename Field::ConstElement_ptr BB, const size_t`  
`ldb, const typename Field::Element beta, typename Field::Element *C, const size_t ldc, MMHelper< Field,`  
`AlgoT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Recursive, StrategyParameter::TwoDAdaptive >`  
`> &H)`
- `template<class Field, class AlgoT, class FieldTrait >`  
`Field::Element * pfgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE tb,`  
`const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, const typename`  
`Field::ConstElement_ptr AA, const size_t lda, const typename Field::ConstElement_ptr BB, const size_t`  
`ldb, const typename Field::Element beta, typename Field::Element *C, const size_t ldc, MMHelper< Field,`  
`AlgoT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Recursive, StrategyParameter::TwoD > > &H)`
- `template<class Field, class AlgoT, class FieldTrait >`  
`Field::Element_ptr pfgemm (const Field &F, const FFLAS_TRANSPOSE ta, const FFLAS_TRANSPOSE`

```
tb, const size_t m, const size_t n, const size_t k, const typename Field::Element alpha, const typename
Field::ConstElement_ptr A, const size_t lda, const typename Field::ConstElement_ptr B, const size_t ldb,
const typename Field::Element beta, typename Field::Element_ptr C, const size_t ldc, MMHelper< Field,
AlgoT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Recursive, StrategyParameter::ThreeD > > &H)
```

- template<class Field, class AlgoT, class FieldTrait >  
Field::Element \* pfgemm (const Field &F, const FFLAS\_TRANSPOSE ta, const FFLAS\_TRANSPOSE tb, const size\_t m, const size\_t n, const size\_t k, const typename Field::Element alpha, const typename Field::ConstElement\_ptr A, const size\_t lda, const typename Field::ConstElement\_ptr B, const size\_t ldb, const typename Field::Element beta, typename Field::Element\_ptr C, const size\_t ldc, MMHelper< Field, AlgoT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Recursive, StrategyParameter::ThreeDInPlace > > &H)

## 13.243 pfgemv.inl File Reference

### Namespaces

- namespace FFLAS

### Functions

- template<class Field, class AlgoT, class FieldTrait >  
Field::Element\_ptr fgemv (const Field &F, const FFLAS\_TRANSPOSE ta, const size\_t m, const size\_t n, const typename Field::Element alpha, const typename Field::ConstElement\_ptr A, const size\_t lda, const typename Field::ConstElement\_ptr X, const size\_t incX, const typename Field::Element beta, typename Field::Element\_ptr Y, const size\_t incY, MMHelper< Field, AlgoT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Recursive, StrategyParameter::Threads > > &H)
- template<class Field, class AlgoT, class FieldTrait, class Cut >  
Field::Element\_ptr fgemv (const Field &F, const FFLAS\_TRANSPOSE ta, const size\_t m, const size\_t n, const typename Field::Element alpha, const typename Field::ConstElement\_ptr A, const size\_t lda, const typename Field::ConstElement\_ptr X, const size\_t incX, const typename Field::Element beta, typename Field::Element\_ptr Y, const size\_t incY, MMHelper< Field, AlgoT, FieldTrait, ParSeqHelper::Parallel< CuttingStrategy::Row, Cut > > &H)

## 13.244 align-allocator.h File Reference

```
#include "fflas-ffpack/config.h"
```

## 13.245 args-parser.h File Reference

```
#include <fflas-ffpack/fflas-ffpack-config.h>
#include <givaro/givinteger.h>
#include <givaro/givprint.h>
#include <iostream>
#include <fstream>
#include <vector>
#include <string>
#include <cstring>
#include <list>
#include <stdlib.h>
```

### Data Structures

- struct Argument

## Namespaces

- namespace [FFLAS](#)

## Macros

- #define [TYPE\\_BOOL](#) [TYPE\\_NONE](#)
- #define [END\\_OF\\_ARGUMENTS](#) { '\0', "\0", "\0", [TYPE\\_NONE](#), NULL }
- #define [type\\_integer](#) long int

## Enumerations

- enum [ArgumentType](#) {  
[TYPE\\_NONE](#) , [TYPE\\_INT](#) , [TYPE\\_UINT64](#) , [TYPE\\_LONGLONG](#) ,  
[TYPE\\_INTEGER](#) , [TYPE\\_DOUBLE](#) , [TYPE\\_INTLIST](#) , [TYPE\\_STR](#) }

## Functions

- void [parseArguments](#) (int argc, char \*\*argv, [Argument](#) \*args, bool printDefaults=true)
- void [printHelpMessage](#) (const char \*program, [Argument](#) \*args, bool printDefaults=false)
- [Argument](#) \* [findArgument](#) ([Argument](#) \*args, char c)
- int [getListArgs](#) (std::list< int > &outlist, std::string &instring)  
*transforms a string list of ints to a list of int string "12,13,15" is turned into list of ints {12,13,15}*
- char \* [getArgumentValue](#) (int argc, char \*\*argv, int i)  
*Get the value of an argument and avoid core dump when no value was given after an argument.*
- std::ostream & [writeCommandString](#) (std::ostream &os, [Argument](#) \*args, const char \*programName=nullptr)  
*writes the values of all arguments, preceded by the programName*

## 13.245.1 Macro Definition Documentation

### 13.245.1.1 TYPE\_BOOL

```
#define TYPE_BOOL TYPE\_NONE
```

### 13.245.1.2 END\_OF\_ARGUMENTS

```
#define END_OF_ARGUMENTS { '\0', "\0", "\0", TYPE\_NONE, NULL }
```

### 13.245.1.3 type\_integer

```
#define type_integer long int
```

## 13.245.2 Enumeration Type Documentation

### 13.245.2.1 ArgumentType

```
enum ArgumentType
```

#### Enumerator

|               |  |
|---------------|--|
| TYPE_NONE     |  |
| TYPE_INT      |  |
| TYPE_UINT64   |  |
| TYPE_LONGLONG |  |
| TYPE_INTEGER  |  |
| TYPE_DOUBLE   |  |
| TYPE_INTLIST  |  |
| TYPE_STR      |  |

### 13.245.3 Function Documentation

#### 13.245.3.1 printHelpMessage()

```
void printHelpMessage (
    const char * program,
    Argument * args,
    bool printDefaults = false)
```

#### 13.245.3.2 findArgument()

```
Argument * findArgument (
    Argument * args,
    char c)
```

#### 13.245.3.3 getListArgs()

```
int getListArgs (
    std::list< int > & outlist,
    std::string & instring)
```

transforms a string list of ints to a list of int string "12,13,15" is turned into list of ints {12,13,15}

##### Parameters

|                 |                      |
|-----------------|----------------------|
| <i>outlist</i>  | list once converted  |
| <i>instring</i> | list to be converted |

##### Returns

status message.

## 13.246 bit\_manipulation.h File Reference

```
#include <givaro/udl.h>
#include "fflas-ffpack/fflas-ffpack-config.h"
```

##### Macros

- #define [\\_\\_has\\_builtin](#)(x)

##### Functions

- int32\_t [clz](#) (uint64\_t val)
- int32\_t [clz](#) (uint32\_t val)
- int32\_t [ctz](#) (uint32\_t val)
- int32\_t [ctz](#) (uint64\_t val)

### 13.246.1 Macro Definition Documentation

#### 13.246.1.1 \_\_has\_builtin

```
#define __has_builtin(
    x)
```

##### Value:

0



## 13.246.2 Function Documentation

### 13.246.2.1 clz() [1/2]

```
int32_t clz (
    uint64_t val) [inline]
```

### 13.246.2.2 clz() [2/2]

```
int32_t clz (
    uint32_t val) [inline]
```

### 13.246.2.3 ctz() [1/2]

```
int32_t ctz (
    uint32_t val) [inline]
```

### 13.246.2.4 ctz() [2/2]

```
int32_t ctz (
    uint64_t val) [inline]
```

## 13.247 cast.h File Reference

### Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

### Functions

- template<class T, class CT = const T>  
T [fflas\\_const\\_cast](#) (CT x)

## 13.248 debug.h File Reference

Various utilities for debugging.

```
#include <fflas-ffpack/fflas-ffpack-config.h>
#include <iostream>
#include <sstream>
#include <cmath>
#include <stdexcept>
```

### Data Structures

- class [Failure](#)  
*A precondition failed.*

### Namespaces

- namespace [FFPACK](#)  
*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

### Macros

- #define [FFLASFFPACK\\_check](#)(check)
- #define [FFLASFFPACK\\_abort](#)(msg)

## Functions

- [Failure](#) & [failure](#) ()
- `template<class T >`  
`bool isOdd (const T &a)`
- `bool isOdd (const float &a)`
- `bool isOdd (const double &a)`

### 13.248.1 Detailed Description

Various utilities for debugging.

**Todo** we should put vector printing elsewhere.

### 13.248.2 Macro Definition Documentation

#### 13.248.2.1 FFLASFFPACK\_check

```
#define FFLASFFPACK_check(  
    check)
```

**Value:**

```
if (!(check)) {\n    FFPACK::failure() (__func__, __FILE__, __LINE__, #check); \n    throw std::runtime_error(#check); \n}
```

#### 13.248.2.2 FFLASFFPACK\_abort

```
#define FFLASFFPACK_abort(  
    msg)
```

**Value:**

```
{\n    FFPACK::failure() (__func__, __FILE__, __LINE__, msg); \n    throw std::runtime_error(msg); \n}
```

## 13.249 fflas\_intrinsic.h File Reference

## 13.250 fflas\_io.h File Reference

```
#include <cstring>\n#include <stdio.h>\n#include <stdlib.h>\n#include <fstream>\n#include "fflas-ffpack/fflas/fflas.h"\n#include "fflas_memory.h"
```

## Namespaces

- namespace [FFLAS](#)

## Enumerations

- enum [FFLAS\\_FORMAT](#) {  
[FflasAuto](#) = 0 , [FflasDense](#) = 1 , [FflasSMS](#) = 2 , [FflasBinary](#) = 3 ,  
[FflasMath](#) = 4 , [FflasMaple](#) = 5 , [FflasSageMath](#) = 6 }

## Functions

- template<class [Field](#) >  
std::ostream & [WriteMatrix](#) (std::ostream &c, const [Field](#) &F, size\_t m, size\_t n, typename [Field::ConstElement\\_ptr](#) A, size\_t lda, [FFLAS\\_FORMAT](#) format, bool column\_major)  
*WriteMatrix: write a matrix to an output stream.*
- void [preamble](#) (std::ifstream &ifs, [FFLAS\\_FORMAT](#) &format)
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [ReadMatrix](#) (std::ifstream &ifs, [Field](#) &F, size\_t &m, size\_t &n, typename [Field::Element\\_ptr](#) &A, [FFLAS\\_FORMAT](#) format=[FflasAuto](#))  
*ReadMatrix: read a matrix from an input stream.*
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [ReadMatrix](#) (const std::string &matrix\_file, [Field](#) &F, size\_t &m, size\_t &n, typename [Field::Element\\_ptr](#) &A, [FFLAS\\_FORMAT](#) format=[FflasAuto](#))  
*ReadMatrix: read a matrix from a file.*
- template<class [Field](#) >  
void [WriteMatrix](#) (std::string &matrix\_file, const [Field](#) &F, int m, int n, typename [Field::ConstElement\\_ptr](#) A, size\_t lda, [FFLAS\\_FORMAT](#) format=[FflasDense](#), bool column\_major=false)  
*WriteMatrix: write a matrix to a file.*
- std::ostream & [WritePermutation](#) (std::ostream &c, const size\_t \*P, size\_t N)  
*WritePermutation: write a permutation matrix to an output stream.*

## 13.251 fflas\_memory.h File Reference

```
#include "fflas-ffpack/utils/align-allocator.h"
#include <givaro/givinteger.h>
```

## Namespaces

- namespace [FFLAS](#)

## Functions

- template<class [Element](#) >  
bool [alignable](#) ()
- template<> bool [alignable](#)< [Givaro::Integer](#) \* > ()
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [fflas\\_new](#) (const [Field](#) &F, const size\_t m, const [Alignment](#) align=[Alignment::DEFAULT](#))
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [fflas\\_new](#) (const [Field](#) &F, const size\_t m, const size\_t n, const [Alignment](#) align=[Alignment::DEFAULT](#))
- template<class [Element](#) >  
[Element](#) \* [fflas\\_new](#) (const size\_t m, const [Alignment](#) align=[Alignment::DEFAULT](#))
- template<class [Element\\_ptr](#) >  
void [fflas\\_delete](#) ([Element\\_ptr](#) A)
- template<class [Ptr](#) , class ... [Args](#)>  
void [fflas\\_delete](#) ([Ptr](#) p, [Args](#) ... args)
- void [prefetch](#) (const int64\_t \*)
- void [getTLBSize](#) (int &tlb)
- void [queryCacheSizes](#) (int &l1, int &l2, int &l3)
- int [queryL1CacheSize](#) ()
- int [queryTopLevelCacheSize](#) ()

## 13.252 fflas\_randommatrix.h File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "fflas-ffpack/utils/debug.h"
#include "fflas-ffpack/fflas/fflas.h"
#include <givaro/givinteger.h>
#include <givaro/givintprime.h>
#include <givaro/givranditer.h>
#include "fflas-ffpack/ffpack/ffpack.h"
```

### Namespaces

- namespace [FFPACK](#)  
*Finite Field PACK Set of elimination based routines for dense linear algebra.*

### Functions

- template<class [Field](#) , class RandIter >  
[Field::Element\\_ptr](#) [NonZeroRandomMatrix](#) (const [Field](#) &F, size\_t m, size\_t n, typename [Field::Element\\_ptr](#) A, size\_t lda, RandIter &G)  
*Random non-zero Matrix.*
- template<class [Field](#) , class RandIter >  
[Field::Element\\_ptr](#) [NonZeroRandomMatrix](#) (const [Field](#) &F, size\_t m, size\_t n, typename [Field::Element\\_ptr](#) A, size\_t lda)  
*Random non-zero Matrix.*
- template<class [Field](#) , class RandIter >  
[Field::Element\\_ptr](#) [RandomMatrix](#) (const [Field](#) &F, size\_t m, size\_t n, typename [Field::Element\\_ptr](#) A, size\_t lda, RandIter &G)  
*Random Matrix.*
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [RandomMatrix](#) (const [Field](#) &F, size\_t m, size\_t n, typename [Field::Element\\_ptr](#) A, size\_t lda)  
*Random Matrix.*
- template<class [Field](#) , class RandIter >  
[Field::Element\\_ptr](#) [RandomTriangularMatrix](#) (const [Field](#) &F, size\_t m, size\_t n, const [FFLAS::FFLAS\\_UPLO](#) UpLo, const [FFLAS::FFLAS\\_DIAG](#) Diag, bool nonsingular, typename [Field::Element\\_ptr](#) A, size\_t lda, RandIter &G)  
*Random Triangular Matrix.*
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [RandomTriangularMatrix](#) (const [Field](#) &F, size\_t m, size\_t n, const [FFLAS::FFLAS\\_UPLO](#) UpLo, const [FFLAS::FFLAS\\_DIAG](#) Diag, bool nonsingular, typename [Field::Element\\_ptr](#) A, size\_t lda)  
*Random Triangular Matrix.*
- size\_t [RandInt](#) (size\_t a, size\_t b)
- template<class [Field](#) , class RandIter >  
[Field::Element\\_ptr](#) [RandomSymmetricMatrix](#) (const [Field](#) &F, size\_t n, bool nonsingular, typename [Field::Element\\_ptr](#) A, size\_t lda, RandIter &G)  
*Random Symmetric Matrix.*
- template<class [Field](#) , class RandIter >  
[Field::Element\\_ptr](#) [RandomMatrixWithRank](#) (const [Field](#) &F, size\_t m, size\_t n, size\_t r, typename [Field::Element\\_ptr](#) A, size\_t lda, RandIter &G)  
*Random Matrix with prescribed rank.*
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [RandomMatrixWithRank](#) (const [Field](#) &F, size\_t m, size\_t n, size\_t r, typename [Field::Element\\_ptr](#) A, size\_t lda)  
*Random Matrix with prescribed rank.*

- `size_t * RandomIndexSubset` (`size_t N`, `size_t R`, `size_t *P`)  
*Pick uniformly at random a sequence of  $R$  distinct elements from the set  $\{0, \dots, N - 1\}$  using Knuth's shuffle.*
- `size_t * RandomPermutation` (`size_t N`, `size_t *P`)  
*Pick uniformly at random a permutation of size  $N$  stored in LAPACK format using Knuth's shuffle.*
- `void RandomRankProfileMatrix` (`size_t M`, `size_t N`, `size_t R`, `size_t *rows`, `size_t *cols`)  
*Pick uniformly at random an  $R$ -subpermutation of dimension  $M \times N$ : a matrix with only  $R$  non-zeros equal to one, in a random rook placement.*
- `void swapval` (`size_t k`, `size_t N`, `size_t *P`, `size_t val`)
- `void RandomSymmetricRankProfileMatrix` (`size_t N`, `size_t R`, `size_t *rows`, `size_t *cols`)  
*Pick uniformly at random a symmetric  $R$ -subpermutation of dimension  $N \times N$ : a symmetric matrix with only  $R$  non-zeros, all equal to one, in a random rook placement.*
- `void RandomLTQSRankProfileMatrix` (`size_t n`, `size_t r`, `size_t t`, `size_t *rows`, `size_t *cols`)
- `template<class Field, class RandIter >`  
`Field::Element_ptr RandomMatrixWithRankandRPM` (`const Field &F`, `size_t M`, `size_t N`, `size_t R`, `typename Field::Element_ptr A`, `size_t lda`, `const size_t *RRP`, `const size_t *CRP`, `RandIter &G`)  
*Random Matrix with prescribed rank and rank profile matrix Creates an  $m \times n$  matrix with random entries and rank  $r$ .*
- `template<class Field >`  
`Field::Element_ptr RandomMatrixWithRankandRPM` (`const Field &F`, `size_t M`, `size_t N`, `size_t R`, `typename Field::Element_ptr A`, `size_t lda`, `const size_t *RRP`, `const size_t *CRP`)  
*Random Matrix with prescribed rank and rank profile matrix Creates an  $m \times n$  matrix with random entries and rank  $r$ .*
- `template<class Field, class RandIter >`  
`Field::Element_ptr RandomSymmetricMatrixWithRankandRPM` (`const Field &F`, `size_t N`, `size_t R`, `typename Field::Element_ptr A`, `size_t lda`, `const size_t *RRP`, `const size_t *CRP`, `RandIter &G`)  
*Random Symmetric Matrix with prescribed rank and rank profile matrix Creates an  $n \times n$  symmetric matrix with random entries and rank  $r$ .*
- `template<class Field >`  
`Field::Element_ptr RandomSymmetricMatrixWithRankandRPM` (`const Field &F`, `size_t M`, `size_t N`, `size_t R`, `typename Field::Element_ptr A`, `size_t lda`, `const size_t *RRP`, `const size_t *CRP`)  
*Random Symmetric Matrix with prescribed rank and rank profile matrix Creates an  $n \times n$  symmetric matrix with random entries and rank  $r$ .*
- `template<class Field, class RandIter >`  
`Field::Element_ptr RandomMatrixWithRankandRandomRPM` (`const Field &F`, `size_t M`, `size_t N`, `size_t R`, `typename Field::Element_ptr A`, `size_t lda`, `RandIter &G`)  
*Random Matrix with prescribed rank, with random rank profile matrix Creates an  $m \times n$  matrix with random entries, rank  $r$  and with a rank profile matrix chosen uniformly at random.*
- `template<class Field >`  
`Field::Element_ptr RandomMatrixWithRankandRandomRPM` (`const Field &F`, `size_t M`, `size_t N`, `size_t R`, `typename Field::Element_ptr A`, `size_t lda`)  
*Random Matrix with prescribed rank, with random rank profile matrix Creates an  $m \times n$  matrix with random entries, rank  $r$  and with a rank profile matrix chosen uniformly at random.*
- `template<class Field, class RandIter >`  
`Field::Element_ptr RandomSymmetricMatrixWithRankandRandomRPM` (`const Field &F`, `size_t N`, `size_t R`, `typename Field::Element_ptr A`, `size_t lda`, `RandIter &G`)  
*Random Symmetric Matrix with prescribed rank, with random rank profile matrix Creates an  $n \times n$  matrix with random entries, rank  $r$  and with a rank profile matrix chosen uniformly at random.*
- `template<class Field >`  
`Field::Element_ptr RandomSymmetricMatrixWithRankandRandomRPM` (`const Field &F`, `size_t N`, `size_t R`, `typename Field::Element_ptr A`, `size_t lda`)  
*Random Symmetric Matrix with prescribed rank, with random rank profile matrix Creates an  $n \times n$  matrix with random entries, rank  $r$  and with a rank profile matrix chosen uniformly at random.*
- `template<class Field >`  
`Field::Element_ptr RandomMatrixWithDet` (`const Field &F`, `size_t n`, `const typename Field::Element d`, `typename Field::Element_ptr A`, `size_t lda`)  
*Random Matrix with prescribed det.*

- `template<class Field , class Randlter >`  
`Field::Element_ptr RandomMatrixWithDet` (const `Field` &F, `size_t` n, const typename `Field::Element` d, type-name `Field::Element_ptr` A, `size_t` lda, `Randlter` &G)  
*Random Matrix with prescribed det.*
- `template<class Field , class Randlter >`  
`Field::Element_ptr RandomLTQSMatrixWithRankandQSorder` (`Field` &F, `size_t` n, `size_t` r, `size_t` t, typename `Field::Element_ptr` A, `size_t` lda, `Randlter` &G)

## 13.253 flimits.h File Reference

```
#include <climits>
#include <limits>
#include <type_traits>
#include <givaro/givinteger.h>
```

### Data Structures

- `struct limits< unsigned char >`
- `struct limits< signed char >`
- `struct limits< char >`
- `struct limits< unsigned short int >`
- `struct limits< short int >`
- `struct limits< unsigned int >`
- `struct limits< int >`
- `struct limits< unsigned long >`
- `struct limits< long >`
- `struct limits< unsigned long long >`
- `struct limits< long long >`
- `struct limits< float >`
- `struct limits< double >`
- `struct limits< Givaro::Integer >`
- `struct limits< Reclnt::ruint< K > >`
- `struct limits< Reclnt::rint< K > >`

### Functions

- `template<class T , class E >`  
`std::enable_if< std::is_signed< T >::value==std::is_signed< E >::value, bool >::type in_range` (E e)
- `template<class T , class E >`  
`std::enable_if<(std::is_signed< T >::value)&&!std::is_signed< E >::value, bool >::type in_range` (E e)
- `template<class T , class E >`  
`std::enable_if<!std::is_signed< T >::value)&&(std::is_signed< E >::value), bool >::type in_range` (E e)

## 13.253.1 Function Documentation

### 13.253.1.1 in\_range() [1/3]

```
template<class T , class E >
std::enable_if< std::is_signed< T >::value==std::is_signed< E >::value, bool >::type in_↵
range (
    E e)
```

**13.253.1.2 in\_range() [2/3]**

```
template<class T , class E >
std::enable_if<(std::is_signed< T >::value)&&!(std::is_signed< E >::value), bool >::type
in_range (
    E e)
```

**13.253.1.3 in\_range() [3/3]**

```
template<class T , class E >
std::enable_if<!(std::is_signed< T >::value)&&(std::is_signed< E >::value), bool >::type
in_range (
    E e)
```

**13.254 Matio.h File Reference**

```
#include <cstring>
#include <stdio.h>
#include <stdlib.h>
#include "fflas_memory.h"
```

**Functions**

- template<class [Field](#) >  
[Field::Element\\_ptr read\\_field](#) (const [Field](#) &F, const char \*mat\_file, size\_t \*tni, size\_t \*tnj)
- template<class [Field](#) >  
std::ostream & [write\\_field](#) (const [Field](#) &F, std::ostream &c, typename [Field::ConstElement\\_ptr](#) E, int n, int m, int id, bool mapleFormat=false, bool column\_major=false)

**13.254.1 Function Documentation****13.254.1.1 read\_field()**

```
template<class Field >
Field::Element\_ptr read\_field (
    const Field & F,
    const char * mat_file,
    size_t * tni,
    size_t * tnj)
```

**13.254.1.2 write\_field()**

```
template<class Field >
std::ostream & write\_field (
    const Field & F,
    std::ostream & c,
    typename Field::ConstElement\_ptr E,
    int n,
    int m,
    int id,
    bool mapleFormat = false,
    bool column_major = false)
```

**13.255 test-utils.h File Reference**

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "fflas-ffpack/utils/debug.h"
```

```
#include "fflas-ffpack/ffpack/ffpack.h"
#include "fflas-ffpack/utils/fflas_randommatrix.h"
#include <givaro/givinteger.h>
#include <givaro/givintprime.h>
#include <givaro/givranditer.h>
#include <givaro/givtimer.h>
#include <random>
#include <functional>
```

## Namespaces

- namespace [FFLAS](#)
- namespace [FFPACK](#)

*Finite Field **PACK** Set of elimination based routines for dense linear algebra.*

## Functions

- `uint64_t` [getSeed](#) ()
- `template<typename Field >`  
`Field * chooseField (Givaro::Integer q, uint64_t b, uint64_t seed)`
- `template<> Givaro::ZRing< int32_t > * chooseField< Givaro::ZRing< int32_t > > (Givaro::Integer q,`  
`uint64_t b, uint64_t seed)`
- `template<> Givaro::ZRing< int64_t > * chooseField< Givaro::ZRing< int64_t > > (Givaro::Integer q,`  
`uint64_t b, uint64_t seed)`
- `template<> Givaro::ZRing< float > * chooseField< Givaro::ZRing< float > > (Givaro::Integer q, uint64_t`  
`b, uint64_t seed)`
- `template<> Givaro::ZRing< double > * chooseField< Givaro::ZRing< double > > (Givaro::Integer q,`  
`uint64_t b, uint64_t seed)`

## 13.256 timer.h File Reference

```
#include <time.h>
#include <givaro/givtimer.h>
```

## Namespaces

- namespace [FFLAS](#)

## Typedefs

- `typedef Givaro::Timer Timer`
- `typedef Givaro::BaseTimer BaseTimer`
- `typedef Givaro::UserTimer UserTimer`
- `typedef Givaro::SysTimer SysTimer`

## 13.257 cblas.C File Reference

```
#include "fflas-ffpack/config-blas.h"
```

## Macros

- `#define \_\_FFLASFFPACK\_CONFIGURATION`
- `#define \_\_FFLASFFPACK\_HAVE\_CBLAS 1`



**Functions**

- int [main](#) ()

**13.257.1 Macro Definition Documentation****13.257.1.1 \_\_FFLASFFPACK\_CONFIGURATION**

```
#define __FFLASFFPACK_CONFIGURATION
```

**13.257.1.2 \_\_FFLASFFPACK\_HAVE\_CBLAS**

```
#define __FFLASFFPACK_HAVE_CBLAS 1
```

**13.257.2 Function Documentation****13.257.2.1 main()**

```
int main (
    void )
```

**13.258 clapack.C File Reference**

```
#include "fflas-ffpack/config-blas.h"
```

**Macros**

- #define [\\_\\_FFLASFFPACK\\_CONFIGURATION](#)
- #define [\\_\\_FFLASFFPACK\\_HAVE\\_LAPACK](#) 1
- #define [\\_\\_FFLASFFPACK\\_HAVE\\_CLAPACK](#) 1

**Functions**

- int [main](#) ()

**13.258.1 Macro Definition Documentation****13.258.1.1 \_\_FFLASFFPACK\_CONFIGURATION**

```
#define __FFLASFFPACK_CONFIGURATION
```

**13.258.1.2 \_\_FFLASFFPACK\_HAVE\_LAPACK**

```
#define __FFLASFFPACK_HAVE_LAPACK 1
```

**13.258.1.3 \_\_FFLASFFPACK\_HAVE\_CLAPACK**

```
#define __FFLASFFPACK_HAVE_CLAPACK 1
```

**13.258.2 Function Documentation****13.258.2.1 main()**

```
int main (
    void )
```

## 13.259 cuda.C File Reference

```
#include <stdio.h>
#include <cuda_runtime.h>
#include <cusparse.h>
```

### Functions

- int [main](#) ()

### 13.259.1 Function Documentation

#### 13.259.1.1 main()

```
int main (
    void )
```

## 13.260 fblas.C File Reference

```
#include "fflas-ffpack/config-blas.h"
```

### Macros

- #define [\\_\\_FFLASFFPACK\\_CONFIGURATION](#)

### Functions

- void [dgemm\\_](#) (const char \*, const char \*, const int \*, const int \*, const int \*, const double \*, const double \*, const int \*, const double \*, const int \*, const double \*, double \*, const int \*)
- int [main](#) ()

### 13.260.1 Macro Definition Documentation

#### 13.260.1.1 \_\_FFLASFFPACK\_CONFIGURATION

```
#define __FFLASFFPACK_CONFIGURATION
```

### 13.260.2 Function Documentation

#### 13.260.2.1 dgemm\_()

```
void dgemm_ (
    const char * ,
    const char * ,
    const int * ,
    const int * ,
    const int * ,
    const double * ,
    const double * ,
    const int * ,
    const double * ,
    const int * ,
    const double * ,
    double * ,
    const int * )
```

### 13.260.2.2 main()

```
int main (  
    void )
```

## 13.261 lapack.C File Reference

```
#include "fflas-ffpack/config-blas.h"
```

### Macros

- `#define __FFLASFFPACK_CONFIGURATION`
- `#define __FFLASFFPACK_HAVE_LAPACK 1`

### Functions

- int [main](#) ()

### 13.261.1 Macro Definition Documentation

#### 13.261.1.1 \_\_FFLASFFPACK\_CONFIGURATION

```
#define __FFLASFFPACK_CONFIGURATION
```

#### 13.261.1.2 \_\_FFLASFFPACK\_HAVE\_LAPACK

```
#define __FFLASFFPACK_HAVE_LAPACK 1
```

### 13.261.2 Function Documentation

#### 13.261.2.1 main()

```
int main (  
    void )
```

## 13.262 regression-check.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"  
#include <givaro/modular.h>  
#include "fflas-ffpack/fflas-ffpack.h"
```

### Functions

- bool [check1](#) ()
- bool [check2](#) ()
- bool [check3](#) ()
- bool [check4](#) ()
- bool [checkZeroDimCharpoly](#) ()
- bool [checkZeroDimMinPoly](#) ()
- bool [gf2ModularBalanced](#) ()
- int [main](#) ()

### 13.262.1 Function Documentation

#### 13.262.1.1 check1()

```
bool check1 ()
```

**13.262.1.2 check2()**

```
bool check2 ()
```

**13.262.1.3 check3()**

```
bool check3 ()
```

**13.262.1.4 check4()**

```
bool check4 ()
```

**13.262.1.5 checkZeroDimCharpoly()**

```
bool checkZeroDimCharpoly ()
```

**13.262.1.6 checkZeroDimMinPoly()**

```
bool checkZeroDimMinPoly ()
```

**13.262.1.7 gf2ModularBalanced()**

```
bool gf2ModularBalanced ()
```

**13.262.1.8 main()**

```
int main (
    void )
```

**13.263 test-charpoly-check.C File Reference**

```
#include <iostream>
#include <stdlib.h>
#include <time.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "fflas-ffpack/utils/fflas_io.h"
```

**Macros**

- `#define` [ENABLE\\_CHECKER\\_charpoly](#) 1
- `#define` [TIME\\_CHECKER\\_CHARPOLY](#) 1

**Functions**

- `template<class Field, class Polynomial >`  
`void printPolynomial (const Field &F, Polynomial &v)`
- `int main (int argc, char **argv)`

**13.263.1 Macro Definition Documentation****13.263.1.1 ENABLE\_CHECKER\_charpoly**

```
#define ENABLE_CHECKER_charpoly 1
```

**13.263.1.2 TIME\_CHECKER\_CHARPOLY**

```
#define TIME_CHECKER_CHARPOLY 1
```

## 13.263.2 Function Documentation

### 13.263.2.1 printPolynomial()

```
template<class Field , class Polynomial >
void printPolynomial (
    const Field & F,
    Polynomial & v)
```

### 13.263.2.2 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.264 test-charpoly.C File Reference

```
#include <iostream>
#include <iomanip>
#include "givaro/modular.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/fflas_randommatrix.h"
#include "fflas-ffpack/ffpack/ffpack.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include <random>
#include <chrono>
```

### Functions

- template<class Field , class RandIter >  
bool [launch\\_test](#) (const Field &F, size\_t n, typename Field::Element \*A, size\_t lda, size\_t nbit, RandIter &G, FFPACK::FFPACK\_CHARPOLY\_TAG CT)
- template<class Field >  
bool [run\\_with\\_field](#) (const Givaro::Integer p, uint64\_t bits, size\_t n, std::string file, int variant, size\_t iter, uint64\_t seed)
- int [main](#) (int argc, char \*\*argv)

## 13.264.1 Function Documentation

### 13.264.1.1 launch\_test()

```
template<class Field , class RandIter >
bool launch_test (
    const Field & F,
    size_t n,
    typename Field::Element * A,
    size_t lda,
    size_t nbit,
    RandIter & G,
    FFPACK::FFPACK_CHARPOLY_TAG CT)
```

### 13.264.1.2 run\_with\_field()

```
template<class Field >
bool run_with_field (
    const Givaro::Integer p,
    uint64_t bits,
```

```

    size_t n,
    std::string file,
    int variant,
    size_t iter,
    uint64_t seed)

```

### 13.264.1.3 main()

```

int main (
    int argc,
    char ** argv)

```

## 13.265 test-compressQ.C File Reference

```

#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <list>
#include <vector>
#include <givaro/modular-balanced.h>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/ffpack/ffpack.h"
#include "fflas-ffpack/utils/args-parser.h"

```

### Typedefs

- typedef Givaro::Modular< double > [Field](#)

### Functions

- template<class T >  
std::ostream & [printvect](#) (std::ostream &o, vector< T > &vect)
- int [main](#) (int argc, char \*\*argv)

## 13.265.1 Typedef Documentation

### 13.265.1.1 Field

```
typedef Givaro::Modular<double> Field
```

## 13.265.2 Function Documentation

### 13.265.2.1 printvect()

```

template<class T >
std::ostream & printvect (
    std::ostream & o,
    vector< T > & vect)

```

[Bug](#) does not belong here

### 13.265.2.2 main()

```

int main (
    int argc,
    char ** argv)

```

## 13.266 test-det-check.C File Reference

```
#include <iostream>
#include <stdlib.h>
#include <time.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "fflas-ffpack/checkers/checkers_ffpack.h"
#include "fflas-ffpack/checkers/checkers_ffpack.inl"
```

### Macros

- `#define` [ENABLE\\_CHECKER\\_Det](#) 1
- `#define` [TIME\\_CHECKER\\_Det](#) 1

### Functions

- `int` [main](#) (`int` argc, `char` \*\*argv)

### 13.266.1 Macro Definition Documentation

#### 13.266.1.1 ENABLE\_CHECKER\_Det

```
#define ENABLE_CHECKER_Det 1
```

#### 13.266.1.2 TIME\_CHECKER\_Det

```
#define TIME_CHECKER_Det 1
```

### 13.266.2 Function Documentation

#### 13.266.2.1 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.267 test-det.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iomanip>
#include <iostream>
#include <givaro/modular-balanced.h>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/ffpack/ffpack.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
```

### Functions

- `template<class` [Field](#) `,` `class` [RandIter](#) `>`  
`bool` [test\\_det](#) ([Field](#) &F, `size_t` n, `int` iter, [RandIter](#) &G)
- `int` [main](#) (`int` argc, `char` \*\*argv)

## 13.267.1 Function Documentation

### 13.267.1.1 test\_det()

```
template<class Field , class RandIter >
bool test_det (
    Field & F,
    size_t n,
    int iter,
    RandIter & G)
```

**Todo** test with stride

### 13.267.1.2 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.268 test-echelon.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <iomanip>
#include <givaro/modular-balanced.h>
#include <givaro/udl.h>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/ffpack/ffpack.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include <random>
#include <chrono>
```

### Macros

- `#define __FFLASFFPACK_SEQUENTIAL`
- `#define __FFLASFFPACK_GAUSSJORDAN_BASECASE 25`
- `#define __FFLASFFPACK_PLUQ_THRESHOLD 25`

### Functions

- `template<class Field , class RandIter >`  
`bool test_colechelon (Field &F, size_t m, size_t n, size_t r, size_t iters, FFPACK::FFPACK_LU_TAG LuTag,`  
`RandIter &G, bool par)`
- `template<class Field , class RandIter >`  
`bool test_rowechelon (Field &F, size_t m, size_t n, size_t r, size_t iters, FFPACK::FFPACK_LU_TAG LuTag,`  
`RandIter &G, bool par)`
- `template<class Field , class RandIter >`  
`bool test_redcolechelon (Field &F, size_t m, size_t n, size_t r, size_t iters, FFPACK::FFPACK_LU_TAG LuTag,`  
`RandIter &G, bool par)`
- `template<class Field , class RandIter >`  
`bool test_redrowechelon (Field &F, size_t m, size_t n, size_t r, size_t iters, FFPACK::FFPACK_LU_TAG LuTag,`  
`RandIter &G, bool par)`
- `template<class Field >`  
`bool run_with_field (Givaro::Integer q, uint64_t b, size_t m, size_t n, size_t r, size_t iters, uint64_t seed)`
- `int main (int argc, char **argv)`



## 13.268.1 Macro Definition Documentation

### 13.268.1.1 \_\_FFLASFFPACK\_SEQUENTIAL

```
#define __FFLASFFPACK_SEQUENTIAL
```

### 13.268.1.2 \_\_FFLASFFPACK\_GAUSSJORDAN\_BASECASE

```
#define __FFLASFFPACK_GAUSSJORDAN_BASECASE 25
```

### 13.268.1.3 \_\_FFLASFFPACK\_PLUQ\_THRESHOLD

```
#define __FFLASFFPACK_PLUQ_THRESHOLD 25
```

## 13.268.2 Function Documentation

### 13.268.2.1 test\_colechelon()

```
template<class Field , class RandIter >
bool test_colechelon (
    Field & F,
    size_t m,
    size_t n,
    size_t r,
    size_t iters,
    FFPACK::FFPACK_LU_TAG LuTag,
    RandIter & G,
    bool par)
```

**Todo** check Ida

### 13.268.2.2 test\_rowechelon()

```
template<class Field , class RandIter >
bool test_rowechelon (
    Field & F,
    size_t m,
    size_t n,
    size_t r,
    size_t iters,
    FFPACK::FFPACK_LU_TAG LuTag,
    RandIter & G,
    bool par)
```

**Todo** check Ida

### 13.268.2.3 test\_redcolechelon()

```
template<class Field , class RandIter >
bool test_redcolechelon (
    Field & F,
    size_t m,
    size_t n,
    size_t r,
    size_t iters,
    FFPACK::FFPACK_LU_TAG LuTag,
    RandIter & G,
    bool par)
```

**Todo** check Ida

### 13.268.2.4 test\_redrowechelon()

```
template<class Field , class RandIter >
bool test_redrowechelon (
    Field & F,
    size_t m,
    size_t n,
    size_t r,
    size_t iters,
    FFPACK::FFPACK_LU_TAG LuTag,
    RandIter & G,
    bool par)
```

**Todo** check lda

### 13.268.2.5 run\_with\_field()

```
template<class Field >
bool run_with_field (
    Givaro::Integer q,
    uint64_t b,
    size_t m,
    size_t n,
    size_t r,
    size_t iters,
    uint64_t seed)
```

### 13.268.2.6 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.269 test-fadd.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <typeinfo>
#include <givaro/modular-balanced.h>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "assert.h"
```

### Functions

- template<class Field >  
bool [test\\_fadd](#) (const Field &F, size\_t m, size\_t k, size\_t n, bool timing, uint64\_t seed)
- template<class Field >  
bool [test\\_faddin](#) (const Field &F, size\_t m, size\_t k, size\_t n, bool timing, uint64\_t seed)
- template<class Field >  
bool [test\\_fsub](#) (const Field &F, size\_t m, size\_t k, size\_t n, bool timing, uint64\_t seed)
- template<class Field >  
bool [test\\_fsubin](#) (const Field &F, size\_t m, size\_t k, size\_t n, bool timing, uint64\_t seed)
- int [main](#) (int ac, char \*\*av)

## 13.269.1 Function Documentation

### 13.269.1.1 test\_fadd()

```
template<class Field >
bool test_fadd (
    const Field & F,
    size_t m,
    size_t k,
    size_t n,
    bool timing,
    uint64_t seed)
```

### 13.269.1.2 test\_faddin()

```
template<class Field >
bool test_faddin (
    const Field & F,
    size_t m,
    size_t k,
    size_t n,
    bool timing,
    uint64_t seed)
```

### 13.269.1.3 test\_fsub()

```
template<class Field >
bool test_fsub (
    const Field & F,
    size_t m,
    size_t k,
    size_t n,
    bool timing,
    uint64_t seed)
```

### 13.269.1.4 test\_fsubin()

```
template<class Field >
bool test_fsubin (
    const Field & F,
    size_t m,
    size_t k,
    size_t n,
    bool timing,
    uint64_t seed)
```

### 13.269.1.5 main()

```
int main (
    int ac,
    char ** av)
```

## 13.270 test-fdot.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iomanip>
#include <iostream>
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/args-parser.h"
```

```
#include "fflas-ffpack/utils/test-utils.h"
#include "fflas-ffpack/paladin/parallel.h"
#include "fflas-ffpack/paladin/fflas_plevel1.h"
#include <givaro/zring.h>
#include <givaro/modular.h>
#include <random>
#include <chrono>
```

## Macros

- #define [ENABLE\\_ALL\\_CHECKINGS](#) 1

## Functions

- template<typename [Field](#) >  
bool [check\\_fdot](#) (const [Field](#) &F, size\_t n, typename [Field::ConstElement\\_ptr](#) a, size\_t inca, typename [Field::ConstElement\\_ptr](#) b, size\_t incb)
- template<class [Field](#) >  
bool [run\\_with\\_field](#) (Givaro::Integer q, size\_t BS, size\_t n, size\_t iters, uint64\_t seed)
- bool [run\\_with\\_Integer](#) (size\_t BS, size\_t n, size\_t iters, uint64\_t seed)
- int [main](#) (int argc, char \*\*argv)

## 13.270.1 Macro Definition Documentation

### 13.270.1.1 [ENABLE\\_ALL\\_CHECKINGS](#)

```
#define ENABLE_ALL_CHECKINGS 1
```

## 13.270.2 Function Documentation

### 13.270.2.1 [check\\_fdot\(\)](#)

```
template<typename Field >
bool check\_fdot (
    const Field & F,
    size_t n,
    typename Field::ConstElement\_ptr a,
    size_t inca,
    typename Field::ConstElement\_ptr b,
    size_t incb)
```

### 13.270.2.2 [run\\_with\\_field\(\)](#)

```
template<class Field >
bool run\_with\_field (
    Givaro::Integer q,
    size_t BS,
    size_t n,
    size_t iters,
    uint64_t seed)
```

### 13.270.2.3 [run\\_with\\_Integer\(\)](#)

```
bool run\_with\_Integer (
    size_t BS,
    size_t n,
    size_t iters,
    uint64_t seed)
```

### 13.270.2.4 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.271 test-fgemm-check.C File Reference

```
#include <iostream>
#include <stdlib.h>
#include <time.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
```

### Macros

- #define [ENABLE\\_ALL\\_CHECKINGS](#) 1

### Functions

- template<class [Field](#) , class RandIter >  
bool [launch\\_MM\\_dispatch](#) (const [Field](#) &F, const int mm, const int nn, const int kk, const typename [Field::Element](#) alpha, const typename [Field::Element](#) beta, const size\_t iters, RandIter &G)
- template<class [Field](#) >  
bool [run\\_with\\_field](#) (Givaro::Integer q, uint64\_t b, int m, int n, int k, size\_t iters, uint64\_t seed)
- int [main](#) (int argc, char \*\*argv)

### 13.271.1 Macro Definition Documentation

#### 13.271.1.1 ENABLE\_ALL\_CHECKINGS

```
#define ENABLE_ALL_CHECKINGS 1
```

### 13.271.2 Function Documentation

#### 13.271.2.1 launch\_MM\_dispatch()

```
template<class Field , class RandIter >
bool launch_MM_dispatch (
    const Field & F,
    const int mm,
    const int nn,
    const int kk,
    const typename Field::Element alpha,
    const typename Field::Element beta,
    const size_t iters,
    RandIter & G)
```

**Bug** test for ldX equal

**Bug**

**Bug** test for transpo

**Bug**

**Todo** does nbw actually do nbw recursive calls and then call blas (check ?) ?

### 13.271.2.2 run\_with\_field()

```
template<class Field >
bool run_with_field (
    Givaro::Integer q,
    uint64_t b,
    int m,
    int n,
    int k,
    size_t iters,
    uint64_t seed)
```

### 13.271.2.3 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.272 test-fgemm.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include <iomanip>
#include <iostream>
#include <givaro/modular.h>
#include <recint/rint.h>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include <random>
```

### Macros

- #define `ENABLE_CHECKER_fgemm` 1

### Functions

- template<class `Field` >
   
bool `check_MM` (const `Field` &F, const typename `Field::Element_ptr` Cd, enum `FFLAS_TRANSPOSE` &ta, enum `FFLAS_TRANSPOSE` &tb, const size\_t m, const size\_t n, const size\_t k, const typename `Field::Element` &alpha, const typename `Field::Element_ptr` A, size\_t lda, const typename `Field::Element_ptr` B, size\_t ldb, const typename `Field::Element` &beta, const typename `Field::Element_ptr` C, size\_t ldc)
- template<class `Field` , class `RandIter` >
   
bool `launch_MM` (const `Field` &F, const size\_t m, const size\_t n, const size\_t k, const typename `Field::Element` alpha, const typename `Field::Element` beta, const size\_t ldc, const size\_t lda, enum `FFLAS_TRANSPOSE` ta, const size\_t ldb, enum `FFLAS_TRANSPOSE` tb, size\_t iters, int nbw, bool par, `RandIter` &G)
- template<class `Field` , class `RandIter` >
   
bool `launch_MM_dispatch` (const `Field` &F, const int mm, const int nn, const int kk, const typename `Field::Element` alpha, const typename `Field::Element` beta, const size\_t iters, const int nbw, const bool par, `RandIter` &G)
- template<class `Field` >
   
bool `run_with_field` (`Givaro::Integer` q, `uint64_t` b, int m, int n, int k, int nbw, size\_t iters, bool par, size\_t seed)
- int `main` (int argc, char \*\*argv)

## 13.272.1 Macro Definition Documentation

### 13.272.1.1 ENABLE\_CHECKER\_fgemm

```
#define ENABLE_CHECKER_fgemm 1
```

## 13.272.2 Function Documentation

### 13.272.2.1 check\_MM()

```
template<class Field >
bool check_MM (
    const Field & F,
    const typename Field::Element_ptr Cd,
    enum FFLAS_TRANSPOSE & ta,
    enum FFLAS_TRANSPOSE & tb,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element & alpha,
    const typename Field::Element_ptr A,
    size_t lda,
    const typename Field::Element_ptr B,
    size_t ldb,
    const typename Field::Element & beta,
    const typename Field::Element_ptr C,
    size_t ldc)
```

### 13.272.2.2 launch\_MM()

```
template<class Field , class RandIter >
bool launch_MM (
    const Field & F,
    const size_t m,
    const size_t n,
    const size_t k,
    const typename Field::Element alpha,
    const typename Field::Element beta,
    const size_t ldc,
    const size_t lda,
    enum FFLAS_TRANSPOSE ta,
    const size_t ldb,
    enum FFLAS_TRANSPOSE tb,
    size_t iters,
    int nbw,
    bool par,
    RandIter & G)
```

### 13.272.2.3 launch\_MM\_dispatch()

```
template<class Field , class RandIter >
bool launch_MM_dispatch (
    const Field & F,
    const int mm,
    const int nn,
    const int kk,
    const typename Field::Element alpha,
    const typename Field::Element beta,
    const size_t iters,
    const int nbw,
```

```
const bool par,
RandIter & G)
```

**Bug** test for ldX equal

**Bug**

**Bug** test for transpo

**Bug**

**Todo** does nbw actually do nbw recursive calls and then call blas (check ?) ?

#### 13.272.2.4 run\_with\_field()

```
template<class Field >
bool run_with_field (
    Givaro::Integer q,
    uint64_t b,
    int m,
    int n,
    int k,
    int nbw,
    size_t iters,
    bool par,
    size_t seed)
```

#### 13.272.2.5 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.273 test-fgemv.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iomanip>
#include <iostream>
#include <givaro/modular.h>
#include <recint/rint.h>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
```

### Functions

- template<class Field >  
bool **check\_MV** (const Field &F, const typename Field::Element\_ptr Cd, enum FFLAS\_TRANSPOSE &ta, const size\_t m, const size\_t k, const typename Field::Element &alpha, const typename Field::Element\_ptr A, size\_t lda, const typename Field::Element\_ptr X, size\_t incX, const typename Field::Element &beta, const typename Field::Element\_ptr Y, size\_t incY)
- template<class Field, class RandIter >  
bool **launch\_MV** (const Field &F, const size\_t m, const size\_t k, const typename Field::Element &alpha, const typename Field::Element &beta, const size\_t lda, enum FFLAS\_TRANSPOSE ta, const size\_t incX, const size\_t incY, size\_t iters, bool par, RandIter &G)



- template<class `Field` , class `RandIter` >  
 bool `launch_MV_dispatch` (const `Field` &`F`, const int `mm`, const int `kk`, const typename `Field::Element` `alpha`, const typename `Field::Element` `beta`, const size\_t `iters`, const bool `par`, `RandIter` &`G`)
- template<class `Field` >  
 bool `run_with_field` (`Givaro::Integer` `q`, uint64\_t `b`, int `m`, int `k`, size\_t `iters`, bool `par`, uint64\_t `seed`)
- int `main` (int `argc`, char \*\*`argv`)

## 13.273.1 Function Documentation

### 13.273.1.1 `check_MV()`

```
template<class Field >
bool check_MV (
    const Field & F,
    const typename Field::Element_ptr Cd,
    enum FFLAS_TRANSPOSE & ta,
    const size_t m,
    const size_t k,
    const typename Field::Element & alpha,
    const typename Field::Element_ptr A,
    size_t lda,
    const typename Field::Element_ptr X,
    size_t incX,
    const typename Field::Element & beta,
    const typename Field::Element_ptr Y,
    size_t incY)
```

### 13.273.1.2 `launch_MV()`

```
template<class Field , class RandIter >
bool launch_MV (
    const Field & F,
    const size_t m,
    const size_t k,
    const typename Field::Element alpha,
    const typename Field::Element beta,
    const size_t lda,
    enum FFLAS_TRANSPOSE ta,
    const size_t incX,
    const size_t incY,
    size_t iters,
    bool par,
    RandIter & G)
```

### 13.273.1.3 `launch_MV_dispatch()`

```
template<class Field , class RandIter >
bool launch_MV_dispatch (
    const Field & F,
    const int mm,
    const int kk,
    const typename Field::Element alpha,
    const typename Field::Element beta,
    const size_t iters,
    const bool par,
    RandIter & G)
```

### 13.273.1.4 run\_with\_field()

```
template<class Field >
bool run_with_field (
    Givaro::Integer q,
    uint64_t b,
    int m,
    int k,
    size_t iters,
    bool par,
    uint64_t seed)
```

### 13.273.1.5 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.274 test-fger.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iomanip>
#include <iostream>
#include <givaro/modular-integral.h>
#include <givaro/modular-balanced.h>
#include <givaro/givintprime.h>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "fflas-ffpack/utils/fflas_io.h"
```

### Macros

- #define `TIME` 1

### Functions

- template<class `Field` >  
bool `check_fger` (const `Field` &F, const typename `Field::Element_ptr` Cd, const size\_t m, const size\_t n, const typename `Field::Element` &alpha, const typename `Field::Element_ptr` x, const size\_t incx, const typename `Field::Element_ptr` y, const size\_t incy, const typename `Field::Element_ptr` C, const size\_t ldc)
- template<class `Field` , class `RandIter` >  
bool `launch_fger` (const `Field` &F, const size\_t m, const size\_t n, const typename `Field::Element` alpha, const size\_t ldc, const size\_t inca, const size\_t incb, size\_t iters, `RandIter` &G)
- template<class `Field` , class `RandIter` >  
bool `launch_fger_dispatch` (const `Field` &F, const size\_t nn, const typename `Field::Element` alpha, const size\_t iters, `RandIter` &G)
- template<class `Field` >  
bool `run_with_field` (int64\_t q, uint64\_t b, size\_t n, size\_t iters, uint64\_t seed)
- int `main` (int argc, char \*\*argv)

### 13.274.1 Macro Definition Documentation

#### 13.274.1.1 TIME

```
#define TIME 1
```

## 13.274.2 Function Documentation

### 13.274.2.1 check\_fger()

```
template<class Field >
bool check_fger (
    const Field & F,
    const typename Field::Element_ptr Cd,
    const size_t m,
    const size_t n,
    const typename Field::Element & alpha,
    const typename Field::Element_ptr x,
    const size_t incx,
    const typename Field::Element_ptr y,
    const size_t incy,
    const typename Field::Element_ptr C,
    const size_t ldc)
```

### 13.274.2.2 launch\_fger()

```
template<class Field , class RandIter >
bool launch_fger (
    const Field & F,
    const size_t m,
    const size_t n,
    const typename Field::Element alpha,
    const size_t ldc,
    const size_t inca,
    const size_t incb,
    size_t iters,
    RandIter & G)
```

### 13.274.2.3 launch\_fger\_dispatch()

```
template<class Field , class RandIter >
bool launch_fger_dispatch (
    const Field & F,
    const size_t nn,
    const typename Field::Element alpha,
    const size_t iters,
    RandIter & G)
```

**Bug** test for incx equal

**Bug**

**Bug** test for transpo

**Bug**

**Todo** does nbw actually do nbw recursive calls and then call blas (check ?) ?

### 13.274.2.4 run\_with\_field()

```
template<class Field >
bool run_with_field (
    int64_t q,
    uint64_t b,
    size_t n,
    size_t iters,
    uint64_t seed)
```

### 13.274.2.5 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.275 test-fgesv.C File Reference

```
#include <iostream>
#include <iomanip>
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include <givaro/modular.h>
```

### Functions

- template<class [Field](#) , class RandIter >  
bool [test\\_square\\_fgesv](#) ([Field](#) &F, [FFLAS\\_SIDE](#) side, string fileA, string fileB, size\_t m, size\_t k, size\_t r, RandIter &G)
- template<class [Field](#) , class RandIter >  
bool [test\\_rect\\_fgesv](#) ([Field](#) &F, [FFLAS\\_SIDE](#) side, string fileA, string fileB, size\_t m, size\_t n, size\_t k, size\_t r, RandIter &G)
- template<class [Field](#) >  
bool [run\\_with\\_field](#) (Givaro::Integer q, uint64\_t b, size\_t m, size\_t n, size\_t k, size\_t r, size\_t iters, string fileA, string fileB, uint64\_t &seed)
- int [main](#) (int argc, char \*\*argv)

### 13.275.1 Function Documentation

#### 13.275.1.1 test\_square\_fgesv()

```
template<class Field , class RandIter >
bool test_square_fgesv (
    Field & F,
    FFLAS\_SIDE side,
    string fileA,
    string fileB,
    size_t m,
    size_t k,
    size_t r,
    RandIter & G)
```

#### 13.275.1.2 test\_rect\_fgesv()

```
template<class Field , class RandIter >
bool test_rect_fgesv (
    Field & F,
    FFLAS\_SIDE side,
    string fileA,
    string fileB,
    size_t m,
    size_t n,
    size_t k,
    size_t r,
    RandIter & G)
```

### 13.275.1.3 run\_with\_field()

```
template<class Field >
bool run_with_field (
    Givaro::Integer q,
    uint64_t b,
    size_t m,
    size_t n,
    size_t k,
    size_t r,
    size_t iters,
    string fileA,
    string fileB,
    uint64_t & seed)
```

### 13.275.1.4 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.276 test-finit.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <typeinfo>
#include <givaro/modular.h>
#include <givaro/modular-balanced.h>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "assert.h"
#include <random>
#include <chrono>
```

### Functions

- template<class Field >  
bool [test\\_freduce](#) (const Field &F, size\_t m, size\_t k, size\_t n, bool timing, uint64\_t seed)
- template<class Field >  
bool [run\\_with\\_field](#) (Givaro::Integer q, size\_t b, size\_t m, size\_t k, size\_t n, size\_t iters, bool timing, uint64\_t seed)
- int [main](#) (int ac, char \*\*av)

## 13.276.1 Function Documentation

### 13.276.1.1 test\_freduce()

```
template<class Field >
bool test_freduce (
    const Field & F,
    size_t m,
    size_t k,
    size_t n,
    bool timing,
    uint64_t seed)
```

### 13.276.1.2 run\_with\_field()

```
template<class Field >
bool run_with_field (
    Givaro::Integer q,
    size_t b,
    size_t m,
    size_t k,
    size_t n,
    size_t iters,
    bool timing,
    uint64_t seed)
```

### 13.276.1.3 main()

```
int main (
    int ac,
    char ** av)
```

## 13.277 test-fscal.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <typeinfo>
#include <givaro/modular-balanced.h>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "assert.h"
```

### Functions

- template<class Field, class RandIter >  
bool test\_fscal (const Field &F, const typename Field::Element &alpha, size\_t m, size\_t k, size\_t n, bool timing, RandIter &G)
- template<class Field >  
bool test\_fscal (const Field &F, size\_t m, size\_t k, size\_t n, bool timing, uint64\_t seed)
- template<class Field, class RandIter >  
bool test\_fscal\_in (const Field &F, const typename Field::Element &alpha, size\_t m, size\_t k, size\_t n, bool timing, RandIter &G)
- template<class Field >  
bool test\_fscal\_in (const Field &F, size\_t m, size\_t k, size\_t n, bool timing, uint64\_t seed)
- int main (int ac, char \*\*av)

### 13.277.1 Function Documentation

#### 13.277.1.1 test\_fscal() [1/2]

```
template<class Field, class RandIter >
bool test_fscal (
    const Field & F,
    const typename Field::Element & alpha,
    size_t m,
    size_t k,
    size_t n,
    bool timing,
    RandIter & G)
```

**13.277.1.2 test\_fscal() [2/2]**

```
template<class Field >
bool test_fscal (
    const Field & F,
    size_t m,
    size_t k,
    size_t n,
    bool timing,
    uint64_t seed)
```

**13.277.1.3 test\_fscalin() [1/2]**

```
template<class Field , class RandIter >
bool test_fscalin (
    const Field & F,
    const typename Field::Element & alpha,
    size_t m,
    size_t k,
    size_t n,
    bool timing,
    RandIter & G)
```

**13.277.1.4 test\_fscalin() [2/2]**

```
template<class Field >
bool test_fscalin (
    const Field & F,
    size_t m,
    size_t k,
    size_t n,
    bool timing,
    uint64_t seed)
```

**13.277.1.5 main()**

```
int main (
    int ac,
    char ** av)
```

**13.278 test-fsyr2k.C File Reference**

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iomanip>
#include <iostream>
#include <random>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include <givaro/modular.h>
```

**Macros**

- #define `ENABLE_ALL_CHECKINGS` 1

## Functions

- `template<typename Field , class RandIter >`  
`bool check\_fsyr2k (const Field &F, size_t n, size_t k, const typename Field::Element &alpha, const typename Field::Element &beta, FFLAS::FFLAS\_UPLO uplo, FFLAS::FFLAS\_TRANSPOSE trans, RandIter &Rand)`
- `template<class Field >`  
`bool run\_with\_field (Givaro::Integer q, size_t b, size_t n, size_t k, int a, int c, size_t iters, uint64_t seed)`
- `int main (int argc, char **argv)`

## 13.278.1 Macro Definition Documentation

### 13.278.1.1 `ENABLE_ALL_CHECKINGS`

```
#define ENABLE_ALL_CHECKINGS 1
```

## 13.278.2 Function Documentation

### 13.278.2.1 `check_fsyr2k()`

```
template<typename Field , class RandIter >
bool check\_fsyr2k (
    const Field & F,
    size_t n,
    size_t k,
    const typename Field::Element & alpha,
    const typename Field::Element & beta,
    FFLAS::FFLAS\_UPLO uplo,
    FFLAS::FFLAS\_TRANSPOSE trans,
    RandIter & Rand)
```

### 13.278.2.2 `run_with_field()`

```
template<class Field >
bool run\_with\_field (
    Givaro::Integer q,
    size_t b,
    size_t n,
    size_t k,
    int a,
    int c,
    size_t iters,
    uint64_t seed)
```

### 13.278.2.3 `main()`

```
int main (
    int argc,
    char ** argv)
```

## 13.279 test-fsyrk.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iomanip>
#include <iostream>
#include <random>
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/args-parser.h"
```



```
#include "fflas-ffpack/utils/test-utils.h"
#include <givaro/modular.h>
```

## Macros

- #define [ENABLE\\_ALL\\_CHECKINGS](#) 1

## Functions

- template<typename [Field](#) , class RandIter >  
bool [check\\_fsyrc](#) (const [Field](#) &F, size\_t n, size\_t k, size\_t w, const typename [Field::Element](#) &alpha, const typename [Field::Element](#) &beta, [FFLAS::FFLAS\\_UPLO](#) uplo, [FFLAS::FFLAS\\_TRANSPOSE](#) trans, RandIter &Rand)
- template<typename [Field](#) , class RandIter >  
bool [check\\_fsyrc\\_diag](#) (const [Field](#) &F, size\_t n, size\_t k, const typename [Field::Element](#) &alpha, const typename [Field::Element](#) &beta, [FFLAS::FFLAS\\_UPLO](#) uplo, [FFLAS::FFLAS\\_TRANSPOSE](#) trans, RandIter &Rand)
- template<typename [Field](#) , class RandIter >  
bool [check\\_fsyrc\\_bkdiag](#) (const [Field](#) &F, size\_t n, size\_t k, const typename [Field::Element](#) &alpha, const typename [Field::Element](#) &beta, [FFLAS\\_UPLO](#) uplo, [FFLAS\\_TRANSPOSE](#) trans, RandIter &Rand)
- template<class [Field](#) , class RandIter >  
bool [check\\_computeS1S2](#) (const [Field](#) &F, size\_t N, size\_t K, [FFLAS\\_TRANSPOSE](#) trans, RandIter &G)
- template<class [Field](#) >  
bool [run\\_with\\_field](#) (Givaro::Integer q, size\_t b, size\_t n, size\_t k, size\_t w, int a, int c, size\_t iters, uint64\_t seed)
- int [main](#) (int argc, char \*\*argv)

## 13.279.1 Macro Definition Documentation

### 13.279.1.1 [ENABLE\\_ALL\\_CHECKINGS](#)

```
#define ENABLE\_ALL\_CHECKINGS 1
```

## 13.279.2 Function Documentation

### 13.279.2.1 [check\\_fsyrc\(\)](#)

```
template<typename Field , class RandIter >
bool check\_fsyrc (
    const Field & F,
    size_t n,
    size_t k,
    size_t w,
    const typename Field::Element & alpha,
    const typename Field::Element & beta,
    FFLAS::FFLAS\_UPLO uplo,
    FFLAS::FFLAS\_TRANSPOSE trans,
    RandIter & Rand)
```

### 13.279.2.2 [check\\_fsyrc\\_diag\(\)](#)

```
template<typename Field , class RandIter >
bool check\_fsyrc\_diag (
    const Field & F,
    size_t n,
    size_t k,
    const typename Field::Element & alpha,
    const typename Field::Element & beta,
```

```

    FFLAS::FFLAS_UPLO uplo,
    FFLAS::FFLAS_TRANSPOSE trans,
    RandIter & Rand)

```

### 13.279.2.3 check\_fsyrk\_bkdiag()

```

template<typename Field , class RandIter >
bool check_fsyrk_bkdiag (
    const Field & F,
    size_t n,
    size_t k,
    const typename Field::Element & alpha,
    const typename Field::Element & beta,
    FFLAS_UPLO uplo,
    FFLAS_TRANSPOSE trans,
    RandIter & Rand)

```

### 13.279.2.4 check\_computeS1S2()

```

template<class Field , class RandIter >
bool check_computeS1S2 (
    const Field & F,
    size_t N,
    size_t K,
    FFLAS_TRANSPOSE trans,
    RandIter & G)

```

### 13.279.2.5 run\_with\_field()

```

template<class Field >
bool run_with_field (
    Givaro::Integer q,
    size_t b,
    size_t n,
    size_t k,
    size_t w,
    int a,
    int c,
    size_t iters,
    uint64_t seed)

```

### 13.279.2.6 main()

```

int main (
    int argc,
    char ** argv)

```

## 13.280 test-fsytrf.C File Reference

```

#include <iostream>
#include <iterator>
#include <vector>
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "fflas-ffpack/ffpack/ffpack.h"
#include "fflas-ffpack/utlis/args-parser.h"
#include <iomanip>
#include <random>
#include <chrono>

```

```
#include <givaro/modular.h>
#include "fflas-ffpack/utils/test-utils.h"
```

## Functions

- `template<typename T >`  
`std::ostream & operator<< (std::ostream &os, const std::vector< T > &x)`
- `template<class Field , class RandIter >`  
`bool test_RPM_fsytrf (Field &F, FFLAS_UPLO uplo, string file, size_t n, size_t r, RandIter &G, size_t threshold)`
- `template<class Field , class RandIter >`  
`bool test_generic_fsytrf (Field &F, FFLAS_UPLO uplo, string file, size_t n, RandIter &G, size_t threshold)`
- `template<class Field >`  
`bool run_with_field (Givaro::Integer q, uint64_t b, size_t n, size_t r, size_t iters, string file, size_t threshold, uint64_t &seed)`
- `int main (int argc, char **argv)`

## 13.280.1 Function Documentation

### 13.280.1.1 operator<<()

```
template<typename T >
std::ostream & operator<< (
    std::ostream & os,
    const std::vector< T > & x)
```

### 13.280.1.2 test\_RPM\_fsytrf()

```
template<class Field , class RandIter >
bool test_RPM_fsytrf (
    Field & F,
    FFLAS_UPLO uplo,
    string file,
    size_t n,
    size_t r,
    RandIter & G,
    size_t threshold)
```

### 13.280.1.3 test\_generic\_fsytrf()

```
template<class Field , class RandIter >
bool test_generic_fsytrf (
    Field & F,
    FFLAS_UPLO uplo,
    string file,
    size_t n,
    RandIter & G,
    size_t threshold)
```

### 13.280.1.4 run\_with\_field()

```
template<class Field >
bool run_with_field (
    Givaro::Integer q,
    uint64_t b,
    size_t n,
    size_t r,
    size_t iters,
```

```

    string file,
    size_t threshold,
    uint64_t & seed)

```

### 13.280.1.5 main()

```

int main (
    int argc,
    char ** argv)

```

## 13.281 test-fftrmm.C File Reference

```

#include "fflas-ffpack/fflas-ffpack-config.h"
#include <givaro/modular-integer.h>
#include <iomanip>
#include <iostream>
#include <random>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include <givaro/modular.h>
#include <givaro/modular-balanced.h>

```

### Macros

- `#define \_\_FFLASFFPACK\_SEQUENTIAL`

### Functions

- `template<typename Field , class RandIter >`  
`bool check\_fftrmm (const Field &F, size_t m, size_t n, const typename Field::Element &alpha,`  
`FFLAS::FFLAS\_SIDE side, FFLAS::FFLAS\_UPLO uplo, FFLAS::FFLAS\_TRANSPOSE trans, FFLAS::FFLAS\_DIAG`  
`diag, RandIter &Rand)`
- `template<class Field >`  
`bool run\_with\_field (Givaro::Integer q, size_t b, size_t m, size_t n, uint64_t a, size_t iters, uint64_t seed)`
- `int main (int argc, char **argv)`

## 13.281.1 Macro Definition Documentation

### 13.281.1.1 [\\_\\_FFLASFFPACK\\_SEQUENTIAL](#)

```
#define \_\_FFLASFFPACK\_SEQUENTIAL
```

## 13.281.2 Function Documentation

### 13.281.2.1 [check\\_fftrmm\(\)](#)

```

template<typename Field , class RandIter >
bool check\_fftrmm (
    const Field & F,
    size_t m,
    size_t n,
    const typename Field::Element & alpha,
    FFLAS::FFLAS\_SIDE side,
    FFLAS::FFLAS\_UPLO uplo,
    FFLAS::FFLAS\_TRANSPOSE trans,

```

```

    FFLAS::FFLAS_DIAG diag,
    RandIter & Rand)

```

### 13.281.2.2 run\_with\_field()

```

template<class Field >
bool run_with_field (
    Givaro::Integer q,
    size_t b,
    size_t m,
    size_t n,
    uint64_t a,
    size_t iters,
    uint64_t seed)

```

### 13.281.2.3 main()

```

int main (
    int argc,
    char ** argv)

```

## 13.282 test-ffrmv.C File Reference

```

#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iomanip>
#include <iostream>
#include <chrono>
#include <random>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include <givaro/modular.h>

```

### Macros

- #define `__FFLASFFPACK_SEQUENTIAL`
- #define `ENABLE_ALL_CHECKINGS` 1

### Functions

- template<typename `Field` , class `RandIter` >  
 bool `check_ffrmv` (const `Field` &F, size\_t n, `FFLAS_UPLO` uplo, `FFLAS_TRANSPOSE` trans, `FFLAS_DIAG` diag, `RandIter` &Rand)
- template<class `Field` >  
 bool `run_with_field` (`Givaro::Integer` q, size\_t b, size\_t n, size\_t iters, uint64\_t seed)
- int `main` (int argc, char \*\*argv)

## 13.282.1 Macro Definition Documentation

### 13.282.1.1 \_\_FFLASFFPACK\_SEQUENTIAL

```
#define __FFLASFFPACK_SEQUENTIAL
```

### 13.282.1.2 ENABLE\_ALL\_CHECKINGS

```
#define ENABLE_ALL_CHECKINGS 1
```

## 13.282.2 Function Documentation

### 13.282.2.1 check\_ftrmv()

```
template<typename Field , class RandIter >
bool check_ftrmv (
    const Field & F,
    size_t n,
    FFLAS_UPLO uplo,
    FFLAS_TRANSPOSE trans,
    FFLAS_DIAG diag,
    RandIter & Rand)
```

### 13.282.2.2 run\_with\_field()

```
template<class Field >
bool run_with_field (
    Givaro::Integer q,
    size_t b,
    size_t n,
    size_t iters,
    uint64_t seed)
```

### 13.282.2.3 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.283 test-ftrsm-check.C File Reference

```
#include <iostream>
#include <stdlib.h>
#include <time.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "fflas-ffpack/utils/fflas_io.h"
```

### Macros

- #define [ENABLE\\_ALL\\_CHECKINGS](#) 1

### Functions

- int [main](#) (int argc, char \*\*argv)

## 13.283.1 Macro Definition Documentation

### 13.283.1.1 ENABLE\_ALL\_CHECKINGS

```
#define ENABLE_ALL_CHECKINGS 1
```

## 13.283.2 Function Documentation

### 13.283.2.1 main()

```
int main (
    int argc,
```

```
char ** argv)
```

## 13.284 test-ftrsm.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <givaro/modular-integer.h>
#include <iomanip>
#include <iostream>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include <givaro/modular.h>
#include <givaro/modular-balanced.h>
#include <random>
```

### Macros

- `#define __FFLASFFPACK_SEQUENTIAL`
- `#define ENABLE_ALL_CHECKINGS 1`

### Functions

- `template<typename Field, class RandIter >`  
`bool check_ftrsm (const Field &F, size_t m, size_t n, const typename Field::Element &alpha,`  
`FFLAS::FFLAS_SIDE side, FFLAS::FFLAS_UPLO uplo, FFLAS::FFLAS_TRANSPOSE trans, FFLAS::FFLAS_DIAG`  
`diag, RandIter &Rand)`
- `template<class Field >`  
`bool run_with_field (Givaro::Integer q, size_t b, size_t m, size_t n, uint64_t a, size_t iters, uint64_t seed)`
- `int main (int argc, char **argv)`

## 13.284.1 Macro Definition Documentation

### 13.284.1.1 \_\_FFLASFFPACK\_SEQUENTIAL

```
#define __FFLASFFPACK_SEQUENTIAL
```

### 13.284.1.2 ENABLE\_ALL\_CHECKINGS

```
#define ENABLE_ALL_CHECKINGS 1
```

## 13.284.2 Function Documentation

### 13.284.2.1 check\_ftrsm()

```
template<typename Field, class RandIter >
bool check_ftrsm (
    const Field & F,
    size_t m,
    size_t n,
    const typename Field::Element & alpha,
    FFLAS::FFLAS_SIDE side,
    FFLAS::FFLAS_UPLO uplo,
    FFLAS::FFLAS_TRANSPOSE trans,
    FFLAS::FFLAS_DIAG diag,
    RandIter & Rand)
```

### 13.284.2.2 run\_with\_field()

```
template<class Field >
bool run_with_field (
    Givaro::Integer q,
    size_t b,
    size_t m,
    size_t n,
    uint64_t a,
    size_t iters,
    uint64_t seed)
```

### 13.284.2.3 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.285 test-ftsyr2k.C File Reference

```
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <givaro/modular-integer.h>
#include <iomanip>
#include <iostream>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/ffpack/ffpack.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include <givaro/modular.h>
#include <givaro/modular-balanced.h>
#include <random>
```

### Macros

- `#define` [ENABLE\\_ALL\\_CHECKINGS](#) 1

### Functions

- `template<typename Field , class RandIter >`  
`bool` [check\\_ftsyr2k](#) (const [Field](#) &F, size\_t n, [FFLAS::FFLAS\\_UPLO](#) uplo, [FFLAS::FFLAS\\_DIAG](#) diagA, RandIter &Rand)
- `template<class Field >`  
`bool` [run\\_with\\_field](#) (Givaro::Integer q, size\_t b, size\_t n, size\_t iters, uint64\_t seed)
- `int` [main](#) (int argc, char \*\*argv)

## 13.285.1 Macro Definition Documentation

### 13.285.1.1 ENABLE\_ALL\_CHECKINGS

```
#define ENABLE_ALL_CHECKINGS 1
```

## 13.285.2 Function Documentation

### 13.285.2.1 check\_ftsyr2k()

```
template<typename Field , class RandIter >
bool check_ftsyr2k (
```



```

    const Field & F,
    size_t n,
    FFLAS::FFLAS_UPLO uplo,
    FFLAS::FFLAS_DIAG diagA,
    RandIter & Rand)

```

### 13.285.2.2 run\_with\_field()

```

template<class Field >
bool run_with_field (
    Givaro::Integer q,
    size_t b,
    size_t n,
    size_t iters,
    uint64_t seed)

```

### 13.285.2.3 main()

```

int main (
    int argc,
    char ** argv)

```

## 13.286 test-ffrstr.C File Reference

```

#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <givaro/modular-integer.h>
#include <iomanip>
#include <iostream>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/ffpack/ffpack.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include <givaro/modular.h>
#include <givaro/modular-balanced.h>
#include <random>

```

### Macros

- #define [ENABLE\\_ALL\\_CHECKINGS](#) 1

### Functions

- template<typename [Field](#) , class RandIter >  
bool [check\\_ftrstr](#) (const [Field](#) &F, size\_t n, [FFLAS::FFLAS\\_SIDE](#) side, [FFLAS::FFLAS\\_UPLO](#) uplo, [FFLAS::FFLAS\\_DIAG](#) diagA, [FFLAS::FFLAS\\_DIAG](#) diagB, RandIter &Rand)
- template<class [Field](#) >  
bool [run\\_with\\_field](#) (Givaro::Integer q, size\_t b, size\_t n, size\_t iters, uint64\_t seed)
- int [main](#) (int argc, char \*\*argv)

## 13.286.1 Macro Definition Documentation

### 13.286.1.1 ENABLE\_ALL\_CHECKINGS

```

#define ENABLE_ALL_CHECKINGS 1

```

## 13.286.2 Function Documentation

### 13.286.2.1 check\_ftrstr()

```
template<typename Field , class RandIter >
bool check_ftrstr (
    const Field & F,
    size_t n,
    FFLAS::FFLAS_SIDE side,
    FFLAS::FFLAS_UPLO uplo,
    FFLAS::FFLAS_DIAG diagA,
    FFLAS::FFLAS_DIAG diagB,
    RandIter & Rand)
```

### 13.286.2.2 run\_with\_field()

```
template<class Field >
bool run_with_field (
    Givaro::Integer q,
    size_t b,
    size_t n,
    size_t iters,
    uint64_t seed)
```

### 13.286.2.3 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.287 test-fftrsv.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iomanip>
#include <iostream>
#include <random>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include <givaro/modular.h>
```

### Macros

- #define [\\_\\_FFLASFFPACK\\_SEQUENTIAL](#)
- #define [ENABLE\\_ALL\\_CHECKINGS](#) 1

### Functions

- template<typename [Field](#) , class RandIter >  
bool [check\\_fftrsv](#) (const [Field](#) &F, size\_t n, [FFLAS\\_UPLO](#) uplo, [FFLAS\\_TRANSPOSE](#) trans, [FFLAS\\_DIAG](#) diag, RandIter &Rand)
- template<class [Field](#) >  
bool [run\\_with\\_field](#) (Givaro::Integer q, size\_t b, size\_t n, size\_t iters, uint64\_t seed)
- int [main](#) (int argc, char \*\*argv)

## 13.287.1 Macro Definition Documentation

### 13.287.1.1 \_\_FFLASFFPACK\_SEQUENTIAL

```
#define __FFLASFFPACK_SEQUENTIAL
```

### 13.287.1.2 ENABLE\_ALL\_CHECKINGS

```
#define ENABLE_ALL_CHECKINGS 1
```

## 13.287.2 Function Documentation

### 13.287.2.1 check\_ftsrv()

```
template<typename Field , class RandIter >
bool check_ftsrv (
    const Field & F,
    size_t n,
    FFLAS_UPLO uplo,
    FFLAS_TRANSPOSE trans,
    FFLAS_DIAG diag,
    RandIter & Rand)
```

### 13.287.2.2 run\_with\_field()

```
template<class Field >
bool run_with_field (
    Givaro::Integer q,
    size_t b,
    size_t n,
    size_t iters,
    uint64_t seed)
```

### 13.287.2.3 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.288 test-fftrtri.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iomanip>
#include <iostream>
#include <random>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include <givaro/modular.h>
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/ffpack/ffpack.h"
```

### Macros

- #define [\\_\\_FFLASFFPACK\\_SEQUENTIAL](#)
- #define [ENABLE\\_ALL\\_CHECKINGS](#) 1

## Functions

- `template<typename Field , class RandIter >`  
`bool check\_ftrtri (const Field &F, size_t n, FFLAS\_UPLO uplo, FFLAS\_DIAG diag, RandIter &Rand)`
- `template<class Field >`  
`bool run\_with\_field (Givaro::Integer q, size_t b, size_t n, size_t iters, uint64_t seed)`
- `int main (int argc, char **argv)`

## 13.288.1 Macro Definition Documentation

### 13.288.1.1 `__FFLASFFPACK_SEQUENTIAL`

```
#define __FFLASFFPACK_SEQUENTIAL
```

### 13.288.1.2 `ENABLE_ALL_CHECKINGS`

```
#define ENABLE_ALL_CHECKINGS 1
```

## 13.288.2 Function Documentation

### 13.288.2.1 `check_ftrtri()`

```
template<typename Field , class RandIter >
bool check\_ftrtri (
    const Field & F,
    size_t n,
    FFLAS\_UPLO uplo,
    FFLAS\_DIAG diag,
    RandIter & Rand)
```

### 13.288.2.2 `run_with_field()`

```
template<class Field >
bool run\_with\_field (
    Givaro::Integer q,
    size_t b,
    size_t n,
    size_t iters,
    uint64_t seed)
```

### 13.288.2.3 `main()`

```
int main (
    int argc,
    char ** argv)
```

## 13.289 test-interfaces-c.c File Reference

```
#include <fflas-ffpack/interfaces/libs/fflas_c.h>
#include <fflas-ffpack/interfaces/libs/ffpack_c.h>
#include <stdlib.h>
#include <stdio.h>
```

## Functions

- `int main ()`

## 13.289.1 Function Documentation

### 13.289.1.1 main()

```
int main (
    void )
```

## 13.290 test-invert-check.C File Reference

```
#include <iostream>
#include <stdlib.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "fflas-ffpack/utils/fflas_randommatrix.h"
```

### Macros

- `#define` [ENABLE\\_ALL\\_CHECKINGS](#) 1

### Functions

- `int` [main](#) (`int` argc, `char **`argv)

## 13.290.1 Macro Definition Documentation

### 13.290.1.1 ENABLE\_ALL\_CHECKINGS

```
#define ENABLE_ALL_CHECKINGS 1
```

## 13.290.2 Function Documentation

### 13.290.2.1 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.291 test-io.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <random>
#include <givaro/modular.h>
#include <givaro/zring.h>
#include "fflas-ffpack/utils/test-utils.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/args-parser.h"
```

### Data Structures

- `struct` [CompactElement](#)< [Element](#) >
- `struct` [CompactElement](#)< `double` >
- `struct` [CompactElement](#)< `float` >
- `struct` [CompactElement](#)< `int64_t` >
- `struct` [CompactElement](#)< `int32_t` >
- `struct` [CompactElement](#)< `int16_t` >

## Functions

- template<class [Field](#) >  
bool [run\\_with\\_field](#) (Givaro::Integer q, uint64\_t b, size\_t m, size\_t n, size\_t iters, uint64\_t seed)
- int [main](#) (int argc, char \*\*argv)

### 13.291.1 Function Documentation

#### 13.291.1.1 [run\\_with\\_field\(\)](#)

```
template<class Field >
bool run\_with\_field (
    Givaro::Integer q,
    uint64_t b,
    size_t m,
    size_t n,
    size_t iters,
    uint64_t seed)
```

#### 13.291.1.2 [main\(\)](#)

```
int main (
    int argc,
    char ** argv)
```

## 13.292 test-lu.C File Reference

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <givaro/modular-balanced.h>
#include <iostream>
#include <iomanip>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/ffpack/ffpack.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "fflas-ffpack/utils/args-parser.h"
#include <random>
```

## Macros

- #define [BASECASE\\_K](#) 37
- #define [\\_\\_FFLASFFPACK\\_SEQUENTIAL](#)
- #define [\\_\\_LUDIVINE\\_CUTOFF](#) 1

## Functions

- template<class [Field](#) , [FFLAS::FFLAS\\_DIAG](#) diag, [FFLAS\\_TRANSPOSE](#) trans>  
bool [test\\_LUdivine](#) (const [Field](#) &F, typename [Field::ConstElement\\_ptr](#) A, size\_t lda, size\_t r, size\_t m, size\_t n)  
*Tests the LUdivine routine.*
- template<class [Field](#) , [FFLAS\\_DIAG](#) diag>  
bool [verifPLUQ](#) (const [Field](#) &F, typename [Field::ConstElement\\_ptr](#) A, size\_t lda, typename [Field::Element\\_ptr](#) PLUQ, size\_t ldpluq, size\_t \*P, size\_t \*Q, size\_t m, size\_t n, size\_t R)  
*Verifies that  $B = PLUQ$  where A stores  $[L|U]$ .*
- template<class [Field](#) , [FFLAS\\_DIAG](#) diag, class RandIter >  
bool [test\\_pluq](#) (const [Field](#) &F, typename [Field::ConstElement\\_ptr](#) A, size\_t r, size\_t m, size\_t n, size\_t lda, RandIter &G)

Tests the LUdivine routine.

- template<class [Field](#) , [FFLAS\\_DIAG](#) diag, [FFLAS\\_TRANSPOSE](#) trans, class RandIter >  
bool [launch\\_test](#) (const [Field](#) &F, size\_t r, size\_t m, size\_t n, RandIter &G)
- template<class [Field](#) >  
bool [run\\_with\\_field](#) (Givaro::Integer q, uint64\_t b, size\_t m, size\_t n, size\_t r, size\_t iters, uint64\_t seed)
- int [main](#) (int argc, char \*\*argv)

## Variables

- Givaro::Timer [tperm](#)
- Givaro::Timer [tgemm](#)
- Givaro::Timer [tBC](#)
- Givaro::Timer [ttrsm](#)
- Givaro::Timer [trest](#)
- Givaro::Timer [timtot](#)
- size\_t [mvcnt](#) = 0

## 13.292.1 Macro Definition Documentation

### 13.292.1.1 BASECASE\_K

```
#define BASECASE_K 37
```

### 13.292.1.2 \_\_FFLASFFPACK\_SEQUENTIAL

```
#define __FFLASFFPACK_SEQUENTIAL
```

### 13.292.1.3 \_\_LUDIVINE\_CUTOFF

```
#define __LUDIVINE_CUTOFF 1
```

## 13.292.2 Function Documentation

### 13.292.2.1 test\_LUdivine()

```
template<class Field , FFLAS::FFLAS\_DIAG diag, FFLAS\_TRANSPOSE trans>
bool test_LUdivine (
    const Field & F,
    typename Field::ConstElement\_ptr A,
    size_t lda,
    size_t r,
    size_t m,
    size_t n)
    Tests the LUdivine routine.
```

Tests the LUdivine routine.

#### Template Parameters

|              |                    |
|--------------|--------------------|
| <i>Field</i> | Field              |
| <i>Diag</i>  | Unit diagonal in U |
| <i>Trans</i> |                    |

#### Parameters

|          |                       |
|----------|-----------------------|
| <i>F</i> | field                 |
| <i>A</i> | Matrix (preallocated) |
| <i>r</i> | rank of A             |
| <i>m</i> | rows                  |

|            |                  |
|------------|------------------|
| <i>n</i>   | cols             |
| <i>lda</i> | leading dim of A |

**Returns**

0 iff correct, 1 otherwise

**13.292.2.2   verifPLUQ()**

```
template<class Field , FFLAS_DIAG diag>
bool verificPLUQ (
    const Field & F,
    typename Field::ConstElement_ptr A,
    size_t lda,
    typename Field::Element_ptr PLUQ,
    size_t ldpluq,
    size_t * P,
    size_t * Q,
    size_t m,
    size_t n,
    size_t R)
```

Verifies that  $B = PLUQ$  where A stores  $[L\backslash U]$ .

**Template Parameters**

|              |                    |
|--------------|--------------------|
| <i>Field</i> | Field              |
| <i>Diag</i>  | Unit diagonal in U |

**Parameters**

|            |                       |
|------------|-----------------------|
| <i>F</i>   | field                 |
| <i>A</i>   | Matrix (preallocated) |
| <i>r</i>   | rank of A             |
| <i>m</i>   | rows                  |
| <i>n</i>   | cols                  |
| <i>lda</i> | leading dim of A      |

**Returns**

0 iff correct, 1 otherwise

**13.292.2.3   test\_pluq()**

```
template<class Field , FFLAS_DIAG diag, class RandIter >
bool test_pluq (
    const Field & F,
    typename Field::ConstElement_ptr A,
    size_t r,
    size_t m,
    size_t n,
    size_t lda,
    RandIter & G)
```

Tests the LUdivine routine.



## Template Parameters

|              |                    |
|--------------|--------------------|
| <i>Field</i> | Field              |
| <i>Diag</i>  | Unit diagonal in U |
| <i>Trans</i> |                    |

## Parameters

|            |                       |
|------------|-----------------------|
| <i>F</i>   | field                 |
| <i>A</i>   | Matrix (preallocated) |
| <i>r</i>   | rank of A             |
| <i>m</i>   | rows                  |
| <i>n</i>   | cols                  |
| <i>lda</i> | leading dim of A      |

## Returns

0 iff correct, 1 otherwise

## 13.292.2.4 launch\_test()

```
template<class Field , FFLAS_DIAG diag, FFLAS_TRANSPOSE trans, class RandIter >
bool launch_test (
    const Field & F,
    size_t r,
    size_t m,
    size_t n,
    RandIter & G)
```

## 13.292.2.5 run\_with\_field()

```
template<class Field >
bool run_with_field (
    Givaro::Integer q,
    uint64_t b,
    size_t m,
    size_t n,
    size_t r,
    size_t iters,
    uint64_t seed)
```

## 13.292.2.6 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.292.3 Variable Documentation

## 13.292.3.1 tperm

Givaro::Timer tperm

## 13.292.3.2 tgemm

Givaro::Timer tgemm

**13.292.3.3 tBC**

```
Givaro::Timer tBC
```

**13.292.3.4 ttrsm**

```
Givaro::Timer ttrsm
```

**13.292.3.5 trest**

```
Givaro::Timer trest
```

**13.292.3.6 timtot**

```
Givaro::Timer timtot
```

**13.292.3.7 mvcnt**

```
size_t mvcnt = 0
```

**13.293 test-maxdelayeddim.C File Reference**

```
#include <givaro/modular.h>
#include <recint/rint.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include <stdlib.h>
#include <stdio.h>
```

**Macros**

- #define [MAX\\_WITH\\_SIZE\\_T](#)(x)

**Functions**

- template<class [Field](#) >  
bool [test](#) (Givaro::Integer p, size\_t kmax)
- int [main](#) ()

**13.293.1 Macro Definition Documentation****13.293.1.1 MAX\_WITH\_SIZE\_T**

```
#define MAX_WITH_SIZE_T(  
    x)
```

**Value:**

```
( (static_cast<uint64_t>(std::numeric_limits<size_t>::max()) < x)? std::numeric_limits<size_t>::max() : x )
```

**13.293.2 Function Documentation****13.293.2.1 test()**

```
template<class Field >
bool test (
    Givaro::Integer p,
    size_t kmax)
```

**13.293.2.2 main()**

```
int main (
    void )
```

### 13.294 test-minpoly.C File Reference

```
#include <iomanip>
#include <iostream>
#include <random>
#include <chrono>
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/ffpack/ffpack.h"
#include "fflas-ffpack/utlis/args-parser.h"
#include "fflas-ffpack/utlis/fflas_randommatrix.h"
#include "fflas-ffpack/utlis/test-utlis.h"
#include <givaro/modular.h>
#include <givaro/modular-balanced.h>
#include <givaro/modular-integer.h>
#include <givaro/givpoly1factor.h>
#include <givaro/givpoly1.h>
```

## Functions

- `template<typename Field , class RandIter >`  
`bool check\_minpoly (const Field &F, size_t n, RandIter &G)`
- `template<class Field >`  
`bool run\_with\_field (Givaro::Integer q, size_t b, size_t n, size_t iters, uint64_t seed)`
- `int main (int argc, char **argv)`

### 13.294.1 Function Documentation

### 13.294.1.1 check\_minpoly()

```
template<typename Field , class RandIter >
bool check_minpoly (
    const Field & F,
    size_t n,
    RandIter & G)
```

### 13.294.1.2 run\_with\_field()

```
template<class Field >
bool run_with_field (
    Givaro::Integer q,
    size_t b,
    size_t n,
    size_t iters,
    uint64_t seed)
```

### 13.294.1.3 main()

```
int main (
    int argc,
    char ** argv)
```

### 13.295 test-multifile1.C File Reference

```
#include "fflas-ffpack/fflas-ffpack.h"
```

## 13.296 test-multifile2.C File Reference

```
#include "fflas-ffpack/fflas-ffpack.h"
```

### Functions

- int [main](#) (void)

### 13.296.1 Function Documentation

#### 13.296.1.1 main()

```
int main (
    void )
```

## 13.297 test-nullspace.C File Reference

```
#include <iomanip>
#include <iostream>
#include "fflas-ffpack/ffpack/ffpack.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/fflas_randommatrix.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "fflas-ffpack/utils/timer.h"
```

### Functions

- template<class [Field](#) >  
std::string [checkingMessage](#) (const [Field](#) &F)
- template<class [Field](#) >  
[Field::Element\\_ptr](#) [readOrRandomMatrixWithRankAndRandomRPM](#) (const [Field](#) &F, std::string file, size\_t m, size\_t n, size\_t lda, size\_t r, uint64\_t seed)  
*If file is not empty, read it and set m, n, lda and r.*
- template<class [Field](#) >  
bool [test\\_nullspace](#) ([Field](#) &F, [FFLAS::FFLAS\\_SIDE](#) side, size\_t m, size\_t n, size\_t r, typename [Field::Element\\_ptr](#) A, size\_t lda)
- template<class [Field](#) >  
bool [run\\_with\\_field](#) (Givaro::Integer q, uint64\_t b, size\_t m, size\_t n, size\_t r, size\_t iters, std::string file, uint64\_t &seed)
- int [main](#) (int argc, char \*\*argv)

### 13.297.1 Function Documentation

#### 13.297.1.1 checkingMessage()

```
template<class Field >
std::string checkingMessage (
    const Field & F)
```

#### 13.297.1.2 readOrRandomMatrixWithRankAndRandomRPM()

```
template<class Field >
Field::Element\_ptr readOrRandomMatrixWithRankAndRandomRPM (
    const Field & F,
    std::string file,
```

```

    size_t & m,
    size_t & n,
    size_t & lda,
    size_t & r,
    uint64_t seed)

```

If file is not empty, read it and set m, n, lda and r.

Otherwise, generate a random matrix of size m x n with random lda.

### 13.297.1.3 test\_nullspace()

```

template<class Field >
bool test_nullspace (
    Field & F,
    FFLAS::FFLAS_SIDE side,
    size_t m,
    size_t n,
    size_t r,
    typename Field::Element_ptr A,
    size_t lda)

```

### 13.297.1.4 run\_with\_field()

```

template<class Field >
bool run_with_field (
    Givaro::Integer q,
    uint64_t b,
    size_t m,
    size_t n,
    size_t r,
    size_t iters,
    std::string file,
    uint64_t & seed)

```

### 13.297.1.5 main()

```

int main (
    int argc,
    char ** argv)

```

## 13.298 test-permutations.C File Reference

```

#include "fflas-ffpack/fflas-ffpack-config.h"
#include <iostream>
#include <givaro/modular.h>
#include "fflas-ffpack/ffpack/ffpack.h"

```

### Functions

- bool [checkMonotonicApplyP](#) (FFLAS\_SIDE Side, FFLAS\_TRANSPOSE trans, size\_t \*P, size\_t N, size\_t R)
- int [main](#) ()

### Variables

- Givaro::Timer [tperm](#)
- Givaro::Timer [tgemm](#)
- Givaro::Timer [tBC](#)
- Givaro::Timer [ttrsm](#)

- Givaro::Timer [trest](#)
- Givaro::Timer [timtot](#)

## 13.298.1 Function Documentation

### 13.298.1.1 checkMonotonicApplyP()

```
bool checkMonotonicApplyP (
    FFLAS_SIDE Side,
    FFLAS_TRANSPOSE trans,
    size_t * P,
    size_t N,
    size_t R)
```

### 13.298.1.2 main()

```
int main (
    void )
```

## 13.298.2 Variable Documentation

### 13.298.2.1 tperm

```
Givaro::Timer tperm
```

### 13.298.2.2 tgemm

```
Givaro::Timer tgemm
```

### 13.298.2.3 tBC

```
Givaro::Timer tBC
```

### 13.298.2.4 ttrsm

```
Givaro::Timer ttrsm
```

### 13.298.2.5 trest

```
Givaro::Timer trest
```

### 13.298.2.6 timtot

```
Givaro::Timer timtot
```

## 13.299 test-pluq-check.C File Reference

```
#include <iostream>
#include <stdlib.h>
#include <time.h>
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
```

### Macros

- #define [ENABLE\\_ALL\\_CHECKINGS](#) 1

**Functions**

- int [main](#) (int argc, char \*\*argv)

**13.299.1 Macro Definition Documentation****13.299.1.1 ENABLE\_ALL\_CHECKINGS**

```
#define ENABLE_ALL_CHECKINGS 1
```

**13.299.2 Function Documentation****13.299.2.1 main()**

```
int main (
    int argc,
    char ** argv)
```

**13.300 test-quasisep.C File Reference**

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include <givaro/modular-balanced.h>
#include <iostream>
#include <iomanip>
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/ffpack/ffpack.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "fflas-ffpack/utils/args-parser.h"
#include <random>
```

**Functions**

- template<class [Field](#) , [FFLAS\\_DIAG](#) diag, class RandIter >  
bool [test\\_BruhatGenerator](#) (const [Field](#) &F, size\_t n, size\_t r, size\_t t, typename [Field::ConstElement\\_ptr](#) A, size\_t lda, typename [Field::Element\\_ptr](#) TS, size\_t l, RandIter &G)
- template<class [Field](#) , [FFLAS\\_DIAG](#) diag, class RandIter >  
bool [launch\\_test](#) (const [Field](#) &F, size\_t n, size\_t r, size\_t t, size\_t l, RandIter &G)
- template<class [Field](#) , class RandGen >  
bool [testLTQSRPM](#) (const [Field](#) &F, size\_t n, size\_t r, size\_t t, RandGen &G)
- template<class [Field](#) >  
bool [run\\_with\\_field](#) (Givaro::Integer q, uint64\_t b, size\_t n, size\_t r, size\_t t, size\_t l, size\_t iters, uint64\_t seed)
- int [main](#) (int argc, char \*\*argv)

**13.300.1 Function Documentation****13.300.1.1 test\_BruhatGenerator()**

```
template<class Field , FFLAS\_DIAG diag, class RandIter >
bool test_BruhatGenerator (
    const Field & F,
    size_t n,
    size_t r,
    size_t t,
    typename Field::ConstElement\_ptr A,
    size_t lda,
    typename Field::Element\_ptr TS,
    size_t l,
    RandIter & G)
```

**13.300.1.2 launch\_test()**

```
template<class Field , FFLAS_DIAG diag, class RandIter >
bool launch_test (
    const Field & F,
    size_t n,
    size_t r,
    size_t t,
    size_t l,
    RandIter & G)
```

**13.300.1.3 testLTQSRPM()**

```
template<class Field , class RandGen >
bool testLTQSRPM (
    const Field & F,
    size_t n,
    size_t r,
    size_t t,
    RandGen & G)
```

**13.300.1.4 run\_with\_field()**

```
template<class Field >
bool run_with_field (
    Givaro::Integer q,
    uint64_t b,
    size_t n,
    size_t r,
    size_t t,
    size_t l,
    size_t iters,
    uint64_t seed)
```

**13.300.1.5 main()**

```
int main (
    int argc,
    char ** argv)
```

**13.301 test-rankprofiles.C File Reference**

```
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "fflas-ffpack/ffpack/ffpack.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include <givaro/modular.h>
#include <iostream>
#include <iomanip>
#include <random>
#include <chrono>
```

**Macros**

- #define `__FFLASFFPACK_SEQUENTIAL`



## Functions

- template<class [Field](#) >  
bool [run\\_with\\_field](#) (Givaro::Integer q, uint64\_t b, size\_t m, size\_t n, size\_t r, size\_t iters, uint64\_t seed, bool par)
- int [main](#) (int argc, char \*\*argv)

### 13.301.1 Macro Definition Documentation

#### 13.301.1.1 \_\_FFLASFFPACK\_SEQUENTIAL

```
#define __FFLASFFPACK_SEQUENTIAL
```

### 13.301.2 Function Documentation

#### 13.301.2.1 run\_with\_field()

```
template<class Field >
bool run_with_field (
    Givaro::Integer q,
    uint64_t b,
    size_t m,
    size_t n,
    size_t r,
    size_t iters,
    uint64_t seed,
    bool par)
```

#### 13.301.2.2 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.302 test-rpm.C File Reference

```
#include <iostream>
#include "givaro/modular.h"
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/ffpack/ffpack.h"
```

## Functions

- bool [checkRPM](#) (size\_t M, size\_t N, size\_t R)
- bool [checkSymmetricRPM](#) (size\_t N, size\_t R)
- int [main](#) (int argc, char \*\*argv)

### 13.302.1 Function Documentation

#### 13.302.1.1 checkRPM()

```
bool checkRPM (
    size_t M,
    size_t N,
    size_t R)
```

### 13.302.1.2 checkSymmetricRPM()

```
bool checkSymmetricRPM (
    size_t N,
    size_t R)
```

### 13.302.1.3 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.303 test-simd.C File Reference

```
#include "givaro/givinteger.h"
#include "givaro/modular.h"
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "fflas-ffpack/fflas/fflas_simd.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "fflas-ffpack/utils/align-allocator.h"
#include <array>
#include <vector>
#include <random>
#include <string>
#include <functional>
#include <limits>
#include <type_traits>
#include <algorithm>
```

### Data Structures

- struct [ALL< true, v... >](#)
- struct [ALL< false, v... >](#)
- struct [ALL<>](#)
- struct [count\\_nonconst\\_lvalue\\_reference< T, O... >](#)
- struct [count\\_nonconst\\_lvalue\\_reference< T &, O... >](#)
- struct [count\\_nonconst\\_lvalue\\_reference< const T &, O... >](#)
- struct [count\\_nonconst\\_lvalue\\_reference<>](#)
- struct [is\\_all\\_same< T, Args... >](#)
- struct [is\\_all\\_same<>](#)
- struct [width< T >](#)
- struct [width< float >](#)
- struct [width< double >](#)
- class [TestOneMethod< Simd >](#)
- struct [ScalFunctionsBase< Element, typename enable\\_if< is\\_floating\\_point< Element >::value >::type >](#)
- class [ScalFunctionsBase< Element, typename enable\\_if< is\\_floating\\_point< Element >::value >::type >::FloatingPointTestD](#)
- struct [ScalFunctionsBase< Element, typename enable\\_if< is\\_integral< Element >::value >::type >](#)
- struct [ScalFunctions< Element >](#)

### Macros

- [#define \\_TEST\\_ONE\(K, f1, f2, r, n\)](#)
- [#define TEST\\_ONE\\_OP\(f\)](#)
- [#define TEST\\_ONE\\_OP\\_WZ\(f\)](#)
- [#define TEST\\_IMPL\(SIZE, Elt\)](#)

## Functions

- `template<typename Element >`  
`enable_if< is_integral< Element >::value, bool >::type` `check_eq` (Element x, Element y)
- `template<typename Element >`  
`enable_if< is_floating_point< Element >::value, bool >::type` `check_eq` (Element x, Element y)
- `template<typename Element >`  
`bool` `cmp` (vector< Element > out\_scal, vector< Element > out\_simd)
- `template<typename Ret , typename T >`  
`Ret` `eval_func_on_array` (function< Ret()> f, array< T, 0 > &arr)
- `template<typename T , typename... TArgs>`  
`void` `eval_func_on_array` (function< void(T, TArgs...)> f, array< typename decay< T >::type, sizeof...(TArgs)+1 > &arr)
- `template<typename Ret , typename T , typename... TArgs>`  
`Ret` `eval_func_on_array` (function< Ret(T, TArgs...)> f, array< typename decay< T >::type, sizeof...(TArgs)+1 > &arr)
- `template<typename E >`  
`std::ostream &` `operator<<` (std::ostream &o, const vector< E > &V)
- `template<typename Simd , typename Element >`  
`enable_if< is_floating_point< Element >::value, bool >::type` `test_impl_base` ()
- `template<typename Simd , typename Element >`  
`enable_if< is_integral< Element >::value, bool >::type` `test_impl_base` ()
- `template<typename Simd , typename Element >`  
`bool` `test_impl` ()
- `int` `main` (int argc, char \*argv[])

### 13.303.1 Macro Definition Documentation

#### 13.303.1.1 \_TEST\_ONE

```
#define _TEST_ONE(
```

```
    K,  
    f1,  
    f2,  
    r,  
    n)
```

Value:

```
do {  
    K T(f1, f2, r, n);  
    bool b = T.writeResultLine();  
    if (b == false)  
        T.writeDebugData();  
    btest &= b;  
} while (0)
```

#### 13.303.1.2 TEST\_ONE\_OP

```
#define TEST_ONE_OP(
```

```
    f)
```

Value:

```
_TEST_ONE(TestOneMethod<Simd>,  
function<decltype(Simd::f)>(Simd::f),  
function<decltype(Scal::f)>(Scal::f),  
function<decltype(Scal::genInputs)>(Scal::genInputs), #f)
```

#### 13.303.1.3 TEST\_ONE\_OP\_WZ

```
#define TEST_ONE_OP_WZ(
```

```
    f)
```

Value:

```
_TEST_ONE(TestOneMethod<Simd>,  
function<decltype(Simd::f)>(Simd::f),  
function<decltype(Scal::f)>(Scal::f),  
function<decltype(Scal::genInputsWithZero)>(Scal::genInputsWithZero),  
#f " test with zero")
```

### 13.303.1.4 TEST\_IMPL

```
#define TEST_IMPL(  
    SIZE,  
    Elt)
```

Value:

```
do {  
    pass &= test_impl<Simd##SIZE<Elt>, Elt>(); \  
    cout << endl; \  
} while (0)
```

## 13.303.2 Function Documentation

### 13.303.2.1 check\_eq() [1/2]

```
template<typename Element >  
enable_if< is_integral< Element >::value, bool >::type check_eq (  
    Element x,  
    Element y)
```

### 13.303.2.2 check\_eq() [2/2]

```
template<typename Element >  
enable_if< is_floating_point< Element >::value, bool >::type check_eq (  
    Element x,  
    Element y)
```

### 13.303.2.3 cmp()

```
template<typename Element >  
bool cmp (  
    vector< Element > out_scal,  
    vector< Element > out_simd)
```

### 13.303.2.4 eval\_func\_on\_array() [1/3]

```
template<typename Ret , typename T >  
Ret eval_func_on_array (  
    function< Ret()> f,  
    array< T, 0 > & arr)
```

### 13.303.2.5 eval\_func\_on\_array() [2/3]

```
template<typename T , typename... TArgs>  
void eval_func_on_array (  
    function< void(T, TArgs...)> f,  
    array< typename decay< T >::type, sizeof...(TArgs)+1 > & arr)
```

### 13.303.2.6 eval\_func\_on\_array() [3/3]

```
template<typename Ret , typename T , typename... TArgs>  
Ret eval_func_on_array (  
    function< Ret(T, TArgs...)> f,  
    array< typename decay< T >::type, sizeof...(TArgs)+1 > & arr)
```

### 13.303.2.7 operator<<()

```
template<typename E >  
std::ostream & operator<< (  
    std::ostream & o,  
    const vector< E > & V)
```

**13.303.2.8 test\_impl\_base() [1/2]**

```
template<typename Simd , typename Element >
enable_if< is_floating_point< Element >::value, bool >::type test_impl_base ()
```

**13.303.2.9 test\_impl\_base() [2/2]**

```
template<typename Simd , typename Element >
enable_if< is_integral< Element >::value, bool >::type test_impl_base ()
```

**13.303.2.10 test\_impl()**

```
template<typename Simd , typename Element >
bool test_impl ()
```

**13.303.2.11 main()**

```
int main (
    int argc,
    char * argv[])
```

**13.304 test-solve.C File Reference**

```
#include <givaro/modular-integer.h>
#include <iomanip>
#include <iostream>
#include "fflas-ffpack/utils/timer.h"
#include "fflas-ffpack/fflas/fflas.h"
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include <givaro/modular.h>
#include <givaro/modular-balanced.h>
```

**Functions**

- template<typename [Field](#) , class RandIter >  
bool [check\\_solve](#) (const [Field](#) &F, size\_t m, RandIter &Rand, bool isParallel)
- template<class [Field](#) >  
bool [run\\_with\\_field](#) (Givaro::Integer q, size\_t b, size\_t m, size\_t iters, uint64\_t seed)
- int [main](#) (int argc, char \*\*argv)

**13.304.1 Function Documentation****13.304.1.1 check\_solve()**

```
template<typename Field , class RandIter >
bool check_solve (
    const Field & F,
    size_t m,
    RandIter & Rand,
    bool isParallel)
```

**13.304.1.2 run\_with\_field()**

```
template<class Field >
bool run_with_field (
    Givaro::Integer q,
    size_t b,
```

```

    size_t m,
    size_t iters,
    uint64_t seed)

```

### 13.304.1.3 main()

```

int main (
    int argc,
    char ** argv)

```

## 13.305 test-storage-transpose.C File Reference

```

#include <iomanip>
#include <iostream>
#include <random>
#include "fflas-ffpack/utils/args-parser.h"
#include "fflas-ffpack/utils/test-utils.h"
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/fflas_memory.h"
#include <givaro/modular.h>
#include <recint/rint.h>
#include "fflas-ffpack/fflas/fflas_transpose.h"

```

### Data Structures

- class [Test< Elt >](#)

### Functions

- int [main](#) (int argc, char \*\*argv)

## 13.305.1 Function Documentation

### 13.305.1.1 main()

```

int main (
    int argc,
    char ** argv)

```

## 13.306 101-fgemm.C File Reference

```

#include <fflas-ffpack/fflas-ffpack-config.h>
#include <givaro/modular-balanced.h>
#include <fflas-ffpack/fflas/fflas.h>
#include <fflas-ffpack/utils/timer.h>
#include <fflas-ffpack/utils/fflas_io.h>
#include <fflas-ffpack/utils/args-parser.h>
#include <iostream>

```

### Functions

- int [main](#) (int argc, char \*\*argv)

## 13.306.1 Function Documentation

### 13.306.1.1 main()

```
int main (  
    int argc,  
    char ** argv)
```

## 13.307 2x2-fgemm.C File Reference

```
#include <fflas-ffpack/fflas-ffpack-config.h>  
#include <givaro/modular-balanced.h>  
#include <fflas-ffpack/fflas/fflas.h>  
#include <fflas-ffpack/utils/timer.h>  
#include <fflas-ffpack/utils/fflas_io.h>  
#include <fflas-ffpack/utils/args-parser.h>  
#include <iostream>
```

### Functions

- int [main](#) (int argc, char \*\*argv)

## 13.307.1 Function Documentation

### 13.307.1.1 main()

```
int main (  
    int argc,  
    char ** argv)
```

## 13.308 2x2-ftsrv.C File Reference

```
#include <fflas-ffpack/fflas-ffpack-config.h>  
#include <givaro/modular-balanced.h>  
#include <fflas-ffpack/fflas/fflas.h>  
#include <fflas-ffpack/utils/timer.h>  
#include <fflas-ffpack/utils/fflas_io.h>  
#include <fflas-ffpack/utils/args-parser.h>  
#include <iostream>  
#include <array>
```

### Functions

- int [main](#) (int argc, char \*\*argv)

## 13.308.1 Function Documentation

### 13.308.1.1 main()

```
int main (  
    int argc,  
    char ** argv)
```

## 13.309 2x2-pluq.C File Reference

```
#include <iostream>
#include <vector>
#include <givaro/modular.h>
#include "fflas-ffpack/fflas-ffpack-config.h"
#include "fflas-ffpack/fflas-ffpack.h"
#include "fflas-ffpack/utils/fflas_io.h"
```

### Functions

- int [main](#) (int argc, char \*\*argv)

### 13.309.1 Function Documentation

#### 13.309.1.1 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.310 fflas-101\_1.C File Reference

```
#include <fflas-ffpack/fflas/fflas.h>
#include <givaro/modular.h>
#include <givaro/modular-balanced.h>
#include "fflas-ffpack/utils/fflas_io.h"
#include <iostream>
```

### Functions

- int [main](#) (int argc, char \*\*argv)

### 13.310.1 Function Documentation

#### 13.310.1.1 main()

```
int main (
    int argc,
    char ** argv)
```

## 13.311 fflas-101\_3.C File Reference

```
#include <fflas-ffpack/fflas/fflas.h>
#include <givaro/modular.h>
#include <givaro/modular-balanced.h>
#include "fflas-ffpack/utils/fflas_io.h"
#include "fflas-ffpack/utils/fflas_randommatrix.h"
#include <iostream>
```

### Functions

- int [main](#) (int argc, char \*\*argv)



### 13.311.1 Function Documentation

#### 13.311.1.1 main()

```
int main (  
    int argc,  
    char ** argv)
```

## 13.312 fflas\_101.C File Reference

```
#include <fflas-ffpack/fflas/fflas.h>  
#include <givaro/modular.h>  
#include <givaro/modular-balanced.h>  
#include <iostream>
```

### Functions

- int [main](#) (int argc, char \*\*argv)

### 13.312.1 Function Documentation

#### 13.312.1.1 main()

```
int main (  
    int argc,  
    char ** argv)
```

## 13.313 fflas\_101\_lvl1.C File Reference

```
#include <fflas-ffpack/fflas/fflas.h>  
#include <givaro/modular.h>  
#include <givaro/modular-balanced.h>  
#include <iostream>  
#include "fflas-ffpack/utils/fflas_io.h"
```

### Functions

- int [main](#) (int argc, char \*\*argv)

### 13.313.1 Function Documentation

#### 13.313.1.1 main()

```
int main (  
    int argc,  
    char ** argv)
```

## 13.314 ffpack-fgesv.C File Reference

```
#include <fflas-ffpack/fflas/fflas.h>  
#include <givaro/modular.h>  
#include <givaro/modular-balanced.h>  
#include "fflas-ffpack/utils/fflas_io.h"  
#include <fflas-ffpack/ffpack/ffpack.h>  
#include <iostream>
```

## Functions

- int [main](#) (int argc, char \*\*argv)

### 13.314.1 Function Documentation

#### 13.314.1.1 main()

```
int main (  
    int argc,  
    char ** argv)
```

## 13.315 ffpack-solve.C File Reference

```
#include <fflas-ffpack/fflas/fflas.h>  
#include <givaro/modular.h>  
#include <givaro/modular-balanced.h>  
#include "fflas-ffpack/utils/fflas_io.h"  
#include <fflas-ffpack/ffpack/ffpack.h>  
#include <iostream>
```

## Functions

- int [main](#) (int argc, char \*\*argv)

### 13.315.1 Function Documentation

#### 13.315.1.1 main()

```
int main (  
    int argc,  
    char ** argv)
```

PS: the function Solve will modify the matrix A so here we used a duplicate matrix A2 otherwise A\*x will not be equal to b for the later verification stage

# Index

- [\\_F](#)
  - [RNSIntegerMod< RNS >, 551](#)
- [\\_M](#)
  - [rns\\_double, 530](#)
  - [rns\\_double\\_extended, 541](#)
- [\\_MAX\\_SIZE\\_MATRICES](#)
  - [benchmark-checkers.C, 781](#)
- [\\_MMi](#)
  - [rns\\_double, 531](#)
  - [rns\\_double\\_extended, 541](#)
- [\\_Mi](#)
  - [rns\\_double, 530](#)
  - [rns\\_double\\_extended, 541](#)
- [\\_Mi\\_modp\\_rns](#)
  - [RNSIntegerMod< RNS >, 551](#)
- [\\_NR\\_TESTS](#)
  - [benchmark-checkers.C, 781](#)
- [\\_PLUQ](#)
  - [FFPACK, 363](#)
- [\\_RNSdelayed](#)
  - [RNSIntegerMod< RNS >, 552](#)
- [\\_TEST\\_ONE](#)
  - [test-simd.C, 1101](#)
- [\\_\\_FFLASFFPACK\\_ARITHPROG\\_THRESHOLD](#)
  - [fflas-ffpack-default-thresholds.h, 824](#)
- [\\_\\_FFLASFFPACK\\_CACHE\\_LINE\\_SIZE](#)
  - [fflas\\_sparse.h, 885](#)
- [\\_\\_FFLASFFPACK\\_CHARPOLY\\_Danilevskii\\_LUKrylov\\_THRESHOLD](#)
  - [fflas-ffpack-default-thresholds.h, 824](#)
- [\\_\\_FFLASFFPACK\\_CHARPOLY\\_LUKrylov\\_ArithProg\\_THRESHOLD](#)
  - [fflas-ffpack-default-thresholds.h, 824](#)
- [\\_\\_FFLASFFPACK\\_CONFIGURATION](#)
  - [cblas.C, 1051](#)
  - [clapack.C, 1051](#)
  - [fblas.C, 1052](#)
  - [lapack.C, 1053](#)
- [\\_\\_FFLASFFPACK\\_DIMKPENALTY](#)
  - [fflas\\_pfgemm.inl, 870](#)
- [\\_\\_FFLASFFPACK\\_FORCE\\_SEQ](#)
  - [benchmark-charpoly-mp.C, 779](#)
- [\\_\\_FFLASFFPACK\\_FSYRK\\_THRESHOLD](#)
  - [fflas-ffpack-default-thresholds.h, 825](#)
- [\\_\\_FFLASFFPACK\\_FSYTRF\\_THRESHOLD](#)
  - [fflas-ffpack-default-thresholds.h, 825](#)
- [\\_\\_FFLASFFPACK\\_FTRSSYR2K\\_THRESHOLD](#)
  - [ffpack.h, 923](#)
- [\\_\\_FFLASFFPACK\\_FTRSTR\\_THRESHOLD](#)
  - [ffpack.h, 923](#)
- [\\_\\_FFLASFFPACK\\_FTRTRI\\_THRESHOLD](#)
  - [fflas-ffpack-default-thresholds.h, 825](#)
- [\\_\\_FFLASFFPACK\\_GAUSSJORDAN\\_BASECASE](#)
  - [ffpack\\_echelonforms.inl, 931](#)
  - [test-echelon.C, 1059](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_BLAS](#)
  - [config.h, 821](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_CBLAS](#)
  - [cblas.C, 1051](#)
  - [config.h, 821](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_CLAPACK](#)
  - [clapack.C, 1051](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_CXX11](#)
  - [config.h, 821](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_DGETRF](#)
  - [benchmark-dgetrf.C, 782](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_DLFCN\\_H](#)
  - [config.h, 821](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_DTRTRI](#)
  - [benchmark-dtrtri.C, 785](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_FLOAT\\_H](#)
  - [config.h, 821](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_INTPYPES\\_H](#)
  - [config.h, 821](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_LAPACK](#)
  - [clapack.C, 1051](#)
  - [config.h, 821](#)
  - [lapack.C, 1053](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_LIMITS\\_H](#)
  - [config.h, 821](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_LITTLE\\_ENDIAN](#)
  - [config.h, 821](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_PTHREAD\\_H](#)
  - [config.h, 821](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_STDDEF\\_H](#)
  - [config.h, 821](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_STDINT\\_H](#)
  - [config.h, 821](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_STDIO\\_H](#)
  - [config.h, 821](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_STDLIB\\_H](#)
  - [config.h, 822](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_STRINGS\\_H](#)
  - [config.h, 822](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_STRING\\_H](#)
  - [config.h, 822](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_SYS\\_STAT\\_H](#)
  - [config.h, 822](#)
- [\\_\\_FFLASFFPACK\\_HAVE\\_SYS\\_TIME\\_H](#)
  - [config.h, 822](#)

- \_\_FFLASFFPACK\_HAVE\_SYS\_TYPES\_H  
config.h, [822](#)
- \_\_FFLASFFPACK\_HAVE\_UNISTD\_H  
config.h, [822](#)
- \_\_FFLASFFPACK\_KAAPI\_ROUTINES\_INL  
kaapi\_routines.inl, [1032](#)
- \_\_FFLASFFPACK\_LT\_OBJDIR  
config.h, [822](#)
- \_\_FFLASFFPACK\_MINBLOCKCUTS  
blockcuts.inl, [1031](#)
- \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET  
benchmark-charpoly.C, [780](#)  
benchmark-fadd-lvl2.C, [785](#)  
benchmark-fdot.C, [786](#)  
benchmark-fgemm-mp.C, [787](#)  
benchmark-fgemm-rns.C, [788](#)  
benchmark-fgemv-mp.C, [790](#)  
benchmark-fgemv.C, [791](#)  
benchmark-fgesv.C, [794](#)  
benchmark-fsyrc.C, [795](#)  
benchmark-fsytrf.C, [796](#)  
benchmark-ftrsm-mp.C, [796](#)  
benchmark-ftrsm.C, [797](#)  
benchmark-ftrsv.C, [798](#)  
benchmark-ftrtri.C, [798](#)  
benchmark-pluq.C, [801](#)  
benchmark-quasisep.C, [802](#)
- \_\_FFLASFFPACK\_OPENBLAS\_NUM\_THREADS  
config.h, [822](#)
- \_\_FFLASFFPACK\_PACKAGE  
config.h, [822](#)
- \_\_FFLASFFPACK\_PACKAGE\_BUGREPORT  
config.h, [822](#)
- \_\_FFLASFFPACK\_PACKAGE\_NAME  
config.h, [822](#)
- \_\_FFLASFFPACK\_PACKAGE\_STRING  
config.h, [822](#)
- \_\_FFLASFFPACK\_PACKAGE\_TARNAME  
config.h, [822](#)
- \_\_FFLASFFPACK\_PACKAGE\_URL  
config.h, [822](#)
- \_\_FFLASFFPACK\_PACKAGE\_VERSION  
config.h, [823](#)
- \_\_FFLASFFPACK\_PLUQ\_THRESHOLD  
fflas-ffpack-default-thresholds.h, [824](#)  
test-echelon.C, [1059](#)
- \_\_FFLASFFPACK\_SEQPARTHRESHOLD  
fflas\_pfgemm.inl, [870](#)
- \_\_FFLASFFPACK\_SEQUENTIAL  
parallel.h, [1033](#)  
test-echelon.C, [1059](#)  
test-ftrmm.C, [1078](#)  
test-ftrmv.C, [1079](#)  
test-ftrsm.C, [1081](#)  
test-ftrsv.C, [1085](#)  
test-ftrtri.C, [1086](#)  
test-lu.C, [1089](#)  
test-rankprofiles.C, [1099](#)
- \_\_FFLASFFPACK\_SIZEOF\_CHAR  
config.h, [823](#)
- \_\_FFLASFFPACK\_SIZEOF\_INT  
config.h, [823](#)
- \_\_FFLASFFPACK\_SIZEOF\_LONG  
config.h, [823](#)
- \_\_FFLASFFPACK\_SIZEOF\_LONG\_LONG  
config.h, [823](#)
- \_\_FFLASFFPACK\_SIZEOF\_SHORT  
config.h, [823](#)
- \_\_FFLASFFPACK\_SIZEOF\_\_INT64\_T  
config.h, [823](#)
- \_\_FFLASFFPACK\_STDC\_HEADERS  
config.h, [823](#)
- \_\_FFLASFFPACK\_USE\_OPENMP  
config.h, [823](#)
- \_\_FFLASFFPACK\_VERSION  
config.h, [823](#)
- \_\_FFLASFFPACK\_WINOTHRESHOLD  
fflas-ffpack-default-thresholds.h, [824](#)
- \_\_FFLASFFPACK\_WINOTHRESHOLD\_BAL  
fflas-ffpack-default-thresholds.h, [824](#)
- \_\_FFLASFFPACK\_WINOTHRESHOLD\_BAL\_FLT  
fflas-ffpack-default-thresholds.h, [824](#)
- \_\_FFLASFFPACK\_WINOTHRESHOLD\_FLT  
fflas-ffpack-default-thresholds.h, [824](#)
- \_\_FFLASFFPACK\_charpoly\_INL  
ffpack\_charpoly.inl, [927](#)
- \_\_FFLASFFPACK\_checker\_charpoly\_INL  
checker\_charpoly.inl, [806](#)
- \_\_FFLASFFPACK\_checker\_det\_INL  
checker\_det.inl, [806](#)
- \_\_FFLASFFPACK\_checker\_fgemm\_INL  
checker\_fgemm.inl, [807](#)
- \_\_FFLASFFPACK\_checker\_ftrsm\_INL  
checker\_ftrsm.inl, [807](#)
- \_\_FFLASFFPACK\_checker\_invert\_INL  
checker\_invert.inl, [807](#)
- \_\_FFLASFFPACK\_checker\_pluq\_INL  
checker\_pluq.inl, [808](#)
- \_\_FFLASFFPACK\_fadd\_INL  
fflas\_fadd.inl, [830](#)
- \_\_FFLASFFPACK\_fassign\_INL  
fflas\_fassign.inl, [831](#)
- \_\_FFLASFFPACK\_faxpy\_INL  
fflas\_faxpy.inl, [832](#)
- \_\_FFLASFFPACK\_fdot\_INL  
fflas\_fdot.inl, [833](#)
- \_\_FFLASFFPACK\_fflas\_blockcuts\_INL  
blockcuts.inl, [1031](#)
- \_\_FFLASFFPACK\_fflas\_bounds\_INL  
fflas\_bounds.inl, [827](#)
- \_\_FFLASFFPACK\_fflas\_fflas\_fgemm\_winograd\_INL  
fgemm\_winograd.inl, [839](#)
- \_\_FFLASFFPACK\_fflas\_fflas\_level1\_INL  
fflas\_level1.inl, [864](#)
- \_\_FFLASFFPACK\_fflas\_fflas\_level2\_INL  
fflas\_level2.inl, [867](#)

- \_\_FFLASFFPACK\_fflas\_fflas\_level3\_INL  
fflas\_level3.inl, [870](#)
- \_\_FFLASFFPACK\_fflas\_fflas\_mmhelper\_INL  
fflas\_helpers.inl, [859](#)
- \_\_FFLASFFPACK\_fflas\_fflas\_sparse\_INL  
fflas\_sparse.inl, [887](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd128\_INL  
simd128.inl, [873](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd128\_double\_INL  
simd128\_double.inl, [874](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd128\_float\_INL  
simd128\_float.inl, [874](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd128\_int16\_INL  
simd128\_int16.inl, [875](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd128\_int32\_INL  
simd128\_int32.inl, [875](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd128\_int64\_INL  
simd128\_int64.inl, [876](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd256\_INL  
simd256.inl, [876](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd256\_double\_INL  
simd256\_double.inl, [877](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd256\_float\_INL  
simd256\_float.inl, [877](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd256\_int16\_INL  
simd256\_int16.inl, [878](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd256\_int32\_INL  
simd256\_int32.inl, [878](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd256\_int64\_INL  
simd256\_int64.inl, [878](#)
- \_\_FFLASFFPACK\_fflas\_freduce\_INL  
fflas\_freduce.inl, [849](#)
- \_\_FFLASFFPACK\_fflas\_freduce\_mp\_INL  
fflas\_freduce\_mp.inl, [849](#)
- \_\_FFLASFFPACK\_fflas\_fsyr2k\_INL  
fflas\_fsyr2k.inl, [852](#)
- \_\_FFLASFFPACK\_fflas\_fsyrk\_INL  
fflas\_fsyrk.inl, [854](#)
- \_\_FFLASFFPACK\_fflas\_fsyrk\_strassen\_INL  
fflas\_fsyrk\_strassen.inl, [855](#)
- \_\_FFLASFFPACK\_fflas\_igemm\_igemm\_INL  
igemm.inl, [860](#)
- \_\_FFLASFFPACK\_fflas\_igemm\_igemm\_kernels\_INL  
igemm\_kernels.inl, [861](#)
- \_\_FFLASFFPACK\_fflas\_igemm\_igemm\_tools\_INL  
igemm\_tools.inl, [862](#)
- \_\_FFLASFFPACK\_fflas\_pfgemm\_INL  
fflas\_pfgemm.inl, [870](#)
- \_\_FFLASFFPACK\_fflas\_pftsrsm\_INL  
fflas\_pftsrsm.inl, [871](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_HYB\_pspmm\_INL  
csr\_hyb\_pspmm.inl, [896](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_HYB\_pspmv\_INL  
csr\_hyb\_pspmv.inl, [896](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_HYB\_spm INL  
csr\_hyb\_spm.inl, [897](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_HYB\_spmv\_INL  
csr\_hyb\_spmv.inl, [897](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_HYB\_utils\_INL  
csr\_hyb\_utils.inl, [898](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_pspmm\_INL  
csr\_pspmm.inl, [892](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_pspmv\_INL  
csr\_pspmv.inl, [892](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_spm INL  
csr\_spm.inl, [893](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_spmv\_INL  
csr\_spmv.inl, [894](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_pspmm\_INL  
ell\_pspmm.inl, [899](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_pspmv\_INL  
ell\_pspmv.inl, [900](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_simd\_pspmv\_INL  
ell\_simd\_pspmv.inl, [904](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_simd\_spmv\_INL  
ell\_simd\_spmv.inl, [904](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_simd\_utils\_INL  
ell\_simd\_utils.inl, [905](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_spm INL  
ell\_spm.inl, [901](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_spmv\_INL  
ell\_spmv.inl, [902](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_utils\_INL  
ell\_utils.inl, [902](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_HYB\_ZO\_pspmm\_INL  
hyb\_zo\_pspmm.inl, [906](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_HYB\_ZO\_pspmv\_INL  
hyb\_zo\_pspmv.inl, [906](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_HYB\_ZO\_spm INL  
hyb\_zo\_spm.inl, [907](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_HYB\_ZO\_spmv\_INL  
hyb\_zo\_spmv.inl, [907](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_HYB\_ZO\_utils\_INL  
hyb\_zo\_utils.inl, [908](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_coo\_spm INL  
coo\_spm.inl, [889](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_coo\_spmv\_INL  
coo\_spmv.inl, [890](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_coo\_utils\_INL  
coo\_utils.inl, [890](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_sell\_pspmv\_INL  
sell\_pspmv.inl, [910](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_sell\_spmv\_INL  
sell\_spmv.inl, [911](#)
- \_\_FFLASFFPACK\_fflas\_sparse\_sell\_utils\_INL  
sell\_utils.inl, [911](#)
- \_\_FFLASFFPACK\_ffpack\_INL  
ffpack.inl, [925](#)
- \_\_FFLASFFPACK\_ffpack\_bruhatgen\_inl  
ffpack\_bruhatgen.inl, [926](#)
- \_\_FFLASFFPACK\_ffpack\_charpoly\_danilveski\_INL  
ffpack\_charpoly\_danilevski.inl, [927](#)
- \_\_FFLASFFPACK\_ffpack\_charpoly\_kgfast\_INL  
ffpack\_charpoly\_kgfast.inl, [928](#)
- \_\_FFLASFFPACK\_ffpack\_charpoly\_kgfastgeneralized\_INL  
ffpack\_charpoly\_kgfastgeneralized.inl, [928](#)

- \_\_FFLASFFPACK\_ffpack\_charpoly\_kglu\_INL  
ffpack\_charpoly\_kglu.inl, [929](#)
- \_\_FFLASFFPACK\_ffpack\_echelon\_forms\_INL  
ffpack\_echelonforms.inl, [931](#)
- \_\_FFLASFFPACK\_ffpack\_fgesv\_INL  
ffpack\_fgesv.inl, [932](#)
- \_\_FFLASFFPACK\_ffpack\_fgetrs\_INL  
ffpack\_fgetrs.inl, [932](#)
- \_\_FFLASFFPACK\_ffpack\_fsytrf\_INL  
ffpack\_fsytrf.inl, [934](#)
- \_\_FFLASFFPACK\_ffpack\_ftrssyr2k\_INL  
ffpack\_ftrssyr2k.inl, [935](#)
- \_\_FFLASFFPACK\_ffpack\_ftrstr\_INL  
ffpack\_ftrstr.inl, [935](#)
- \_\_FFLASFFPACK\_ffpack\_ftrtr\_INL  
ffpack\_ftrtr.inl, [936](#)
- \_\_FFLASFFPACK\_ffpack\_invert\_INL  
ffpack\_invert.inl, [936](#)
- \_\_FFLASFFPACK\_ffpack\_krylovelim\_INL  
ffpack\_krylovelim.inl, [937](#)
- \_\_FFLASFFPACK\_ffpack\_ludivine\_INL  
ffpack\_ludivine.inl, [937](#)
- \_\_FFLASFFPACK\_ffpack\_minpoly\_INL  
ffpack\_minpoly.inl, [939](#)
- \_\_FFLASFFPACK\_ffpack\_permutation\_INL  
ffpack\_permutation.inl, [941](#)
- \_\_FFLASFFPACK\_ffpack\_pluq\_INL  
ffpack\_pluq.inl, [942](#)
- \_\_FFLASFFPACK\_ffpack\_ppluq\_INL  
ffpack\_ppluq.inl, [943](#)
- \_\_FFLASFFPACK\_ffpack\_rank\_profiles\_INL  
ffpack\_rankprofiles.inl, [944](#)
- \_\_FFLASFFPACK\_fgemm\_INL  
fflas\_fgemm.inl, [835](#)
- \_\_FFLASFFPACK\_fgemm\_bini\_INL  
schedule\_bini.inl, [839](#)
- \_\_FFLASFFPACK\_fgemm\_winograd\_INL  
schedule\_winograd.inl, [840](#)
- \_\_FFLASFFPACK\_fgemm\_winograd\_acc\_INL  
schedule\_winograd\_acc.inl, [841](#)
- \_\_FFLASFFPACK\_fgemm\_winograd\_acc\_ip\_INL  
schedule\_winograd\_acc\_ip.inl, [841](#)
- \_\_FFLASFFPACK\_fgemm\_winograd\_ip\_INL  
schedule\_winograd\_ip.inl, [842](#)
- \_\_FFLASFFPACK\_fgmv\_INL  
fflas\_fgmv.inl, [843](#)
- \_\_FFLASFFPACK\_fgmv\_mp\_INL  
fflas\_fgmv\_mp.inl, [844](#)
- \_\_FFLASFFPACK\_fger\_INL  
fflas\_fger.inl, [845](#)
- \_\_FFLASFFPACK\_field\_rns\_INL  
rns.inl, [951](#)
- \_\_FFLASFFPACK\_field\_rns\_double\_INL  
rns-double.inl, [949](#)
- \_\_FFLASFFPACK\_field\_rns\_double\_recint\_INL  
rns-double-recint.inl, [948](#)
- \_\_FFLASFFPACK\_freivalds\_INL  
fflas\_freivalds.inl, [849](#)
- \_\_FFLASFFPACK\_fscal\_INL  
fflas\_fscal.inl, [851](#)
- \_\_FFLASFFPACK\_fscal\_mp\_INL  
fflas\_fscal\_mp.inl, [852](#)
- \_\_FFLASFFPACK\_ftrmm\_INL  
fflas\_ftrmm.inl, [856](#)
- \_\_FFLASFFPACK\_ftrsm\_INL  
fflas\_ftrsm.inl, [856](#)
- \_\_FFLASFFPACK\_ftrsv\_INL  
fflas\_ftrsv.inl, [858](#)
- \_\_FFLASFFPACK\_simd512\_INL  
simd512.inl, [879](#)
- \_\_FFLASFFPACK\_simd512\_double\_INL  
simd512\_double.inl, [880](#)
- \_\_FFLASFFPACK\_simd512\_float\_INL  
simd512\_float.inl, [880](#)
- \_\_FFLASFFPACK\_simd512\_int32\_INL  
simd512\_int32.inl, [880](#)
- \_\_FFLAS\_L1\_INST\_C  
fflas\_L1\_inst.C, [963](#)
- \_\_FFLAS\_L2\_INST\_C  
fflas\_L2\_inst.C, [967](#)
- \_\_FFLAS\_L3\_INST\_C  
fflas\_L3\_inst.C, [970](#)
- \_\_FFLAS\_\_TRSM\_READONLY  
fflas\_L3\_inst\_implem.inl, [973](#)
- fflas\_level3.inl, [870](#)
- ffpack\_ppluq.inl, [943](#)
- \_\_FFPACK\_FSYTRF\_BC\_CROUT  
benchmark-fsytrf.C, [796](#)
- \_\_FFPACK\_INST\_C  
ffpack\_inst.C, [1025](#)
- \_\_FFPACK\_charpoly\_mp\_INL  
ffpack\_charpoly\_mp.inl, [929](#)
- \_\_FFPACK\_det\_mp\_INL  
ffpack\_det\_mp.inl, [930](#)
- \_\_FFPACK\_fgemm\_classical\_INL  
fgemm\_classical\_mp.inl, [837](#)
- \_\_FFPACK\_fger\_mp\_INL  
fflas\_fger\_mp.inl, [846](#)
- \_\_FFPACK\_ftrsm\_mp\_INL  
fflas\_ftrsm\_mp.inl, [857](#)
- \_\_FFPACK\_ludivine\_mp\_INL  
ffpack\_ludivine\_mp.inl, [938](#)
- \_\_FFPACK\_pluq\_mp\_INL  
ffpack\_pluq\_mp.inl, [942](#)
- \_\_LUDIVINE\_CUTOFF  
test-lu.C, [1089](#)
- \_\_has\_builtin  
bit\_manipulation.h, [1042](#)
- \_\_alloc  
rns\_double\_elt, [532](#)
- rns\_double\_elt\_cstptr, [535](#)
- rns\_double\_elt\_ptr, [538](#)
- \_\_basis  
rns\_double, [530](#)
- rns\_double\_extended, [541](#)
- \_\_basisMax

- rns\_double, [530](#)
- rns\_double\_extended, [541](#)
- \_coo
  - SpMat< Field, flag >, [756](#)
- \_coo16
  - CooMat< Field >, [435](#)
- \_coo16\_zo
  - CooMat< Field >, [435](#)
- \_coo32
  - CooMat< Field >, [435](#)
- \_coo32\_zo
  - CooMat< Field >, [435](#)
- \_coo64
  - CooMat< Field >, [435](#)
- \_coo64\_zo
  - CooMat< Field >, [435](#)
- \_crt\_in
  - rns\_double, [531](#)
  - rns\_double\_extended, [541](#)
- \_crt\_out
  - rns\_double, [531](#)
  - rns\_double\_extended, [541](#)
- \_csr
  - SpMat< Field, flag >, [756](#)
- \_csr16
  - CsrMat< Field >, [437](#)
- \_csr16\_zo
  - CsrMat< Field >, [437](#)
- \_csr32
  - CsrMat< Field >, [437](#)
- \_csr32\_zo
  - CsrMat< Field >, [437](#)
- \_csr64
  - CsrMat< Field >, [437](#)
- \_csr64\_zo
  - CsrMat< Field >, [437](#)
- \_ell
  - SpMat< Field, flag >, [756](#)
- \_ell16
  - EllMat< Field >, [443](#)
- \_ell16\_zo
  - EllMat< Field >, [443](#)
- \_ell32
  - EllMat< Field >, [443](#)
- \_ell32\_zo
  - EllMat< Field >, [444](#)
- \_ell64
  - EllMat< Field >, [443](#)
- \_ell64\_zo
  - EllMat< Field >, [444](#)
- \_errorStream
  - Failure, [445](#)
- \_field\_rns
  - rns\_double, [530](#)
  - rns\_double\_extended, [541](#)
- \_iM\_modp\_rns
  - RNSIntegerMod< RNS >, [551](#)
- \_ibeg
  - ForStrategy2D< blocksize\_t, Cut, Param >, [465](#)
- \_iend
  - ForStrategy2D< blocksize\_t, Cut, Param >, [465](#)
- \_invbasis
  - rns\_double, [530](#)
  - rns\_double\_extended, [541](#)
- \_jbeg
  - ForStrategy2D< blocksize\_t, Cut, Param >, [465](#)
- \_jend
  - ForStrategy2D< blocksize\_t, Cut, Param >, [465](#)
- \_ldm
  - rns\_double, [531](#)
  - rns\_double\_extended, [541](#)
- \_mi\_sum
  - rns\_double, [531](#)
- \_mm
  - Test< Elt >, [764](#)
- \_negbasis
  - rns\_double, [530](#)
  - rns\_double\_extended, [541](#)
- \_nn
  - Test< Elt >, [764](#)
- \_p
  - RNSIntegerMod< RNS >, [551](#)
- \_pbits
  - rns\_double, [531](#)
  - rns\_double\_extended, [541](#)
- \_ptr
  - rns\_double\_elt, [532](#)
  - rns\_double\_elt\_cstptr, [535](#)
  - rns\_double\_elt\_ptr, [538](#)
- \_rns
  - RNSInteger< RNS >, [545](#)
  - RNSIntegerMod< RNS >, [551](#)
- \_simd512\_int64\_INL
  - simd512\_int64.inl, [881](#)
- \_size
  - rns\_double, [531](#)
  - rns\_double\_extended, [541](#)
- \_stride
  - rns\_double\_elt, [532](#)
  - rns\_double\_elt\_cstptr, [535](#)
  - rns\_double\_elt\_ptr, [538](#)
- \_zero
  - ScalFunctionsBase< Element, typename enable\_if< is\_floating\_point< Element >::value >::type >, [560](#)
  - ScalFunctionsBase< Element, typename enable\_if< is\_integral< Element >::value >::type >, [563](#)
- ~CheckerImplem\_Det
  - CheckerImplem\_Det< Field >, [415](#)
- ~CheckerImplem\_PLUQ
  - CheckerImplem\_PLUQ< Field >, [420](#)
- ~CheckerImplem\_charpoly
  - CheckerImplem\_charpoly< Field, Polynomial >, [413](#)
  - CheckerImplem\_charpoly< Givaro::ZRing< Givaro::Integer >, Polynomial >, [414](#)



- ~CheckerImplem\_fgemm
  - CheckerImplem\_fgemm< Field >, 417
- ~CheckerImplem\_ftsm
  - CheckerImplem\_ftsm< Field >, 418
- ~CheckerImplem\_invert
  - CheckerImplem\_invert< Field >, 419
- ~rns\_double\_elt
  - rns\_double\_elt, 532
- 101-fgemm.C, 1104
  - main, 1105
- 2x2-fgemm.C, 1105
  - main, 1105
- 2x2-ftsv.C, 1105
  - main, 1105
- 2x2-pluq.C, 1106
  - main, 1106
- add
  - FFLAS::vectorised, 281
  - FieldSimd< \_Field >, 448
  - RNSIntegerMod< RNS >, 549
  - ScalFunctions< Element >, 555
  - Simd128\_impl< true, true, false, 2 >, 572
  - Simd128\_impl< true, true, false, 4 >, 581
  - Simd128\_impl< true, true, false, 8 >, 592
  - Simd128\_impl< true, true, true, 2 >, 599
  - Simd128\_impl< true, true, true, 4 >, 608
  - Simd128\_impl< true, true, true, 8 >, 617
  - Simd256\_impl< true, false, true, 8 >, 628
  - Simd256\_impl< true, true, false, 2 >, 639
  - Simd256\_impl< true, true, false, 4 >, 655
  - Simd256\_impl< true, true, false, 8 >, 667
  - Simd256\_impl< true, true, true, 2 >, 675
  - Simd256\_impl< true, true, true, 4 >, 685, 691
  - Simd256\_impl< true, true, true, 8 >, 701
  - Simd512\_impl< true, false, true, 8 >, 710
  - Simd512\_impl< true, true, false, 8 >, 721
  - Simd512\_impl< true, true, true, 8 >, 729
- add\_r
  - FieldSimd< \_Field >, 449
- addin
  - FieldSimd< \_Field >, 449
  - ScalFunctions< Element >, 555
  - Simd128\_impl< true, true, false, 2 >, 572
  - Simd128\_impl< true, true, false, 4 >, 582
  - Simd128\_impl< true, true, false, 8 >, 592
  - Simd128\_impl< true, true, true, 2 >, 600
  - Simd128\_impl< true, true, true, 4 >, 608
  - Simd128\_impl< true, true, true, 8 >, 618
  - Simd256\_impl< true, false, true, 8 >, 628
  - Simd256\_impl< true, true, false, 2 >, 639
  - Simd256\_impl< true, true, false, 4 >, 655, 656
  - Simd256\_impl< true, true, false, 8 >, 667
  - Simd256\_impl< true, true, true, 2 >, 675
  - Simd256\_impl< true, true, true, 4 >, 685, 691
  - Simd256\_impl< true, true, true, 8 >, 701
  - Simd512\_impl< true, false, true, 8 >, 710
  - Simd512\_impl< true, true, false, 8 >, 721
  - Simd512\_impl< true, true, true, 8 >, 729
- addin\_r
  - FieldSimd< \_Field >, 449
- addp
  - FFLAS::vectorised, 280
- AlgoChooser< ModeCategories::ConvertTo< Element-  
Categories::RNSElementTag >, ParSeq >, 401
  - value, 401
- AlgoChooser< ModeT, ParSeq >, 401
  - value, 401
- align-allocator.h, 1040
- alignable
  - FFLAS, 188
- alignable< Givaro::Integer \* >
  - FFLAS, 188
- aligned\_allocator
  - NoSimd< T >, 521
  - Simd128\_impl< true, true, false, 2 >, 566
  - Simd128\_impl< true, true, false, 4 >, 576
  - Simd128\_impl< true, true, false, 8 >, 586
  - Simd128\_impl< true, true, true, 2 >, 596
  - Simd128\_impl< true, true, true, 4 >, 605
  - Simd128\_impl< true, true, true, 8 >, 615
  - Simd256\_impl< true, false, true, 8 >, 625
  - Simd256\_impl< true, true, false, 2 >, 633
  - Simd256\_impl< true, true, false, 4 >, 645
  - Simd256\_impl< true, true, false, 8 >, 662
  - Simd256\_impl< true, true, true, 2 >, 671
  - Simd256\_impl< true, true, true, 4 >, 682
  - Simd256\_impl< true, true, true, 8 >, 698
  - Simd512\_impl< true, false, true, 8 >, 707
  - Simd512\_impl< true, true, false, 8 >, 715
  - Simd512\_impl< true, true, true, 8 >, 726
- aligned\_vector
  - NoSimd< T >, 521
  - Simd128\_impl< true, true, false, 2 >, 566
  - Simd128\_impl< true, true, false, 4 >, 576
  - Simd128\_impl< true, true, false, 8 >, 586
  - Simd128\_impl< true, true, true, 2 >, 597
  - Simd128\_impl< true, true, true, 4 >, 606
  - Simd128\_impl< true, true, true, 8 >, 615
  - Simd256\_impl< true, false, true, 8 >, 625
  - Simd256\_impl< true, true, false, 2 >, 633
  - Simd256\_impl< true, true, false, 4 >, 645
  - Simd256\_impl< true, true, false, 8 >, 662
  - Simd256\_impl< true, true, true, 2 >, 671
  - Simd256\_impl< true, true, true, 4 >, 682
  - Simd256\_impl< true, true, true, 8 >, 698
  - Simd512\_impl< true, false, true, 8 >, 707
  - Simd512\_impl< true, true, false, 8 >, 715
  - Simd512\_impl< true, true, true, 8 >, 726
- alignment
  - FieldSimd< \_Field >, 452
  - NoSimd< T >, 521
  - Simd128\_impl< true, true, false, 2 >, 574
  - Simd128\_impl< true, true, false, 4 >, 584
  - Simd128\_impl< true, true, false, 8 >, 594
  - Simd128\_impl< true, true, true, 2 >, 603



- Simd128\_impl< true, true, true, 4 >, [612](#)
- Simd128\_impl< true, true, true, 8 >, [622](#)
- Simd256\_impl< true, false, true, 8 >, [631](#)
- Simd256\_impl< true, true, false, 2 >, [641](#)
- Simd256\_impl< true, true, false, 4 >, [659](#)
- Simd256\_impl< true, true, false, 8 >, [669](#)
- Simd256\_impl< true, true, true, 2 >, [678](#)
- Simd256\_impl< true, true, true, 4 >, [695](#)
- Simd256\_impl< true, true, true, 8 >, [704](#)
- Simd512\_impl< true, false, true, 8 >, [712](#)
- Simd512\_impl< true, true, false, 8 >, [723](#)
- Simd512\_impl< true, true, true, 8 >, [733](#)
- ALL< false, v... >, [402](#)
  - value, [402](#)
- ALL< true, v... >, [402](#)
  - value, [402](#)
- ALL< v >, [401](#)
- ALL<>, [402](#)
  - value, [402](#)
- Amax
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [502](#)
- Amin
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [502](#)
- applyP
  - FFPACK, [304](#), [305](#), [365](#)
- applyP\_block
  - FFPACK, [357](#)
- applyP\_modular\_double
  - ffpack.C, [990](#)
  - ffpack\_c.h, [1011](#)
- ArbitraryPreIntTag, [402](#)
- Architecture of the library., [2](#)
- areEqual
  - RNSIntegerMod< RNS >, [550](#)
- AreEqual< X, X >, [403](#)
  - value, [403](#)
- AreEqual< X, Y >, [403](#)
  - value, [403](#)
- args-parser.h, [1040](#)
  - ArgumentType, [1041](#)
  - END\_OF\_ARGUMENTS, [1041](#)
  - findArgument, [1042](#)
  - getListArgs, [1042](#)
  - printHelpMessage, [1042](#)
  - TYPE\_BOOL, [1041](#)
  - TYPE\_DOUBLE, [1041](#)
  - TYPE\_INT, [1041](#)
  - TYPE\_INTEGER, [1041](#)
  - type\_integer, [1041](#)
  - TYPE\_INTLIST, [1041](#)
  - TYPE\_LONGLONG, [1041](#)
  - TYPE\_NONE, [1041](#)
  - TYPE\_STR, [1041](#)
  - TYPE\_UINT64, [1041](#)
- Argument, [403](#)
  - c, [403](#)
  - data, [404](#)
  - example, [403](#)
  - helpString, [403](#)
  - type, [404](#)
- ArgumentType
  - args-parser.h, [1041](#)
- ArithProg
  - FFPACK::Protected, [395](#)
- arithprog.C, [773](#)
  - main, [773](#)
  - TTimer, [773](#)
- assign
  - RNSInteger< RNS >, [545](#)
  - RNSIntegerMod< RNS >, [549](#)
- associatedDelayedField< const FFPACK::RNSIntegerMod< RNS > >, [404](#)
  - field, [404](#)
  - type, [404](#)
- associatedDelayedField< const Givaro::Modular< T, X > >, [405](#)
  - field, [405](#)
  - type, [405](#)
- associatedDelayedField< const Givaro::ModularBalanced< T > >, [405](#)
  - field, [405](#)
  - type, [405](#)
- associatedDelayedField< const Givaro::ZRing< T > >, [406](#)
  - field, [406](#)
  - type, [406](#)
- associatedDelayedField< Field >, [404](#)
  - field, [404](#)
  - type, [404](#)
- assume\_aligned
  - fflas\_sparse.h, [885](#)
- AtlasConj
  - config-blas.h, [812](#)
- Aunfit
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [501](#)
- aut
  - HelperFlag, [474](#)
- Auto, [406](#)
- averageCol
  - StatsMatrix, [758](#)
- averageColDifference
  - StatsMatrix, [758](#)
- averageRow
  - StatsMatrix, [758](#)
- averageRowDifference
  - StatsMatrix, [758](#)
- axpy
  - FieldSimd< \_Field >, [451](#)
- axpy\_r
  - FieldSimd< \_Field >, [451](#)
- axpyin
  - FieldSimd< \_Field >, [451](#)
  - RNSIntegerMod< RNS >, [550](#)

- axpyin\_r
  - FieldSimd< \_Field >, 451
- axpyp
  - FFLAS::vectorised, 281
  - FFLAS::vectorised::unswitch, 285
- balanced
  - FieldTraits< FFPACK::RNSInteger< T > >, 453
  - FieldTraits< FFPACK::RNSIntegerMod< T > >, 454
  - FieldTraits< Field >, 453
  - FieldTraits< Givaro::Modular< Element > >, 454
  - FieldTraits< Givaro::ModularBalanced< Element > >, 455
  - FieldTraits< Givaro::ZRing< double > >, 455
  - FieldTraits< Givaro::ZRing< float > >, 456
  - FieldTraits< Givaro::ZRing< Givaro::Integer > >, 456
  - FieldTraits< Givaro::ZRing< int16\_t > >, 457
  - FieldTraits< Givaro::ZRing< int32\_t > >, 457
  - FieldTraits< Givaro::ZRing< int64\_t > >, 458
  - FieldTraits< Givaro::ZRing< Reclnt::ruint< K > >, 458
  - FieldTraits< Givaro::ZRing< uint16\_t > >, 459
  - FieldTraits< Givaro::ZRing< uint32\_t > >, 459
  - FieldTraits< Givaro::ZRing< uint64\_t > >, 459
  - winograd.C, 779
- BARRIER
  - parallel.h, 1033
- BASECASE\_K
  - test-lu.C, 1089
- BaseTimer
  - FFLAS, 74
- BasisElement
  - rns\_double, 528
  - rns\_double\_extended, 539
  - RNSInteger< RNS >, 543
  - RNSIntegerMod< RNS >, 547
- begin
  - ForStrategy1D< blocksize\_t, Cut, Param >, 462
  - Info, 479, 480
- BEGIN\_PARALLEL\_MAIN
  - parallel.h, 1034
- Bench
  - Bench< Elt >, 408
- Bench< Elt >, 406
  - Bench, 408
  - cardinality, 408
  - doBenchs, 408
  - Elt\_ptr, 407
  - enable\_if\_no\_simd\_t, 407
  - enable\_if\_simd128\_t, 407
  - enable\_if\_simd256\_t, 407
  - enable\_if\_simd512\_t, 407
  - enable\_if\_t, 407
  - F, 408
  - Field, 407
  - inplace, 409
  - is\_same\_element, 407
  - iters, 409
  - m, 408
  - n, 408
  - Residu, 407
  - run, 408
- benchmark-charpoly-mp.C, 779
  - \_\_FFLASFFPACK\_FORCE\_SEQ, 779
  - main, 779
- benchmark-charpoly.C, 779
  - \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET, 780
  - main, 780
  - run\_with\_field, 780
- benchmark-checkers.C, 780
  - \_MAX\_SIZE\_MATRICES, 781
  - \_NR\_TESTS, 781
  - CUBE, 781
  - ENABLE\_ALL\_CHECKINGS, 781
  - main, 781
- benchmark-dgemm.C, 781
  - CBLAS\_GEMM, 782
  - Floats, 782
  - main, 782
  - TTimer, 782
- benchmark-dgetrf.C, 782
  - \_\_FFLASFFPACK\_HAVE\_DGETRF, 782
  - main, 783
- benchmark-dgetri.C, 783
  - main, 783
- benchmark-dsytrf.C, 783
  - EFFGFF, 783
  - main, 784
- benchmark-dtrsm.C, 784
  - main, 784
- benchmark-dtrtri.C, 784
  - \_\_FFLASFFPACK\_HAVE\_DTRTRI, 785
  - main, 785
- benchmark-fadd-lvl2.C, 785
  - \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET, 785
  - main, 785
- benchmark-fdot.C, 785
  - \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET, 786
  - main, 786
  - run\_with\_field, 786
- benchmark-fgemm-mp.C, 786
  - \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET, 787
  - main, 787
  - MG\_DEFAULT, 787
  - STD\_RECINT\_SIZE, 787
  - tmain, 787
- benchmark-fgemm-rns.C, 787
  - \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET, 788
  - ConstElement\_ptr, 788
  - Element\_ptr, 788

- Field, [788](#)
- GRAIN, [788](#)
- main, [789](#)
- PSeq, [789](#)
- RNS, [788](#)
- THREADS, [788](#)
- THREED, [788](#)
- THREEDA, [788](#)
- THREEDIP, [788](#)
- TWOD, [788](#)
- TWODA, [788](#)
- benchmark-fgemm.C, [789](#)
  - CLASSIC\_HYBRID, [789](#)
  - main, [789](#)
- benchmark-fgemv-mp.C, [789](#)
  - \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET, [790](#)
  - main, [790](#)
  - MG\_DEFAULT, [790](#)
  - STD\_RECINT\_SIZE, [790](#)
  - tmain, [790](#)
  - write\_matrix, [790](#)
- benchmark-fgemv.C, [791](#)
  - \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET, [791](#)
  - benchmark\_disp, [793](#)
  - benchmark\_in\_Field, [793](#)
  - benchmark\_with\_field, [793](#)
  - benchmark\_with\_timer, [792](#)
  - check\_result, [792](#)
  - fill\_value, [792](#)
  - genData, [792](#)
  - main, [794](#)
- benchmark-fgesv.C, [794](#)
  - \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET, [794](#)
  - main, [794](#)
- benchmark-fsyr2k.C, [794](#)
  - main, [795](#)
- benchmark-fsyrk.C, [795](#)
  - \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET, [795](#)
  - main, [795](#)
- benchmark-fsytrf.C, [795](#)
  - \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET, [796](#)
  - \_\_FFPACK\_FSYTRF\_BC\_CROUT, [796](#)
  - CUBE, [796](#)
  - main, [796](#)
- benchmark-ftdsm-mp.C, [796](#)
  - \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET, [796](#)
  - main, [797](#)
- benchmark-ftdsm.C, [797](#)
  - \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET, [797](#)
  - main, [797](#)
- benchmark-ftsv.C, [797](#)
  - \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET, [798](#)
  - main, [798](#)
- benchmark-fttri.C, [798](#)
  - \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET, [798](#)
  - CUBE, [798](#)
  - main, [798](#)
- benchmark-inverse.C, [798](#)
  - CUBE, [799](#)
  - main, [799](#)
- benchmark-lqup-mp.C, [799](#)
  - main, [799](#)
- benchmark-lqup.C, [800](#)
  - CUBE, [800](#)
  - main, [800](#)
- benchmark-pluq.C, [800](#)
  - \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET, [801](#)
  - CUBE, [801](#)
  - Field, [801](#)
  - main, [801](#)
  - Rec\_Initialize, [801](#)
  - verification\_PLUQ, [801](#)
- benchmark-quasisep.C, [801](#)
  - \_\_FFLASFFPACK\_OPENBLAS\_NT\_ALREADY\_SET, [802](#)
  - main, [802](#)
  - run\_with\_field, [802](#)
- benchmark-storage-transpose.C, [802](#)
  - main, [803](#)
- benchmark-wino.C, [803](#)
  - CUBE, [803](#)
  - launch\_wino, [803](#)
  - main, [803](#)
- benchmark\_disp
  - benchmark-fgemv.C, [793](#)
- benchmark\_in\_Field
  - benchmark-fgemv.C, [793](#)
- benchmark\_with\_field
  - benchmark-fgemv.C, [793](#)
- benchmark\_with\_timer
  - benchmark-fgemv.C, [792](#)
- Bibliography, [7](#)
- Bini, [409](#)
  - FFLAS::BLAS3, [192](#)
- bit\_manipulation.h, [1042](#)
  - \_\_has\_builtin, [1042](#)
  - clz, [1043](#)
  - ctz, [1043](#)
- bitsize
  - FFLAS, [140](#)
- bitsize< Givaro::ZRing< Givaro::Integer > >
  - FFLAS, [140](#)
- blas\_enum
  - config-blas.h, [811](#)
- blend
  - ScalFunctions< Element >, [558](#)

- Simd128\_impl< true, true, false, 2 >, [572](#)
- Simd128\_impl< true, true, false, 4 >, [581](#)
- Simd128\_impl< true, true, false, 8 >, [591](#)
- Simd128\_impl< true, true, true, 2 >, [599](#)
- Simd128\_impl< true, true, true, 4 >, [608](#)
- Simd128\_impl< true, true, true, 8 >, [617](#)
- Simd256\_impl< true, false, true, 8 >, [628](#)
- Simd256\_impl< true, true, false, 2 >, [639](#)
- Simd256\_impl< true, true, false, 4 >, [655](#)
- Simd256\_impl< true, true, false, 8 >, [667](#)
- Simd256\_impl< true, true, true, 2 >, [675](#)
- Simd256\_impl< true, true, true, 4 >, [685](#), [691](#)
- Simd256\_impl< true, true, true, 8 >, [700](#)
- Simd512\_impl< true, false, true, 8 >, [709](#)
- Simd512\_impl< true, true, false, 8 >, [721](#)
- Simd512\_impl< true, true, true, 8 >, [729](#)
- blendv
  - ScalFunctionsBase< Element, typename enable\_if< Bruhat2EchelonPermutation  
is\_floating\_point< Element >::value >::type  
>, [559](#)
  - Simd256\_impl< true, false, true, 8 >, [628](#)
  - Simd512\_impl< true, false, true, 8 >, [710](#)
- Block, [409](#)
- BlockCuts
  - FFLAS, [179](#), [181](#)
- BlockCuts< CuttingStrategy::Block, StrategyParameter::Fixed >
  - FFLAS, [180](#)
- BlockCuts< CuttingStrategy::Block, StrategyParameter::Grain >
  - FFLAS, [179](#)
- BlockCuts< CuttingStrategy::Block, StrategyParameter::Threads >
  - FFLAS, [181](#)
- BlockCuts< CuttingStrategy::Column, StrategyParameter::Fixed >
  - FFLAS, [180](#)
- BlockCuts< CuttingStrategy::Column, StrategyParameter::Grain >
  - FFLAS, [180](#)
- BlockCuts< CuttingStrategy::Column, StrategyParameter::Threads >
  - FFLAS, [180](#)
- BlockCuts< CuttingStrategy::Row, StrategyParameter::Fixed >
  - FFLAS, [179](#)
- BlockCuts< CuttingStrategy::Row, StrategyParameter::Grain >
  - FFLAS, [179](#)
- BlockCuts< CuttingStrategy::Row, StrategyParameter::Threads >
  - FFLAS, [180](#)
- BlockCuts< CuttingStrategy::Single, StrategyParameter::Threads >
  - FFLAS, [179](#)
- blockcuts.inl, [1030](#)
  - \_\_FFLASFFPACK\_MINBLOCKCUTS, [1031](#)
  - \_\_FFLASFFPACK\_fflas\_blockcuts\_INL, [1031](#)
- blockindex
  - ForStrategy1D< blocksize\_t, Cut, Param >, [462](#)
  - ForStrategy2D< blocksize\_t, Cut, Param >, [465](#)
- BlockingFactor
  - FFLAS::details, [206](#)
- BLOCKS
  - ForStrategy2D< blocksize\_t, Cut, Param >, [466](#)
- BlockTransposeSIMD< Field, Simd, >, [409](#)
  - info, [409](#)
  - size, [409](#)
  - transpose, [410](#)
- Bmax
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [502](#)
- Bmin
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [502](#)
- Bruhat2EchelonPermutation
  - FFPACK, [345](#)
- Bug List, [3](#)
- build
  - ForStrategy1D< blocksize\_t, Cut, Param >, [461](#)
- buildMatrix
  - FFPACK, [351](#)
- Bunfit
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [501](#)
- c
  - Argument, [403](#)
- callLUdivine\_small< double >, [411](#)
  - operator(), [411](#)
- callLUdivine\_small< Element >, [411](#)
  - operator(), [411](#)
- callLUdivine\_small< float >, [412](#)
  - operator(), [412](#)
- cardinality
  - Bench< Elt >, [408](#)
  - RNSInteger< RNS >, [544](#)
  - RNSIntegerMod< RNS >, [548](#)
  - Test< Elt >, [763](#)
- cast.h, [1043](#)
- category
  - FieldTraits< FFPACK::RNSInteger< T > >, [453](#)
  - FieldTraits< FFPACK::RNSIntegerMod< T > >, [454](#)
  - FieldTraits< Field >, [453](#)
  - FieldTraits< Givaro::Modular< Element > >, [454](#)
  - FieldTraits< Givaro::ModularBalanced< Element > >, [455](#)
  - FieldTraits< Givaro::ZRing< double > >, [455](#)
  - FieldTraits< Givaro::ZRing< float > >, [456](#)
  - FieldTraits< Givaro::ZRing< Givaro::Integer > >, [456](#)
  - FieldTraits< Givaro::ZRing< int16\_t > >, [457](#)
  - FieldTraits< Givaro::ZRing< int32\_t > >, [457](#)
  - FieldTraits< Givaro::ZRing< int64\_t > >, [457](#)
  - FieldTraits< Givaro::ZRing< ReclInt::ruint< K > >, [458](#)

- FieldTraits< Givaro::ZRing< uint16\_t > >, [458](#)
- FieldTraits< Givaro::ZRing< uint32\_t > >, [459](#)
- FieldTraits< Givaro::ZRing< uint64\_t > >, [459](#)
- cblas.C, [1050](#)
  - \_\_FFLASFFPACK\_CONFIGURATION, [1051](#)
  - \_\_FFLASFFPACK\_HAVE\_CBLAS, [1051](#)
  - main, [1051](#)
- CBLAS\_DIAG
  - config-blas.h, [812](#)
- cblas\_dsyrc
  - config-blas.h, [816](#)
- CBLAS\_ENUM\_DEFINED\_H
  - config-blas.h, [811](#)
- CBLAS\_EXTERNALS
  - config-blas.h, [811](#)
- CBLAS\_GEMM
  - benchmark-dgemm.C, [782](#)
- cblas\_imptrsm
  - FFLAS, [127](#)
- CBLAS\_INT
  - config-blas.h, [811](#)
- CBLAS\_ORDER
  - config-blas.h, [811](#)
- CBLAS\_SIDE
  - config-blas.h, [812](#)
- CBLAS\_TRANSPOSE
  - config-blas.h, [811](#)
- CBLAS\_UPLO
  - config-blas.h, [812](#)
- CblasColMajor
  - config-blas.h, [811](#)
- CblasConjTrans
  - config-blas.h, [812](#)
- CblasLeft
  - config-blas.h, [812](#)
- CblasLower
  - config-blas.h, [812](#)
- CblasNonUnit
  - config-blas.h, [812](#)
- CblasNoTrans
  - config-blas.h, [812](#)
- CblasRight
  - config-blas.h, [812](#)
- CblasRowMajor
  - config-blas.h, [811](#)
- CblasTrans
  - config-blas.h, [812](#)
- CblasUnit
  - config-blas.h, [812](#)
- CblasUpper
  - config-blas.h, [812](#)
- ceil
  - ScalFunctionsBase< Element, typename enable\_if< is\_floating\_point< Element >::value >::type >, [559](#)
  - Simd256\_impl< true, false, true, 8 >, [630](#)
  - Simd512\_impl< true, false, true, 8 >, [712](#)
- changeBS
  - ForStrategy1D< blocksize\_t, Cut, Param >, [463](#)
- changeCBS
  - ForStrategy2D< blocksize\_t, Cut, Param >, [466](#)
- changeRBS
  - ForStrategy2D< blocksize\_t, Cut, Param >, [466](#)
- characteristic
  - RNSInteger< RNS >, [544](#)
  - RNSIntegerMod< RNS >, [548](#)
- CharPoly
  - FFPACK, [323](#), [324](#), [351](#), [369](#), [370](#)
- charpoly.C, [773](#), [774](#)
  - CUBE, [774](#)
  - GFOPS, [774](#)
  - main, [774](#)
  - TTimer, [774](#)
- CharpolyFailed, [412](#)
- check
  - Checker\_Empty< Field >, [413](#)
  - CheckerImplem\_charpoly< Field, Polynomial >, [414](#)
  - CheckerImplem\_charpoly< Givaro::ZRing< Givaro::Integer >, Polynomial >, [415](#)
  - CheckerImplem\_Det< Field >, [415](#)
  - CheckerImplem\_fgemm< Field >, [418](#)
  - CheckerImplem\_ftsm< Field >, [419](#)
  - CheckerImplem\_invert< Field >, [420](#)
  - CheckerImplem\_PLUQ< Field >, [420](#)
- check1
  - regression-check.C, [1053](#)
- check2
  - regression-check.C, [1053](#)
- check3
  - regression-check.C, [1054](#)
- check4
  - regression-check.C, [1054](#)
- check\_computeS1S2
  - test-fsyrc.C, [1076](#)
- CHECK\_DEPENDENCIES
  - parallel.h, [1033](#)
- check\_eq
  - test-simd.C, [1102](#)
- check\_fdot
  - test-fdot.C, [1062](#)
- check\_fger
  - test-fger.C, [1069](#)
- check\_fsyr2k
  - test-fsyr2k.C, [1074](#)
- check\_fsyrc
  - test-fsyrc.C, [1075](#)
- check\_fsyrc\_bkdiag
  - test-fsyrc.C, [1076](#)
- check\_fsyrc\_diag
  - test-fsyrc.C, [1075](#)
- check\_ftmm
  - test-ftmm.C, [1078](#)
- check\_ftmmv
  - test-ftmmv.C, [1080](#)
- check\_ftsm

- test-ftrsm.C, [1081](#)
- check\_ftrssyr2k
  - test-ftrssyr2k.C, [1082](#)
- check\_ftrstr
  - test-ftrstr.C, [1084](#)
- check\_ftrsv
  - test-ftrsv.C, [1085](#)
- check\_ftrtri
  - test-ftrtri.C, [1086](#)
- check\_minpoly
  - test-minpoly.C, [1093](#)
- check\_MM
  - test-fgemm.C, [1065](#)
- check\_MV
  - test-fgemv.C, [1067](#)
- check\_result
  - benchmark-fgemv.C, [792](#)
- check\_solve
  - test-solve.C, [1103](#)
- checkA
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [501](#)
- checkB
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [501](#)
- CHECKER, [41](#)
- Checker\_charpoly
  - FFPACK, [303](#)
- checker\_charpoly.inl, [805](#)
  - \_\_FFLASFFPACK\_checker\_charpoly\_INL, [806](#)
- Checker\_Det
  - FFPACK, [303](#)
- checker\_det.inl, [806](#)
  - \_\_FFLASFFPACK\_checker\_det\_INL, [806](#)
- Checker\_Empty
  - Checker\_Empty< Field >, [413](#)
- Checker\_Empty< Field >, [412](#)
  - check, [413](#)
  - Checker\_Empty, [413](#)
- checker\_empty.h, [806](#)
- Checker\_fgemm
  - FFLAS, [72](#)
- checker\_fgemm.inl, [806](#)
  - \_\_FFLASFFPACK\_checker\_fgemm\_INL, [807](#)
- Checker\_ftrsm
  - FFLAS, [72](#)
- checker\_ftrsm.inl, [807](#)
  - \_\_FFLASFFPACK\_checker\_ftrsm\_INL, [807](#)
- Checker\_invert
  - FFPACK, [303](#)
- checker\_invert.inl, [807](#)
  - \_\_FFLASFFPACK\_checker\_invert\_INL, [807](#)
- Checker\_PLUQ
  - FFPACK, [303](#)
- checker\_pluq.inl, [807](#)
  - \_\_FFLASFFPACK\_checker\_pluq\_INL, [808](#)
- CheckerImplem\_charpoly
  - CheckerImplem\_charpoly< Field, Polynomial >, [413](#)
  - CheckerImplem\_charpoly< Givaro::ZRing< Givaro::Integer >, Polynomial >, [414](#)
  - CheckerImplem\_charpoly< Field, Polynomial >, [413](#)
    - ~CheckerImplem\_charpoly, [413](#)
  - check, [414](#)
  - CheckerImplem\_charpoly, [413](#)
  - CheckerImplem\_charpoly< Givaro::ZRing< Givaro::Integer >, Polynomial >, [414](#)
    - ~CheckerImplem\_charpoly, [414](#)
  - check, [415](#)
  - CheckerImplem\_charpoly, [414](#)
  - Ring, [414](#)
- CheckerImplem\_Det
  - CheckerImplem\_Det< Field >, [415](#)
- CheckerImplem\_Det< Field >, [415](#)
  - ~CheckerImplem\_Det, [415](#)
- check, [415](#)
- CheckerImplem\_Det, [415](#)
- CheckerImplem\_fgemm
  - CheckerImplem\_fgemm< Field >, [417](#)
- CheckerImplem\_fgemm< Field >, [417](#)
  - ~CheckerImplem\_fgemm, [417](#)
- check, [418](#)
- CheckerImplem\_fgemm, [417](#)
- CheckerImplem\_ftrsm
  - CheckerImplem\_ftrsm< Field >, [418](#)
- CheckerImplem\_ftrsm< Field >, [418](#)
  - ~CheckerImplem\_ftrsm, [418](#)
- check, [419](#)
- CheckerImplem\_ftrsm, [418](#)
- CheckerImplem\_invert
  - CheckerImplem\_invert< Field >, [419](#)
- CheckerImplem\_invert< Field >, [419](#)
  - ~CheckerImplem\_invert, [419](#)
- check, [420](#)
- CheckerImplem\_invert, [419](#)
- CheckerImplem\_PLUQ
  - CheckerImplem\_PLUQ< Field >, [420](#)
- CheckerImplem\_PLUQ< Field >, [420](#)
  - ~CheckerImplem\_PLUQ, [420](#)
- check, [420](#)
- CheckerImplem\_PLUQ, [420](#)
- checkers.doxy, [808](#)
- checkers\_fflas.h, [808](#)
- checkers\_fflas.inl, [808](#)
  - FFLASFFPACK\_checkers\_fflas\_inl\_H, [809](#)
- checkers\_ffpack.h, [809](#)
- checkers\_ffpack.inl, [809](#)
  - FFLASFFPACK\_checkers\_ffpack\_inl\_H, [810](#)
- checkingMessage
  - test-nullspace.C, [1094](#)
- checkMonotonicApplyP
  - test-permutations.C, [1096](#)
- checkOut
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [501](#)

- checkRPM
  - test-rpm.C, [1099](#)
- checkSymmetricRPM
  - test-rpm.C, [1099](#)
- checkZeroDimCharpoly
  - regression-check.C, [1054](#)
- checkZeroDimMinPoly
  - regression-check.C, [1054](#)
- chooseField
  - FFPACK, [390](#)
- chooseField< Givaro::ZRing< double > >
  - FFPACK, [391](#)
- chooseField< Givaro::ZRing< float > >
  - FFPACK, [390](#)
- chooseField< Givaro::ZRing< int32\_t > >
  - FFPACK, [390](#)
- chooseField< Givaro::ZRing< int64\_t > >
  - FFPACK, [390](#)
- chunk
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd >, [746](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd\_ZO >, [748](#)
  - Sparse< \_Field, SparseMatrix\_t::SELL >, [752](#)
  - Sparse< \_Field, SparseMatrix\_t::SELL\_ZO >, [755](#)
- chunkSize
  - Sparse< \_Field, SparseMatrix\_t::SELL >, [753](#)
  - Sparse< \_Field, SparseMatrix\_t::SELL\_ZO >, [756](#)
- clapack.C, [1051](#)
  - \_\_FFLASFFPACK\_CONFIGURATION, [1051](#)
  - \_\_FFLASFFPACK\_HAVE\_CLAPACK, [1051](#)
  - \_\_FFLASFFPACK\_HAVE\_LAPACK, [1051](#)
  - main, [1051](#)
- Classic, [421](#)
- CLASSIC\_HYBRID
  - benchmark-fgemm.C, [789](#)
- clz
  - bit\_manipulation.h, [1043](#)
- Cmax
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [502](#)
- Cmin
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [502](#)
- cmp
  - test-simd.C, [1102](#)
- cmp\_false
  - ScalFunctionsBase< Element, typename enable\_if< is\_floating\_point< Element >::value >::type >, [560](#)
  - ScalFunctionsBase< Element, typename enable\_if< is\_integral< Element >::value >::type >, [563](#)
- cmp\_true
  - ScalFunctionsBase< Element, typename enable\_if< is\_floating\_point< Element >::value >::type >, [560](#)
  - ScalFunctionsBase< Element, typename enable\_if< is\_integral< Element >::value >::type >, [563](#)
- col
  - Coo< Field >, [433](#)
  - Coo< ValT, IdxT >, [431](#), [434](#)
  - Sparse< \_Field, SparseMatrix\_t::COO >, [736](#)
  - Sparse< \_Field, SparseMatrix\_t::COO\_ZO >, [738](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR >, [740](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR\_HYB >, [741](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR\_ZO >, [743](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL >, [745](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd >, [747](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd\_ZO >, [748](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_ZO >, [750](#)
  - Sparse< \_Field, SparseMatrix\_t::SELL >, [753](#)
  - Sparse< \_Field, SparseMatrix\_t::SELL\_ZO >, [756](#)
- colblockindex
  - ForStrategy2D< blocksize\_t, Cut, Param >, [465](#)
- colBlockSize
  - ForStrategy2D< blocksize\_t, Cut, Param >, [466](#)
- coldim
  - StatsMatrix, [757](#)
- colnumblocks
  - ForStrategy2D< blocksize\_t, Cut, Param >, [465](#)
- ColRankProfileSubmatrix
  - FFPACK, [335](#), [374](#)
- ColRankProfileSubmatrix\_modular\_double
  - ffpack.C, [1002](#)
  - ffpack\_c.h, [1022](#)
- ColRankProfileSubmatrixIndices
  - FFPACK, [334](#), [374](#)
- ColRankProfileSubmatrixIndices\_modular\_double
  - ffpack.C, [1002](#)
  - ffpack\_c.h, [1021](#)
- Column, [421](#)
- ColumnEchelonForm
  - FFPACK, [316](#), [317](#), [368](#)
- ColumnEchelonForm\_modular\_double
  - ffpack.C, [992](#)
  - ffpack\_c.h, [1014](#)
- ColumnEchelonForm\_modular\_float
  - ffpack.C, [993](#)
  - ffpack\_c.h, [1015](#)
- ColumnEchelonForm\_modular\_int32\_t
  - ffpack.C, [994](#)
  - ffpack\_c.h, [1015](#)
- ColumnRankProfile
  - FFPACK, [331](#), [332](#), [373](#)
- ColumnRankProfile\_modular\_double
  - ffpack.C, [1001](#)
  - ffpack\_c.h, [1020](#)
- COMMA
  - parallel.h, [1036](#)
- CompactElement< double >, [421](#)
  - type, [422](#)
- CompactElement< Element >, [421](#)
  - type, [421](#)
- CompactElement< float >, [422](#)
  - type, [422](#)



- CompactElement< int16\_t >, [422](#)
  - type, [422](#)
- CompactElement< int32\_t >, [422](#)
  - type, [422](#)
- CompactElement< int64\_t >, [422](#)
  - type, [423](#)
- compatible\_data\_type< Field >, [423](#)
  - value, [423](#)
- compatible\_data\_type< Givaro::ZRing< double > >, [423](#)
  - value, [423](#)
- compatible\_data\_type< Givaro::ZRing< float > >, [423](#)
  - value, [423](#)
- compliant
  - NoSimd< T >, [521](#)
  - Simd128\_impl< true, true, false, 2 >, [569](#)
  - Simd128\_impl< true, true, false, 4 >, [579](#)
  - Simd128\_impl< true, true, false, 8 >, [589](#)
  - Simd128\_impl< true, true, true, 2 >, [597](#)
  - Simd128\_impl< true, true, true, 4 >, [606](#)
  - Simd128\_impl< true, true, true, 8 >, [615](#)
  - Simd256\_impl< true, false, true, 8 >, [626](#)
  - Simd256\_impl< true, true, false, 2 >, [636](#)
  - Simd256\_impl< true, true, false, 4 >, [651](#)
  - Simd256\_impl< true, true, false, 8 >, [665](#)
  - Simd256\_impl< true, true, true, 2 >, [672](#)
  - Simd256\_impl< true, true, true, 4 >, [682](#), [688](#)
  - Simd256\_impl< true, true, true, 8 >, [698](#)
  - Simd512\_impl< true, false, true, 8 >, [707](#)
  - Simd512\_impl< true, true, false, 8 >, [718](#)
  - Simd512\_impl< true, true, true, 8 >, [726](#)
- Compose
  - Compose< H1, H2 >, [424](#)
- Compose< H1, H2 >, [424](#)
  - Compose, [424](#)
  - first\_component, [424](#)
  - operator<<, [425](#)
  - second\_component, [424](#)
- composePermutationsLLL
  - FFPACK, [360](#)
  - ffpack.C, [989](#)
  - ffpack\_c.h, [1011](#)
- composePermutationsLLM
  - FFPACK, [360](#)
  - ffpack.C, [989](#)
  - ffpack\_c.h, [1010](#)
- composePermutationsMLM
  - FFPACK, [361](#)
  - ffpack.C, [989](#)
  - ffpack\_c.h, [1011](#)
- CompressRows
  - FFPACK::Protected, [396](#)
- CompressRowsQA
  - FFPACK::Protected, [397](#)
- CompressRowsQK
  - FFPACK::Protected, [397](#)
- CompressToBlockBiDiagonal
  - FFPACK, [344](#)
- computeDeviation
  - FFLAS, [153](#)
- computeFactorClassic
  - FFLAS::Protected, [212](#)
- ComputeRPermutation
  - FFPACK, [346](#), [348](#)
- computeS1S2
  - FFLAS, [123](#)
- config-blas.h, [810](#)
  - AtlasConj, [812](#)
  - blas\_enum, [811](#)
  - CBLAS\_DIAG, [812](#)
  - cblas\_dsyrk, [816](#)
  - CBLAS\_ENUM\_DEFINED\_H, [811](#)
  - CBLAS\_EXTERNALS, [811](#)
  - CBLAS\_INT, [811](#)
  - CBLAS\_ORDER, [811](#)
  - CBLAS\_SIDE, [812](#)
  - CBLAS\_TRANSPOSE, [811](#)
  - CBLAS\_UPLO, [812](#)
  - CblasColMajor, [811](#)
  - CblasConjTrans, [812](#)
  - CblasLeft, [812](#)
  - CblasLower, [812](#)
  - CblasNonUnit, [812](#)
  - CblasNoTrans, [812](#)
  - CblasRight, [812](#)
  - CblasRowMajor, [811](#)
  - CblasTrans, [812](#)
  - CblasUnit, [812](#)
  - CblasUpper, [812](#)
  - dasum\_, [813](#)
  - daxpy\_, [812](#)
  - dcopy\_, [814](#)
  - ddot\_, [812](#)
  - dgemm\_, [816](#)
  - dgemv\_, [813](#)
  - dger\_, [814](#)
  - dnrm2\_, [813](#)
  - dscal\_, [814](#)
  - dtrmm\_, [815](#)
  - dtrsm\_, [815](#)
  - idamax\_, [813](#)
  - saxpy\_, [812](#)
  - scopy\_, [814](#)
  - sdot\_, [813](#)
  - sgemm\_, [816](#)
  - sgemv\_, [813](#)
  - sger\_, [814](#)
  - sscal\_, [815](#)
  - strmm\_, [815](#)
  - strsm\_, [815](#)
- config.h, [817](#), [820](#)
  - \_\_FFLASFFPACK\_HAVE\_BLAS, [821](#)
  - \_\_FFLASFFPACK\_HAVE\_CBLAS, [821](#)
  - \_\_FFLASFFPACK\_HAVE\_CXX11, [821](#)
  - \_\_FFLASFFPACK\_HAVE\_DLFCN\_H, [821](#)
  - \_\_FFLASFFPACK\_HAVE\_FLOAT\_H, [821](#)



- \_\_FFLASFFPACK\_HAVE\_INTTYPES\_H, 821
- \_\_FFLASFFPACK\_HAVE\_LAPACK, 821
- \_\_FFLASFFPACK\_HAVE\_LIMITS\_H, 821
- \_\_FFLASFFPACK\_HAVE\_LITTLE\_ENDIAN, 821
- \_\_FFLASFFPACK\_HAVE\_PTHREAD\_H, 821
- \_\_FFLASFFPACK\_HAVE\_STDDEF\_H, 821
- \_\_FFLASFFPACK\_HAVE\_STDINT\_H, 821
- \_\_FFLASFFPACK\_HAVE\_STDIO\_H, 821
- \_\_FFLASFFPACK\_HAVE\_STDLIB\_H, 822
- \_\_FFLASFFPACK\_HAVE\_STRINGS\_H, 822
- \_\_FFLASFFPACK\_HAVE\_STRING\_H, 822
- \_\_FFLASFFPACK\_HAVE\_SYS\_STAT\_H, 822
- \_\_FFLASFFPACK\_HAVE\_SYS\_TIME\_H, 822
- \_\_FFLASFFPACK\_HAVE\_SYS\_TYPES\_H, 822
- \_\_FFLASFFPACK\_HAVE\_UNISTD\_H, 822
- \_\_FFLASFFPACK\_LT\_OBJDIR, 822
- \_\_FFLASFFPACK\_OPENBLAS\_NUM\_THREADS, 822
- \_\_FFLASFFPACK\_PACKAGE, 822
- \_\_FFLASFFPACK\_PACKAGE\_BUGREPORT, 822
- \_\_FFLASFFPACK\_PACKAGE\_NAME, 822
- \_\_FFLASFFPACK\_PACKAGE\_STRING, 822
- \_\_FFLASFFPACK\_PACKAGE\_TARNAME, 822
- \_\_FFLASFFPACK\_PACKAGE\_URL, 822
- \_\_FFLASFFPACK\_PACKAGE\_VERSION, 823
- \_\_FFLASFFPACK\_SIZEOF\_CHAR, 823
- \_\_FFLASFFPACK\_SIZEOF\_INT, 823
- \_\_FFLASFFPACK\_SIZEOF\_LONG, 823
- \_\_FFLASFFPACK\_SIZEOF\_LONG\_LONG, 823
- \_\_FFLASFFPACK\_SIZEOF\_SHORT, 823
- \_\_FFLASFFPACK\_SIZEOF\_\_\_INT64\_T, 823
- \_\_FFLASFFPACK\_STDC\_HEADERS, 823
- \_\_FFLASFFPACK\_USE\_OPENMP, 823
- \_\_FFLASFFPACK\_VERSION, 823
- HAVE\_BLAS, 817
- HAVE\_CBLAS, 817
- HAVE\_CXX11, 817
- HAVE\_DLFCN\_H, 818
- HAVE\_FLOAT\_H, 818
- HAVE\_INTTYPES\_H, 818
- HAVE\_LAPACK, 818
- HAVE\_LIMITS\_H, 818
- HAVE\_LITTLE\_ENDIAN, 818
- HAVE\_PTHREAD\_H, 818
- HAVE\_STDDEF\_H, 818
- HAVE\_STDINT\_H, 818
- HAVE\_STDIO\_H, 818
- HAVE\_STDLIB\_H, 818
- HAVE\_STRING\_H, 818
- HAVE\_STRINGS\_H, 818
- HAVE\_SYS\_STAT\_H, 818
- HAVE\_SYS\_TIME\_H, 818
- HAVE\_SYS\_TYPES\_H, 819
- HAVE\_UNISTD\_H, 819
- LT\_OBJDIR, 819
- OPENBLAS\_NUM\_THREADS, 819
- PACKAGE, 819
- PACKAGE\_BUGREPORT, 819
- PACKAGE\_NAME, 819
- PACKAGE\_STRING, 819
- PACKAGE\_TARNAME, 819
- PACKAGE\_URL, 819
- PACKAGE\_VERSION, 819
- SIZEOF\_\_\_INT64\_T, 820
- SIZEOF\_CHAR, 819
- SIZEOF\_INT, 819
- SIZEOF\_LONG, 819
- SIZEOF\_LONG\_LONG, 819
- SIZEOF\_SHORT, 820
- STDC\_HEADERS, 820
- USE\_OPENMP, 820
- VERSION, 820
- Configuring and Installing FFLAS-FFPACK, 2
- CONST
  - fflas\_simd.h, 872
- ConstElement\_ptr
  - benchmark-fgemv-rns.C, 788
  - rns\_double, 528
  - rns\_double\_extended, 539
  - RNSInteger< RNS >, 543
  - RNSIntegerMod< RNS >, 547
- CONSTREFERENCE
  - parallel.h, 1034
- convert
  - rns\_double, 529, 530
  - rns\_double\_extended, 540
  - RNSInteger< RNS >, 544
  - RNSIntegerMod< RNS >, 549
- convert\_transpose
  - rns\_double, 529
- ConvertTo< T >, 430
- COO
  - FFLAS, 76
- Coo
  - Coo< Field >, 432
  - Coo< ValT, IdxT >, 431, 434
- coo
  - HelperFlag, 474
- Coo< Field >, 432
  - col, 433
  - Coo, 432
  - deleted, 433
  - operator=, 433
  - row, 433
  - val, 433
- Coo< ValT, IdxT >, 430, 433
  - col, 431, 434
  - Coo, 431, 434
  - operator=, 431, 434
  - row, 431, 434
  - Self, 431, 434
  - val, 431, 434
- coo.h, 888
- coo\_spmv.inl, 888
  - \_\_FFLASFFPACK\_fflas\_sparse\_coo\_spmv\_INL, 889

- coo\_spmv.inl, [889](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_coo\_spmv\_INL, [890](#)
- coo\_utils.inl, [890](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_coo\_utils\_INL, [890](#)
- COO\_ZO
  - FFLAS, [76](#)
- CooMat< Field >, [435](#)
  - \_coo16, [435](#)
  - \_coo16\_zo, [435](#)
  - \_coo32, [435](#)
  - \_coo32\_zo, [435](#)
  - \_coo64, [435](#)
  - \_coo64\_zo, [435](#)
- Copying and Licence, [2](#)
- count\_nonconst\_lvalue\_reference< const T &, O... >, [436](#)
  - n, [436](#)
- count\_nonconst\_lvalue\_reference< T >, [436](#)
- count\_nonconst\_lvalue\_reference< T &, O... >, [436](#)
  - n, [436](#)
- count\_nonconst\_lvalue\_reference< T, O... >, [436](#)
  - n, [436](#)
- count\_nonconst\_lvalue\_reference<>, [437](#)
  - n, [437](#)
- CROUT
  - ffpack\_pluq.inl, [942](#)
- CSC
  - FFLAS, [76](#)
- CSC\_ZO
  - FFLAS, [76](#)
- CSR
  - FFLAS, [76](#)
- csr
  - HelperFlag, [474](#)
- csr.h, [890](#)
- CSR\_HYB
  - FFLAS, [76](#)
- csr\_hyb.h, [895](#)
- csr\_hyb\_pspmm.inl, [895](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_HYB\_pspmm\_INL, [896](#)
- csr\_hyb\_pspmv.inl, [896](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_HYB\_pspmv\_INL, [896](#)
- csr\_hyb\_spmmm.inl, [897](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_HYB\_spmmm\_INL, [897](#)
- csr\_hyb\_spmv.inl, [897](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_HYB\_spmv\_INL, [897](#)
- csr\_hyb\_utils.inl, [898](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_HYB\_utils\_INL, [898](#)
- csr\_pspmm.inl, [891](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_pspmm\_INL, [892](#)
- csr\_pspmv.inl, [892](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_pspmv\_INL, [892](#)
- csr\_spmmm.inl, [892](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_spmmm\_INL, [893](#)
- csr\_spmv.inl, [894](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_CSR\_spmv\_INL, [894](#)
- csr\_utils.inl, [894](#)
- CSR\_ZO
  - FFLAS, [76](#)
- CsrMat< Field >, [437](#)
  - \_csr16, [437](#)
  - \_csr16\_zo, [437](#)
  - \_csr32, [437](#)
  - \_csr32\_zo, [437](#)
  - \_csr64, [437](#)
  - \_csr64\_zo, [437](#)
- cst
  - Sparse< \_Field, SparseMatrix\_t::COO\_ZO >, [738](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR\_ZO >, [743](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd\_ZO >, [747](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_ZO >, [749](#)
  - Sparse< \_Field, SparseMatrix\_t::SELL\_ZO >, [755](#)
- ctz
  - bit\_manipulation.h, [1043](#)
- CUBE
  - benchmark-checkers.C, [781](#)
  - benchmark-fsytrf.C, [796](#)
  - benchmark-ftytri.C, [798](#)
  - benchmark-inverse.C, [799](#)
  - benchmark-lqup.C, [800](#)
  - benchmark-pluq.C, [801](#)
  - benchmark-wino.C, [803](#)
  - charpoly.C, [774](#)
  - fsyrk.C, [775](#)
  - fsytrf.C, [776](#)
  - ftytri.C, [776](#)
  - pluq.C, [777](#)
  - mda.C, [1052](#)
  - main, [1052](#)
- current
  - ForStrategy1D< blocksize\_t, Cut, Param >, [462](#)
  - ForStrategy2D< blocksize\_t, Cut, Param >, [466](#)
- Cut
  - Parallel< C, P >, [522](#)
- cyclic\_shift\_col
  - FFPACK, [362](#), [365](#)
- cyclic\_shift\_col\_modular\_double
  - ffpack.C, [990](#)
  - ffpack\_c.h, [1011](#)
- cyclic\_shift\_mathPerm
  - FFPACK, [361](#)
  - ffpack.C, [989](#)
  - ffpack\_c.h, [1011](#)
- cyclic\_shift\_row

- FFPACK, [361](#), [364](#)
- cyclic\_shift\_row\_col
  - FFPACK, [361](#), [364](#)
- cyclic\_shift\_row\_modular\_double
  - ffpack.C, [989](#)
  - ffpack\_c.h, [1011](#)
- Danilevski
  - FFPACK, [350](#)
  - FFPACK::Protected, [395](#)
- dasum\_
  - config-blas.h, [813](#)
- dat
  - Sparse< \_Field, SparseMatrix\_t::COO >, [736](#)
  - Sparse< \_Field, SparseMatrix\_t::COO\_ZO >, [738](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR >, [740](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR\_HYB >, [741](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR\_ZO >, [744](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL >, [745](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd >, [747](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd\_ZO >, [748](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_ZO >, [750](#)
  - Sparse< \_Field, SparseMatrix\_t::HYB\_ZO >, [751](#)
  - Sparse< \_Field, SparseMatrix\_t::SELL >, [754](#)
  - Sparse< \_Field, SparseMatrix\_t::SELL\_ZO >, [756](#)
- data
  - Argument, [404](#)
- daxpy\_
  - config-blas.h, [812](#)
- dcopy\_
  - config-blas.h, [814](#)
- ddot\_
  - config-blas.h, [812](#)
- debug.h, [1043](#)
  - FFLASFFPACK\_abort, [1044](#)
  - FFLASFFPACK\_check, [1044](#)
- DeCompressRows
  - FFPACK::Protected, [397](#)
- DeCompressRowsQA
  - FFPACK::Protected, [398](#)
- DeCompressRowsQK
  - FFPACK::Protected, [397](#)
- DefaultBoundedTag, [438](#)
- DefaultTag, [438](#)
- delayed
  - RNSIntegerMod< RNS >, [547](#)
  - Sparse< \_Field, SparseMatrix\_t::COO >, [736](#)
  - Sparse< \_Field, SparseMatrix\_t::COO\_ZO >, [738](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR >, [739](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR\_HYB >, [741](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR\_ZO >, [743](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL >, [744](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd >, [746](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd\_ZO >, [747](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_ZO >, [749](#)
  - Sparse< \_Field, SparseMatrix\_t::HYB\_ZO >, [751](#)
  - Sparse< \_Field, SparseMatrix\_t::SELL >, [752](#)
  - Sparse< \_Field, SparseMatrix\_t::SELL\_ZO >, [755](#)
- DelayedField
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [499](#)
- delayedField
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [503](#)
- DelayedField\_t
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [499](#)
- DelayedTag, [438](#)
- deleted
  - Coo< Field >, [433](#)
- DENSE\_THRESHOLD
  - fflas\_sparse.h, [885](#)
- denseCols
  - StatsMatrix, [759](#)
- denseRows
  - StatsMatrix, [759](#)
- Det
  - FFPACK, [327](#), [328](#), [351](#), [352](#), [371](#), [372](#)
- det.C, [804](#)
  - main, [804](#)
- Det\_modular\_double
  - ffpack.C, [999](#)
  - ffpack\_c.h, [1019](#)
- deviationCol
  - StatsMatrix, [758](#)
- deviationColDifference
  - StatsMatrix, [758](#)
- deviationRow
  - StatsMatrix, [758](#)
- deviationRowDifference
  - StatsMatrix, [758](#)
- DfElt
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [499](#)
- dgemm\_
  - config-blas.h, [816](#)
  - fblas.C, [1052](#)
- dgemv\_
  - config-blas.h, [813](#)
- dger\_
  - config-blas.h, [814](#)
- digits
  - limits< char >, [488](#)
  - limits< double >, [489](#)
  - limits< float >, [489](#)
  - limits< int >, [491](#)
  - limits< long >, [491](#)
  - limits< long long >, [492](#)
  - limits< short int >, [494](#)
  - limits< signed char >, [494](#)
  - limits< unsigned char >, [495](#)
  - limits< unsigned int >, [496](#)
  - limits< unsigned long >, [496](#)

- limits< unsigned long long >, [497](#)
- limits< unsigned short int >, [497](#)
- div
  - ScalFunctions< Element >, [556](#)
  - Simd256\_impl< true, false, true, 8 >, [628](#)
  - Simd512\_impl< true, false, true, 8 >, [710](#)
- DivideAndConquer, [438](#)
- dnrm2\_
  - config-blas.h, [813](#)
- DNS\_BIN\_VER
  - read\_sparse.h, [909](#)
- doApplyS
  - FFPACK, [357](#)
- doApplyT
  - FFPACK, [358](#)
- doBenchs
  - Bench< Elt >, [408](#)
- doTests
  - Test< Elt >, [763](#)
- DotProdBoundClassic
  - FFLAS::Protected, [212](#)
- DOUBLE\_TO\_FLOAT\_CROSSOVER
  - fflas.h, [826](#)
  - winograd.C, [778](#)
- dscal\_
  - config-blas.h, [814](#)
- dtrmm\_
  - config-blas.h, [815](#)
- dtrsm\_
  - config-blas.h, [815](#)
- DynamicPeeling
  - FFLAS::Protected, [217](#)
- DynamicPeeling2
  - FFLAS::Protected, [217](#)
- EFFGFF
  - benchmark-dsytrf.C, [783](#)
- Element
  - FieldSimd< \_Field >, [447](#)
  - readMyMachineType< Field, mpz\_t >, [526](#)
  - readMyMachineType< Field, T >, [525](#)
  - rns\_double, [528](#)
  - rns\_double\_extended, [539](#)
  - RNSInteger< RNS >, [543](#)
  - RNSIntegerMod< RNS >, [547](#)
  - TestOneMethod< Simd >, [765](#)
- Element\_ptr
  - benchmark-fgemm-rns.C, [788](#)
  - readMyMachineType< Field, mpz\_t >, [526](#)
  - readMyMachineType< Field, T >, [525](#)
  - rns\_double, [528](#)
  - rns\_double\_extended, [539](#)
  - RNSInteger< RNS >, [543](#)
  - RNSIntegerMod< RNS >, [547](#)
- ElementTraits< double >, [439](#)
  - value, [439](#)
- ElementTraits< Element >, [438](#)
  - value, [439](#)
- ElementTraits< FFPACK::rns\_double\_elt >, [439](#)
  - value, [439](#)
- ElementTraits< float >, [439](#)
  - value, [439](#)
- ElementTraits< Givaro::Integer >, [440](#)
  - value, [440](#)
- ElementTraits< int16\_t >, [440](#)
  - value, [440](#)
- ElementTraits< int32\_t >, [440](#)
  - value, [440](#)
- ElementTraits< int64\_t >, [440](#)
  - value, [441](#)
- ElementTraits< int8\_t >, [441](#)
  - value, [441](#)
- ElementTraits< RecInt::rint< K > >, [441](#)
  - value, [441](#)
- ElementTraits< RecInt::rmint< K, MG > >, [441](#)
  - value, [441](#)
- ElementTraits< RecInt::ruint< K > >, [442](#)
  - value, [442](#)
- ElementTraits< uint16\_t >, [442](#)
  - value, [442](#)
- ElementTraits< uint32\_t >, [442](#)
  - value, [442](#)
- ElementTraits< uint64\_t >, [442](#)
  - value, [443](#)
- ElementTraits< uint8\_t >, [443](#)
  - value, [443](#)
- ELL
  - FFLAS, [76](#)
- ell
  - HelperFlag, [474](#)
- ell.h, [898](#)
- ell\_pspmm.inl, [899](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_pspmm\_INL, [899](#)
- ell\_pspmv.inl, [899](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_pspmv\_INL, [900](#)
- ELL\_simd
  - FFLAS, [76](#)
- ell\_simd.h, [902](#)
- ell\_simd\_pspmv.inl, [903](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_simd\_pspmv\_INL, [904](#)
- ell\_simd\_spmv.inl, [904](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_simd\_spmv\_INL, [904](#)
- ell\_simd\_utils.inl, [905](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_simd\_utils\_INL, [905](#)
- ELL\_simd\_ZO
  - FFLAS, [76](#)
- ell\_spm.inl, [900](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_spm\_INL, [901](#)
- ell\_spmv.inl, [901](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_spmv\_INL, [902](#)

- ell\_utils.inl, [902](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_ELL\_utils\_INL, [902](#)
- ELL\_ZO
  - FFLAS, [76](#)
- ElIMat< Field >, [443](#)
  - \_ell16, [443](#)
  - \_ell16\_zo, [443](#)
  - \_ell32, [443](#)
  - \_ell32\_zo, [444](#)
  - \_ell64, [443](#)
  - \_ell64\_zo, [444](#)
- Elt\_ptr
  - Bench< Elt >, [407](#)
  - Test< Elt >, [762](#)
- ENABLE\_ALL\_CHECKINGS
  - benchmark-checkers.C, [781](#)
  - ffpack\_ftrtr.inl, [936](#)
  - test-fdot.C, [1062](#)
  - test-fgemm-check.C, [1063](#)
  - test-fsyr2k.C, [1074](#)
  - test-fsyrk.C, [1075](#)
  - test-ftmv.C, [1079](#)
  - test-ftsm-check.C, [1080](#)
  - test-ftsm.C, [1081](#)
  - test-ftssyr2k.C, [1082](#)
  - test-ftrstr.C, [1083](#)
  - test-ftrsv.C, [1085](#)
  - test-ftrtri.C, [1086](#)
  - test-invert-check.C, [1087](#)
  - test-pluq-check.C, [1097](#)
- ENABLE\_CHECKER\_charpoly
  - test-charpoly-check.C, [1054](#)
- ENABLE\_CHECKER\_Det
  - test-det-check.C, [1057](#)
- ENABLE\_CHECKER\_fgemm
  - test-fgemm.C, [1065](#)
- enable\_if\_no\_simd\_t
  - Bench< Elt >, [407](#)
  - Test< Elt >, [762](#)
- enable\_if\_simd128\_t
  - Bench< Elt >, [407](#)
  - Test< Elt >, [762](#)
- enable\_if\_simd256\_t
  - Bench< Elt >, [407](#)
  - Test< Elt >, [762](#)
- enable\_if\_simd512\_t
  - Bench< Elt >, [407](#)
  - Test< Elt >, [763](#)
- enable\_if\_t
  - Bench< Elt >, [407](#)
  - Test< Elt >, [762](#)
  - TestOneMethod< Simd >, [765](#)
- end
  - ForStrategy1D< blocksize\_t, Cut, Param >, [462](#)
- END\_OF\_ARGUMENTS
  - args-parser.h, [1041](#)
- END\_PARALLEL\_MAIN
- parallel.h, [1034](#)
- eq
  - ScalFunctions< Element >, [557](#)
  - Simd128\_impl< true, true, false, 2 >, [573](#)
  - Simd128\_impl< true, true, false, 4 >, [583](#)
  - Simd128\_impl< true, true, false, 8 >, [593](#)
  - Simd128\_impl< true, true, true, 2 >, [602](#)
  - Simd128\_impl< true, true, true, 4 >, [611](#)
  - Simd128\_impl< true, true, true, 8 >, [620](#)
  - Simd256\_impl< true, false, true, 8 >, [629](#)
  - Simd256\_impl< true, true, false, 2 >, [640](#)
  - Simd256\_impl< true, true, false, 4 >, [658](#)
  - Simd256\_impl< true, true, false, 8 >, [668](#)
  - Simd256\_impl< true, true, true, 2 >, [677](#)
  - Simd256\_impl< true, true, true, 4 >, [687](#), [694](#)
  - Simd256\_impl< true, true, true, 8 >, [703](#)
  - Simd512\_impl< true, false, true, 8 >, [711](#)
  - Simd512\_impl< true, true, false, 8 >, [722](#)
  - Simd512\_impl< true, true, true, 8 >, [731](#)
- eval\_func\_on\_array
  - test-simd.C, [1102](#)
- evaluate\_scalar\_method
  - TestOneMethod< Simd >, [765](#), [766](#)
- evaluate\_simd\_method
  - TestOneMethod< Simd >, [766](#)
- example
  - Argument, [403](#)
- ExpandBlockBiDiagonalToBruhat
  - FFPACK, [344](#)
- expandLCRE
  - FFPACK, [349](#)
- F
  - Bench< Elt >, [408](#)
  - Test< Elt >, [764](#)
- fadd
  - FFLAS, [77](#), [78](#), [80](#), [82](#), [163](#), [164](#), [171](#), [172](#)
  - FFLAS::details, [199](#), [200](#)
- fadd\_1\_modular\_double
  - fflas\_c.h, [957](#)
  - fflas\_lvl1.C, [976](#)
- fadd\_2\_modular\_double
  - fflas\_c.h, [960](#)
  - fflas\_lvl2.C, [981](#)
- faddin
  - FFLAS, [78](#), [81](#), [164](#), [172](#)
- faddin\_1\_modular\_double
  - fflas\_c.h, [957](#)
  - fflas\_lvl1.C, [977](#)
- faddin\_2\_modular\_double
  - fflas\_c.h, [961](#)
  - fflas\_lvl2.C, [981](#)
- Failure, [444](#)
  - \_errorStream, [445](#)
  - Failure, [444](#)
  - operator(), [444](#), [445](#)
  - print, [445](#)
  - setErrorStream, [445](#)
- failure

- FFPACK, 377
- FailureCharpolyCheck, 445
- FailureDetCheck, 446
- FailureFgemmCheck, 446
- FailureInvertCheck, 446
- FailurePLUQCheck, 446
- FailureTrsmCheck, 446
- fassign
  - FFLAS, 82–84, 160, 164
- fassign\_1\_modular\_double
  - fflas\_c.h, 955
  - fflas\_lvl1.C, 975
- fassign\_2\_modular\_double
  - fflas\_c.h, 957
  - fflas\_lvl2.C, 978
- faxpby
  - FFLAS, 132, 139
- faxpy
  - FFLAS, 84, 85, 162, 169
  - FFLAS::details, 201
- faxpy\_1\_modular\_double
  - fflas\_c.h, 956
  - fflas\_lvl1.C, 976
- faxpy\_2\_modular\_double
  - fflas\_c.h, 960
  - fflas\_lvl2.C, 980
- fblas.C, 1052
  - \_\_FFLASFFPACK\_CONFIGURATION, 1052
  - dgemm\_, 1052
  - main, 1052
- fconvert
  - FFLAS, 129, 137, 158
- fconvert\_rns
  - FFLAS, 155, 156
- fconvert\_trans\_rns
  - FFLAS, 156
- fdot
  - FFLAS, 86–88, 133, 162, 181
- fdot\_1\_modular\_double
  - fflas\_c.h, 956
  - fflas\_lvl1.C, 976
- fequal
  - FFLAS, 132, 136, 160, 165
- fequal\_1\_modular\_double
  - fflas\_c.h, 955
  - fflas\_lvl1.C, 975
- fequal\_2\_modular\_double
  - fflas\_c.h, 958
  - fflas\_lvl2.C, 978
- FFLAS, 41, 45
  - alignable, 188
  - alignable< Givaro::Integer \* >, 188
  - BaseTimer, 74
  - bitsize, 140
  - bitsize< Givaro::ZRing< Givaro::Integer > >, 140
  - BlockCuts, 179, 181
  - BlockCuts< CuttingStrategy::Block, StrategyParameter::Fixed >, 180
  - BlockCuts< CuttingStrategy::Block, StrategyParameter::Grain >, 179
  - BlockCuts< CuttingStrategy::Block, StrategyParameter::Threads >, 181
  - BlockCuts< CuttingStrategy::Column, StrategyParameter::Fixed >, 180
  - BlockCuts< CuttingStrategy::Column, StrategyParameter::Grain >, 180
  - BlockCuts< CuttingStrategy::Column, StrategyParameter::Threads >, 180
  - BlockCuts< CuttingStrategy::Row, StrategyParameter::Fixed >, 179
  - BlockCuts< CuttingStrategy::Row, StrategyParameter::Grain >, 179
  - BlockCuts< CuttingStrategy::Row, StrategyParameter::Threads >, 180
  - BlockCuts< CuttingStrategy::Single, StrategyParameter::Threads >, 179
  - cblas\_imptrsm, 127
  - Checker\_fgemm, 72
  - Checker\_ftrsm, 72
  - computeDeviation, 153
  - computeS1S2, 123
  - COO, 76
  - COO\_ZO, 76
  - CSC, 76
  - CSC\_ZO, 76
  - CSR, 76
  - CSR\_HYB, 76
  - CSR\_ZO, 76
  - ELL, 76
  - ELL\_simd, 76
  - ELL\_simd\_ZO, 76
  - ELL\_ZO, 76
  - fadd, 77, 78, 80, 82, 163, 164, 171, 172
  - faddin, 78, 81, 164, 172
  - fassign, 82–84, 160, 164
  - faxpby, 132, 139
  - faxpy, 84, 85, 162, 169
  - fconvert, 129, 137, 158
  - fconvert\_rns, 155, 156
  - fconvert\_trans\_rns, 156
  - fdot, 86–88, 133, 162, 181
  - fequal, 132, 136, 160, 165
  - FFLAS\_BASE, 75
  - fflas\_delete, 154, 188
  - FFLAS\_DIAG, 75
  - FFLAS\_FORMAT, 76
  - fflas\_new, 155, 156, 188
  - FFLAS\_ORDER, 74
  - FFLAS\_SIDE, 75
  - FFLAS\_TRANSPOSE, 74
  - FFLAS\_UPLO, 75
  - FflasAuto, 76
  - FflasBinary, 76
  - FflasColMajor, 74
  - FflasDense, 76
  - FflasDouble, 76

- FflasFloat, 76
- FflasGeneric, 76
- FflasLeft, 75
- FflasLeftTri, 75
- FflasLower, 75
- FflasMaple, 76
- FflasMath, 76
- FflasNonUnit, 75
- FflasNoTrans, 75
- FflasRight, 75
- FflasRightTri, 75
- FflasRowMajor, 74
- FflasSageMath, 76
- FflasSMS, 76
- FflasTrans, 75
- FflasUnit, 75
- FflasUpper, 75
- fgemm, 88–90, 92–97, 144, 176–178
- fgemv, 97–102, 173, 184
- fger, 103–106, 173
- fidentity, 136, 137, 166
- finit, 108, 110, 129, 137, 157, 167
- finit\_rns, 155, 156
- finit\_trans\_rns, 155
- fiszero, 131, 136, 159, 166
- fmove, 139, 170
- fneg, 130, 138, 159, 168
- fnegin, 130, 138, 158, 168
- ForceCheck\_fgemm, 72
- ForceCheck\_ftrsm, 72
- frand, 131, 135
- freduce, 107–111, 157, 167
- freduce\_constoverride, 108, 110
- freivalds, 111
- fscal, 112–116, 161, 169
- fscaln, 111, 113–116, 161, 169
- fspmm, 145
- fspmv, 145, 152
- fsquare, 91, 92, 178
- fsub, 78, 80, 164, 171
- fsubin, 78, 81, 172
- fswap, 133, 163
- fsyr2k, 116
- fsyrk, 117–124
- fsyrk\_strassen, 124, 142
- ftrmm, 124, 125, 175
- ftrmv, 140
- ftrsm, 126, 127, 141, 144, 145, 175
- ftrsv, 128, 174
- fzero, 130, 133, 135, 159, 165
- getArgumentValue, 185
- getDataType, 151, 152
- getSeed, 189
- getStat, 154
- getTLBSize, 189
- has\_equal, 73
- has\_minus, 73
- has\_minus\_eq, 73
- has\_mul, 73
- has\_mul\_eq, 74
- has\_plus, 73
- has\_plus\_eq, 73
- HYB\_ZO, 76
- igemm\_, 128
- InfNorm, 77
- max3, 77
- max4, 77
- maxCardinality, 154
- maxCardinality< Givaro::Modular< int32\_t > >, 154
- maxCardinality< Givaro::Modular< int64\_t > >, 154
- min3, 77
- min4, 77
- minCardinality, 154
- MKLSparseMatrixFormat, 73
- mone, 76
- NoSimdSparseMatrix, 73
- NotMKLSparseMatrixFormat, 73
- NotZOSparseMatrix, 72
- number\_kind, 76
- one, 76
- operator<<, 151
- other, 76
- parseArguments, 185
- pfadd, 79
- pfaddin, 79
- pfgemm, 142, 182–184
- pfgemm\_1D\_rec, 142
- pfgemm\_2D\_rec, 143
- pfgemm\_3D\_rec, 143
- pfgemm\_3D\_rec2, 144
- pfrand, 181
- pfreduce, 109
- pfsb, 79
- pfsb, 80
- pfzero, 181
- preamble, 186
- prefetch, 189
- queryCacheSizes, 189
- queryL1CacheSize, 189
- queryTopLevelCacheSize, 189
- readDnsFormat, 152
- readMachineType, 152
- ReadMatrix, 186
- readSmsFormat, 151
- readSprFormat, 151
- SELL, 76
- SELL\_ZO, 76
- SimdSparseMatrix, 72
- sparse\_delete, 146–150, 153
- sparse\_init, 145–150, 153
- sparse\_print, 147, 150, 153
- SparseMatrix\_t, 76
- SysTimer, 74
- Timer, 74



- UserTimer, 74
- writeCommandString, 185
- writeDnsFormat, 152
- WriteMatrix, 185, 187
- WritePermutation, 187
- zero, 76
- ZOSparseMatrix, 72
- fflas-101\_1.C, 1106
  - main, 1106
- fflas-101\_3.C, 1106
  - main, 1107
- FFLAS-FFPACK, 41
- FFLAS-FFPACK Documentation., 1
- FFLAS-FFPACK fields, 43
- fflas-ffpack-config.h, 823
  - GCC\_VERSION, 824
- fflas-ffpack-default-thresholds.h, 824
  - \_\_FFLASFFPACK\_ARITHPROG\_THRESHOLD, 824
  - \_\_FFLASFFPACK\_CHARPOLY\_Danilevskii\_LUKrylov\_THRESHOLD, 824
  - \_\_FFLASFFPACK\_CHARPOLY\_LUKrylov\_ArithProg\_THRESHOLD, 824
  - \_\_FFLASFFPACK\_FSYRK\_THRESHOLD, 825
  - \_\_FFLASFFPACK\_FSYTRF\_THRESHOLD, 825
  - \_\_FFLASFFPACK\_FTRTRI\_THRESHOLD, 825
  - \_\_FFLASFFPACK\_PLUQ\_THRESHOLD, 824
  - \_\_FFLASFFPACK\_WINOTHRESHOLD, 824
  - \_\_FFLASFFPACK\_WINOTHRESHOLD\_BAL, 824
  - \_\_FFLASFFPACK\_WINOTHRESHOLD\_BAL\_FLT, 824
  - \_\_FFLASFFPACK\_WINOTHRESHOLD\_FLT, 824
- fflas-ffpack-thresholds.h, 825
- fflas-ffpack.doxy, 825
- fflas-ffpack.h, 825
- fflas.doxy, 825
- fflas.h, 825
  - DOUBLE\_TO\_FLOAT\_CROSSOVER, 826
  - WINOTHRESHOLD, 826
- FFLAS::\_ftranspose\_impl, 190
  - nonsquare\_inplace\_v1, 190
  - nonsquare\_inplace\_v2, 190
  - not\_inplace, 190
  - square\_inplace, 190
- FFLAS::BLAS3, 191
  - Bini, 192
  - Winograd, 193
  - Winograd\_L\_S, 196
  - Winograd\_LR\_S, 196
  - Winograd\_R\_S, 197
  - WinogradAcc\_2\_24, 194
  - WinogradAcc\_2\_27, 194
  - WinogradAcc\_3\_21, 194
  - WinogradAcc\_3\_23, 193
  - WinogradAcc\_L\_S, 196
  - WinogradAcc\_LR, 195
  - WinogradAcc\_R\_S, 195
  - WinoPar, 193
- FFLAS::csr\_hyb\_details, 197
- FFLAS::CuttingStrategy, 197
  - RNSModulus, 198
- FFLAS::details, 198
  - BlockingFactor, 206
  - fadd, 199, 200
  - faxpy, 201
  - freduce, 201, 202
  - fscale, 202, 203
  - fscalein, 202, 203
  - gebp, 206
  - igebb11, 205
  - igebb14, 204
  - igebb21, 204
  - igebb24, 203
  - igebb41, 204
  - igebb44, 203
  - igebp, 205
  - pack\_lhs, 205
  - unpack\_lhs, 205
- FFLAS::details\_spmv, 206
- FFLAS::FieldCategories, 207
- FFLAS::FieldCategories, 207
- FFLAS::MMHelperAlgo, 207
- FFLAS::ModeCategories, 208
- FFLAS::ParSeqHelper, 208
- FFLAS::Protected, 209
  - computeFactorClassic, 212
  - DotProdBoundClassic, 212
  - DynamicPeeling, 217
  - DynamicPeeling2, 217
  - fgemm\_convert, 213
  - fgemv\_convert, 218
  - fger\_convert, 218
  - fsquareCommon, 215
  - fsyrk\_convert, 218
  - igemm, 222
  - igemm\_colmajor, 221, 222
  - MatF2MatD\_Triangular, 222
  - MatF2MatFL\_Triangular, 223
  - min\_types, 220, 221
  - NeedDoublePreAddReduction, 214, 215
  - NeedPreAddReduction, 213, 214
  - NeedPreAxyReduction, 219, 220
  - NeedPreScalReduction, 219
  - NeedPreSubReduction, 214
  - ScalAndReduce, 215, 219
  - TRSMBound, 212, 213
  - unfit, 221
  - WinogradCalc, 218
  - WinogradSteps, 216
  - WinogradThreshold, 216
- FFLAS::sell\_details, 223
- FFLAS::sparse\_details, 223
  - fspmm, 230–232
  - fspmm\_dispatch, 229
  - fspmv, 227–229, 236, 237
  - fspmv\_dispatch, 227



- init\_y, 226
- pfspmm, 233–235
- pfspmm\_dispatch, 232
- pfspmv, 235, 236
- FFLAS::sparse\_details\_impl, 237
  - fspmm, 245, 246, 253, 254, 259, 263, 264, 272, 273
  - fspmm\_mone, 247, 254, 264, 265
  - fspmm\_mone\_simd\_aligned, 248, 255, 266
  - fspmm\_mone\_simd\_unaligned, 248, 255, 266
  - fspmm\_one, 247, 254, 264, 265
  - fspmm\_one\_simd\_aligned, 247, 255, 265
  - fspmm\_one\_simd\_unaligned, 247, 255, 265
  - fspmm\_simd\_aligned, 246, 253
  - fspmm\_simd\_unaligned, 246, 254
  - fspmv, 248, 249, 256, 260, 266, 267, 269, 270, 273–276
  - fspmv\_mone, 249, 256, 257, 267, 270, 271, 276, 277
  - fspmv\_mone\_simd, 271, 277
  - fspmv\_one, 249, 256, 257, 267, 270, 276, 277
  - fspmv\_one\_simd, 271, 277
  - fspmv\_simd, 269, 270, 275, 276
  - pfspmm, 250, 257, 258, 260, 261, 271, 272
  - pfspmm\_mone, 251
  - pfspmm\_one, 250, 251
  - pfspmm\_zo, 262
  - pfspmv, 251, 252, 258, 259, 262, 268, 272, 274
  - pfspmv\_mone, 252, 253, 263, 268, 269, 275
  - pfspmv\_one, 252, 253, 263, 268, 269, 274, 275
  - pfspmv\_task, 252
- FFLAS::StrategyParameter, 278
- FFLAS::StructureHelper, 278
- FFLAS::vectorised, 278
  - add, 281
  - addp, 280
  - axpyp, 281
  - modp, 283
  - reduce, 281–283
  - scalp, 283, 284
  - sub, 281
  - subp, 280
  - VEC\_ADD, 280
  - VEC\_SUB, 280
- FFLAS::vectorised::unswitch, 284
  - axpyp, 285
  - modp, 285
  - scalp, 286
- fflas\_101.C, 1107
  - main, 1107
- fflas\_101\_lvl1.C, 1107
  - main, 1107
- FFLAS\_BASE
  - FFLAS, 75
- fflas\_bounds.inl, 826
  - \_\_FFLASFFPACK\_fflas\_bounds\_INL, 827
  - FFLAS\_INT\_TYPE, 827
- fflas\_c.h, 951
- fadd\_1\_modular\_double, 957
- fadd\_2\_modular\_double, 960
- faddin\_1\_modular\_double, 957
- faddin\_2\_modular\_double, 961
- fassign\_1\_modular\_double, 955
- fassign\_2\_modular\_double, 957
- faxpy\_1\_modular\_double, 956
- faxpy\_2\_modular\_double, 960
- fdot\_1\_modular\_double, 956
- fequal\_1\_modular\_double, 955
- fequal\_2\_modular\_double, 958
- FFLAS\_C\_BASE, 954
- FFLAS\_C\_DIAG, 954
- FFLAS\_C\_ORDER, 953
- FFLAS\_C\_SIDE, 954
- FFLAS\_C\_TRANSPOSE, 953
- FFLAS\_C\_UPLO, 953
- FFLAS\_COMPILED, 953
- FflasColMajor, 953
- FflasDouble, 954
- FflasFloat, 954
- FflasGeneric, 954
- FflasLeft, 954
- FflasLower, 954
- FflasNonUnit, 954
- FflasNoTrans, 953
- FflasRight, 954
- FflasRowMajor, 953
- FflasTrans, 953
- FflasUnit, 954
- FflasUpper, 954
- fgemm\_3\_modular\_double, 962
- fgemv\_2\_modular\_double, 961
- fger\_2\_modular\_double, 961
- fidentity\_2\_modular\_double, 958
- fiszero\_1\_modular\_double, 955
- fiszero\_2\_modular\_double, 958
- fmove\_2\_modular\_double, 960
- fneg\_1\_modular\_double, 955
- fneg\_2\_modular\_double, 959
- fnegin\_1\_modular\_double, 955
- fnegin\_2\_modular\_double, 959
- freduce\_1\_modular\_double, 954
- freduce\_2\_modular\_double, 959
- freducein\_1\_modular\_double, 954
- freducein\_2\_modular\_double, 958
- fscal\_1\_modular\_double, 956
- fscal\_2\_modular\_double, 959
- fscalin\_1\_modular\_double, 956
- fscalin\_2\_modular\_double, 959
- fsquare\_3\_modular\_double, 963
- fsub\_1\_modular\_double, 957
- fsub\_2\_modular\_double, 960
- fsubin\_1\_modular\_double, 957
- fsubin\_2\_modular\_double, 960
- fswap\_1\_modular\_double, 956
- ftmm\_3\_modular\_double, 962
- ftsm\_3\_modular\_double, 962

- ftsv\_2\_modular\_double, 961
- fzero\_1\_modular\_double, 955
- fzero\_2\_modular\_double, 958
- FFLAS\_C\_BASE
  - fflas\_c.h, 954
- FFLAS\_C\_DIAG
  - fflas\_c.h, 954
  - ffpack\_c.h, 1008
- FFLAS\_C\_ORDER
  - fflas\_c.h, 953
  - ffpack\_c.h, 1008
- FFLAS\_C\_SIDE
  - fflas\_c.h, 954
  - ffpack\_c.h, 1008
- FFLAS\_C\_TRANSPOSE
  - fflas\_c.h, 953
  - ffpack\_c.h, 1008
- FFLAS\_C\_UPLO
  - fflas\_c.h, 953
  - ffpack\_c.h, 1008
- FFLAS\_COMPILED
  - fflas\_c.h, 953
  - ffpack\_inst.C, 1025
  - ffpack\_inst.h, 1026
- fflas\_const\_cast
  - FFPACK, 364, 377
- fflas\_delete
  - FFLAS, 154, 188
- FFLAS\_DIAG
  - FFLAS, 75
- FFLAS\_ELT
  - fflas\_L1\_inst.C, 963, 964
  - fflas\_L1\_inst.h, 964, 965
  - fflas\_L2\_inst.C, 967
  - fflas\_L2\_inst.h, 968
  - fflas\_L3\_inst.C, 970, 971
  - fflas\_L3\_inst.h, 971, 972
  - ffpack\_inst.C, 1025
  - ffpack\_inst.h, 1026
- fflas\_enum.h, 827
- fflas\_fadd.h, 828
- fflas\_fadd.inl, 829
  - \_\_FFLASFFPACK\_fadd\_INL, 830
- fflas\_fassign.h, 830
- fflas\_fassign.inl, 831
  - \_\_FFLASFFPACK\_fassign\_INL, 831
- fflas\_faxpy.inl, 831
  - \_\_FFLASFFPACK\_faxpy\_INL, 832
- fflas\_fdot.inl, 832
  - \_\_FFLASFFPACK\_fdot\_INL, 833
- fflas\_fgemm.inl, 833
  - \_\_FFLASFFPACK\_fgemm\_INL, 835
- fflas\_fgenv.inl, 842
  - \_\_FFLASFFPACK\_fgenv\_INL, 843
- fflas\_fgenv\_mp.inl, 844
  - \_\_FFLASFFPACK\_fgenv\_mp\_INL, 844
- fflas\_fger.inl, 844
  - \_\_FFLASFFPACK\_fger\_INL, 845
- fflas\_fger\_mp.inl, 845
  - \_\_FFPACK\_fger\_mp\_INL, 846
- FFLAS\_FIELD
  - fflas\_L1\_inst.C, 963, 964
  - fflas\_L1\_inst.h, 964, 965
  - fflas\_L2\_inst.C, 967
  - fflas\_L2\_inst.h, 968
  - fflas\_L3\_inst.C, 970, 971
  - fflas\_L3\_inst.h, 971, 972
  - ffpack\_inst.C, 1025
  - ffpack\_inst.h, 1026
- FFLAS\_FORMAT
  - FFLAS, 76
- fflas\_freduce.h, 846
- fflas\_freduce.inl, 847
  - \_\_FFLASFFPACK\_fflas\_freduce\_INL, 849
  - FFLASFFPACK\_COPY\_REDUCE, 849
- fflas\_freduce\_mp.inl, 849
  - \_\_FFLASFFPACK\_fflas\_freduce\_mp\_INL, 849
- fflas\_freivalds.inl, 849
  - \_\_FFLASFFPACK\_freivalds\_INL, 849
- fflas\_fscal.h, 850
- fflas\_fscal.inl, 850
  - \_\_FFLASFFPACK\_fscal\_INL, 851
- fflas\_fscal\_mp.inl, 851
  - \_\_FFLASFFPACK\_fscal\_mp\_INL, 852
- fflas\_fsyr2k.inl, 852
  - \_\_FFLASFFPACK\_fflas\_fsyr2k\_INL, 852
- fflas\_fsyrk.inl, 853
  - \_\_FFLASFFPACK\_fflas\_fsyrk\_INL, 854
- fflas\_fsyrk\_strassen.inl, 854
  - \_\_FFLASFFPACK\_fflas\_fsyrk\_strassen\_INL, 855
- fflas\_ftrmm.inl, 855
  - \_\_FFLASFFPACK\_ftrmm\_INL, 856
- fflas\_ftrsm.inl, 856
  - \_\_FFLASFFPACK\_ftrsm\_INL, 856
- fflas\_ftrsm\_mp.inl, 857
  - \_\_FFPACK\_ftrsm\_mp\_INL, 857
- fflas\_ftsv.inl, 857
  - \_\_FFLASFFPACK\_ftsv\_INL, 858
- fflas\_helpers.inl, 858
  - \_\_FFLASFFPACK\_fflas\_fflas\_mmhelper\_INL, 859
- FFLAS\_INT\_TYPE
  - fflas\_bounds.inl, 827
- fflas\_intrinsic.h, 1044
- fflas\_io.h, 1044
- fflas\_L1\_inst.C, 963
  - \_\_FFLAS\_L1\_INST\_C, 963
  - FFLAS\_ELT, 963, 964
  - FFLAS\_FIELD, 963, 964
  - INST\_OR\_DECL, 963
- fflas\_L1\_inst.h, 964
  - FFLAS\_ELT, 964, 965
  - FFLAS\_FIELD, 964, 965
  - INST\_OR\_DECL, 964
- fflas\_L1\_inst\_implem.inl, 965
- fflas\_L2\_inst.C, 966
  - \_\_FFLAS\_L2\_INST\_C, 967

- FFLAS\_ELT, 967
- FFLAS\_FIELD, 967
- INST\_OR\_DECL, 967
- fflas\_L2\_inst.h, 967
  - FFLAS\_ELT, 968
  - FFLAS\_FIELD, 968
  - INST\_OR\_DECL, 968
- fflas\_L2\_inst\_implem.inl, 968
- fflas\_L3\_inst.C, 970
  - \_\_FFLAS\_L3\_INST\_C, 970
  - FFLAS\_ELT, 970, 971
  - FFLAS\_FIELD, 970, 971
  - INST\_OR\_DECL, 970
- fflas\_L3\_inst.h, 971
  - FFLAS\_ELT, 971, 972
  - FFLAS\_FIELD, 971, 972
  - INST\_OR\_DECL, 971
- fflas\_L3\_inst\_implem.inl, 972
  - \_\_FFLAS\_TRSM\_READONLY, 973
- fflas\_level1.inl, 862
  - \_\_FFLASFFPACK\_fflas\_fflas\_level1\_INL, 864
- fflas\_level2.inl, 865
  - \_\_FFLASFFPACK\_fflas\_fflas\_level2\_INL, 867
- fflas\_level3.inl, 867
  - \_\_FFLASFFPACK\_fflas\_fflas\_level3\_INL, 870
  - \_\_FFLAS\_TRSM\_READONLY, 870
- fflas\_lvl1.C, 973
  - fadd\_1\_modular\_double, 976
  - faddin\_1\_modular\_double, 977
  - fassign\_1\_modular\_double, 975
  - faxpy\_1\_modular\_double, 976
  - fdot\_1\_modular\_double, 976
  - fequal\_1\_modular\_double, 975
  - fiszero\_1\_modular\_double, 975
  - fneg\_1\_modular\_double, 974
  - fnegin\_1\_modular\_double, 974
  - freduce\_1\_modular\_double, 974
  - freducein\_1\_modular\_double, 974
  - fscal\_1\_modular\_double, 975
  - fscalin\_1\_modular\_double, 975
  - fsub\_1\_modular\_double, 976
  - fsubin\_1\_modular\_double, 977
  - fswap\_1\_modular\_double, 976
  - fzero\_1\_modular\_double, 974
- fflas\_lvl2.C, 977
  - fadd\_2\_modular\_double, 981
  - faddin\_2\_modular\_double, 981
  - fassign\_2\_modular\_double, 978
  - faxpy\_2\_modular\_double, 980
  - fequal\_2\_modular\_double, 978
  - fgemv\_2\_modular\_double, 981
  - fger\_2\_modular\_double, 982
  - fidentity\_2\_modular\_double, 979
  - fiszero\_2\_modular\_double, 979
  - fmove\_2\_modular\_double, 980
  - fneg\_2\_modular\_double, 980
  - fnegin\_2\_modular\_double, 979
  - freduce\_2\_modular\_double, 979
  - freducein\_2\_modular\_double, 979
  - fscale\_2\_modular\_double, 980
  - fscalin\_2\_modular\_double, 980
  - fsub\_2\_modular\_double, 981
  - fsubin\_2\_modular\_double, 981
  - ftsv\_2\_modular\_double, 982
  - fzero\_2\_modular\_double, 978
- fflas\_lvl3.C, 982
  - fgemm\_3\_modular\_double, 983
  - fsquare\_3\_modular\_double, 984
  - ftmm\_3\_modular\_double, 983
  - ftsm\_3\_modular\_double, 983
- fflas\_memory.h, 1045
- fflas\_new
  - FFLAS, 155, 156, 188
- FFLAS\_ORDER
  - FFLAS, 74
- fflas\_pfgemm.inl, 870
  - \_\_FFLASFFPACK\_DIMKPENALTY, 870
  - \_\_FFLASFFPACK\_SEQPARTHRESHOLD, 870
  - \_\_FFLASFFPACK\_fflas\_pfgemm\_INL, 870
- fflas\_pftsm.inl, 871
  - \_\_FFLASFFPACK\_fflas\_pftsm\_INL, 871
  - PTRSM\_HYBRID\_THRESHOLD, 871
- fflas\_plevel1.h, 1031
- fflas\_randommatrix.h, 1046
- FFLAS\_SIDE
  - FFLAS, 75
- fflas\_simd.h, 871
  - CONST, 872
  - FLOAT\_MOD, 873
  - INLINE, 872
  - NORML\_MOD, 872
  - PURE, 872
  - Simd, 873
  - SIMD\_INT, 872
- fflas\_sparse.C, 984
- fflas\_sparse.h, 881
  - \_\_FFLASFFPACK\_CACHE\_LINE\_SIZE, 885
  - assume\_aligned, 885
  - DENSE\_THRESHOLD, 885
  - index\_t, 885
  - ROUND\_DOWN, 885
- fflas\_sparse.inl, 886
  - \_\_FFLASFFPACK\_fflas\_fflas\_sparse\_INL, 887
- FFLAS\_TRANSPOSE
  - FFLAS, 74
- fflas\_transpose.h, 913
  - FFLAS\_TRANSPOSE\_BLOCKSIZE, 914
  - LD, 914
  - ST, 914
- FFLAS\_TRANSPOSE\_BLOCKSIZE
  - fflas\_transpose.h, 914
- FFLAS\_UPLO
  - FFLAS, 75
- FflasAuto
  - FFLAS, 76
- FflasBinary

- FFLAS, [76](#)
- FflasColMajor
  - FFLAS, [74](#)
  - fflas\_c.h, [953](#)
  - ffpack\_c.h, [1008](#)
- FflasDense
  - FFLAS, [76](#)
- FflasDouble
  - FFLAS, [76](#)
  - fflas\_c.h, [954](#)
- FFLASFFPACK\_abort
  - debug.h, [1044](#)
- FFLASFFPACK\_check
  - debug.h, [1044](#)
- FFLASFFPACK\_checkers\_fflas\_inl\_H
  - checkers\_fflas.inl, [809](#)
- FFLASFFPACK\_checkers\_ffpack\_inl\_H
  - checkers\_ffpack.inl, [810](#)
- FFLASFFPACK\_COPY\_REDUCE
  - fflas\_freduce.inl, [849](#)
- FFLASFFPACK\_PERM\_BKSIZE
  - ffpack\_permutation.inl, [941](#)
- FflasFloat
  - FFLAS, [76](#)
  - fflas\_c.h, [954](#)
- FflasGeneric
  - FFLAS, [76](#)
  - fflas\_c.h, [954](#)
- FflasLeft
  - FFLAS, [75](#)
  - fflas\_c.h, [954](#)
  - ffpack\_c.h, [1009](#)
- FflasLeftTri
  - FFLAS, [75](#)
- FflasLower
  - FFLAS, [75](#)
  - fflas\_c.h, [954](#)
  - ffpack\_c.h, [1008](#)
- FflasMaple
  - FFLAS, [76](#)
- FflasMath
  - FFLAS, [76](#)
- FflasNonUnit
  - FFLAS, [75](#)
  - fflas\_c.h, [954](#)
  - ffpack\_c.h, [1008](#)
- FflasNoTrans
  - FFLAS, [75](#)
  - fflas\_c.h, [953](#)
  - ffpack\_c.h, [1008](#)
- FflasRight
  - FFLAS, [75](#)
  - fflas\_c.h, [954](#)
  - ffpack\_c.h, [1009](#)
- FflasRightTri
  - FFLAS, [75](#)
- FflasRowMajor
  - FFLAS, [74](#)
- fflas\_c.h, [953](#)
- ffpack\_c.h, [1008](#)
- FflasSageMath
  - FFLAS, [76](#)
- FflasSMS
  - FFLAS, [76](#)
- FflasTrans
  - FFLAS, [75](#)
  - fflas\_c.h, [953](#)
  - ffpack\_c.h, [1008](#)
- FflasUnit
  - FFLAS, [75](#)
  - fflas\_c.h, [954](#)
  - ffpack\_c.h, [1008](#)
- FflasUpper
  - FFLAS, [75](#)
  - fflas\_c.h, [954](#)
  - ffpack\_c.h, [1008](#)
- FFPACK, [42](#), [287](#)
  - \_PLUQ, [363](#)
  - applyP, [304](#), [305](#), [365](#)
  - applyP\_block, [357](#)
  - Bruhat2EchelonPermutation, [345](#)
  - buildMatrix, [351](#)
  - CharPoly, [323](#), [324](#), [351](#), [369](#), [370](#)
  - Checker\_charpoly, [303](#)
  - Checker\_Det, [303](#)
  - Checker\_invert, [303](#)
  - Checker\_PLUQ, [303](#)
  - chooseField, [390](#)
  - chooseField< Givaro::ZRing< double > >, [391](#)
  - chooseField< Givaro::ZRing< float > >, [390](#)
  - chooseField< Givaro::ZRing< int32\_t > >, [390](#)
  - chooseField< Givaro::ZRing< int64\_t > >, [390](#)
  - ColRankProfileSubmatrix, [335](#), [374](#)
  - ColRankProfileSubmatrixIndices, [334](#), [374](#)
  - ColumnEchelonForm, [316](#), [317](#), [368](#)
  - ColumnRankProfile, [331](#), [332](#), [373](#)
  - composePermutationsLLL, [360](#)
  - composePermutationsLLM, [360](#)
  - composePermutationsMLM, [361](#)
  - CompressToBlockBiDiagonal, [344](#)
  - ComputeRPermutation, [346](#), [348](#)
  - cyclic\_shift\_col, [362](#), [365](#)
  - cyclic\_shift\_mathPerm, [361](#)
  - cyclic\_shift\_row, [361](#), [364](#)
  - cyclic\_shift\_row\_col, [361](#), [364](#)
  - Danilevski, [350](#)
  - Det, [327](#), [328](#), [351](#), [352](#), [371](#), [372](#)
  - doApplyS, [357](#)
  - doApplyT, [358](#)
  - ExpandBlockBiDiagonalToBruhat, [344](#)
  - expandLCRE, [349](#)
  - failure, [377](#)
  - fflas\_const\_cast, [364](#), [377](#)
  - fgesv, [308](#), [309](#), [366](#)
  - fgetrs, [306](#), [307](#), [365](#)
  - ForceCheck\_charpoly, [304](#)

- ForceCheck\_Det, [304](#)
- ForceCheck\_invert, [304](#)
- ForceCheck\_PLUQ, [303](#)
- fsytrf, [312](#), [313](#)
- fsytrf\_BC\_Crout, [352](#)
- fsytrf\_BC\_RL, [352](#)
- fsytrf\_LOW\_RPM\_BC\_Crout, [353](#)
- fsytrf\_nonunit, [313](#), [353](#), [354](#)
- fsytrf\_RPM, [354](#)
- fsytrf\_UP\_RPM, [353](#)
- fsytrf\_UP\_RPM\_BC\_Crout, [353](#)
- fsytrf\_UP\_RPM\_BC\_RL, [352](#)
- ftssyr2k, [311](#)
- ftstr, [311](#)
- fttri, [309](#), [366](#)
- fttrm, [310](#), [367](#)
- getEchelonForm, [337](#), [338](#)
- getEchelonForm< FFLAS\_FIELD< FFLAS\_ELT >  
>, [375](#)
- getEchelonTransform, [338](#)
- getEchelonTransform< FFLAS\_FIELD< FFLAS\_ELT  
> >, [375](#)
- getLTBruhatGen, [342](#), [343](#)
- getReducedEchelonForm, [339](#), [340](#)
- getReducedEchelonForm< FFLAS\_FIELD<  
FFLAS\_ELT > >, [376](#)
- getReducedEchelonTransform, [341](#)
- getReducedEchelonTransform< FFLAS\_FIELD<  
FFLAS\_ELT > >, [376](#)
- getTriangular, [336](#)
- getTriangular< FFLAS\_FIELD< FFLAS\_ELT > >,  
[374](#), [375](#)
- getTridiagonal, [354](#)
- Invert, [321](#), [369](#)
- Invert2, [322](#), [369](#)
- isOdd, [377](#)
- IsSingular, [326](#), [371](#)
- KrylovElim, [371](#)
- LAPACKPerm2MathPerm, [304](#)
- LeadingSubmatrixRankProfiles, [332](#)
- LQUPtoInverseOfFullRankMinor, [346](#), [377](#)
- LTBruhatGen, [342](#)
- LTQSorter, [343](#)
- LUdivine, [315](#), [355](#), [367](#)
- LUdivine\_gauss, [354](#), [368](#)
- LUdivine\_small, [355](#), [367](#)
- MathPerm2LAPACKPerm, [304](#)
- MatrixApplyS, [357](#), [358](#)
- MatrixApplyT, [359](#)
- MatVecMinPoly, [325](#), [370](#)
- MinPoly, [324](#), [370](#)
- MonotonicApplyP, [306](#)
- MonotonicCompress, [356](#)
- MonotonicCompressCycles, [356](#)
- MonotonicCompressMorePivots, [356](#)
- MonotonicExpand, [357](#)
- NonZeroRandomMatrix, [377](#), [378](#)
- NullSpaceBasis, [329](#), [373](#)
- pColumnEchelonForm, [316](#)
- pColumnRankProfile, [332](#)
- pDet, [327](#)
- PermApplyS, [358](#)
- PermApplyT, [360](#)
- PLUQ, [313](#)–[315](#), [363](#), [364](#), [367](#)
- PLUQ\_basecaseCrout, [362](#)
- PLUQ\_basecaseV2, [362](#)
- PLUQ\_basecaseV3, [362](#)
- PLUQtoEchelonPermutation, [341](#)
- pPLUQ, [314](#)
- pRank, [326](#)
- pReducedColumnEchelonForm, [319](#)
- pReducedRowEchelonForm, [320](#)
- productBruhatxTS, [346](#), [349](#)
- pRowEchelonForm, [318](#)
- pRowRankProfile, [331](#)
- pSolve, [329](#)
- RandInt, [381](#)
- RandomIndexSubset, [382](#)
- RandomLTQSMatrixWithRankandQSorter, [390](#)
- RandomLTQSRankProfileMatrix, [384](#)
- RandomMatrix, [378](#), [379](#)
- RandomMatrixWithDet, [389](#)
- RandomMatrixWithRank, [381](#), [382](#)
- RandomMatrixWithRankandRandomRPM, [387](#)
- RandomMatrixWithRankandRPM, [384](#), [385](#)
- RandomNullSpaceVector, [329](#), [347](#), [373](#)
- RandomPermutation, [383](#)
- RandomRankProfileMatrix, [383](#)
- RandomSymmetricMatrix, [381](#)
- RandomSymmetricMatrixWithRankandRandom-  
RPM, [388](#)
- RandomSymmetricMatrixWithRankandRPM, [385](#),  
[386](#)
- RandomSymmetricRankProfileMatrix, [384](#)
- RandomTriangularMatrix, [379](#), [380](#)
- Rank, [325](#), [326](#), [371](#)
- RankProfileFromLU, [332](#)
- ReducedColumnEchelonForm, [318](#), [319](#), [369](#)
- ReducedRowEchelonForm, [319](#), [320](#), [368](#)
- RowEchelonForm, [317](#), [318](#), [368](#)
- RowRankProfile, [330](#), [331](#), [373](#)
- RowRankProfileSubmatrix, [334](#), [374](#)
- RowRankProfileSubmatrixIndices, [333](#), [374](#)
- Solve, [328](#), [372](#)
- solveLB, [348](#), [372](#)
- solveLB2, [348](#), [372](#)
- SpecRankProfile, [371](#)
- swapval, [383](#)
- threads\_fgemm, [363](#)
- threads\_ftsm, [363](#)
- TInverter, [345](#), [348](#)
- trinv\_left, [310](#), [367](#)
- ffpack-fgesv.C, [1107](#)
- main, [1108](#)
- ffpack-solve.C, [1108](#)
- main, [1108](#)

- ffpack.C, 984
  - applyP\_modular\_double, 990
  - ColRankProfileSubmatrix\_modular\_double, 1002
  - ColRankProfileSubmatrixIndices\_modular\_double, 1002
  - ColumnEchelonForm\_modular\_double, 992
  - ColumnEchelonForm\_modular\_float, 993
  - ColumnEchelonForm\_modular\_int32\_t, 994
  - ColumnRankProfile\_modular\_double, 1001
  - composePermutationsLLL, 989
  - composePermutationsLLM, 989
  - composePermutationsMLM, 989
  - cyclic\_shift\_col\_modular\_double, 990
  - cyclic\_shift\_mathPerm, 989
  - cyclic\_shift\_row\_modular\_double, 989
  - Det\_modular\_double, 999
  - fgesv\_modular\_double, 991
  - fgesvin\_modular\_double, 991
  - fgetrsin\_modular\_double, 990
  - fgetrsv\_modular\_double, 990
  - fttrtri\_modular\_double, 991
  - fttrtm\_modular\_double, 992
  - getEchelonForm\_modular\_double, 1003
  - getEchelonFormin\_modular\_double, 1003
  - getEchelonTransform\_modular\_double, 1003
  - getReducedEchelonForm\_modular\_double, 1004
  - getReducedEchelonFormin\_modular\_double, 1004
  - getReducedEchelonTransform\_modular\_double, 1004
  - getTriangular\_modular\_double, 1002
  - getTriangularin\_modular\_double, 1003
  - Invert2\_modular\_double, 998
  - Invert\_modular\_double, 998
  - Invertin\_modular\_double, 998
  - IsSingular\_modular\_double, 999
  - KrylovElim\_modular\_double, 998
  - LAPACKPerm2MathPerm, 988
  - LeadingSubmatrixRankProfiles, 1001
  - LUdivine\_modular\_double, 992
  - MathPerm2LAPACKPerm, 988
  - MatrixApplyS\_modular\_double, 988
  - MatrixApplyT\_modular\_double, 988
  - NullSpaceBasis\_modular\_double, 1000
  - pColumnEchelonForm\_modular\_double, 995
  - pColumnEchelonForm\_modular\_float, 996
  - pColumnEchelonForm\_modular\_int32\_t, 997
  - PermApplyS\_double, 988
  - PermApplyT\_double, 989
  - PLUQ\_modular\_double, 992
  - PLUQtoEchelonPermutation, 1004
  - pReducedColumnEchelonForm\_modular\_double, 996
  - pReducedColumnEchelonForm\_modular\_float, 996
  - pReducedColumnEchelonForm\_modular\_int32\_t, 997
  - pReducedRowEchelonForm\_modular\_double, 996
  - pReducedRowEchelonForm\_modular\_float, 997
  - pReducedRowEchelonForm\_modular\_int32\_t, 998
  - pRowEchelonForm\_modular\_double, 995
  - pRowEchelonForm\_modular\_float, 996
  - pRowEchelonForm\_modular\_int32\_t, 997
  - RandomNullSpaceVector\_modular\_double, 1000
  - Rank\_modular\_double, 999
  - RankProfileFromLU, 1001
  - ReducedColumnEchelonForm\_modular\_double, 993
  - ReducedColumnEchelonForm\_modular\_float, 994
  - ReducedColumnEchelonForm\_modular\_int32\_t, 995
  - ReducedRowEchelonForm\_modular\_double, 993
  - ReducedRowEchelonForm\_modular\_float, 994
  - ReducedRowEchelonForm\_modular\_int32\_t, 995
  - RowEchelonForm\_modular\_double, 992
  - RowEchelonForm\_modular\_float, 993
  - RowEchelonForm\_modular\_int32\_t, 994
  - RowRankProfile\_modular\_double, 1001
  - RowRankProfileSubmatrix\_modular\_double, 1002
  - RowRankProfileSubmatrixIndices\_modular\_double, 1001
  - Solve\_modular\_double, 999
  - solveLB2\_modular\_double, 1000
  - solveLB\_modular\_double, 1000
  - SpecRankProfile\_modular\_double, 999
  - trinv\_left\_modular\_double, 991
- ffpack.doxy, 914
- ffpack.h, 914
  - \_\_FFLASFFPACK\_FTRSSYR2K\_THRESHOLD, 923
  - \_\_FFLASFFPACK\_FTRSTR\_THRESHOLD, 923
- ffpack.inl, 924
  - \_\_FFLASFFPACK\_ffpack\_INL, 925
- FFPACK::Protected, 391
  - ArithProg, 395
  - CompressRows, 396
  - CompressRowsQA, 397
  - CompressRowsQK, 397
  - Danilevski, 395
  - DeCompressRows, 397
  - DeCompressRowsQA, 398
  - DeCompressRowsQK, 397
  - fgemv\_kgf, 394
  - GaussJordan, 393
  - Hybrid\_KGF\_LUK\_MinPoly, 396
  - KellerGehrig, 393
  - KGFast, 394
  - KGFast\_generalized, 394
  - LUdivine\_construct, 392, 398
  - LUKrylov, 394
  - LUKrylov\_KGFast, 395
  - MatVecMinPoly, 396
  - newD, 396
  - RandomKrylovPrecond, 395
  - updateD, 396
- ffpack\_bruhatgen.inl, 925



- \_\_FFLASFFPACK\_ffpack\_bruhatgen\_inl, 926
- ffpack\_c.h, 1005
  - applyP\_modular\_double, 1011
  - ColRankProfileSubmatrix\_modular\_double, 1022
  - ColRankProfileSubmatrixIndices\_modular\_double, 1021
  - ColumnEchelonForm\_modular\_double, 1014
  - ColumnEchelonForm\_modular\_float, 1015
  - ColumnEchelonForm\_modular\_int32\_t, 1015
  - ColumnRankProfile\_modular\_double, 1020
  - composePermutationsLLL, 1011
  - composePermutationsLLM, 1010
  - composePermutationsMLM, 1011
  - cyclic\_shift\_col\_modular\_double, 1011
  - cyclic\_shift\_mathPerm, 1011
  - cyclic\_shift\_row\_modular\_double, 1011
  - Det\_modular\_double, 1019
  - FFLAS\_C\_DIAG, 1008
  - FFLAS\_C\_ORDER, 1008
  - FFLAS\_C\_SIDE, 1008
  - FFLAS\_C\_TRANSPOSE, 1008
  - FFLAS\_C\_UPLO, 1008
  - FflasColMajor, 1008
  - FflasLeft, 1009
  - FflasLower, 1008
  - FflasNonUnit, 1008
  - FflasNoTrans, 1008
  - FflasRight, 1009
  - FflasRowMajor, 1008
  - FflasTrans, 1008
  - FflasUnit, 1008
  - FflasUpper, 1008
  - FFPACK\_C\_CHARPOLY\_TAG, 1009
  - FFPACK\_C\_LU\_TAG, 1009
  - FFPACK\_C\_MINPOLY\_TAG, 1009
  - FFPACK\_COMPILED, 1008
  - FfpackArithProg, 1009
  - FfpackDanilevski, 1009
  - FfpackDense, 1009
  - FfpackHybrid, 1009
  - FfpackKG, 1009
  - FfpackKGF, 1009
  - FfpackKGFast, 1009
  - FfpackKGFastG, 1009
  - FfpackLUK, 1009
  - FfpackSingular, 1009
  - FfpackSlabRecursive, 1009
  - FfpackTileRecursive, 1009
  - fgesv\_modular\_double, 1012
  - fgesvin\_modular\_double, 1012
  - fgetrs\_modular\_double, 1012
  - fgetrsin\_modular\_double, 1012
  - fttrtri\_modular\_double, 1013
  - fttrrm\_modular\_double, 1013
  - getEchelonForm\_modular\_double, 1022
  - getEchelonFormin\_modular\_double, 1023
  - getEchelonTransform\_modular\_double, 1023
  - getReducedEchelonForm\_modular\_double, 1023
  - getReducedEchelonFormin\_modular\_double, 1024
  - getReducedEchelonTransform\_modular\_double, 1024
  - getTriangular\_modular\_double, 1022
  - getTriangularin\_modular\_double, 1022
  - Invert2\_modular\_double, 1018
  - Invert\_modular\_double, 1018
  - Invertin\_modular\_double, 1018
  - IsSingular\_modular\_double, 1019
  - KrylovElim\_modular\_double, 1018
  - LAPACKPerm2MathPerm, 1009
  - LeadingSubmatrixRankProfiles, 1021
  - LUdivine\_gauss\_modular\_double, 1014
  - LUdivine\_modular\_double, 1013
  - LUdivine\_small\_modular\_double, 1014
  - MathPerm2LAPACKPerm, 1009
  - MatrixApplyS\_modular\_double, 1010
  - MatrixApplyT\_modular\_double, 1010
  - NullSpaceBasis\_modular\_double, 1020
  - PermApplyS\_double, 1010
  - PermApplyT\_double, 1010
  - PLUQ\_modular\_double, 1013
  - PLUQtoEchelonPermutation, 1024
  - RandomNullSpaceVector\_modular\_double, 1020
  - Rank\_modular\_double, 1019
  - RankProfileFromLU, 1021
  - ReducedColumnEchelonForm\_modular\_double, 1016
  - ReducedColumnEchelonForm\_modular\_float, 1016
  - ReducedColumnEchelonForm\_modular\_int32\_t, 1017
  - ReducedRowEchelonForm2\_modular\_double, 1017
  - ReducedRowEchelonForm\_modular\_double, 1016
  - ReducedRowEchelonForm\_modular\_float, 1016
  - ReducedRowEchelonForm\_modular\_int32\_t, 1017
  - REF\_modular\_double, 1017
  - RowEchelonForm\_modular\_double, 1014
  - RowEchelonForm\_modular\_float, 1015
  - RowEchelonForm\_modular\_int32\_t, 1015
  - RowRankProfile\_modular\_double, 1020
  - RowRankProfileSubmatrix\_modular\_double, 1021
  - RowRankProfileSubmatrixIndices\_modular\_double, 1021
  - Solve\_modular\_double, 1019
  - solveLB2\_modular\_double, 1020
  - solveLB\_modular\_double, 1019
  - SpecRankProfile\_modular\_double, 1018
  - trinv\_left\_modular\_double, 1013
- FFPACK\_C\_CHARPOLY\_TAG
  - ffpack\_c.h, 1009
- FFPACK\_C\_LU\_TAG
  - ffpack\_c.h, 1009
- FFPACK\_C\_MINPOLY\_TAG
  - ffpack\_c.h, 1009
- ffpack\_charpoly.inl, 926

- \_\_FFLASFFPACK\_charpoly\_INL, 927
- ffpack\_charpoly\_danilevski.inl, 927
- \_\_FFLASFFPACK\_ffpack\_charpoly\_danilveski\_INL, 927
- ffpack\_charpoly\_kgfast.inl, 927
- \_\_FFLASFFPACK\_ffpack\_charpoly\_kgfast\_INL, 928
- ffpack\_charpoly\_kgfastgeneralized.inl, 928
- \_\_FFLASFFPACK\_ffpack\_charpoly\_kgfastgeneralized\_INL, 928
- ffpack\_charpoly\_kglu.inl, 928
- \_\_FFLASFFPACK\_ffpack\_charpoly\_kglu\_INL, 929
- ffpack\_charpoly\_mp.inl, 929
- \_\_FFPACK\_charpoly\_mp\_INL, 929
- FFPACK\_COMPILED
- ffpack\_c.h, 1008
- ffpack\_det\_mp.inl, 929
- \_\_FFPACK\_det\_mp\_INL, 930
- ffpack\_echelonforms.inl, 930
- \_\_FFLASFFPACK\_GAUSSJORDAN\_BASECASE, 931
- \_\_FFLASFFPACK\_ffpack\_echelon\_forms\_INL, 931
- ffpack\_fgesv.inl, 931
- \_\_FFLASFFPACK\_ffpack\_fgesv\_INL, 932
- ffpack\_fgetrs.inl, 932
- \_\_FFLASFFPACK\_ffpack\_fgetrs\_INL, 932
- ffpack\_frobenius.inl, 932
- ffpack\_fsytrf.inl, 933
- \_\_FFLASFFPACK\_ffpack\_fsytrf\_INL, 934
- ffpack\_ftrssyr2k.inl, 934
- \_\_FFLASFFPACK\_ffpack\_ftrssyr2k\_INL, 935
- ffpack\_ftrstr.inl, 935
- \_\_FFLASFFPACK\_ffpack\_ftrstr\_INL, 935
- ffpack\_ftrtr.inl, 935
- \_\_FFLASFFPACK\_ffpack\_ftrtr\_INL, 936
- ENABLE\_ALL\_CHECKINGS, 936
- ffpack\_inst.C, 1024
- \_\_FFPACK\_INST\_C, 1025
- FFLAS\_COMPILED, 1025
- FFLAS\_ELT, 1025
- FFLAS\_FIELD, 1025
- INST\_OR\_DECL, 1025
- ffpack\_inst.h, 1025
- FFLAS\_COMPILED, 1026
- FFLAS\_ELT, 1026
- FFLAS\_FIELD, 1026
- INST\_OR\_DECL, 1026
- ffpack\_inst\_implem.inl, 1027
- ffpack\_invert.inl, 936
- \_\_FFLASFFPACK\_ffpack\_invert\_INL, 936
- ffpack\_krylovelim.inl, 937
- \_\_FFLASFFPACK\_ffpack\_krylovelim\_INL, 937
- ffpack\_ludivine.inl, 937
- \_\_FFLASFFPACK\_ffpack\_ludivine\_INL, 937
- ffpack\_ludivine\_mp.inl, 938
- \_\_FFPACK\_ludivine\_mp\_INL, 938
- ffpack\_minpoly.inl, 938
- \_\_FFLASFFPACK\_ffpack\_minpoly\_INL, 939
- ffpack\_permutation.inl, 939
- \_\_FFLASFFPACK\_ffpack\_permutation\_INL, 941
- FFLASFFPACK\_PERM\_BKSIZE, 941
- ffpack\_pluq.inl, 941
- \_\_FFLASFFPACK\_ffpack\_pluq\_INL, 942
- CROUT, 942
- ffpack\_pluq\_mp.inl, 942
- \_\_FFPACK\_pluq\_mp\_INL, 942
- ffpack\_ppluq.inl, 942
- \_\_FFLASFFPACK\_ffpack\_ppluq\_INL, 943
- \_\_FFLAS\_\_TRSM\_READONLY, 943
- PBASECASE\_K, 943
- ffpack\_rankprofiles.inl, 943
- \_\_FFLASFFPACK\_ffpack\_rank\_profiles\_INL, 944
- FpackArithProg
- ffpack\_c.h, 1009
- FpackDanilevski
- ffpack\_c.h, 1009
- FpackDense
- ffpack\_c.h, 1009
- FpackHybrid
- ffpack\_c.h, 1009
- FpackKG
- ffpack\_c.h, 1009
- FpackKGF
- ffpack\_c.h, 1009
- FpackKGFast
- ffpack\_c.h, 1009
- FpackKGFastG
- ffpack\_c.h, 1009
- FpackLUK
- ffpack\_c.h, 1009
- FpackSingular
- ffpack\_c.h, 1009
- FpackSlabRecursive
- ffpack\_c.h, 1009
- FpackTileRecursive
- ffpack\_c.h, 1009
- fgemm
- FFLAS, 88–90, 92–97, 144, 176–178
- fgemm\_3\_modular\_double
- fflas\_c.h, 962
- fflas\_lvl3.C, 983
- fgemm\_classical.inl, 835
- fgemm\_classical\_mp.inl, 835
- \_\_FFPACK\_fgemm\_classical\_INL, 837
- fgemm\_convert
- FFLAS::Protected, 213
- fgemm\_winograd.inl, 837
- \_\_FFLASFFPACK\_fflas\_fflas\_fgemm\_winograd\_INL, 839
- NEWWINO, 839
- fgemv
- FFLAS, 97–102, 173, 184
- fgemv\_2\_modular\_double
- fflas\_c.h, 961
- fflas\_lvl2.C, 981



- fgemv\_convert
  - FFLAS::Protected, 218
- fgemv\_kgf
  - FFPACK::Protected, 394
- fger
  - FFLAS, 103–106, 173
- fger\_2\_modular\_double
  - fflas\_c.h, 961
  - fflas\_lvl2.C, 982
- fger\_convert
  - FFLAS::Protected, 218
- fgesv
  - FFPACK, 308, 309, 366
- fgesv\_modular\_double
  - ffpack.C, 991
  - ffpack\_c.h, 1012
- fgesvin\_modular\_double
  - ffpack.C, 991
  - ffpack\_c.h, 1012
- fgetrs
  - FFPACK, 306, 307, 365
- fgetrs\_modular\_double
  - ffpack\_c.h, 1012
- fgetrsin\_modular\_double
  - ffpack.C, 990
  - ffpack\_c.h, 1012
- fgetrsv\_modular\_double
  - ffpack.C, 990
- fidentity
  - FFLAS, 136, 137, 166
- fidentity\_2\_modular\_double
  - fflas\_c.h, 958
  - fflas\_lvl2.C, 979
- Field
  - Bench< Elt >, 407
  - benchmark-fgemm-rns.C, 788
  - benchmark-pluq.C, 801
  - FieldSimd< \_Field >, 447
  - Sparse< \_Field, SparseMatrix\_t::COO >, 736
  - Sparse< \_Field, SparseMatrix\_t::COO\_ZO >, 737
  - Sparse< \_Field, SparseMatrix\_t::CSR >, 739
  - Sparse< \_Field, SparseMatrix\_t::CSR\_HYB >, 741
  - Sparse< \_Field, SparseMatrix\_t::CSR\_ZO >, 743
  - Sparse< \_Field, SparseMatrix\_t::ELL >, 744
  - Sparse< \_Field, SparseMatrix\_t::ELL\_ZO >, 749
  - Sparse< \_Field, SparseMatrix\_t::HYB\_ZO >, 751
  - Sparse< \_Field, SparseMatrix\_t::SELL >, 752
  - Sparse< \_Field, SparseMatrix\_t::SELL\_ZO >, 754
  - Test< Elt >, 762
  - test-compressQ.C, 1056
- field
  - associatedDelayedField< const FFPACK::RNSIntegerMod< T > >, 404
  - associatedDelayedField< const Givaro::Modular< T, X > >, 405
  - associatedDelayedField< const Givaro::ModularBalanced< T > >, 405
  - associatedDelayedField< const Givaro::ZRing< T > >, 406
  - associatedDelayedField< Field >, 404
  - field-traits.h, 944
  - field.doxy, 947
  - FieldMax
    - MMHelper< Field, AlgoTrait, ModeTrait, ParSeqTrait >, 502
  - FieldMin
    - MMHelper< Field, AlgoTrait, ModeTrait, ParSeqTrait >, 502
  - FieldSimd
    - FieldSimd< \_Field >, 448
  - FieldSimd< \_Field >, 446
    - add, 448
    - add\_r, 449
    - addin, 449
    - addin\_r, 449
    - alignment, 452
    - axpy, 451
    - axpy\_r, 451
    - axpyin, 451
    - axpyin\_r, 451
    - Element, 447
    - Field, 447
    - FieldSimd, 448
    - init, 448
    - maxpy, 452
    - maxpyin, 452
    - mod, 450
    - mul, 450
    - mul\_r, 450, 451
    - mulin, 450
    - operator=, 448
    - scalar\_t, 447
    - simd, 447
    - sub, 449
    - sub\_r, 449, 450
    - subin, 449
    - subin\_r, 450
    - vect\_size, 452
    - vect\_t, 447
    - zero, 450
  - FieldTraits< FFPACK::RNSInteger< T > >, 453
    - balanced, 453
    - category, 453
  - FieldTraits< FFPACK::RNSIntegerMod< T > >, 453
    - balanced, 454
    - category, 454
  - FieldTraits< Field >, 452
    - balanced, 453
    - category, 453
  - FieldTraits< Givaro::Modular< Element > >, 454
    - balanced, 454
    - category, 454
  - FieldTraits< Givaro::ModularBalanced< Element > >, 454
    - balanced, 455

- category, [455](#)
- FieldTraits< Givaro::ZRing< double > >, [455](#)
  - balanced, [455](#)
  - category, [455](#)
- FieldTraits< Givaro::ZRing< float > >, [455](#)
  - balanced, [456](#)
  - category, [456](#)
- FieldTraits< Givaro::ZRing< Givaro::Integer > >, [456](#)
  - balanced, [456](#)
  - category, [456](#)
- FieldTraits< Givaro::ZRing< int16\_t > >, [456](#)
  - balanced, [457](#)
  - category, [457](#)
- FieldTraits< Givaro::ZRing< int32\_t > >, [457](#)
  - balanced, [457](#)
  - category, [457](#)
- FieldTraits< Givaro::ZRing< int64\_t > >, [457](#)
  - balanced, [458](#)
  - category, [457](#)
- FieldTraits< Givaro::ZRing< RecInt::ruint< K > > >, [458](#)
  - balanced, [458](#)
  - category, [458](#)
- FieldTraits< Givaro::ZRing< uint16\_t > >, [458](#)
  - balanced, [459](#)
  - category, [458](#)
- FieldTraits< Givaro::ZRing< uint32\_t > >, [459](#)
  - balanced, [459](#)
  - category, [459](#)
- FieldTraits< Givaro::ZRing< uint64\_t > >, [459](#)
  - balanced, [459](#)
  - category, [459](#)
- fill\_value
  - benchmark-fgemv.C, [792](#)
- findArgument
  - args-parser.h, [1042](#)
- finit
  - FFLAS, [108](#), [110](#), [129](#), [137](#), [157](#), [167](#)
- finit\_rns
  - FFLAS, [155](#), [156](#)
- finit\_trans\_rns
  - FFLAS, [155](#)
- first\_component
  - Compose< H1, H2 >, [424](#)
- firstBlockSize
  - ForStrategy1D< blocksize\_t, Cut, Param >, [462](#)
- fiszero
  - FFLAS, [131](#), [136](#), [159](#), [166](#)
- fiszero\_1\_modular\_double
  - fflas\_c.h, [955](#)
  - fflas\_lvl1.C, [975](#)
- fiszero\_2\_modular\_double
  - fflas\_c.h, [958](#)
  - fflas\_lvl2.C, [979](#)
- Fixed, [460](#)
- FixedPreIntTag, [460](#)
- flimits.h, [1048](#)
  - in\_range, [1048](#), [1049](#)
- FLOAT\_MOD
  - fflas\_simd.h, [873](#)
- FloatingPointTestDistribution
  - ScalFunctionsBase< Element, typename enable\_if< is\_floating\_point< Element >::value >::type >::FloatingPointTestDistribution, [460](#)
- Floats
  - benchmark-dgemm.C, [782](#)
- floor
  - ScalFunctionsBase< Element, typename enable\_if< is\_floating\_point< Element >::value >::type >, [559](#)
  - Simd256\_impl< true, false, true, 8 >, [630](#)
  - Simd512\_impl< true, false, true, 8 >, [712](#)
- fma
  - ScalFunctionsBase< Element, typename enable\_if< is\_floating\_point< Element >::value >::type >, [560](#)
  - ScalFunctionsBase< Element, typename enable\_if< is\_integral< Element >::value >::type >, [561](#)
- fmadd
  - ScalFunctions< Element >, [556](#)
  - Simd128\_impl< true, true, false, 2 >, [572](#)
  - Simd128\_impl< true, true, false, 4 >, [582](#)
  - Simd128\_impl< true, true, false, 8 >, [592](#)
  - Simd128\_impl< true, true, true, 2 >, [600](#)
  - Simd128\_impl< true, true, true, 4 >, [609](#)
  - Simd128\_impl< true, true, true, 8 >, [618](#)
  - Simd256\_impl< true, false, true, 8 >, [629](#)
  - Simd256\_impl< true, true, false, 2 >, [640](#)
  - Simd256\_impl< true, true, false, 4 >, [656](#), [657](#)
  - Simd256\_impl< true, true, false, 8 >, [668](#)
  - Simd256\_impl< true, true, true, 2 >, [676](#)
  - Simd256\_impl< true, true, true, 4 >, [686](#), [692](#)
  - Simd256\_impl< true, true, true, 8 >, [701](#)
  - Simd512\_impl< true, false, true, 8 >, [710](#)
  - Simd512\_impl< true, true, false, 8 >, [721](#)
  - Simd512\_impl< true, true, true, 8 >, [730](#)
- fmaddin
  - ScalFunctions< Element >, [556](#)
  - Simd128\_impl< true, true, false, 2 >, [572](#)
  - Simd128\_impl< true, true, false, 4 >, [582](#)
  - Simd128\_impl< true, true, false, 8 >, [592](#)
  - Simd128\_impl< true, true, true, 2 >, [600](#)
  - Simd128\_impl< true, true, true, 4 >, [609](#)
  - Simd128\_impl< true, true, true, 8 >, [618](#)
  - Simd256\_impl< true, false, true, 8 >, [629](#)
  - Simd256\_impl< true, true, false, 2 >, [640](#)
  - Simd256\_impl< true, true, false, 4 >, [657](#)
  - Simd256\_impl< true, true, false, 8 >, [668](#)
  - Simd256\_impl< true, true, true, 2 >, [676](#)
  - Simd256\_impl< true, true, true, 4 >, [686](#), [692](#)
  - Simd256\_impl< true, true, true, 8 >, [701](#)
  - Simd512\_impl< true, false, true, 8 >, [711](#)
  - Simd512\_impl< true, true, false, 8 >, [721](#)
  - Simd512\_impl< true, true, true, 8 >, [730](#)
- fmaddx

- ScalFunctionsBase< Element, typename enable\_if<  
   is\_integral< Element >::value >::type >, 561  
 Simd128\_impl< true, true, false, 2 >, 568  
 Simd128\_impl< true, true, false, 4 >, 578  
 Simd128\_impl< true, true, false, 8 >, 588  
 Simd128\_impl< true, true, true, 2 >, 600  
 Simd128\_impl< true, true, true, 4 >, 609  
 Simd128\_impl< true, true, true, 8 >, 618  
 Simd256\_impl< true, true, false, 2 >, 635  
 Simd256\_impl< true, true, false, 4 >, 647, 649  
 Simd256\_impl< true, true, false, 8 >, 664  
 Simd256\_impl< true, true, true, 2 >, 676  
 Simd256\_impl< true, true, true, 4 >, 686, 692  
 Simd256\_impl< true, true, true, 8 >, 702  
 Simd512\_impl< true, true, false, 8 >, 717  
 Simd512\_impl< true, true, true, 8 >, 730
- fmaddxin  
 ScalFunctionsBase< Element, typename enable\_if<  
   is\_integral< Element >::value >::type >, 561  
 Simd128\_impl< true, true, false, 2 >, 568  
 Simd128\_impl< true, true, false, 4 >, 578  
 Simd128\_impl< true, true, false, 8 >, 588  
 Simd128\_impl< true, true, true, 2 >, 601  
 Simd128\_impl< true, true, true, 4 >, 609  
 Simd128\_impl< true, true, true, 8 >, 619  
 Simd256\_impl< true, true, false, 2 >, 636  
 Simd256\_impl< true, true, false, 4 >, 647, 650  
 Simd256\_impl< true, true, false, 8 >, 664  
 Simd256\_impl< true, true, true, 2 >, 676  
 Simd256\_impl< true, true, true, 4 >, 686, 693  
 Simd256\_impl< true, true, true, 8 >, 702  
 Simd512\_impl< true, true, false, 8 >, 717  
 Simd512\_impl< true, true, true, 8 >, 730
- fmove  
 FFLAS, 139, 170
- fmove\_2\_modular\_double  
 fflas\_c.h, 960  
 fflas\_lvl2.C, 980
- fmsub  
 ScalFunctions< Element >, 556  
 Simd128\_impl< true, true, false, 2 >, 573  
 Simd128\_impl< true, true, false, 4 >, 583  
 Simd128\_impl< true, true, false, 8 >, 593  
 Simd128\_impl< true, true, true, 2 >, 601  
 Simd128\_impl< true, true, true, 4 >, 610  
 Simd128\_impl< true, true, true, 8 >, 619  
 Simd256\_impl< true, false, true, 8 >, 629  
 Simd256\_impl< true, true, false, 2 >, 640  
 Simd256\_impl< true, true, false, 4 >, 657, 658  
 Simd256\_impl< true, true, false, 8 >, 668  
 Simd256\_impl< true, true, true, 2 >, 677  
 Simd256\_impl< true, true, true, 4 >, 687, 693  
 Simd256\_impl< true, true, true, 8 >, 702  
 Simd512\_impl< true, false, true, 8 >, 711  
 Simd512\_impl< true, true, false, 8 >, 722  
 Simd512\_impl< true, true, true, 8 >, 731
- fmsubin  
 ScalFunctions< Element >, 556
- Simd128\_impl< true, true, false, 2 >, 573  
 Simd128\_impl< true, true, false, 4 >, 583  
 Simd128\_impl< true, true, false, 8 >, 593  
 Simd128\_impl< true, true, true, 2 >, 601  
 Simd128\_impl< true, true, true, 4 >, 610  
 Simd128\_impl< true, true, true, 8 >, 619  
 Simd256\_impl< true, false, true, 8 >, 629  
 Simd256\_impl< true, true, false, 2 >, 640  
 Simd256\_impl< true, true, false, 4 >, 658, 692  
 Simd256\_impl< true, true, true, 8 >, 702  
 Simd512\_impl< true, true, false, 8 >, 717  
 Simd512\_impl< true, true, true, 8 >, 731
- fmsubx  
 ScalFunctionsBase< Element, typename enable\_if<  
   is\_integral< Element >::value >::type >, 562  
 Simd128\_impl< true, true, false, 2 >, 569  
 Simd128\_impl< true, true, false, 4 >, 579  
 Simd128\_impl< true, true, false, 8 >, 589  
 Simd128\_impl< true, true, true, 2 >, 601  
 Simd128\_impl< true, true, true, 4 >, 610  
 Simd128\_impl< true, true, true, 8 >, 619  
 Simd256\_impl< true, true, false, 2 >, 636  
 Simd256\_impl< true, true, false, 4 >, 647, 650  
 Simd256\_impl< true, true, false, 8 >, 664  
 Simd256\_impl< true, true, true, 2 >, 677  
 Simd256\_impl< true, true, true, 4 >, 687, 693  
 Simd256\_impl< true, true, true, 8 >, 703  
 Simd512\_impl< true, true, false, 8 >, 717  
 Simd512\_impl< true, true, true, 8 >, 731
- fmsubxin  
 ScalFunctionsBase< Element, typename enable\_if<  
   is\_integral< Element >::value >::type >, 562  
 Simd128\_impl< true, true, false, 2 >, 569  
 Simd128\_impl< true, true, false, 4 >, 579  
 Simd128\_impl< true, true, false, 8 >, 589  
 Simd128\_impl< true, true, true, 2 >, 602  
 Simd128\_impl< true, true, true, 4 >, 610  
 Simd128\_impl< true, true, true, 8 >, 620  
 Simd256\_impl< true, true, false, 2 >, 636  
 Simd256\_impl< true, true, false, 4 >, 648, 650  
 Simd256\_impl< true, true, false, 8 >, 664  
 Simd256\_impl< true, true, true, 2 >, 677  
 Simd256\_impl< true, true, true, 4 >, 687, 694  
 Simd256\_impl< true, true, true, 8 >, 703  
 Simd512\_impl< true, true, false, 8 >, 718  
 Simd512\_impl< true, true, true, 8 >, 731
- fneg  
 FFLAS, 130, 138, 159, 168
- fneg\_1\_modular\_double  
 fflas\_c.h, 955  
 fflas\_lvl1.C, 974
- fneg\_2\_modular\_double  
 fflas\_c.h, 959  
 fflas\_lvl2.C, 980

- fnegin
  - FFLAS, [130](#), [138](#), [158](#), [168](#)
- fnegin\_1\_modular\_double
  - fflas\_c.h, [955](#)
  - fflas\_lvl1.C, [974](#)
- fnegin\_2\_modular\_double
  - fflas\_c.h, [959](#)
  - fflas\_lvl2.C, [979](#)
- fnmadd
  - ScalFunctions< Element >, [556](#)
  - Simd128\_impl< true, true, false, 2 >, [572](#)
  - Simd128\_impl< true, true, false, 4 >, [582](#)
  - Simd128\_impl< true, true, false, 8 >, [592](#)
  - Simd128\_impl< true, true, true, 2 >, [601](#)
  - Simd128\_impl< true, true, true, 4 >, [610](#)
  - Simd128\_impl< true, true, true, 8 >, [619](#)
  - Simd256\_impl< true, false, true, 8 >, [629](#)
  - Simd256\_impl< true, true, false, 2 >, [640](#)
  - Simd256\_impl< true, true, false, 4 >, [657](#)
  - Simd256\_impl< true, true, false, 8 >, [668](#)
  - Simd256\_impl< true, true, true, 2 >, [676](#)
  - Simd256\_impl< true, true, true, 4 >, [686](#), [693](#)
  - Simd256\_impl< true, true, true, 8 >, [702](#)
  - Simd512\_impl< true, false, true, 8 >, [711](#)
  - Simd512\_impl< true, true, false, 8 >, [721](#)
  - Simd512\_impl< true, true, true, 8 >, [730](#)
- fnmaddin
  - ScalFunctions< Element >, [557](#)
  - Simd128\_impl< true, true, false, 2 >, [573](#)
  - Simd128\_impl< true, true, false, 4 >, [582](#)
  - Simd128\_impl< true, true, false, 8 >, [592](#)
  - Simd128\_impl< true, true, true, 2 >, [601](#)
  - Simd128\_impl< true, true, true, 4 >, [610](#)
  - Simd128\_impl< true, true, true, 8 >, [619](#)
  - Simd256\_impl< true, false, true, 8 >, [629](#)
  - Simd256\_impl< true, true, false, 2 >, [640](#)
  - Simd256\_impl< true, true, false, 4 >, [657](#)
  - Simd256\_impl< true, true, false, 8 >, [668](#)
  - Simd256\_impl< true, true, true, 2 >, [676](#)
  - Simd256\_impl< true, true, true, 4 >, [687](#), [693](#)
  - Simd256\_impl< true, true, true, 8 >, [702](#)
  - Simd512\_impl< true, false, true, 8 >, [711](#)
  - Simd512\_impl< true, true, false, 8 >, [722](#)
  - Simd512\_impl< true, true, true, 8 >, [730](#)
- fnmaddx
  - ScalFunctionsBase< Element, typename enable\_if< is\_integral< Element >::value >::type >, [562](#)
  - Simd128\_impl< true, true, false, 2 >, [568](#)
  - Simd128\_impl< true, true, false, 4 >, [578](#)
  - Simd128\_impl< true, true, false, 8 >, [588](#)
  - Simd128\_impl< true, true, true, 2 >, [601](#)
  - Simd128\_impl< true, true, true, 4 >, [610](#)
  - Simd128\_impl< true, true, true, 8 >, [619](#)
  - Simd256\_impl< true, true, false, 2 >, [636](#)
  - Simd256\_impl< true, true, false, 4 >, [647](#), [650](#)
  - Simd256\_impl< true, true, false, 8 >, [664](#)
  - Simd256\_impl< true, true, true, 2 >, [676](#)
  - Simd256\_impl< true, true, true, 4 >, [687](#), [693](#)
- Simd256\_impl< true, true, true, 8 >, [702](#)
- Simd512\_impl< true, true, false, 8 >, [717](#)
- Simd512\_impl< true, true, true, 8 >, [730](#)
- fnmaddxin
  - ScalFunctionsBase< Element, typename enable\_if< is\_integral< Element >::value >::type >, [562](#)
  - Simd128\_impl< true, true, false, 2 >, [569](#)
  - Simd128\_impl< true, true, false, 4 >, [579](#)
  - Simd128\_impl< true, true, false, 8 >, [589](#)
  - Simd128\_impl< true, true, true, 2 >, [601](#)
  - Simd128\_impl< true, true, true, 4 >, [610](#)
  - Simd128\_impl< true, true, true, 8 >, [619](#)
  - Simd256\_impl< true, true, false, 2 >, [636](#)
  - Simd256\_impl< true, true, false, 4 >, [647](#), [650](#)
  - Simd256\_impl< true, true, false, 8 >, [664](#)
  - Simd256\_impl< true, true, true, 2 >, [676](#)
  - Simd256\_impl< true, true, true, 4 >, [687](#), [693](#)
  - Simd256\_impl< true, true, true, 8 >, [702](#)
  - Simd512\_impl< true, true, false, 8 >, [717](#)
  - Simd512\_impl< true, true, true, 8 >, [730](#)
- FOR1D
  - parallel.h, [1035](#)
- FOR2D
  - parallel.h, [1035](#)
- FORBLOCK1D
  - parallel.h, [1034](#)
- FORBLOCK2D
  - parallel.h, [1035](#)
- ForceCheck\_charpoly
  - FFPACK, [304](#)
- ForceCheck\_Det
  - FFPACK, [304](#)
- ForceCheck\_fgemm
  - FFLAS, [72](#)
- ForceCheck\_ftdsm
  - FFLAS, [72](#)
- ForceCheck\_invert
  - FFPACK, [304](#)
- ForceCheck\_PLUQ
  - FFPACK, [303](#)
- ForStrategy1D
  - ForStrategy1D< blocksize\_t, Cut, Param >, [461](#)
- ForStrategy1D< blocksize\_t, Cut, Param >, [461](#)
  - begin, [462](#)
  - blockindex, [462](#)
  - build, [461](#)
  - changeBS, [463](#)
  - current, [462](#)
  - end, [462](#)
  - firstBlockSize, [462](#)
  - ForStrategy1D, [461](#)
  - ibeg, [462](#)
  - iend, [462](#)
  - initialize, [461](#)
  - isTerminated, [461](#)
  - lastBlockSize, [462](#)
  - numBlock, [463](#)
  - numblocks, [462](#)

- operator++, 462
- ForStrategy2D
  - ForStrategy2D< blocksize\_t, Cut, Param >, 464
- ForStrategy2D< blocksize\_t, Cut, Param >, 463
  - \_ibeg, 465
  - \_iend, 465
  - \_jbeg, 465
  - \_jend, 465
  - blockindex, 465
  - BLOCKS, 466
  - changeCBS, 466
  - changeRBS, 466
  - colblockindex, 465
  - colBlockSize, 466
  - colnumblocks, 465
  - current, 466
  - ForStrategy2D, 464
  - ibegin, 464
  - iend, 464
  - initialize, 464
  - isTerminated, 464
  - jbegin, 464
  - jend, 464
  - lastCBS, 466
  - lastRBS, 466
  - numColBlock, 466
  - numRowBlock, 466
  - operator<<, 465
  - operator++, 464
  - rowblockindex, 465
  - rowBlockSize, 466
  - rownumblocks, 464
- frand
  - FFLAS, 131, 135
- freduce
  - FFLAS, 107–111, 157, 167
  - FFLAS::details, 201, 202
- freduce\_1\_modular\_double
  - fflas\_c.h, 954
  - fflas\_lvl1.C, 974
- freduce\_2\_modular\_double
  - fflas\_c.h, 959
  - fflas\_lvl2.C, 979
- freduce\_constoverride
  - FFLAS, 108, 110
- freducein\_1\_modular\_double
  - fflas\_c.h, 954
  - fflas\_lvl1.C, 974
- freducein\_2\_modular\_double
  - fflas\_c.h, 958
  - fflas\_lvl2.C, 979
- freivalds
  - FFLAS, 111
- fscal
  - FFLAS, 112–116, 161, 169
  - FFLAS::details, 202, 203
- fscal\_1\_modular\_double
  - fflas\_c.h, 956
- fflas\_lvl1.C, 975
- fscal\_2\_modular\_double
  - fflas\_c.h, 959
  - fflas\_lvl2.C, 980
- fscalin
  - FFLAS, 111, 113–116, 161, 169
  - FFLAS::details, 202, 203
- fscalin\_1\_modular\_double
  - fflas\_c.h, 956
  - fflas\_lvl1.C, 975
- fscalin\_2\_modular\_double
  - fflas\_c.h, 959
  - fflas\_lvl2.C, 980
- fspmm
  - FFLAS, 145
  - FFLAS::sparse\_details, 230–232
  - FFLAS::sparse\_details\_impl, 245, 246, 253, 254, 259, 263, 264, 272, 273
- fspmm\_dispatch
  - FFLAS::sparse\_details, 229
- fspmm\_mone
  - FFLAS::sparse\_details\_impl, 247, 254, 264, 265
- fspmm\_mone\_simd\_aligned
  - FFLAS::sparse\_details\_impl, 248, 255, 266
- fspmm\_mone\_simd\_unaligned
  - FFLAS::sparse\_details\_impl, 248, 255, 266
- fspmm\_one
  - FFLAS::sparse\_details\_impl, 247, 254, 264, 265
- fspmm\_one\_simd\_aligned
  - FFLAS::sparse\_details\_impl, 247, 255, 265
- fspmm\_one\_simd\_unaligned
  - FFLAS::sparse\_details\_impl, 247, 255, 265
- fspmm\_simd\_aligned
  - FFLAS::sparse\_details\_impl, 246, 253
- fspmm\_simd\_unaligned
  - FFLAS::sparse\_details\_impl, 246, 254
- fspmv
  - FFLAS, 145, 152
  - FFLAS::sparse\_details, 227–229, 236, 237
  - FFLAS::sparse\_details\_impl, 248, 249, 256, 260, 266, 267, 269, 270, 273–276
- fspmv\_dispatch
  - FFLAS::sparse\_details, 227
- fspmv\_mone
  - FFLAS::sparse\_details\_impl, 249, 256, 257, 267, 270, 271, 276, 277
- fspmv\_mone\_simd
  - FFLAS::sparse\_details\_impl, 271, 277
- fspmv\_one
  - FFLAS::sparse\_details\_impl, 249, 256, 257, 267, 270, 276, 277
- fspmv\_one\_simd
  - FFLAS::sparse\_details\_impl, 271, 277
- fspmv\_simd
  - FFLAS::sparse\_details\_impl, 269, 270, 275, 276
- fsquare
  - FFLAS, 91, 92, 178
- fsquare\_3\_modular\_double

- fflas\_c.h, [963](#)
- fflas\_lvl3.C, [984](#)
- fsquareCommon
  - FFLAS::Protected, [215](#)
- fsub
  - FFLAS, [78](#), [80](#), [164](#), [171](#)
- fsub\_1\_modular\_double
  - fflas\_c.h, [957](#)
  - fflas\_lvl1.C, [976](#)
- fsub\_2\_modular\_double
  - fflas\_c.h, [960](#)
  - fflas\_lvl2.C, [981](#)
- fsubin
  - FFLAS, [78](#), [81](#), [172](#)
- fsubin\_1\_modular\_double
  - fflas\_c.h, [957](#)
  - fflas\_lvl1.C, [977](#)
- fsubin\_2\_modular\_double
  - fflas\_c.h, [960](#)
  - fflas\_lvl2.C, [981](#)
- fswap
  - FFLAS, [133](#), [163](#)
- fswap\_1\_modular\_double
  - fflas\_c.h, [956](#)
  - fflas\_lvl1.C, [976](#)
- fsyr2k
  - FFLAS, [116](#)
- fsyrk
  - FFLAS, [117–124](#)
- fsyrk.C, [775](#)
  - CUBE, [775](#)
  - GFOPS, [775](#)
  - main, [775](#)
- fsyrk\_convert
  - FFLAS::Protected, [218](#)
- fsyrk\_strassen
  - FFLAS, [124](#), [142](#)
- fsytrf
  - FFPACK, [312](#), [313](#)
- fsytrf.C, [775](#)
  - CUBE, [776](#)
  - GFOPS, [776](#)
  - main, [776](#)
- fsytrf\_BC\_Crout
  - FFPACK, [352](#)
- fsytrf\_BC\_RL
  - FFPACK, [352](#)
- fsytrf\_LOW\_RPM\_BC\_Crout
  - FFPACK, [353](#)
- fsytrf\_nonunit
  - FFPACK, [313](#), [353](#), [354](#)
- fsytrf\_RPM
  - FFPACK, [354](#)
- fsytrf\_UP\_RPM
  - FFPACK, [353](#)
- fsytrf\_UP\_RPM\_BC\_Crout
  - FFPACK, [353](#)
- fsytrf\_UP\_RPM\_BC\_RL
  - FFPACK, [352](#)
- fflas\_lvl3.C, [983](#)
- ftmmLeftLowerNoTransNonUnit< Element >, [467](#)
- ftmmLeftLowerNoTransUnit< Element >, [467](#)
- ftmmLeftLowerTransNonUnit< Element >, [467](#)
- ftmmLeftLowerTransUnit< Element >, [467](#)
- ftmmLeftUpperNoTransNonUnit< Element >, [467](#)
- ftmmLeftUpperNoTransUnit< Element >, [467](#)
- ftmmLeftUpperTransNonUnit< Element >, [467](#)
- ftmmLeftUpperTransUnit< Element >, [468](#)
- ftmmRightLowerNoTransNonUnit< Element >, [468](#)
- ftmmRightLowerNoTransUnit< Element >, [468](#)
- ftmmRightLowerTransNonUnit< Element >, [468](#)
- ftmmRightLowerTransUnit< Element >, [468](#)
- ftmmRightUpperNoTransNonUnit< Element >, [468](#)
- ftmmRightUpperNoTransUnit< Element >, [468](#)
- ftmmRightUpperTransNonUnit< Element >, [468](#)
- ftmmRightUpperTransUnit< Element >, [469](#)
- ftmv
  - FFLAS, [140](#)
- ftsm
  - FFLAS, [126](#), [127](#), [141](#), [144](#), [145](#), [175](#)
- ftsm\_3\_modular\_double
  - fflas\_c.h, [962](#)
  - fflas\_lvl3.C, [983](#)
- ftsmLeftLowerNoTransNonUnit< Element >, [469](#)
- ftsmLeftLowerNoTransUnit< Element >, [469](#)
- ftsmLeftLowerTransNonUnit< Element >, [469](#)
- ftsmLeftLowerTransUnit< Element >, [469](#)
- ftsmLeftUpperNoTransNonUnit< Element >, [469](#)
- ftsmLeftUpperNoTransUnit< Element >, [470](#)
- ftsmLeftUpperTransNonUnit< Element >, [470](#)
- ftsmLeftUpperTransUnit< Element >, [470](#)
- ftsmRightLowerNoTransNonUnit< Element >, [470](#)
- ftsmRightLowerNoTransUnit< Element >, [470](#)
- ftsmRightLowerTransNonUnit< Element >, [470](#)
- ftsmRightLowerTransUnit< Element >, [470](#)
- ftsmRightUpperNoTransNonUnit< Element >, [470](#)
- ftsmRightUpperNoTransUnit< Element >, [471](#)
- ftsmRightUpperTransNonUnit< Element >, [471](#)
- ftsmRightUpperTransUnit< Element >, [471](#)
- ftssyr2k
  - FFPACK, [311](#)
- ftstr
  - FFPACK, [311](#)
- ftsv
  - FFLAS, [128](#), [174](#)
- ftsv\_2\_modular\_double
  - fflas\_c.h, [961](#)
  - fflas\_lvl2.C, [982](#)
- fttri
  - FFPACK, [309](#), [366](#)
- fttri.C, [776](#)
  - CUBE, [776](#)



- GFOPS, 776
- main, 777
- fftri\_modular\_double
  - ffpack.C, 991
  - ffpack\_c.h, 1013
- fftrtm
  - FFPACK, 310, 367
- fftrtm\_modular\_double
  - ffpack.C, 992
  - ffpack\_c.h, 1013
- fzero
  - FFLAS, 130, 133, 135, 159, 165
- fzero\_1\_modular\_double
  - fflas\_c.h, 955
  - fflas\_lvl1.C, 974
- fzero\_2\_modular\_double
  - fflas\_c.h, 958
  - fflas\_lvl2.C, 978
- gather
  - Simd128\_impl< true, true, false, 2 >, 567, 570
  - Simd128\_impl< true, true, false, 4 >, 577, 579
  - Simd128\_impl< true, true, false, 8 >, 587, 589
  - Simd128\_impl< true, true, true, 2 >, 597
  - Simd128\_impl< true, true, true, 4 >, 606
  - Simd128\_impl< true, true, true, 8 >, 615
  - Simd256\_impl< true, false, true, 8 >, 626
  - Simd256\_impl< true, true, false, 2 >, 634, 637
  - Simd256\_impl< true, true, false, 4 >, 646, 648, 651
  - Simd256\_impl< true, true, false, 8 >, 662, 665
  - Simd256\_impl< true, true, true, 2 >, 672
  - Simd256\_impl< true, true, true, 4 >, 683, 689
  - Simd256\_impl< true, true, true, 8 >, 698
  - Simd512\_impl< true, false, true, 8 >, 708
  - Simd512\_impl< true, true, false, 8 >, 715, 718
  - Simd512\_impl< true, true, true, 8 >, 726
- GaussJordan
  - FFPACK::Protected, 393
- GCC\_VERSION
  - fflas-ffpack-config.h, 824
- gebp
  - FFLAS::details, 206
- genData
  - benchmark-fgemv.C, 792
- GenericTag, 471
- genInputs
  - ScalFunctions< Element >, 554
- genInputsWithZero
  - ScalFunctions< Element >, 554
- get
  - Simd128\_impl< true, true, false, 8 >, 590
  - Simd128\_impl< true, true, true, 8 >, 615
  - Simd256\_impl< true, true, false, 8 >, 665
  - Simd256\_impl< true, true, true, 8 >, 698
- get\_default\_random\_generator
  - ScalFunctionsBase< Element, typename enable\_if< is\_floating\_point< Element >::value >::type >, 559
- ScalFunctionsBase< Element, typename enable\_if< is\_integral< Element >::value >::type >, 561
- getArgumentValue
  - FFLAS, 185
- getDataType
  - FFLAS, 151, 152
- getEchelonForm
  - FFPACK, 337, 338
- getEchelonForm< FFLAS\_FIELD< FFLAS\_ELT > >
  - FFPACK, 375
- getEchelonForm\_modular\_double
  - ffpack.C, 1003
  - ffpack\_c.h, 1022
- getEchelonFormin\_modular\_double
  - ffpack.C, 1003
  - ffpack\_c.h, 1023
- getEchelonTransform
  - FFPACK, 338
- getEchelonTransform< FFLAS\_FIELD< FFLAS\_ELT > >
  - FFPACK, 375
- getEchelonTransform\_modular\_double
  - ffpack.C, 1003
  - ffpack\_c.h, 1023
- getListArgs
  - args-parser.h, 1042
- getLTBruhatGen
  - FFPACK, 342, 343
- getReducedEchelonForm
  - FFPACK, 339, 340
- getReducedEchelonForm< FFLAS\_FIELD< FFLAS\_ELT > >
  - FFPACK, 376
- getReducedEchelonForm\_modular\_double
  - ffpack.C, 1004
  - ffpack\_c.h, 1023
- getReducedEchelonFormin\_modular\_double
  - ffpack.C, 1004
  - ffpack\_c.h, 1024
- getReducedEchelonTransform
  - FFPACK, 341
- getReducedEchelonTransform< FFLAS\_FIELD< FFLAS\_ELT > >
  - FFPACK, 376
- getReducedEchelonTransform\_modular\_double
  - ffpack.C, 1004
  - ffpack\_c.h, 1024
- getSeed
  - FFLAS, 189
- getStat
  - FFLAS, 154
- getStatus
  - TestOneMethod< Simd >, 766
- getTestName
  - TestOneMethod< Simd >, 766
- getTLBSize
  - FFLAS, 189
- getTriangular

- FFPACK, [336](#)
- getTriangular< FFLAS\_FIELD< FFLAS\_ELT > >
  - FFPACK, [374](#), [375](#)
- getTriangular\_modular\_double
  - ffpack.C, [1002](#)
  - ffpack\_c.h, [1022](#)
- getTriangularin\_modular\_double
  - ffpack.C, [1003](#)
  - ffpack\_c.h, [1022](#)
- getTridiagonal
  - FFPACK, [354](#)
- gf2ModularBalanced
  - regression-check.C, [1054](#)
- GFOPS
  - charpoly.C, [774](#)
  - fsyrk.C, [775](#)
  - fsytrf.C, [776](#)
  - fttri.C, [776](#)
  - pluq.C, [777](#)
  - winograd.C, [778](#)
- Givaro, [398](#)
- GRAIN
  - benchmark-fgemm-rns.C, [788](#)
- Grain, [471](#)
- greater
  - ScalFunctions< Element >, [557](#)
  - Simd128\_impl< true, true, false, 2 >, [568](#)
  - Simd128\_impl< true, true, false, 4 >, [578](#)
  - Simd128\_impl< true, true, false, 8 >, [588](#)
  - Simd128\_impl< true, true, true, 2 >, [602](#)
  - Simd128\_impl< true, true, true, 4 >, [611](#)
  - Simd128\_impl< true, true, true, 8 >, [620](#)
  - Simd256\_impl< true, false, true, 8 >, [630](#)
  - Simd256\_impl< true, true, false, 2 >, [635](#)
  - Simd256\_impl< true, true, false, 4 >, [646](#), [649](#)
  - Simd256\_impl< true, true, false, 8 >, [663](#)
  - Simd256\_impl< true, true, true, 2 >, [677](#)
  - Simd256\_impl< true, true, true, 4 >, [688](#), [694](#)
  - Simd256\_impl< true, true, true, 8 >, [703](#)
  - Simd512\_impl< true, false, true, 8 >, [711](#)
  - Simd512\_impl< true, true, false, 8 >, [716](#)
  - Simd512\_impl< true, true, true, 8 >, [731](#)
- greater\_eq
  - ScalFunctions< Element >, [557](#)
  - Simd128\_impl< true, true, false, 2 >, [568](#)
  - Simd128\_impl< true, true, false, 4 >, [578](#)
  - Simd128\_impl< true, true, false, 8 >, [588](#)
  - Simd128\_impl< true, true, true, 2 >, [602](#)
  - Simd128\_impl< true, true, true, 4 >, [611](#)
  - Simd128\_impl< true, true, true, 8 >, [620](#)
  - Simd256\_impl< true, false, true, 8 >, [630](#)
  - Simd256\_impl< true, true, false, 2 >, [635](#)
  - Simd256\_impl< true, true, false, 4 >, [647](#), [649](#)
  - Simd256\_impl< true, true, false, 8 >, [663](#)
  - Simd256\_impl< true, true, true, 2 >, [677](#)
  - Simd256\_impl< true, true, true, 4 >, [688](#), [694](#)
  - Simd256\_impl< true, true, true, 8 >, [703](#)
  - Simd512\_impl< true, false, true, 8 >, [712](#)
- Simd512\_impl< true, true, false, 8 >, [716](#)
- Simd512\_impl< true, true, true, 8 >, [731](#)
- hadd
  - Simd256\_impl< true, false, true, 8 >, [630](#)
  - Simd512\_impl< true, false, true, 8 >, [712](#)
- hadd\_to\_scal
  - Simd128\_impl< true, true, false, 2 >, [569](#)
  - Simd128\_impl< true, true, false, 4 >, [579](#)
  - Simd128\_impl< true, true, false, 8 >, [589](#)
  - Simd128\_impl< true, true, true, 2 >, [602](#)
  - Simd128\_impl< true, true, true, 4 >, [611](#)
  - Simd128\_impl< true, true, true, 8 >, [620](#)
  - Simd256\_impl< true, false, true, 8 >, [631](#)
  - Simd256\_impl< true, true, false, 2 >, [636](#)
  - Simd256\_impl< true, true, false, 4 >, [648](#), [650](#)
  - Simd256\_impl< true, true, false, 8 >, [664](#)
  - Simd256\_impl< true, true, true, 2 >, [678](#)
  - Simd256\_impl< true, true, true, 4 >, [688](#), [694](#)
  - Simd256\_impl< true, true, true, 8 >, [703](#)
  - Simd512\_impl< true, false, true, 8 >, [712](#)
  - Simd512\_impl< true, true, false, 8 >, [718](#)
  - Simd512\_impl< true, true, true, 8 >, [731](#)
- half\_t
  - Simd256\_impl< true, true, false, 2 >, [634](#)
  - Simd256\_impl< true, true, false, 4 >, [645](#)
  - Simd256\_impl< true, true, false, 8 >, [662](#)
  - Simd256\_impl< true, true, true, 2 >, [671](#)
  - Simd256\_impl< true, true, true, 4 >, [682](#)
  - Simd256\_impl< true, true, true, 8 >, [697](#)
  - Simd512\_impl< true, true, false, 8 >, [715](#)
  - Simd512\_impl< true, true, true, 8 >, [725](#)
- has\_equal
  - FFLAS, [73](#)
- has\_minus
  - FFLAS, [73](#)
- has\_minus\_eq
  - FFLAS, [73](#)
- has\_minus\_eq\_impl< C >, [471](#)
  - value, [472](#)
- has\_minus\_impl< C >, [472](#)
  - value, [472](#)
- has\_mul
  - FFLAS, [73](#)
- has\_mul\_eq
  - FFLAS, [74](#)
- has\_mul\_eq\_impl< C >, [472](#)
  - value, [472](#)
- has\_mul\_impl< C >, [472](#)
  - value, [473](#)
- has\_operation< T >, [473](#)
  - value, [473](#)
- has\_plus
  - FFLAS, [73](#)
- has\_plus\_eq
  - FFLAS, [73](#)
- has\_plus\_eq\_impl< C >, [473](#)
  - value, [473](#)
- has\_plus\_impl< C >, [473](#)



- value, [474](#)
- HAVE\_BLAS
  - config.h, [817](#)
- HAVE\_CBLAS
  - config.h, [817](#)
- HAVE\_CXX11
  - config.h, [817](#)
- HAVE\_DLFCN\_H
  - config.h, [818](#)
- HAVE\_FLOAT\_H
  - config.h, [818](#)
- HAVE\_INTPTR\_T\_H
  - config.h, [818](#)
- HAVE\_LAPACK
  - config.h, [818](#)
- HAVE\_LIMITS\_H
  - config.h, [818](#)
- HAVE\_LITTLE\_ENDIAN
  - config.h, [818](#)
- HAVE\_PTHREAD\_H
  - config.h, [818](#)
- HAVE\_STDDEF\_H
  - config.h, [818](#)
- HAVE\_STDINT\_H
  - config.h, [818](#)
- HAVE\_STDIO\_H
  - config.h, [818](#)
- HAVE\_STDLIB\_H
  - config.h, [818](#)
- HAVE\_STRING\_H
  - config.h, [818](#)
- HAVE\_STRINGS\_H
  - config.h, [818](#)
- HAVE\_SYS\_STAT\_H
  - config.h, [818](#)
- HAVE\_SYS\_TIME\_H
  - config.h, [818](#)
- HAVE\_SYS\_TYPES\_H
  - config.h, [819](#)
- HAVE\_UNISTD\_H
  - config.h, [819](#)
- HelperFlag, [474](#)
  - aut, [474](#)
  - coo, [474](#)
  - csr, [474](#)
  - ell, [474](#)
  - none, [474](#)
  - pm1, [474](#)
- HelperMod
  - HelperMod< Field, ElementCategories::MachineIntTag >, [475](#)
  - HelperMod< Field, FFLAS::ElementCategories::ArbitraryPrecIntTag >, [476](#)
  - HelperMod< Field, FFLAS::ElementCategories::FixedPrecIntTag >, [476](#)
  - HelperMod< Field, FFLAS::ElementCategories::MachineFloatTag >, [477](#)
- HelperMod< Field, ElementCategories::MachineIntTag >, [475](#)
  - HelperMod, [475](#)
  - invp, [475](#)
  - max, [475](#)
  - min, [475](#)
  - p, [475](#)
  - pow50rem, [475](#)
- HelperMod< Field, ElementTraits >, [474](#)
- HelperMod< Field, FFLAS::ElementCategories::ArbitraryPrecIntTag >, [476](#)
  - HelperMod, [476](#)
  - p, [476](#)
- HelperMod< Field, FFLAS::ElementCategories::FixedPrecIntTag >, [476](#)
  - HelperMod, [476](#)
  - p, [477](#)
- HelperMod< Field, FFLAS::ElementCategories::MachineFloatTag >, [477](#)
  - HelperMod, [477](#)
  - invp, [477](#)
  - max, [477](#)
  - min, [477](#)
  - p, [477](#)
- helpString
  - Argument, [403](#)
- HYB\_ZO
  - FFLAS, [76](#)
- hyb\_zo.h, [905](#)
- hyb\_zo\_pspmm.inl, [905](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_HYB\_ZO\_pspmm\_INL, [906](#)
- hyb\_zo\_pspmv.inl, [906](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_HYB\_ZO\_pspmv\_INL, [906](#)
- hyb\_zo\_spm.inl, [906](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_HYB\_ZO\_spm\_INL, [907](#)
- hyb\_zo\_spmv.inl, [907](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_HYB\_ZO\_spmv\_INL, [907](#)
- hyb\_zo\_utils.inl, [907](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_HYB\_ZO\_utils\_INL, [908](#)
- Hybrid, [478](#)
- Hybrid\_KGF\_LUK\_MinPoly
  - FFPACK::Protected, [396](#)
- ibeg
  - ForStrategy1D< blocksize\_t, Cut, Param >, [462](#)
- ibegin
  - ForStrategy2D< blocksize\_t, Cut, Param >, [464](#)
- idamax
  - config-blas.h, [813](#)
- iend
  - ForStrategy1D< blocksize\_t, Cut, Param >, [462](#)
  - ForStrategy2D< blocksize\_t, Cut, Param >, [464](#)
- igeb11
  - FFLAS::details, [205](#)

- igebb14
  - FFLAS::details, [204](#)
- igebb21
  - FFLAS::details, [204](#)
- igebb24
  - FFLAS::details, [203](#)
- igebb41
  - FFLAS::details, [204](#)
- igebb44
  - FFLAS::details, [203](#)
- igebp
  - FFLAS::details, [205](#)
- igemm
  - FFLAS::Protected, [222](#)
- igemm.doxy, [859](#)
- igemm.h, [859](#)
- igemm.inl, [859](#)
  - \_\_FFLASFFPACK\_fflas\_igemm\_igemm\_INL, [860](#)
- igemm\_
  - FFLAS, [128](#)
- igemm\_colmajor
  - FFLAS::Protected, [221](#), [222](#)
- igemm\_kernels.h, [860](#)
- igemm\_kernels.inl, [861](#)
  - \_\_FFLASFFPACK\_fflas\_igemm\_igemm\_kernels\_INL, [861](#)
- igemm\_tools.h, [861](#)
- igemm\_tools.inl, [862](#)
  - \_\_FFLASFFPACK\_fflas\_igemm\_igemm\_tools\_INL, [862](#)
- in\_range
  - flimits.h, [1048](#), [1049](#)
- index\_t
  - fflas\_sparse.h, [885](#)
  - parallel.h, [1033](#)
- InfNorm
  - FFLAS, [77](#)
- Info, [478](#), [479](#)
  - begin, [479](#), [480](#)
  - Info, [478](#), [479](#)
  - operator=, [478](#), [480](#)
  - perm, [479](#), [480](#)
  - size, [479](#), [480](#)
- info
  - BlockTransposeSIMD< Field, Simd, >, [409](#)
- init
  - FieldSimd< \_Field >, [448](#)
  - rns\_double, [528–530](#)
  - rns\_double\_extended, [540](#)
  - RNSInteger< RNS >, [544](#)
  - RNSIntegerMod< RNS >, [548](#), [549](#)
- init\_transpose
  - rns\_double, [529](#)
- init\_y
  - FFLAS::sparse\_details, [226](#)
- initA
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [500](#)
- initB
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [500](#)
- initC
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [500](#)
- initialize
  - ForStrategy1D< blocksize\_t, Cut, Param >, [461](#)
  - ForStrategy2D< blocksize\_t, Cut, Param >, [464](#)
- initOut
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [500](#)
- INLINE
  - fflas\_simd.h, [872](#)
- inplace
  - Bench< Elt >, [409](#)
- inputs
  - TestOneMethod< Simd >, [767](#)
- INST\_OR\_DECL
  - fflas\_L1\_inst.C, [963](#)
  - fflas\_L1\_inst.h, [964](#)
  - fflas\_L2\_inst.C, [967](#)
  - fflas\_L2\_inst.h, [968](#)
  - fflas\_L3\_inst.C, [970](#)
  - fflas\_L3\_inst.h, [971](#)
  - ffpack\_inst.C, [1025](#)
  - ffpack\_inst.h, [1026](#)
- integer
  - rns\_double, [527](#)
  - rns\_double\_extended, [539](#)
  - RNSInteger< RNS >, [543](#)
  - RNSIntegerMod< RNS >, [547](#)
- Interfaces, [42](#)
- interfaces.doxy, [951](#)
- IntType
  - ScalFunctionsBase< Element, typename enable\_if< is\_floating\_point< Element >::value >::type >::FloatingPointTestDistribution, [460](#)
- inv
  - RNSIntegerMod< RNS >, [550](#)
- Invert
  - FFPACK, [321](#), [369](#)
- Invert2
  - FFPACK, [322](#), [369](#)
- Invert2\_modular\_double
  - ffpack.C, [998](#)
  - ffpack\_c.h, [1018](#)
- Invert\_modular\_double
  - ffpack.C, [998](#)
  - ffpack\_c.h, [1018](#)
- Invertin\_modular\_double
  - ffpack.C, [998](#)
  - ffpack\_c.h, [1018](#)
- invp
  - HelperMod< Field, ElementCategories::MachineIntTag >, [475](#)
  - HelperMod< Field, FFLAS::ElementCategories::MachineFloatTag >, [477](#)

- is\_all\_same< Args >, [480](#)
- is\_all\_same< T, Args... >, [480](#)
  - value, [480](#)
- is\_all\_same<>, [480](#)
  - value, [481](#)
- is\_same\_element
  - Bench< Elt >, [407](#)
  - NoSimd< T >, [521](#)
  - Simd128\_impl< true, true, false, 2 >, [566](#)
  - Simd128\_impl< true, true, false, 4 >, [576](#)
  - Simd128\_impl< true, true, false, 8 >, [586](#)
  - Simd128\_impl< true, true, true, 2 >, [597](#)
  - Simd128\_impl< true, true, true, 4 >, [606](#)
  - Simd128\_impl< true, true, true, 8 >, [615](#)
  - Simd256\_impl< true, false, true, 8 >, [625](#)
  - Simd256\_impl< true, true, false, 2 >, [633](#)
  - Simd256\_impl< true, true, false, 4 >, [645](#), [650](#)
  - Simd256\_impl< true, true, false, 8 >, [662](#)
  - Simd256\_impl< true, true, true, 2 >, [672](#)
  - Simd256\_impl< true, true, true, 4 >, [682](#), [695](#)
  - Simd256\_impl< true, true, true, 8 >, [698](#)
  - Simd512\_impl< true, false, true, 8 >, [707](#)
  - Simd512\_impl< true, true, false, 8 >, [715](#)
  - Simd512\_impl< true, true, true, 8 >, [726](#)
  - Test< Elt >, [762](#)
- is\_simd< T >, [481](#)
  - type, [481](#)
  - value, [481](#)
- isMOne
  - RNSInteger< RNS >, [544](#)
  - RNSIntegerMod< RNS >, [548](#)
- isOdd
  - FFPACK, [377](#)
- isOne
  - RNSInteger< RNS >, [543](#)
  - RNSIntegerMod< RNS >, [548](#)
- IsSingular
  - FFPACK, [326](#), [371](#)
- IsSingular\_modular\_double
  - ffpack.C, [999](#)
  - ffpack\_c.h, [1019](#)
- isSparseMatrix< Field, M >, [481](#)
- isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::COO > >, [481](#)
- isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::COO\_ZO > >, [482](#)
- isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::CSR > >, [482](#)
- isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::CSR\_HYB > >, [482](#)
- isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::CSR\_ZO > >, [483](#)
- isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::ELL > >, [483](#)
- isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::ELL\_simd > >, [483](#)
- isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::ELL\_simd\_ZO > >, [484](#)
- isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::ELL\_ZO > >, [484](#)
- isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::HYB\_ZO > >, [484](#)
- isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::SELL > >, [484](#)
- isSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::SELL\_ZO > >, [485](#)
- isSparseMatrixMKLFormat< F, M >, [485](#)
- isSparseMatrixSimdFormat< F, M >, [485](#)
- isTerminated
  - ForStrategy1D< blocksize\_t, Cut, Param >, [461](#)
  - ForStrategy2D< blocksize\_t, Cut, Param >, [464](#)
- isZero
  - RNSInteger< RNS >, [544](#)
  - RNSIntegerMod< RNS >, [548](#)
- isZOSparseMatrix< F, M >, [486](#)
- isZOSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::COO\_ZO > >, [486](#)
- isZOSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::CSR\_ZO > >, [486](#)
- isZOSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::ELL\_simd\_ZO > >, [486](#)
- isZOSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::ELL\_ZO > >, [487](#)
- isZOSparseMatrix< Field, Sparse< Field, SparseMatrix\_t::SELL\_ZO > >, [487](#)
- Iterative, [487](#)
- iters
  - Bench< Elt >, [409](#)
- jbegin
  - ForStrategy2D< blocksize\_t, Cut, Param >, [464](#)
- jend
  - ForStrategy2D< blocksize\_t, Cut, Param >, [464](#)
- kaapi\_routines.inl, [1032](#)
- \_\_FFLASFFPACK\_KAAPI\_ROUTINES\_INL, [1032](#)
- KellerGehrig
  - FFPACK::Protected, [393](#)
- KGFast
  - FFPACK::Protected, [394](#)
- KGFast\_generalized
  - FFPACK::Protected, [394](#)
- kmax
  - Sparse< \_Field, SparseMatrix\_t::COO >, [736](#)
  - Sparse< \_Field, SparseMatrix\_t::COO\_ZO >, [738](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR >, [739](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR\_HYB >, [741](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR\_ZO >, [743](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL >, [744](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd >, [746](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd\_ZO >, [748](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_ZO >, [749](#)
  - Sparse< \_Field, SparseMatrix\_t::HYB\_ZO >, [751](#)
  - Sparse< \_Field, SparseMatrix\_t::SELL >, [753](#)
  - Sparse< \_Field, SparseMatrix\_t::SELL\_ZO >, [755](#)

- KrylovElim
  - FFPACK, [371](#)
- KrylovElim\_modular\_double
  - ffpack.C, [998](#)
  - ffpack\_c.h, [1018](#)
- lapack.C, [1053](#)
  - \_\_FFLASFFPACK\_CONFIGURATION, [1053](#)
  - \_\_FFLASFFPACK\_HAVE\_LAPACK, [1053](#)
  - main, [1053](#)
- LAPACKPerm2MathPerm
  - FFPACK, [304](#)
  - ffpack.C, [988](#)
  - ffpack\_c.h, [1009](#)
- lastBlockSize
  - ForStrategy1D< blocksize\_t, Cut, Param >, [462](#)
- lastCBS
  - ForStrategy2D< blocksize\_t, Cut, Param >, [466](#)
- lastRBS
  - ForStrategy2D< blocksize\_t, Cut, Param >, [466](#)
- launch\_fger
  - test-fger.C, [1069](#)
- launch\_fger\_dispatch
  - test-fger.C, [1069](#)
- launch\_MM
  - test-fgemm.C, [1065](#)
- launch\_MM\_dispatch
  - test-fgemm-check.C, [1063](#)
  - test-fgemm.C, [1065](#)
- launch\_MV
  - test-fgemv.C, [1067](#)
- launch\_MV\_dispatch
  - test-fgemv.C, [1067](#)
- launch\_test
  - test-charpoly.C, [1055](#)
  - test-lu.C, [1091](#)
  - test-quasisep.C, [1097](#)
- launch\_wino
  - benchmark-wino.C, [803](#)
- LazyTag, [487](#)
- LD
  - fflas\_transpose.h, [914](#)
- ld
  - Sparse< \_Field, SparseMatrix\_t::ELL >, [745](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd >, [746](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd\_ZO >, [748](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_ZO >, [750](#)
- LeadingSubmatrixRankProfiles
  - FFPACK, [332](#)
  - ffpack.C, [1001](#)
  - ffpack\_c.h, [1021](#)
- lesser
  - ScalFunctions< Element >, [557](#)
  - Simd128\_impl< true, true, false, 2 >, [568](#)
  - Simd128\_impl< true, true, false, 4 >, [578](#)
  - Simd128\_impl< true, true, false, 8 >, [588](#)
  - Simd128\_impl< true, true, true, 2 >, [602](#)
  - Simd128\_impl< true, true, true, 4 >, [611](#)
  - Simd128\_impl< true, true, true, 8 >, [620](#)
  - Simd256\_impl< true, false, true, 8 >, [629](#)
  - Simd256\_impl< true, true, false, 2 >, [635](#)
  - Simd256\_impl< true, true, false, 4 >, [647](#), [649](#)
  - Simd256\_impl< true, true, false, 8 >, [663](#)
  - Simd256\_impl< true, true, true, 2 >, [677](#)
  - Simd256\_impl< true, true, true, 4 >, [688](#), [694](#)
  - Simd256\_impl< true, true, true, 8 >, [703](#)
  - Simd512\_impl< true, false, true, 8 >, [711](#)
  - Simd512\_impl< true, true, false, 8 >, [716](#)
  - Simd512\_impl< true, true, true, 8 >, [731](#)
- lesser\_eq
  - ScalFunctions< Element >, [557](#)
  - Simd128\_impl< true, true, false, 2 >, [568](#)
  - Simd128\_impl< true, true, false, 4 >, [578](#)
  - Simd128\_impl< true, true, false, 8 >, [588](#)
  - Simd128\_impl< true, true, true, 2 >, [602](#)
  - Simd128\_impl< true, true, true, 4 >, [611](#)
  - Simd128\_impl< true, true, true, 8 >, [620](#)
  - Simd256\_impl< true, false, true, 8 >, [629](#)
  - Simd256\_impl< true, true, false, 2 >, [635](#)
  - Simd256\_impl< true, true, false, 4 >, [647](#), [649](#)
  - Simd256\_impl< true, true, false, 8 >, [663](#)
  - Simd256\_impl< true, true, true, 2 >, [677](#)
  - Simd256\_impl< true, true, true, 4 >, [688](#), [694](#)
  - Simd256\_impl< true, true, true, 8 >, [703](#)
  - Simd512\_impl< true, false, true, 8 >, [711](#)
  - Simd512\_impl< true, true, false, 8 >, [717](#)
  - Simd512\_impl< true, true, true, 8 >, [731](#)
- limits< char >, [488](#)
  - digits, [488](#)
  - max, [488](#)
  - min, [488](#)
  - T, [488](#)
- limits< double >, [488](#)
  - digits, [489](#)
  - max, [489](#)
  - min, [489](#)
  - T, [489](#)
- limits< float >, [489](#)
  - digits, [489](#)
  - max, [489](#)
  - min, [489](#)
  - T, [489](#)
- limits< Givaro::Integer >, [490](#)
  - max, [490](#)
  - min, [490](#)
  - T, [490](#)
- limits< int >, [490](#)
  - digits, [491](#)
  - max, [491](#)
  - min, [491](#)
  - T, [490](#)
- limits< long >, [491](#)
  - digits, [491](#)
  - max, [491](#)
  - min, [491](#)
  - T, [491](#)

- limits< long long >, [491](#)
  - digits, [492](#)
  - max, [492](#)
  - min, [492](#)
  - T, [492](#)
- limits< Reclnt::rint< K > >, [492](#)
  - max, [492](#)
  - min, [492](#)
  - T, [492](#)
- limits< Reclnt::ruint< K > >, [493](#)
  - max, [493](#)
  - min, [493](#)
  - T, [493](#)
- limits< short int >, [493](#)
  - digits, [494](#)
  - max, [494](#)
  - min, [494](#)
  - T, [494](#)
- limits< signed char >, [494](#)
  - digits, [494](#)
  - max, [494](#)
  - min, [494](#)
  - T, [494](#)
- limits< T >, [488](#)
- limits< unsigned char >, [495](#)
  - digits, [495](#)
  - max, [495](#)
  - min, [495](#)
  - T, [495](#)
- limits< unsigned int >, [495](#)
  - digits, [496](#)
  - max, [496](#)
  - min, [496](#)
  - T, [495](#)
- limits< unsigned long >, [496](#)
  - digits, [496](#)
  - max, [496](#)
  - min, [496](#)
  - T, [496](#)
- limits< unsigned long long >, [496](#)
  - digits, [497](#)
  - max, [497](#)
  - min, [497](#)
  - T, [497](#)
- limits< unsigned short int >, [497](#)
  - digits, [497](#)
  - max, [497](#)
  - min, [497](#)
  - T, [497](#)
- load
  - Simd128\_impl< true, true, false, 2 >, [567](#), [570](#)
  - Simd128\_impl< true, true, false, 4 >, [577](#), [580](#)
  - Simd128\_impl< true, true, false, 8 >, [587](#), [590](#)
  - Simd128\_impl< true, true, true, 2 >, [597](#)
  - Simd128\_impl< true, true, true, 4 >, [606](#)
  - Simd128\_impl< true, true, true, 8 >, [615](#)
  - Simd256\_impl< true, false, true, 8 >, [626](#)
  - Simd256\_impl< true, true, false, 2 >, [634](#), [637](#)
  - Simd256\_impl< true, true, false, 4 >, [646](#), [648](#), [652](#)
  - Simd256\_impl< true, true, false, 8 >, [663](#), [665](#)
  - Simd256\_impl< true, true, true, 2 >, [673](#)
  - Simd256\_impl< true, true, true, 4 >, [683](#), [689](#)
  - Simd256\_impl< true, true, true, 8 >, [699](#)
  - Simd512\_impl< true, false, true, 8 >, [708](#)
  - Simd512\_impl< true, true, false, 8 >, [716](#), [719](#)
  - Simd512\_impl< true, true, true, 8 >, [727](#)
- loadu
  - Simd128\_impl< true, true, false, 2 >, [567](#), [570](#)
  - Simd128\_impl< true, true, false, 4 >, [577](#), [580](#)
  - Simd128\_impl< true, true, false, 8 >, [587](#), [590](#)
  - Simd128\_impl< true, true, true, 2 >, [597](#)
  - Simd128\_impl< true, true, true, 4 >, [606](#)
  - Simd128\_impl< true, true, true, 8 >, [616](#)
  - Simd256\_impl< true, false, true, 8 >, [626](#)
  - Simd256\_impl< true, true, false, 2 >, [634](#), [637](#)
  - Simd256\_impl< true, true, false, 4 >, [646](#), [648](#), [652](#)
  - Simd256\_impl< true, true, false, 8 >, [663](#), [665](#)
  - Simd256\_impl< true, true, true, 2 >, [673](#)
  - Simd256\_impl< true, true, true, 4 >, [683](#), [689](#)
  - Simd256\_impl< true, true, true, 8 >, [699](#)
  - Simd512\_impl< true, false, true, 8 >, [708](#)
  - Simd512\_impl< true, true, false, 8 >, [716](#), [719](#)
  - Simd512\_impl< true, true, true, 8 >, [727](#)
- LQUPtoInverseOfFullRankMinor
  - FFPACK, [346](#), [377](#)
- LT\_OBJDIR
  - config.h, [819](#)
- LTBruhatGen
  - FFPACK, [342](#)
- LTQSorter
  - FFPACK, [343](#)
- LUdivine
  - FFPACK, [315](#), [355](#), [367](#)
- LUdivine\_construct
  - FFPACK::Protected, [392](#), [398](#)
- LUdivine\_gauss
  - FFPACK, [354](#), [368](#)
- LUdivine\_gauss\_modular\_double
  - ffpack\_c.h, [1014](#)
- LUdivine\_modular\_double
  - ffpack.C, [992](#)
  - ffpack\_c.h, [1013](#)
- LUdivine\_small
  - FFPACK, [355](#), [367](#)
- LUdivine\_small\_modular\_double
  - ffpack\_c.h, [1014](#)
- LUKrylov
  - FFPACK::Protected, [394](#)
- LUKrylov\_KGFast
  - FFPACK::Protected, [395](#)
- m
  - Bench< Elt >, [408](#)
  - Sparse< \_Field, SparseMatrix\_t::COO >, [736](#)
  - Sparse< \_Field, SparseMatrix\_t::COO\_ZO >, [738](#)

- Sparse<\_Field, SparseMatrix\_t::CSR >, 739
- Sparse<\_Field, SparseMatrix\_t::CSR\_HYB >, 741
- Sparse<\_Field, SparseMatrix\_t::CSR\_ZO >, 743
- Sparse<\_Field, SparseMatrix\_t::ELL >, 745
- Sparse<\_Field, SparseMatrix\_t::ELL\_simd >, 746
- Sparse<\_Field, SparseMatrix\_t::ELL\_simd\_ZO >, 748
- Sparse<\_Field, SparseMatrix\_t::ELL\_ZO >, 749
- Sparse<\_Field, SparseMatrix\_t::HYB\_ZO >, 751
- Sparse<\_Field, SparseMatrix\_t::SELL >, 753
- Sparse<\_Field, SparseMatrix\_t::SELL\_ZO >, 755
- MachineFloatTag, 498
- MachineIntTag, 498
- main
  - 101-fgemm.C, 1105
  - 2x2-fgemm.C, 1105
  - 2x2-ftrsv.C, 1105
  - 2x2-pluq.C, 1106
  - arithprog.C, 773
  - benchmark-charpoly-mp.C, 779
  - benchmark-charpoly.C, 780
  - benchmark-checkers.C, 781
  - benchmark-dgemm.C, 782
  - benchmark-dgetrf.C, 783
  - benchmark-dgetri.C, 783
  - benchmark-dsytrf.C, 784
  - benchmark-dtrsm.C, 784
  - benchmark-dtrtri.C, 785
  - benchmark-fadd-lvl2.C, 785
  - benchmark-fdot.C, 786
  - benchmark-fgemm-mp.C, 787
  - benchmark-fgemm-rns.C, 789
  - benchmark-fgemm.C, 789
  - benchmark-fgemv-mp.C, 790
  - benchmark-fgemv.C, 794
  - benchmark-fgesv.C, 794
  - benchmark-fsyr2k.C, 795
  - benchmark-fsyrk.C, 795
  - benchmark-fsytrf.C, 796
  - benchmark-ftrsm-mp.C, 797
  - benchmark-ftrsm.C, 797
  - benchmark-ftrsv.C, 798
  - benchmark-ftrtri.C, 798
  - benchmark-inverse.C, 799
  - benchmark-lqup-mp.C, 799
  - benchmark-lqup.C, 800
  - benchmark-pluq.C, 801
  - benchmark-quasisep.C, 802
  - benchmark-storage-transpose.C, 803
  - benchmark-wino.C, 803
  - cblas.C, 1051
  - charpoly.C, 774
  - clapack.C, 1051
  - cuda.C, 1052
  - det.C, 804
  - fblas.C, 1052
  - fflas-101\_1.C, 1106
  - fflas-101\_3.C, 1107
  - fflas\_101.C, 1107
  - fflas\_101\_lvl1.C, 1107
  - ffpack-fgesv.C, 1108
  - ffpack-solve.C, 1108
  - fsyrk.C, 775
  - fsytrf.C, 776
  - fttrtri.C, 777
  - lapack.C, 1053
  - matmul.C, 804
  - pluq.C, 777, 778
  - rank.C, 805
  - regression-check.C, 1054
  - solve.C, 805
  - test-charpoly-check.C, 1055
  - test-charpoly.C, 1056
  - test-compressQ.C, 1056
  - test-det-check.C, 1057
  - test-det.C, 1058
  - test-echelon.C, 1060
  - test-fadd.C, 1061
  - test-fdot.C, 1062
  - test-fgemm-check.C, 1064
  - test-fgemm.C, 1066
  - test-fgemv.C, 1068
  - test-fger.C, 1069
  - test-fgesv.C, 1071
  - test-finit.C, 1072
  - test-fscal.C, 1073
  - test-fsyr2k.C, 1074
  - test-fsyrk.C, 1076
  - test-fsytrf.C, 1078
  - test-ftrmm.C, 1079
  - test-ftrmv.C, 1080
  - test-ftrsm-check.C, 1080
  - test-ftrsm.C, 1082
  - test-ftrssyr2k.C, 1083
  - test-ftrstr.C, 1084
  - test-ftrsv.C, 1085
  - test-ftrtri.C, 1086
  - test-interfaces-c.c, 1087
  - test-invert-check.C, 1087
  - test-io.C, 1088
  - test-lu.C, 1091
  - test-maxdelayeddim.C, 1092
  - test-minpoly.C, 1093
  - test-multifile2.C, 1094
  - test-nullspace.C, 1095
  - test-permutations.C, 1096
  - test-pluq-check.C, 1097
  - test-quasisep.C, 1098
  - test-rankprofiles.C, 1099
  - test-rpm.C, 1100
  - test-simd.C, 1103
  - test-solve.C, 1104
  - test-storage-transpose.C, 1104
  - winograd.C, 779
- mainpage.dox, 804



- mask\_high
  - Simd128\_impl< true, true, false, 8 >, [593](#)
  - Simd128\_impl< true, true, true, 8 >, [620](#)
  - Simd256\_impl< true, true, false, 8 >, [668](#)
  - Simd256\_impl< true, true, true, 8 >, [703](#)
  - Simd512\_impl< true, true, false, 8 >, [722](#)
  - Simd512\_impl< true, true, true, 8 >, [732](#)
- mask\_t
  - read\_sparse.h, [909](#)
- maskstore
  - Simd512\_impl< true, true, false, 8 >, [716](#), [719](#)
  - Simd512\_impl< true, true, true, 8 >, [727](#)
- MatF2MatD\_Triangular
  - FFLAS::Protected, [222](#)
- MatF2MatFI\_Triangular
  - FFLAS::Protected, [223](#)
- MathPerm2LAPACKPerm
  - FFPACK, [304](#)
  - ffpack.C, [988](#)
  - ffpack\_c.h, [1009](#)
- Matio.h, [1049](#)
  - read\_field, [1049](#)
  - write\_field, [1049](#)
- matmul.C, [804](#)
  - main, [804](#)
- matmul.dox, [839](#)
- Matrix Multiplication Algorithms, [42](#)
- MatrixApplyS
  - FFPACK, [357](#), [358](#)
- MatrixApplyS\_modular\_double
  - ffpack.C, [988](#)
  - ffpack\_c.h, [1010](#)
- MatrixApplyT
  - FFPACK, [359](#)
- MatrixApplyT\_modular\_double
  - ffpack.C, [988](#)
  - ffpack\_c.h, [1010](#)
- MatVecMinPoly
  - FFPACK, [325](#), [370](#)
  - FFPACK::Protected, [396](#)
- max
  - HelperMod< Field, ElementCategories::MachineIntTag >, [475](#)
  - HelperMod< Field, FFLAS::ElementCategories::MachineIntTag >, [477](#)
  - limits< char >, [488](#)
  - limits< double >, [489](#)
  - limits< float >, [489](#)
  - limits< Givaro::Integer >, [490](#)
  - limits< int >, [491](#)
  - limits< long >, [491](#)
  - limits< long long >, [492](#)
  - limits< RecInt::rint< K > >, [492](#)
  - limits< RecInt::ruint< K > >, [493](#)
  - limits< short int >, [494](#)
  - limits< signed char >, [494](#)
  - limits< unsigned char >, [495](#)
  - limits< unsigned int >, [496](#)
  - limits< unsigned long >, [496](#)
  - limits< unsigned long long >, [497](#)
  - limits< unsigned short int >, [497](#)
- max3
  - FFLAS, [77](#)
- max4
  - FFLAS, [77](#)
- MAX\_THREADS
  - parallel.h, [1034](#)
- MAX\_WITH\_SIZE\_T
  - test-maxdelayeddim.C, [1092](#)
- maxCardinality
  - FFLAS, [154](#)
- maxCardinality< Givaro::Modular< int32\_t > >
  - FFLAS, [154](#)
- maxCardinality< Givaro::Modular< int64\_t > >
  - FFLAS, [154](#)
- maxCol
  - StatsMatrix, [758](#)
- maxColDifference
  - StatsMatrix, [758](#)
- MaxDelayedDim
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [500](#)
- maxElement
  - RNSIntegerMod< RNS >, [548](#)
- maxpy
  - FieldSimd< \_Field >, [452](#)
- maxpyin
  - FieldSimd< \_Field >, [452](#)
- maxRow
  - StatsMatrix, [757](#)
- maxrow
  - Sparse< \_Field, SparseMatrix\_t::COO >, [737](#)
  - Sparse< \_Field, SparseMatrix\_t::COO\_ZO >, [738](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR >, [740](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR\_HYB >, [741](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR\_ZO >, [743](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL >, [745](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd >, [746](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd\_ZO >, [748](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_ZO >, [750](#)
  - Sparse< \_Field, SparseMatrix\_t::HYB\_ZO >, [751](#)
  - Sparse< \_Field, SparseMatrix\_t::SELL >, [753](#)
  - Sparse< \_Field, SparseMatrix\_t::SELL\_ZO >, [755](#)
- maxRowDifference
  - StatsMatrix, [758](#)
- MaxStorableValue
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [503](#)
- MG\_DEFAULT
  - benchmark-fgemm-mp.C, [787](#)
  - benchmark-fgemv-mp.C, [790](#)
- min
  - HelperMod< Field, ElementCategories::MachineIntTag >, [475](#)

- HelperMod< Field, FFLAS::ElementCategories::MachineFloatTag, ModeCategories::DefaultTag, ParSeqTrait >, 477
- limits< char >, 488
- limits< double >, 489
- limits< float >, 489
- limits< Givaro::Integer >, 490
- limits< int >, 491
- limits< long >, 491
- limits< long long >, 492
- limits< RecInt::rint< K > >, 492
- limits< RecInt::ruint< K > >, 493
- limits< short int >, 494
- limits< signed char >, 494
- limits< unsigned char >, 495
- limits< unsigned int >, 496
- limits< unsigned long >, 496
- limits< unsigned long long >, 497
- limits< unsigned short int >, 497
- min3
  - FFLAS, 77
- min4
  - FFLAS, 77
- min\_types
  - FFLAS::Protected, 220, 221
- minCardinality
  - FFLAS, 154
- minCol
  - StatsMatrix, 758
- minColDifference
  - StatsMatrix, 758
- minElement
  - RNSIntegerMod< RNS >, 548
- MinPoly
  - FFPACK, 324, 370
- minRow
  - StatsMatrix, 758
- minRowDifference
  - StatsMatrix, 758
- MKL\_CONFIG, 398
- MKLSparseMatrixFormat
  - FFLAS, 73
- MMHelper
  - MMHelper< FFPACK::RNSInteger< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, 504
  - MMHelper< FFPACK::RNSIntegerMod< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, 506
  - MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo<Amax, Dest >, ParSeqTrait >, 502, 508
  - MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo<Aunfit, ElementCategories::RNSElementTag >, ParSeqTrait >, 509, 510
  - MMHelper< Field, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, 511, 512
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeqTrait >, 499, 500
- MMHelper< FFPACK::RNSInteger< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, 503
- MMHelper, 504
- normA, 505
- normB, 505
- operator<<, 505
- parseq, 505
- recLevel, 505
- Self\_t, 504
- setNorm, 504
- MMHelper< FFPACK::RNSIntegerMod< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, 505
- MMHelper, 506
- normA, 507
- normB, 507
- operator<<, 507
- parseq, 507
- recLevel, 507
- Self\_t, 506
- setNorm, 506
- MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo<Dest >, ParSeqTrait >, 507
- MMHelper, 508
- operator<<, 508
- parseq, 508
- recLevel, 508
- Self\_t, 508
- MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo<ElementCategories::RNSElementTag >, ParSeqTrait >, 509
- MMHelper, 509, 510
- normA, 510
- normB, 510
- operator<<, 510
- parseq, 510
- recLevel, 510
- Self\_t, 509
- setNorm, 510
- MMHelper< Field, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, 511
- MMHelper, 511, 512
- operator<<, 512
- parseq, 512
- recLevel, 512
- Self\_t, 511
- MMHelper< Field, AlgoTrait, ModeTrait, ParSeqTrait >, 498
- Amin, 502
- Bmax, 502
- Bmin, 502
- checkA, 501
- checkB, 501
- checkOut, 501
- Cmax, 502



- Cmin, [502](#)
- DelayedField, [499](#)
- delayedField, [503](#)
- DelayedField\_t, [499](#)
- DFelt, [499](#)
- FieldMax, [502](#)
- FieldMin, [502](#)
- initA, [500](#)
- initB, [500](#)
- initC, [500](#)
- initOut, [500](#)
- MaxDelayedDim, [500](#)
- MaxStorableValue, [503](#)
- MMHelper, [499](#), [500](#)
- operator<<, [502](#)
- Outmax, [503](#)
- Outmin, [503](#)
- parseq, [503](#)
- recLevel, [502](#)
- Self\_t, [499](#)
- setOutBounds, [501](#)
- mod
  - FieldSimd< \_Field >, [450](#)
  - Simd128\_impl< true, true, false, 2 >, [573](#)
  - Simd128\_impl< true, true, false, 4 >, [583](#)
  - Simd128\_impl< true, true, false, 8 >, [593](#)
  - Simd128\_impl< true, true, true, 2 >, [602](#)
  - Simd128\_impl< true, true, true, 4 >, [611](#)
  - Simd128\_impl< true, true, true, 8 >, [620](#)
  - Simd256\_impl< true, false, true, 8 >, [631](#)
  - Simd256\_impl< true, true, false, 2 >, [641](#)
  - Simd256\_impl< true, true, false, 4 >, [658](#)
  - Simd256\_impl< true, true, false, 8 >, [669](#)
  - Simd256\_impl< true, true, true, 2 >, [678](#)
  - Simd256\_impl< true, true, true, 4 >, [688](#), [694](#)
  - Simd256\_impl< true, true, true, 8 >, [704](#)
  - Simd512\_impl< true, true, false, 8 >, [722](#)
  - Simd512\_impl< true, true, true, 8 >, [732](#)
- MODE
  - parallel.h, [1036](#)
- ModeTraits< Field >, [512](#)
  - value, [512](#)
- ModeTraits< Givaro::Modular< Element, Compute > >, [513](#)
  - value, [513](#)
- ModeTraits< Givaro::Modular< Givaro::Integer, Compute > >, [513](#)
  - value, [513](#)
- ModeTraits< Givaro::Modular< int16\_t, Compute > >, [513](#)
  - value, [513](#)
- ModeTraits< Givaro::Modular< int32\_t, Compute > >, [514](#)
  - value, [514](#)
- ModeTraits< Givaro::Modular< int64\_t, uint64\_t > >, [514](#)
  - value, [514](#)
- ModeTraits< Givaro::Modular< int8\_t, Compute > >, [514](#)
  - value, [514](#)
- ModeTraits< Givaro::Modular< RecInt::ruint< K >, Compute > >, [515](#)
  - value, [515](#)
- ModeTraits< Givaro::Modular< uint16\_t, Compute > >, [515](#)
  - value, [515](#)
- ModeTraits< Givaro::Modular< uint32\_t, Compute > >, [515](#)
  - value, [515](#)
- ModeTraits< Givaro::Modular< uint8\_t, Compute > >, [516](#)
  - value, [516](#)
- ModeTraits< Givaro::ModularBalanced< Element > >, [516](#)
  - value, [516](#)
- ModeTraits< Givaro::ModularBalanced< Givaro::Integer > >, [516](#)
  - value, [516](#)
- ModeTraits< Givaro::ModularBalanced< int16\_t > >, [517](#)
  - value, [517](#)
- ModeTraits< Givaro::ModularBalanced< int32\_t > >, [517](#)
  - value, [517](#)
- ModeTraits< Givaro::ModularBalanced< int8\_t > >, [517](#)
  - value, [517](#)
- ModeTraits< Givaro::Montgomery< T > >, [517](#)
  - value, [518](#)
- ModeTraits< Givaro::ZRing< double > >, [518](#)
  - value, [518](#)
- ModeTraits< Givaro::ZRing< float > >, [518](#)
  - value, [518](#)
- ModeTraits< Givaro::ZRing< Givaro::Integer > >, [518](#)
  - value, [519](#)
- ModField
  - rns\_double, [527](#)
  - rns\_double\_extended, [539](#)
  - RNSIntegerMod< RNS >, [547](#)
- modp
  - FFLAS::vectorised, [283](#)
  - FFLAS::vectorised::unswitch, [285](#)
- ModularBalanced< T >, [519](#)
- ModularTag, [519](#)
- mOne
  - RNSInteger< RNS >, [545](#)
  - RNSIntegerMod< RNS >, [552](#)
- mone
  - FFLAS, [76](#)
  - Sparse< \_Field, SparseMatrix\_t::HYB\_ZO >, [751](#)
- MonotonicApplyP
  - FFPACK, [306](#)
- MonotonicCompress
  - FFPACK, [356](#)
- MonotonicCompressCycles

- FFPACK, [356](#)
- MonotonicCompressMorePivots
  - FFPACK, [356](#)
- MonotonicExpand
  - FFPACK, [357](#)
- Montgomery< T >, [519](#)
- mul
  - FieldSimd< \_Field >, [450](#)
  - RNSIntegerMod< RNS >, [550](#)
  - ScalFunctions< Element >, [556](#)
  - Simd128\_impl< true, true, false, 2 >, [572](#)
  - Simd128\_impl< true, true, false, 4 >, [582](#)
  - Simd128\_impl< true, true, false, 8 >, [592](#)
  - Simd128\_impl< true, true, true, 2 >, [600](#)
  - Simd128\_impl< true, true, true, 4 >, [609](#)
  - Simd128\_impl< true, true, true, 8 >, [618](#)
  - Simd256\_impl< true, false, true, 8 >, [628](#)
  - Simd256\_impl< true, true, false, 2 >, [640](#)
  - Simd256\_impl< true, true, false, 4 >, [656](#)
  - Simd256\_impl< true, true, false, 8 >, [667](#)
  - Simd256\_impl< true, true, true, 2 >, [675](#)
  - Simd256\_impl< true, true, true, 4 >, [686](#), [692](#)
  - Simd256\_impl< true, true, true, 8 >, [701](#)
  - Simd512\_impl< true, false, true, 8 >, [710](#)
  - Simd512\_impl< true, true, false, 8 >, [721](#)
  - Simd512\_impl< true, true, true, 8 >, [729](#)
- mul\_r
  - FieldSimd< \_Field >, [450](#), [451](#)
- mulhi
  - ScalFunctionsBase< Element, typename enable\_if<
    - is\_integral< Element >::value >::type >, [561](#)
 >, [561](#)
  - Simd128\_impl< true, true, false, 2 >, [568](#)
  - Simd128\_impl< true, true, false, 4 >, [578](#)
  - Simd128\_impl< true, true, false, 8 >, [588](#)
  - Simd128\_impl< true, true, true, 2 >, [600](#)
  - Simd128\_impl< true, true, true, 4 >, [609](#)
  - Simd128\_impl< true, true, true, 8 >, [618](#)
  - Simd256\_impl< true, true, false, 2 >, [635](#)
  - Simd256\_impl< true, true, false, 4 >, [647](#), [649](#)
  - Simd256\_impl< true, true, false, 8 >, [664](#)
  - Simd256\_impl< true, true, true, 2 >, [676](#)
  - Simd256\_impl< true, true, true, 4 >, [686](#), [692](#)
  - Simd256\_impl< true, true, true, 8 >, [701](#)
  - Simd512\_impl< true, true, false, 8 >, [717](#)
  - Simd512\_impl< true, true, true, 8 >, [729](#)
- mulhi\_fast
  - Simd128\_impl< true, true, false, 8 >, [593](#)
  - Simd128\_impl< true, true, true, 8 >, [620](#)
  - Simd256\_impl< true, true, false, 8 >, [669](#)
  - Simd256\_impl< true, true, true, 8 >, [703](#)
  - Simd512\_impl< true, true, false, 8 >, [722](#)
  - Simd512\_impl< true, true, true, 8 >, [732](#)
- mulin
  - FieldSimd< \_Field >, [450](#)
  - ScalFunctions< Element >, [556](#)
  - Simd256\_impl< true, false, true, 8 >, [628](#)
  - Simd512\_impl< true, false, true, 8 >, [710](#)
- mullo
  - ScalFunctionsBase< Element, typename enable\_if<
    - is\_integral< Element >::value >::type >, [561](#)
 >, [561](#)
  - Simd128\_impl< true, true, false, 2 >, [572](#)
  - Simd128\_impl< true, true, false, 4 >, [582](#)
  - Simd128\_impl< true, true, false, 8 >, [588](#)
  - Simd128\_impl< true, true, true, 2 >, [600](#)
  - Simd128\_impl< true, true, true, 4 >, [609](#)
  - Simd128\_impl< true, true, true, 8 >, [618](#)
  - Simd256\_impl< true, true, false, 2 >, [640](#)
  - Simd256\_impl< true, true, false, 4 >, [656](#)
  - Simd256\_impl< true, true, false, 8 >, [663](#)
  - Simd256\_impl< true, true, true, 2 >, [675](#)
  - Simd256\_impl< true, true, true, 4 >, [686](#), [692](#)
  - Simd256\_impl< true, true, true, 8 >, [701](#)
  - Simd512\_impl< true, true, false, 8 >, [717](#)
  - Simd512\_impl< true, true, true, 8 >, [729](#)
- mulx
  - ScalFunctionsBase< Element, typename enable\_if<
    - is\_integral< Element >::value >::type >, [561](#)
 >, [561](#)
  - Simd128\_impl< true, true, false, 2 >, [568](#)
  - Simd128\_impl< true, true, false, 4 >, [578](#)
  - Simd128\_impl< true, true, false, 8 >, [588](#)
  - Simd128\_impl< true, true, true, 2 >, [600](#)
  - Simd128\_impl< true, true, true, 4 >, [609](#)
  - Simd128\_impl< true, true, true, 8 >, [618](#)
  - Simd256\_impl< true, true, false, 2 >, [635](#)
  - Simd256\_impl< true, true, false, 4 >, [647](#), [649](#)
  - Simd256\_impl< true, true, false, 8 >, [664](#)
  - Simd256\_impl< true, true, true, 2 >, [676](#)
  - Simd256\_impl< true, true, true, 4 >, [686](#), [692](#)
  - Simd256\_impl< true, true, true, 8 >, [701](#)
  - Simd512\_impl< true, true, false, 8 >, [717](#)
  - Simd512\_impl< true, true, true, 8 >, [729](#)
- mvcnt
  - test-lu.C, [1092](#)
- n
  - Bench< Elt >, [408](#)
  - count\_nonconst\_lvalue\_reference< const T &, O... >, [436](#)
  - count\_nonconst\_lvalue\_reference< T &, O... >, [436](#)
  - count\_nonconst\_lvalue\_reference< T, O... >, [436](#)
  - count\_nonconst\_lvalue\_reference<>, [437](#)
  - Sparse< \_Field, SparseMatrix\_t::COO >, [736](#)
  - Sparse< \_Field, SparseMatrix\_t::COO\_ZO >, [738](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR >, [739](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR\_HYB >, [741](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR\_ZO >, [743](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL >, [745](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd >, [746](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd\_ZO >, [748](#)
  - Sparse< \_Field, SparseMatrix\_t::ELL\_ZO >, [749](#)
  - Sparse< \_Field, SparseMatrix\_t::HYB\_ZO >, [751](#)
  - Sparse< \_Field, SparseMatrix\_t::SELL >, [753](#)
  - Sparse< \_Field, SparseMatrix\_t::SELL\_ZO >, [755](#)
- name

- TestOneMethod< Simd >, 767
- nb\_lref
  - TestOneMethod< Simd >, 766
- nChunks
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd >, 747
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd\_ZO >, 748
  - Sparse< \_Field, SparseMatrix\_t::SELL >, 753
  - Sparse< \_Field, SparseMatrix\_t::SELL\_ZO >, 755
- nDenseCols
  - StatsMatrix, 759
- nDenseRows
  - StatsMatrix, 759
- need\_field\_characteristic< Field >, 519
  - value, 519
- need\_field\_characteristic< Givaro::Modular< Field > >, 519
  - value, 520
- need\_field\_characteristic< Givaro::ModularBalanced< Field > >, 520
  - value, 520
- NeedDoublePreAddReduction
  - FFLAS::Protected, 214, 215
- NeedPreAddReduction
  - FFLAS::Protected, 213, 214
- NeedPreAxyReduction
  - FFLAS::Protected, 219, 220
- NeedPreScalReduction
  - FFLAS::Protected, 219
- NeedPreSubReduction
  - FFLAS::Protected, 214
- neg
  - RNSIntegerMod< RNS >, 549
- nElements
  - Sparse< \_Field, SparseMatrix\_t::COO >, 737
  - Sparse< \_Field, SparseMatrix\_t::COO\_ZO >, 738
  - Sparse< \_Field, SparseMatrix\_t::CSR >, 740
  - Sparse< \_Field, SparseMatrix\_t::CSR\_HYB >, 741
  - Sparse< \_Field, SparseMatrix\_t::CSR\_ZO >, 743
  - Sparse< \_Field, SparseMatrix\_t::ELL >, 745
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd >, 746
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd\_ZO >, 748
  - Sparse< \_Field, SparseMatrix\_t::ELL\_ZO >, 750
  - Sparse< \_Field, SparseMatrix\_t::HYB\_ZO >, 751
  - Sparse< \_Field, SparseMatrix\_t::SELL >, 753
  - Sparse< \_Field, SparseMatrix\_t::SELL\_ZO >, 755
- nEmptyCols
  - StatsMatrix, 759
- nEmptyColsEnd
  - StatsMatrix, 759
- nEmptyRows
  - StatsMatrix, 759
- newD
  - FFPACK::Protected, 396
- NEWWINO
  - fgemm\_winograd.inl, 839
- nMOnes
  - Sparse< \_Field, SparseMatrix\_t::CSR\_HYB >, 742
  - StatsMatrix, 757
- nnz
  - Sparse< \_Field, SparseMatrix\_t::COO >, 736
  - Sparse< \_Field, SparseMatrix\_t::COO\_ZO >, 738
  - Sparse< \_Field, SparseMatrix\_t::CSR >, 739
  - Sparse< \_Field, SparseMatrix\_t::CSR\_HYB >, 741
  - Sparse< \_Field, SparseMatrix\_t::CSR\_ZO >, 743
  - Sparse< \_Field, SparseMatrix\_t::ELL >, 745
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd >, 746
  - Sparse< \_Field, SparseMatrix\_t::ELL\_simd\_ZO >, 748
  - Sparse< \_Field, SparseMatrix\_t::ELL\_ZO >, 750
  - Sparse< \_Field, SparseMatrix\_t::HYB\_ZO >, 751
  - Sparse< \_Field, SparseMatrix\_t::SELL >, 753
  - Sparse< \_Field, SparseMatrix\_t::SELL\_ZO >, 755
  - StatsMatrix, 757
- none
  - HelperFlag, 474
- nOnes
  - Sparse< \_Field, SparseMatrix\_t::CSR\_HYB >, 742
  - StatsMatrix, 757
- nonsquare\_inplace\_v1
  - FFLAS::\_ftranspose\_impl, 190
- nonsquare\_inplace\_v2
  - FFLAS::\_ftranspose\_impl, 190
- NonZeroRandomMatrix
  - FFPACK, 377, 378
- normA
  - MMHelper< FFPACK::RNSInteger< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, 505
  - MMHelper< FFPACK::RNSIntegerMod< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, 507
  - MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeqTrait >, 510
- normB
  - MMHelper< FFPACK::RNSInteger< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, 505
  - MMHelper< FFPACK::RNSIntegerMod< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, 507
  - MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeqTrait >, 510
- NORML\_MOD
  - fflas\_simd.h, 872
- NoSimd< T >, 520
  - aligned\_allocator, 521
  - aligned\_vector, 521
  - alignment, 521

- compliant, [521](#)
- is\_same\_element, [521](#)
- scalar\_t, [520](#)
- type\_string, [521](#)
- valid, [521](#)
- vect\_size, [521](#)
- vect\_t, [520](#)
- NoSimdSparseMatrix
  - FFLAS, [73](#)
- NOSPLIT
  - parallel.h, [1038](#)
- not\_inplace
  - FFLAS::\_ftranspose\_impl, [190](#)
- nOthers
  - Sparse< \_Field, SparseMatrix\_t::CSR\_HYB >, [742](#)
  - StatsMatrix, [757](#)
- NotMKLSparseMatrixFormat
  - FFLAS, [73](#)
- NotZOSparseMatrix
  - FFLAS, [72](#)
- NullSpaceBasis
  - FFPACK, [329](#), [373](#)
- NullSpaceBasis\_modular\_double
  - ffpack.C, [1000](#)
  - ffpack\_c.h, [1020](#)
- NUM\_THREADS
  - parallel.h, [1034](#)
- NUMARGS
  - parallel.h, [1036](#)
- number\_kind
  - FFLAS, [76](#)
- numBlock
  - ForStrategy1D< blocksize\_t, Cut, Param >, [463](#)
- numblocks
  - ForStrategy1D< blocksize\_t, Cut, Param >, [462](#)
- numColBlock
  - ForStrategy2D< blocksize\_t, Cut, Param >, [466](#)
- numRowBlock
  - ForStrategy2D< blocksize\_t, Cut, Param >, [466](#)
- numthreads
  - Parallel< C, P >, [522](#)
  - Sequential, [563](#)
- one
  - FFLAS, [76](#)
  - RNSInteger< RNS >, [545](#)
  - RNSIntegerMod< RNS >, [552](#)
  - Sparse< \_Field, SparseMatrix\_t::HYB\_ZO >, [751](#)
- OPENBLAS\_NUM\_THREADS
  - config.h, [819](#)
- operator!=
  - rns\_double\_elt\_cstptr, [535](#)
  - rns\_double\_elt\_ptr, [537](#)
- operator<
  - rns\_double\_elt\_cstptr, [535](#)
  - rns\_double\_elt\_ptr, [537](#)
- operator<<
  - Compose< H1, H2 >, [425](#)
- FFLAS, [151](#)
- ForStrategy2D< blocksize\_t, Cut, Param >, [465](#)
- MMHelper< FFPACK::RNSInteger< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, [505](#)
- MMHelper< FFPACK::RNSIntegerMod< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, [507](#)
- MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo< Dest >, ParSeqTrait >, [508](#)
- MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeqTrait >, [510](#)
- MMHelper< Field, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, [512](#)
- MMHelper< Field, AlgoTrait, ModeTrait, ParSeqTrait >, [502](#)
- Parallel< C, P >, [522](#)
- Sequential, [564](#)
- test-fsytrf.C, [1077](#)
- test-simd.C, [1102](#)
- operator()
  - callLUdivine\_small< double >, [411](#)
  - callLUdivine\_small< Element >, [411](#)
  - callLUdivine\_small< float >, [412](#)
  - Failure, [444](#), [445](#)
  - readMyMachineType< Field, mpz\_t >, [526](#)
  - readMyMachineType< Field, T >, [525](#)
  - RNSInteger< RNS >::RandIter, [523](#)
  - RNSIntegerMod< RNS >::RandIter, [524](#)
  - rnsRandIter< RNS >, [553](#)
  - ScalFunctionsBase< Element, typename enable\_if< is\_floating\_point< Element >::value >::type >::FloatingPointTestDistribution, [460](#)
  - tfn\_minus, [767](#)
  - tfn\_minus\_eq, [768](#)
  - tfn\_mul, [768](#)
  - tfn\_mul\_eq, [768](#)
  - tfn\_plus, [769](#)
  - tfn\_plus\_eq, [769](#)
- operator+
  - rns\_double\_elt\_cstptr, [534](#)
  - rns\_double\_elt\_ptr, [537](#)
- operator++
  - ForStrategy1D< blocksize\_t, Cut, Param >, [462](#)
  - ForStrategy2D< blocksize\_t, Cut, Param >, [464](#)
  - rns\_double\_elt\_cstptr, [534](#)
  - rns\_double\_elt\_ptr, [537](#)
- operator+=
  - rns\_double\_elt\_cstptr, [534](#)
  - rns\_double\_elt\_ptr, [537](#)
- operator-
  - rns\_double\_elt\_cstptr, [534](#)
  - rns\_double\_elt\_ptr, [537](#)
- operator--
  - rns\_double\_elt\_cstptr, [534](#)
  - rns\_double\_elt\_ptr, [537](#)
- operator-=

- rns\_double\_elt\_cstptr, [534](#)
- rns\_double\_elt\_ptr, [537](#)
- operator=
  - Coo< Field >, [433](#)
  - Coo< ValT, IdxT >, [431](#), [434](#)
  - FieldSimd< \_Field >, [448](#)
  - Info, [478](#), [480](#)
  - rns\_double\_elt\_cstptr, [534](#)
  - rns\_double\_elt\_ptr, [537](#)
- operator&
  - rns\_double\_elt, [532](#)
  - rns\_double\_elt\_cstptr, [534](#), [535](#)
  - rns\_double\_elt\_ptr, [536](#), [537](#)
- operator[]
  - rns\_double\_elt\_cstptr, [534](#)
  - rns\_double\_elt\_ptr, [536](#), [537](#)
- operator\*
  - rns\_double\_elt\_cstptr, [534](#)
  - rns\_double\_elt\_ptr, [536](#)
- other
  - FFLAS, [76](#)
  - rns\_double\_elt\_cstptr, [535](#)
  - rns\_double\_elt\_ptr, [538](#)
- Outmax
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [503](#)
- Outmin
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-Trait >, [503](#)
- outputs\_scalar
  - TestOneMethod< Simd >, [767](#)
- outputs\_simd
  - TestOneMethod< Simd >, [767](#)
- P
  - HelperMod< Field, ElementCategories::MachineIntTag >, [475](#)
  - HelperMod< Field, FFLAS::ElementCategories::ArbitraryPrecisionTag >, [476](#)
  - HelperMod< Field, FFLAS::ElementCategories::FixedPrecisionTag >, [477](#)
  - HelperMod< Field, FFLAS::ElementCategories::MachineFloatTag >, [477](#)
- pack
  - ScalFunctions< Element >, [558](#)
  - Simd128\_impl< true, true, false, 2 >, [571](#)
  - Simd128\_impl< true, true, false, 4 >, [581](#)
  - Simd128\_impl< true, true, false, 8 >, [591](#)
  - Simd128\_impl< true, true, true, 2 >, [599](#)
  - Simd128\_impl< true, true, true, 4 >, [608](#)
  - Simd128\_impl< true, true, true, 8 >, [617](#)
  - Simd256\_impl< true, false, true, 8 >, [627](#)
  - Simd256\_impl< true, true, false, 2 >, [638](#)
  - Simd256\_impl< true, true, false, 4 >, [654](#)
  - Simd256\_impl< true, true, false, 8 >, [667](#)
  - Simd256\_impl< true, true, true, 2 >, [674](#)
  - Simd256\_impl< true, true, true, 4 >, [685](#), [691](#)
  - Simd256\_impl< true, true, true, 8 >, [700](#)
  - Simd512\_impl< true, false, true, 8 >, [709](#)
  - Simd512\_impl< true, true, false, 8 >, [720](#)
  - Simd512\_impl< true, true, true, 8 >, [728](#)
- pack\_even
  - ScalFunctions< Element >, [558](#)
  - Simd128\_impl< true, true, false, 2 >, [571](#)
  - Simd128\_impl< true, true, false, 4 >, [581](#)
  - Simd128\_impl< true, true, false, 8 >, [591](#)
  - Simd128\_impl< true, true, true, 2 >, [599](#)
  - Simd128\_impl< true, true, true, 4 >, [608](#)
  - Simd128\_impl< true, true, true, 8 >, [617](#)
  - Simd256\_impl< true, false, true, 8 >, [627](#)
  - Simd256\_impl< true, true, false, 2 >, [638](#)
  - Simd256\_impl< true, true, false, 4 >, [654](#)
  - Simd256\_impl< true, true, false, 8 >, [666](#)
  - Simd256\_impl< true, true, true, 2 >, [674](#)
  - Simd256\_impl< true, true, true, 4 >, [684](#), [691](#)
  - Simd256\_impl< true, true, true, 8 >, [700](#)
  - Simd512\_impl< true, false, true, 8 >, [709](#)
  - Simd512\_impl< true, true, false, 8 >, [720](#)
  - Simd512\_impl< true, true, true, 8 >, [728](#)
- pack\_lhs
  - FFLAS::details, [205](#)
- pack\_odd
  - ScalFunctions< Element >, [558](#)
  - Simd128\_impl< true, true, false, 2 >, [571](#)
  - Simd128\_impl< true, true, false, 4 >, [581](#)
  - Simd128\_impl< true, true, false, 8 >, [591](#)
  - Simd128\_impl< true, true, true, 2 >, [599](#)
  - Simd128\_impl< true, true, true, 4 >, [608](#)
  - Simd128\_impl< true, true, true, 8 >, [617](#)
  - Simd256\_impl< true, false, true, 8 >, [627](#)
  - Simd256\_impl< true, true, false, 2 >, [638](#)
  - Simd256\_impl< true, true, false, 4 >, [654](#)
  - Simd256\_impl< true, true, false, 8 >, [667](#)
  - Simd256\_impl< true, true, true, 2 >, [674](#)
  - Simd256\_impl< true, true, true, 4 >, [685](#), [691](#)
  - Simd256\_impl< true, true, true, 8 >, [700](#)
  - Simd512\_impl< true, false, true, 8 >, [709](#)
  - Simd512\_impl< true, true, false, 8 >, [720](#)
  - Simd512\_impl< true, true, true, 8 >, [728](#)
- pack\_rhs
  - FFLAS::details, [205](#)
- PACKAGE
  - config.h, [819](#)
- PACKAGE\_BUGREPORT
  - config.h, [819](#)
- PACKAGE\_NAME
  - config.h, [819](#)
- PACKAGE\_STRING
  - config.h, [819](#)
- PACKAGE\_TARNAME
  - config.h, [819](#)
- PACKAGE\_URL
  - config.h, [819](#)
- PACKAGE\_VERSION
  - config.h, [819](#)
- PAR\_BLOCK
  - parallel.h, [1033](#)

- Parallel
  - Parallel< C, P >, 522
- Parallel< C, P >, 522
  - Cut, 522
  - numthreads, 522
  - operator<<, 522
  - Parallel, 522
  - Param, 522
  - set\_numthreads, 522
- parallel.h, 1032
  - \_\_FFLASFFPACK\_SEQUENTIAL, 1033
  - BARRIER, 1033
  - BEGIN\_PARALLEL\_MAIN, 1034
  - CHECK\_DEPENDENCIES, 1033
  - COMMA, 1036
  - CONSTREFERENCE, 1034
  - END\_PARALLEL\_MAIN, 1034
  - FOR1D, 1035
  - FOR2D, 1035
  - FORBLOCK1D, 1034
  - FORBLOCK2D, 1035
  - index\_t, 1033
  - MAX\_THREADS, 1034
  - MODE, 1036
  - NOSPLIT, 1038
  - NUM\_THREADS, 1034
  - NUMARGS, 1036
  - PAR\_BLOCK, 1033
  - PARFOR1D, 1035
  - PARFOR2D, 1036
  - PARFORBLOCK1D, 1035
  - PARFORBLOCK2D, 1036
  - PP\_ARG\_N, 1037
  - PP\_NARG\_, 1036
  - PP\_RSEQ\_N, 1038
  - READ, 1034
  - READWRITE, 1034
  - RETURNPARAM, 1036
  - SET\_THREADS, 1034
  - splitt, 1039
  - SPLITTER, 1039
  - splitting\_0, 1038
  - splitting\_1, 1038
  - splitting\_2, 1038
  - splitting\_3, 1038
  - SYNCH\_GROUP, 1033
  - TASK, 1033
  - THREAD\_INDEX, 1033
  - VALUE, 1034
  - WAIT, 1033
  - WRITE, 1034
- Param
  - Parallel< C, P >, 522
- PARFOR1D
  - parallel.h, 1035
- PARFOR2D
  - parallel.h, 1036
- PARFORBLOCK1D
  - parallel.h, 1035
- PARFORBLOCK2D
  - parallel.h, 1036
- parseArguments
  - FFLAS, 185
- parseq
  - MMHelper< FFPACK::RNSInteger< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, 505
  - MMHelper< FFPACK::RNSIntegerMod< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, 507
  - MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo< Dest >, ParSeqTrait >, 508
  - MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeqTrait >, 510
  - MMHelper< Field, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, 512
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeqTrait >, 503
  - TRSMHelper< ReclterTrait, ParSeqTrait >, 771
- PBASECASE\_K
  - ffpack\_ppluq.inl, 943
- pColumnEchelonForm
  - FFPACK, 316
- pColumnEchelonForm\_modular\_double
  - ffpack.C, 995
- pColumnEchelonForm\_modular\_float
  - ffpack.C, 996
- pColumnEchelonForm\_modular\_int32\_t
  - ffpack.C, 997
- pColumnRankProfile
  - FFPACK, 332
- pDet
  - FFPACK, 327
- perm
  - Info, 479, 480
  - Sparse< \_Field, SparseMatrix\_t::SELL >, 753
  - Sparse< \_Field, SparseMatrix\_t::SELL\_ZO >, 755
- PermApplyS
  - FFPACK, 358
- PermApplyS\_double
  - ffpack.C, 988
  - ffpack\_c.h, 1010
- PermApplyT
  - FFPACK, 360
- PermApplyT\_double
  - ffpack.C, 989
  - ffpack\_c.h, 1010
- pfadd
  - FFLAS, 79
- pfaddin
  - FFLAS, 79
- pfgemm
  - FFLAS, 142, 182–184
- pfgemm\_1D\_rec
  - FFLAS, 142



- pfgemm\_2D\_rec
    - FFLAS, [143](#)
  - pfgemm\_3D\_rec
    - FFLAS, [143](#)
  - pfgemm\_3D\_rec2
    - FFLAS, [144](#)
  - pfgemm\_variants.inl, [1039](#)
  - pfgemv.inl, [1040](#)
  - pfrand
    - FFLAS, [181](#)
  - pfreduce
    - FFLAS, [109](#)
  - pfspmm
    - FFLAS::sparse\_details, [233–235](#)
    - FFLAS::sparse\_details\_impl, [250](#), [257](#), [258](#), [260](#), [261](#), [271](#), [272](#)
  - pfspmm\_dispatch
    - FFLAS::sparse\_details, [232](#)
  - pfspmm\_mone
    - FFLAS::sparse\_details\_impl, [251](#)
  - pfspmm\_one
    - FFLAS::sparse\_details\_impl, [250](#), [251](#)
  - pfspmm\_zo
    - FFLAS::sparse\_details\_impl, [262](#)
  - pfspmv
    - FFLAS::sparse\_details, [235](#), [236](#)
    - FFLAS::sparse\_details\_impl, [251](#), [252](#), [258](#), [259](#), [262](#), [268](#), [272](#), [274](#)
  - pfspmv\_mone
    - FFLAS::sparse\_details\_impl, [252](#), [253](#), [263](#), [268](#), [269](#), [275](#)
  - pfspmv\_one
    - FFLAS::sparse\_details\_impl, [252](#), [253](#), [263](#), [268](#), [269](#), [274](#), [275](#)
  - pfspmv\_task
    - FFLAS::sparse\_details\_impl, [252](#)
  - pfsub
    - FFLAS, [79](#)
  - pfsubin
    - FFLAS, [80](#)
  - pfzero
    - FFLAS, [181](#)
  - PLUQ
    - FFPACK, [313–315](#), [363](#), [364](#), [367](#)
  - pluq.C, [777](#), [778](#)
    - CUBE, [777](#)
    - GFOPS, [777](#)
    - main, [777](#), [778](#)
  - PLUQ\_basecaseCrout
    - FFPACK, [362](#)
  - PLUQ\_basecaseV2
    - FFPACK, [362](#)
  - PLUQ\_basecaseV3
    - FFPACK, [362](#)
  - PLUQ\_modular\_double
    - ffpack.C, [992](#)
    - ffpack\_c.h, [1013](#)
  - PLUQtoEchelonPermutation
    - FFPACK, [341](#)
    - ffpack.C, [1004](#)
    - ffpack\_c.h, [1024](#)
  - pm1
    - HelperFlag, [474](#)
  - pMMH
    - TRSMHelper< RectlerTrait, ParSeqTrait >, [771](#)
  - pow50rem
    - HelperMod< Field, ElementCategories::MachineIntTag >, [475](#)
  - PP\_ARG\_N
    - parallel.h, [1037](#)
  - PP\_NARG\_
    - parallel.h, [1036](#)
  - PP\_RSEQ\_N
    - parallel.h, [1038](#)
  - pPLUQ
    - FFPACK, [314](#)
  - pRank
    - FFPACK, [326](#)
  - preamble
    - FFLAS, [186](#)
  - precompute\_cst
    - rns\_double, [528](#)
    - rns\_double\_extended, [540](#)
  - pReducedColumnEchelonForm
    - FFPACK, [319](#)
  - pReducedColumnEchelonForm\_modular\_double
    - ffpack.C, [996](#)
  - pReducedColumnEchelonForm\_modular\_float
    - ffpack.C, [996](#)
  - pReducedColumnEchelonForm\_modular\_int32\_t
    - ffpack.C, [997](#)
  - pReducedRowEchelonForm
    - FFPACK, [320](#)
  - pReducedRowEchelonForm\_modular\_double
    - ffpack.C, [996](#)
  - pReducedRowEchelonForm\_modular\_float
    - ffpack.C, [997](#)
  - pReducedRowEchelonForm\_modular\_int32\_t
    - ffpack.C, [998](#)
  - prefetch
    - FFLAS, [189](#)
  - print
    - Failure, [445](#)
  - printHelpMessage
    - args-parser.h, [1042](#)
  - printPolynomial
    - test-charpoly-check.C, [1055](#)
  - printvect
    - test-compressQ.C, [1056](#)
  - productBruhatxTS
    - FFPACK, [346](#), [349](#)
  - pRowEchelonForm
    - FFPACK, [318](#)
  - pRowEchelonForm\_modular\_double
    - ffpack.C, [995](#)
  - pRowEchelonForm\_modular\_float

- ffpack.C, 996
- pRowEchelonForm\_modular\_int32\_t
  - ffpack.C, 997
- pRowRankProfile
  - FFPACK, 331
- PSeq
  - benchmark-fgemm-rns.C, 789
- pSolve
  - FFPACK, 329
- PTRSM\_HYBRID\_THRESHOLD
  - fflas\_ptrsm.inl, 871
- PURE
  - fflas\_simd.h, 872
- queryCacheSizes
  - FFLAS, 189
- queryL1CacheSize
  - FFLAS, 189
- queryTopLevelCacheSize
  - FFLAS, 189
- RandInt
  - FFPACK, 381
- RandIter
  - RNSInteger< RNS >::RandIter, 523
  - RNSIntegerMod< RNS >::RandIter, 524
- random
  - RNSInteger< RNS >::RandIter, 523
  - RNSIntegerMod< RNS >::RandIter, 524
  - rnsRandIter< RNS >, 553
- RandomIndexSubset
  - FFPACK, 382
- RandomKrylovPrecond
  - FFPACK::Protected, 395
- RandomLTQSMatixWithRankandQSorder
  - FFPACK, 390
- RandomLTQSRankProfileMatrix
  - FFPACK, 384
- RandomMatrix
  - FFPACK, 378, 379
- RandomMatrixWithDet
  - FFPACK, 389
- RandomMatrixWithRank
  - FFPACK, 381, 382
- RandomMatrixWithRankandRandomRPM
  - FFPACK, 387
- RandomMatrixWithRankandRPM
  - FFPACK, 384, 385
- RandomNullSpaceVector
  - FFPACK, 329, 347, 373
- RandomNullSpaceVector\_modular\_double
  - ffpack.C, 1000
  - ffpack\_c.h, 1020
- RandomPermutation
  - FFPACK, 383
- RandomRankProfileMatrix
  - FFPACK, 383
- RandomSymmetricMatrix
  - FFPACK, 381
- RandomSymmetricMatrixWithRankandRandomRPM
  - FFPACK, 388
- RandomSymmetricMatrixWithRankandRPM
  - FFPACK, 385, 386
- RandomSymmetricRankProfileMatrix
  - FFPACK, 384
- RandomTriangularMatrix
  - FFPACK, 379, 380
- Rank
  - FFPACK, 325, 326, 371
- rank.C, 805
  - main, 805
- Rank\_modular\_double
  - ffpack.C, 999
  - ffpack\_c.h, 1019
- RankProfileFromLU
  - FFPACK, 332
  - ffpack.C, 1001
  - ffpack\_c.h, 1021
- READ
  - parallel.h, 1034
- read\_field
  - Matio.h, 1049
- read\_sparse.h, 908
  - DNS\_BIN\_VER, 909
  - mask\_t, 909
- readDnsFormat
  - FFLAS, 152
- readMachineType
  - FFLAS, 152
- ReadMatrix
  - FFLAS, 186
- readMyMachineType< Field, mpz\_t >, 525
  - Element, 526
  - Element\_ptr, 526
  - operator(), 526
- readMyMachineType< Field, T >, 525
  - Element, 525
  - Element\_ptr, 525
  - operator(), 525
- readOrRandomMatrixWithRankAndRandomRPM
  - test-nullspace.C, 1094
- readSmsFormat
  - FFLAS, 151
- readSprFormat
  - FFLAS, 151
- READWRITE
  - parallel.h, 1034
- Rec\_Initialize
  - benchmark-pluq.C, 801
- RecInt, 398
- recLevel
  - MMHelper< FFPACK::RNSInteger< E >, Algo-Trait, ModeCategories::DefaultTag, ParSeq-Trait >, 505
  - MMHelper< FFPACK::RNSIntegerMod< E >, Algo-Trait, ModeCategories::DefaultTag, ParSeq-Trait >, 507



- MMHelper< Field, AlgoTrait, ModeCategories::ConversionTag, Dest >, ParSeqTrait >, 508
- MMHelper< Field, AlgoTrait, ModeCategories::ConversionTag, ElementCategories::RNSElementTag >, ParSeqTrait >, 510
- MMHelper< Field, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, 512
- MMHelper< Field, AlgoTrait, ModeTrait, ParSeqTrait >, 502
- Recursive, 526
- reduce
  - FFLAS::vectorised, 281–283
  - rns\_double, 529
  - rns\_double\_extended, 540
  - RNSInteger< RNS >, 544
  - RNSIntegerMod< RNS >, 549
- reduce\_modp
  - RNSIntegerMod< RNS >, 550, 551
- reduce\_modp\_rnsmajor
  - RNSIntegerMod< RNS >, 551
- ReducedColumnEchelonForm
  - FFPACK, 318, 319, 369
- ReducedColumnEchelonForm\_modular\_double
  - ffpack.C, 993
  - ffpack\_c.h, 1016
- ReducedColumnEchelonForm\_modular\_float
  - ffpack.C, 994
  - ffpack\_c.h, 1016
- ReducedColumnEchelonForm\_modular\_int32\_t
  - ffpack.C, 995
  - ffpack\_c.h, 1017
- ReducedRowEchelonForm
  - FFPACK, 319, 320, 368
- ReducedRowEchelonForm2\_modular\_double
  - ffpack\_c.h, 1017
- ReducedRowEchelonForm\_modular\_double
  - ffpack.C, 993
  - ffpack\_c.h, 1016
- ReducedRowEchelonForm\_modular\_float
  - ffpack.C, 994
  - ffpack\_c.h, 1016
- ReducedRowEchelonForm\_modular\_int32\_t
  - ffpack.C, 995
  - ffpack\_c.h, 1017
- REF\_modular\_double
  - ffpack\_c.h, 1017
- regression-check.C, 1053
  - check1, 1053
  - check2, 1053
  - check3, 1054
  - check4, 1054
  - checkZeroDimCharpoly, 1054
  - checkZeroDimMinPoly, 1054
  - gf2ModularBalanced, 1054
  - main, 1054
- Residu
  - Bench< Elt >, 407
  - Test< Elt >, 762
- RETURNPARAM
  - parallel.h, 1036
- CheckerImplem\_charpoly< Givaro::ZRing< Givaro::Integer >, Polynomial >, 414
- RNSInteger< RNS >::RandIter, 523
- RNSIntegerMod< RNS >::RandIter, 524
- rnsRandIter< RNS >, 553
- rint< K >, 526
- RNS, 43
  - benchmark-fgemm-rns.C, 788
- rns
  - RNSInteger< RNS >, 543
  - RNSIntegerMod< RNS >, 547
- rns-double-elt.h, 947
- rns-double-recint.inl, 947
  - \_\_FFLASFFPACK\_field\_rns\_double\_recint\_INL, 948
- rns-double.h, 948
  - ROUND\_DOWN, 948
- rns-double.inl, 949
  - \_\_FFLASFFPACK\_field\_rns\_double\_INL, 949
- rns-integer-mod.h, 949
- rns-integer.h, 950
- rns.h, 950
- rns.inl, 951
  - \_\_FFLASFFPACK\_field\_rns\_INL, 951
- rns\_double, 526
  - \_M, 530
  - \_MMi, 531
  - \_Mi, 530
  - \_basis, 530
  - \_basisMax, 530
  - \_crt\_in, 531
  - \_crt\_out, 531
  - \_field\_rns, 530
  - \_invbasis, 530
  - \_ldm, 531
  - \_mi\_sum, 531
  - \_negbasis, 530
  - \_pbits, 531
  - \_size, 531
- BasisElement, 528
- ConstElement\_ptr, 528
- convert, 529, 530
- convert\_transpose, 529
- Element, 528
- Element\_ptr, 528
- init, 528–530
- init\_transpose, 529
- integer, 527
- ModField, 527
- precompute\_cst, 528
- reduce, 529
- rns\_double, 528
- rns\_double\_elt, 531
  - \_alloc, 532

- [\\_ptr](#), 532
- [\\_stride](#), 532
- [~rns\\_double\\_elt](#), 532
- [operator&](#), 532
- [rns\\_double\\_elt](#), 532
- [rns\\_double\\_elt\\_cstptr](#), 533
  - [\\_alloc](#), 535
  - [\\_ptr](#), 535
  - [\\_stride](#), 535
  - [operator!=](#), 535
  - [operator<](#), 535
  - [operator+](#), 534
  - [operator++](#), 534
  - [operator+=](#), 534
  - [operator-](#), 534
  - [operator--](#), 534
  - [operator-=](#), 534
  - [operator=](#), 534
  - [operator&](#), 534, 535
  - [operator\[\]](#), 534
  - [operator\\*](#), 534
  - [other](#), 535
  - [rns\\_double\\_elt\\_cstptr](#), 533, 534
- [rns\\_double\\_elt\\_ptr](#), 535
  - [\\_alloc](#), 538
  - [\\_ptr](#), 538
  - [\\_stride](#), 538
  - [operator!=](#), 537
  - [operator<](#), 537
  - [operator+](#), 537
  - [operator++](#), 537
  - [operator+=](#), 537
  - [operator-](#), 537
  - [operator--](#), 537
  - [operator-=](#), 537
  - [operator=](#), 537
  - [operator&](#), 536, 537
  - [operator\[\]](#), 536, 537
  - [operator\\*](#), 536
  - [other](#), 538
  - [rns\\_double\\_elt\\_ptr](#), 536
- [rns\\_double\\_extended](#), 538
  - [\\_M](#), 541
  - [\\_MMi](#), 541
  - [\\_Mi](#), 541
  - [\\_basis](#), 541
  - [\\_basisMax](#), 541
  - [\\_crt\\_in](#), 541
  - [\\_crt\\_out](#), 541
  - [\\_field\\_rns](#), 541
  - [\\_invbasis](#), 541
  - [\\_ldm](#), 541
  - [\\_negbasis](#), 541
  - [\\_pbits](#), 541
  - [\\_size](#), 541
  - [BasisElement](#), 539
  - [ConstElement\\_ptr](#), 539
  - [convert](#), 540
  - [Element](#), 539
  - [Element\\_ptr](#), 539
  - [init](#), 540
  - [integer](#), 539
  - [ModField](#), 539
  - [precompute\\_cst](#), 540
  - [reduce](#), 540
  - [rns\\_double\\_extended](#), 539
- [RNSElementTag](#), 542
- [RNSInteger](#)
  - [RNSInteger< RNS >](#), 543
- [RNSInteger< RNS >](#), 542
  - [\\_rns](#), 545
  - [assign](#), 545
  - [BasisElement](#), 543
  - [cardinality](#), 544
  - [characteristic](#), 544
  - [ConstElement\\_ptr](#), 543
  - [convert](#), 544
  - [Element](#), 543
  - [Element\\_ptr](#), 543
  - [init](#), 544
  - [integer](#), 543
  - [isMOne](#), 544
  - [isOne](#), 543
  - [isZero](#), 544
  - [mOne](#), 545
  - [one](#), 545
  - [reduce](#), 544
  - [rns](#), 543
  - [RNSInteger](#), 543
  - [size](#), 543
  - [write](#), 545
  - [zero](#), 545
- [RNSInteger< RNS >::RandIter](#), 523
  - [operator\(\)](#), 523
  - [RandIter](#), 523
  - [random](#), 523
  - [ring](#), 523
- [RNSIntegerMod](#)
  - [RNSIntegerMod< RNS >](#), 547
- [RNSIntegerMod< RNS >](#), 545
  - [\\_F](#), 551
  - [\\_Mi\\_modp\\_rns](#), 551
  - [\\_RNSdelayed](#), 552
  - [\\_iM\\_modp\\_rns](#), 551
  - [\\_p](#), 551
  - [\\_rns](#), 551
  - [add](#), 549
  - [areEqual](#), 550
  - [assign](#), 549
  - [axpyin](#), 550
  - [BasisElement](#), 547
  - [cardinality](#), 548
  - [characteristic](#), 548
  - [ConstElement\\_ptr](#), 547
  - [convert](#), 549
  - [delayed](#), 547

- Element, [547](#)
- Element\_ptr, [547](#)
- init, [548](#), [549](#)
- integer, [547](#)
- inv, [550](#)
- isMOne, [548](#)
- isOne, [548](#)
- isZero, [548](#)
- maxElement, [548](#)
- minElement, [548](#)
- ModField, [547](#)
- mOne, [552](#)
- mul, [550](#)
- neg, [549](#)
- one, [552](#)
- reduce, [549](#)
- reduce\_modp, [550](#), [551](#)
- reduce\_modp\_rnsmajor, [551](#)
- rns, [547](#)
- RNSIntegerMod, [547](#)
- size, [547](#)
- sub, [549](#)
- write, [550](#)
- write\_matrix, [550](#)
- write\_matrix\_long, [551](#)
- zero, [552](#)
- RNSIntegerMod< RNS >::Randlter, [524](#)
  - operator(), [524](#)
  - Randlter, [524](#)
  - random, [524](#)
  - ring, [524](#)
- RNSModulus
  - FFLAS::CuttingStrategy, [198](#)
- rnsRandlter
  - rnsRandlter< RNS >, [552](#)
- rnsRandlter< RNS >, [552](#)
  - operator(), [553](#)
  - random, [553](#)
  - ring, [553](#)
  - rnsRandlter, [552](#)
- round
  - ScalFunctionsBase< Element, typename enable\_if< is\_floating\_point< Element >::value >::type >, [559](#)
  - ScalFunctionsBase< Element, typename enable\_if< is\_integral< Element >::value >::type >, [561](#)
  - Simd128\_impl< true, true, false, 2 >, [573](#)
  - Simd128\_impl< true, true, false, 4 >, [583](#)
  - Simd128\_impl< true, true, false, 8 >, [593](#)
  - Simd128\_impl< true, true, true, 2 >, [602](#)
  - Simd128\_impl< true, true, true, 4 >, [611](#)
  - Simd128\_impl< true, true, true, 8 >, [620](#)
  - Simd256\_impl< true, false, true, 8 >, [630](#)
  - Simd256\_impl< true, true, false, 2 >, [641](#)
  - Simd256\_impl< true, true, false, 4 >, [658](#)
  - Simd256\_impl< true, true, false, 8 >, [668](#)
  - Simd256\_impl< true, true, true, 2 >, [678](#)
  - Simd256\_impl< true, true, true, 4 >, [688](#), [694](#)
  - Simd256\_impl< true, true, true, 8 >, [703](#)
  - Simd512\_impl< true, false, true, 8 >, [712](#)
  - Simd512\_impl< true, true, false, 8 >, [722](#)
  - Simd512\_impl< true, true, true, 8 >, [732](#)
- ROUND\_DOWN
  - fflas\_sparse.h, [885](#)
  - rns-double.h, [948](#)
- Row, [553](#)
- row
  - Coo< Field >, [433](#)
  - Coo< ValT, IdxT >, [431](#), [434](#)
  - Sparse< \_Field, SparseMatrix\_t::COO >, [736](#)
  - Sparse< \_Field, SparseMatrix\_t::COO\_ZO >, [738](#)
- rowblockindex
  - ForStrategy2D< blocksize\_t, Cut, Param >, [465](#)
- rowBlockSize
  - ForStrategy2D< blocksize\_t, Cut, Param >, [466](#)
- rowdim
  - StatsMatrix, [757](#)
- RowEchelonForm
  - FFPACK, [317](#), [318](#), [368](#)
- RowEchelonForm\_modular\_double
  - ffpack.C, [992](#)
  - ffpack\_c.h, [1014](#)
- RowEchelonForm\_modular\_float
  - ffpack.C, [993](#)
  - ffpack\_c.h, [1015](#)
- RowEchelonForm\_modular\_int32\_t
  - ffpack.C, [994](#)
  - ffpack\_c.h, [1015](#)
- rownumblocks
  - ForStrategy2D< blocksize\_t, Cut, Param >, [464](#)
- RowRankProfile
  - FFPACK, [330](#), [331](#), [373](#)
- RowRankProfile\_modular\_double
  - ffpack.C, [1001](#)
  - ffpack\_c.h, [1020](#)
- RowRankProfileSubmatrix
  - FFPACK, [334](#), [374](#)
- RowRankProfileSubmatrix\_modular\_double
  - ffpack.C, [1002](#)
  - ffpack\_c.h, [1021](#)
- RowRankProfileSubmatrixIndices
  - FFPACK, [333](#), [374](#)
- RowRankProfileSubmatrixIndices\_modular\_double
  - ffpack.C, [1001](#)
  - ffpack\_c.h, [1021](#)
- ruint< K >, [553](#)
- run
  - Bench< Elt >, [408](#)
  - Test< Elt >, [763](#)
- run\_with\_field
  - benchmark-charpoly.C, [780](#)
  - benchmark-fdot.C, [786](#)
  - benchmark-quasisep.C, [802](#)
  - test-charpoly.C, [1055](#)
  - test-echelon.C, [1060](#)
  - test-fdot.C, [1062](#)

- test-fgemm-check.C, [1063](#)
- test-fgemm.C, [1066](#)
- test-fgemv.C, [1067](#)
- test-fger.C, [1069](#)
- test-fgesv.C, [1070](#)
- test-finit.C, [1071](#)
- test-fsyr2k.C, [1074](#)
- test-fsyrk.C, [1076](#)
- test-fsytrf.C, [1077](#)
- test-ftrmm.C, [1079](#)
- test-ftrmv.C, [1080](#)
- test-ftrsm.C, [1081](#)
- test-ftrssyr2k.C, [1083](#)
- test-ftrstr.C, [1084](#)
- test-ftrsv.C, [1085](#)
- test-ftrtri.C, [1086](#)
- test-io.C, [1088](#)
- test-lu.C, [1091](#)
- test-minpoly.C, [1093](#)
- test-nullspace.C, [1095](#)
- test-quasisep.C, [1098](#)
- test-rankprofiles.C, [1099](#)
- test-solve.C, [1103](#)
- run\_with\_Integer
  - test-fdot.C, [1062](#)
- saxpy\_
  - config-blas.h, [812](#)
- ScalAndReduce
  - FFLAS::Protected, [215](#), [219](#)
- scalar\_t
  - FieldSimd< \_Field >, [447](#)
  - NoSimd< T >, [520](#)
  - Simd128\_impl< true, true, false, 2 >, [566](#)
  - Simd128\_impl< true, true, false, 4 >, [576](#)
  - Simd128\_impl< true, true, false, 8 >, [586](#)
  - Simd128\_impl< true, true, true, 2 >, [596](#)
  - Simd128\_impl< true, true, true, 4 >, [605](#)
  - Simd128\_impl< true, true, true, 8 >, [614](#)
  - Simd256\_impl< true, false, true, 8 >, [625](#)
  - Simd256\_impl< true, true, false, 2 >, [633](#)
  - Simd256\_impl< true, true, false, 4 >, [645](#)
  - Simd256\_impl< true, true, false, 8 >, [662](#)
  - Simd256\_impl< true, true, true, 2 >, [671](#)
  - Simd256\_impl< true, true, true, 4 >, [682](#)
  - Simd256\_impl< true, true, true, 8 >, [697](#)
  - Simd512\_impl< true, false, true, 8 >, [707](#)
  - Simd512\_impl< true, true, false, 8 >, [715](#)
  - Simd512\_impl< true, true, true, 8 >, [725](#)
- ScalFunctions< Element >, [553](#)
  - add, [555](#)
  - addin, [555](#)
  - blend, [558](#)
  - div, [556](#)
  - eq, [557](#)
  - fmadd, [556](#)
  - fmaddin, [556](#)
  - fmsub, [556](#)
  - fmsubin, [556](#)
  - fnmadd, [556](#)
  - fnmaddin, [557](#)
  - genInputs, [554](#)
  - genInputsWithZero, [554](#)
  - greater, [557](#)
  - greater\_eq, [557](#)
  - lesser, [557](#)
  - lesser\_eq, [557](#)
  - mul, [556](#)
  - mulin, [556](#)
  - pack, [558](#)
  - pack\_even, [558](#)
  - pack\_odd, [558](#)
  - sub, [555](#)
  - subin, [555](#)
  - unpackhi, [557](#)
  - unpacklo, [557](#)
  - unpacklohi, [558](#)
  - vand, [555](#)
  - vandnot, [555](#)
  - vectElt, [554](#)
  - vor, [555](#)
  - vxor, [555](#)
  - zero, [555](#)
- ScalFunctionsBase< Element, Enable >, [558](#)
- ScalFunctionsBase< Element, typename enable\_if<
  - is\_floating\_point< Element >::value >::type
 >, [559](#)
  - \_zero, [560](#)
  - blendv, [559](#)
  - ceil, [559](#)
  - cmp\_false, [560](#)
  - cmp\_true, [560](#)
  - floor, [559](#)
  - fma, [560](#)
  - get\_default\_random\_generator, [559](#)
  - round, [559](#)
- ScalFunctionsBase< Element, typename enable\_if<
  - is\_floating\_point< Element >::value >::type
 >::FloatingPointTestDistribution, [460](#)
  - FloatingPointTestDistribution, [460](#)
  - IntType, [460](#)
  - operator(), [460](#)
- ScalFunctionsBase< Element, typename enable\_if<
  - is\_integral< Element >::value >::type >, [560](#)
  - \_zero, [563](#)
  - cmp\_false, [563](#)
  - cmp\_true, [563](#)
  - fma, [561](#)
  - fmaddx, [561](#)
  - fmaddxin, [561](#)
  - fmsubx, [562](#)
  - fmsubxin, [562](#)
  - fnmaddx, [562](#)
  - fnmaddxin, [562](#)
  - get\_default\_random\_generator, [561](#)
  - mulhi, [561](#)
  - mullo, [561](#)

- mulx, [561](#)
- round, [561](#)
- sll, [562](#)
- sra, [562](#)
- srl, [562](#)
- scalp
  - FFLAS::vectorised, [283](#), [284](#)
  - FFLAS::vectorised::unswitch, [286](#)
- schedule\_bini.inl, [839](#)
  - \_\_FFLASFFPACK\_fgemm\_bini\_INL, [839](#)
- schedule\_winograd.inl, [839](#)
  - \_\_FFLASFFPACK\_fgemm\_winograd\_INL, [840](#)
- schedule\_winograd\_acc.inl, [840](#)
  - \_\_FFLASFFPACK\_fgemm\_winograd\_acc\_INL, [841](#)
- schedule\_winograd\_acc\_ip.inl, [841](#)
  - \_\_FFLASFFPACK\_fgemm\_winograd\_acc\_ip\_INL, [841](#)
- schedule\_winograd\_ip.inl, [841](#)
  - \_\_FFLASFFPACK\_fgemm\_winograd\_ip\_INL, [842](#)
- scopy\_
  - config-blas.h, [814](#)
- sdot\_
  - config-blas.h, [813](#)
- second\_component
  - Compose< H1, H2 >, [424](#)
- Self
  - Coo< ValT, IdxT >, [431](#), [434](#)
- Self\_t
  - MMHelper< FFPACK::RNSInteger< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, [504](#)
  - MMHelper< FFPACK::RNSIntegerMod< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, [506](#)
  - MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo< Simd256\_impl< true, true, true, 2 >, ParSeqTrait >, [508](#)
  - MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo< Simd256\_impl< true, true, true, 8 >, ElementCategories::RNSElementTag >, ParSeqTrait >, [509](#)
  - MMHelper< Field, AlgoTrait, ModeCategories::DefaultTag, Simd512\_impl< true, true, true, 8 >, ParSeqTrait >, [511](#)
  - MMHelper< Field, AlgoTrait, ModeTrait, ParSeqTrait >, [499](#)
  - Sparse< \_Field, SparseMatrix\_t::HYB\_ZO >, [751](#)
- SELL
  - FFLAS, [76](#)
- sell.h, [909](#)
- sell\_pspmv.inl, [909](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_sell\_pspmv\_INL, [910](#)
- sell\_spmv.inl, [910](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_sell\_spmv\_INL, [911](#)
- sell\_utils.inl, [911](#)
  - \_\_FFLASFFPACK\_fflas\_sparse\_sell\_utils\_INL, [911](#)
- SELL\_ZO
- FFLAS, [76](#)
- Sequential, [563](#)
  - numthreads, [563](#)
  - operator<<, [564](#)
  - Sequential, [563](#)
- set
  - Simd128\_impl< true, true, false, 2 >, [567](#), [569](#)
  - Simd128\_impl< true, true, false, 4 >, [577](#), [579](#)
  - Simd128\_impl< true, true, false, 8 >, [587](#), [589](#)
  - Simd128\_impl< true, true, true, 2 >, [597](#)
  - Simd128\_impl< true, true, true, 4 >, [606](#)
  - Simd128\_impl< true, true, true, 8 >, [615](#)
  - Simd256\_impl< true, false, true, 8 >, [626](#)
  - Simd256\_impl< true, true, false, 2 >, [634](#), [637](#)
  - Simd256\_impl< true, true, false, 4 >, [645](#), [648](#), [651](#)
  - Simd256\_impl< true, true, false, 8 >, [662](#), [665](#)
  - Simd256\_impl< true, true, true, 2 >, [672](#)
  - Simd256\_impl< true, true, true, 4 >, [683](#), [689](#)
  - Simd256\_impl< true, true, true, 8 >, [698](#)
  - Simd512\_impl< true, false, true, 8 >, [707](#)
  - Simd512\_impl< true, true, false, 8 >, [715](#), [718](#)
  - Simd512\_impl< true, true, true, 8 >, [726](#)
- set1
  - Simd128\_impl< true, true, false, 2 >, [567](#), [569](#)
  - Simd128\_impl< true, true, false, 4 >, [577](#), [579](#)
  - Simd128\_impl< true, true, false, 8 >, [587](#), [589](#)
  - Simd128\_impl< true, true, true, 2 >, [597](#)
  - Simd128\_impl< true, true, true, 4 >, [606](#)
  - Simd128\_impl< true, true, true, 8 >, [615](#)
  - Simd256\_impl< true, false, true, 8 >, [626](#)
  - Simd256\_impl< true, true, false, 2 >, [634](#), [636](#)
  - Simd256\_impl< true, true, false, 4 >, [645](#), [648](#), [651](#)
  - Simd256\_impl< true, true, false, 8 >, [662](#), [665](#)
  - Simd256\_impl< true, true, true, 4 >, [683](#), [689](#)
  - Simd512\_impl< true, false, true, 8 >, [707](#)
  - Simd512\_impl< true, true, false, 8 >, [715](#), [718](#)
  - Simd512\_impl< true, true, true, 8 >, [726](#)
- set\_numthreads
  - Parallel< C, P >, [522](#)
- SET\_THREADS
  - parallel.h, [1034](#)
- setErrorStream
  - Failure, [445](#)
- setNorm
  - MMHelper< FFPACK::RNSInteger< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, [504](#)
  - MMHelper< FFPACK::RNSIntegerMod< E >, AlgoTrait, ModeCategories::DefaultTag, ParSeqTrait >, [506](#)
  - MMHelper< Field, AlgoTrait, ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeqTrait >, [510](#)
- setOutBounds

MMHelper< Field, AlgoTrait, ModeTrait, ParSeq-  
 Trait >, 501  
 sgemm\_  
 config-blas.h, 816  
 sgemv\_  
 config-blas.h, 813  
 sger\_  
 config-blas.h, 814  
 shuffle  
 Simd128\_impl< true, true, false, 2 >, 570  
 Simd128\_impl< true, true, false, 4 >, 580  
 Simd128\_impl< true, true, false, 8 >, 590  
 Simd128\_impl< true, true, true, 2 >, 598  
 Simd128\_impl< true, true, true, 4 >, 607  
 Simd128\_impl< true, true, true, 8 >, 616  
 Simd256\_impl< true, true, false, 2 >, 638  
 Simd256\_impl< true, true, false, 4 >, 653  
 Simd256\_impl< true, true, false, 8 >, 666  
 Simd256\_impl< true, true, true, 2 >, 673  
 Simd256\_impl< true, true, true, 4 >, 684, 690  
 Simd256\_impl< true, true, true, 8 >, 699  
 Simd512\_impl< true, false, true, 8 >, 708  
 Simd512\_impl< true, true, false, 8 >, 719  
 Simd512\_impl< true, true, true, 8 >, 727  
 shuffle\_twice  
 Simd256\_impl< true, true, false, 4 >, 652  
 Simd256\_impl< true, true, true, 4 >, 684, 690  
 sigma  
 Sparse< \_Field, SparseMatrix\_t::SELL >, 753  
 Sparse< \_Field, SparseMatrix\_t::SELL\_ZO >, 755  
 signbits  
 Simd128\_impl< true, true, false, 8 >, 593  
 Simd128\_impl< true, true, true, 8 >, 621  
 Simd256\_impl< true, true, false, 8 >, 669  
 Simd256\_impl< true, true, true, 8 >, 704  
 Simd512\_impl< true, true, false, 8 >, 722  
 Simd512\_impl< true, true, true, 8 >, 732  
 Simd  
 fflas\_simd.h, 873  
 simd  
 FieldSimd< \_Field >, 447  
 SIMD wrapper, 42  
 simd.doxy, 873  
 Simd128  
 simd128.inl, 873  
 simd128.inl, 873  
 \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd128\_INL,  
 873  
 Simd128, 873  
 simd128\_double.inl, 874  
 \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd128\_double\_INL,  
 874  
 simd128\_float.inl, 874  
 \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd128\_float\_INL,  
 874  
 Simd128\_impl< ArithType, Int, Signed, Size >, 564  
 Simd128\_impl< true, false, true, 4 >, 564  
 Simd128\_impl< true, false, true, 8 >, 564  
 Simd128\_impl< true, true, false, 2 >, 564  
 add, 572  
 addin, 572  
 aligned\_allocator, 566  
 aligned\_vector, 566  
 alignment, 574  
 blend, 572  
 compliant, 569  
 eq, 573  
 fmadd, 572  
 fmaddin, 572  
 fmaddx, 568  
 fmaddxin, 568  
 fmsub, 573  
 fmsubin, 573  
 fmsubx, 569  
 fmsubxin, 569  
 fnmadd, 572  
 fnmaddin, 573  
 fnmaddx, 568  
 fnmaddxin, 569  
 gather, 567, 570  
 greater, 568  
 greater\_eq, 568  
 hadd\_to\_scal, 569  
 is\_same\_element, 566  
 lesser, 568  
 lesser\_eq, 568  
 load, 567, 570  
 loadu, 567, 570  
 mod, 573  
 mul, 572  
 mulhi, 568  
 mullo, 572  
 mulx, 568  
 pack, 571  
 pack\_even, 571  
 pack\_odd, 571  
 round, 573  
 scalar\_t, 566  
 set, 567, 569  
 set1, 567, 569  
 shuffle, 570  
 sll, 570  
 sll128, 573  
 sra, 567  
 srl, 570  
 srl128, 573  
 store, 567, 570  
 storeu, 567, 570  
 stream, 567, 570  
 sub, 572  
 subin, 572  
 transpose, 571  
 type\_string, 567  
 unpackhi, 571  
 unpackhi\_intrinsic, 571  
 unpacklo, 571

- unpacklo\_intrinsic, 570
- unpacklohi, 571
- valid, 569
- vand, 574
- vandnot, 574
- vect\_size, 574
- vect\_t, 566
- vor, 574
- vxor, 574
- zero, 573
- Simd128\_impl< true, true, false, 2 >::Converter, 425
  - t, 425
  - v, 425
- Simd128\_impl< true, true, false, 4 >, 574
  - add, 581
  - addin, 582
  - aligned\_allocator, 576
  - aligned\_vector, 576
  - alignment, 584
  - blend, 581
  - compliant, 579
  - eq, 583
  - fmadd, 582
  - fmaddin, 582
  - fmaddx, 578
  - fmaddxin, 578
  - fmsub, 583
  - fmsubin, 583
  - fmsubx, 579
  - fmsubxin, 579
  - fnmadd, 582
  - fnmaddin, 582
  - fnmaddx, 578
  - fnmaddxin, 579
  - gather, 577, 579
  - greater, 578
  - greater\_eq, 578
  - hadd\_to\_scal, 579
  - is\_same\_element, 576
  - lesser, 578
  - lesser\_eq, 578
  - load, 577, 580
  - loadu, 577, 580
  - mod, 583
  - mul, 582
  - mulhi, 578
  - mullo, 582
  - mulx, 578
  - pack, 581
  - pack\_even, 581
  - pack\_odd, 581
  - round, 583
  - scalar\_t, 576
  - set, 577, 579
  - set1, 577, 579
  - shuffle, 580
  - sll, 580
  - sll128, 583
  - sra, 578
  - srl, 580
  - srl128, 583
  - store, 577, 580
  - storeu, 577, 580
  - stream, 577, 580
  - sub, 582
  - subin, 582
  - transpose, 581
  - type\_string, 577
  - unpackhi, 581
  - unpackhi\_intrinsic, 580
  - unpacklo, 581
  - unpacklo\_intrinsic, 580
  - unpacklohi, 581
  - valid, 579
  - vand, 583
  - vandnot, 584
  - vect\_size, 584
  - vect\_t, 577
  - vor, 584
  - vxor, 584
  - zero, 583
- Simd128\_impl< true, true, false, 4 >::Converter, 425
  - t, 425
  - v, 425
- Simd128\_impl< true, true, false, 8 >, 584
  - add, 592
  - addin, 592
  - aligned\_allocator, 586
  - aligned\_vector, 586
  - alignment, 594
  - blend, 591
  - compliant, 589
  - eq, 593
  - fmadd, 592
  - fmaddin, 592
  - fmaddx, 588
  - fmaddxin, 588
  - fmsub, 593
  - fmsubin, 593
  - fmsubx, 589
  - fmsubxin, 589
  - fnmadd, 592
  - fnmaddin, 592
  - fnmaddx, 588
  - fnmaddxin, 589
  - gather, 587, 589
  - get, 590
  - greater, 588
  - greater\_eq, 588
  - hadd\_to\_scal, 589
  - is\_same\_element, 586
  - lesser, 588
  - lesser\_eq, 588
  - load, 587, 590
  - loadu, 587, 590
  - mask\_high, 593



- mod, [593](#)
- mul, [592](#)
- mulhi, [588](#)
- mulhi\_fast, [593](#)
- mullo, [588](#)
- mulx, [588](#)
- pack, [591](#)
- pack\_even, [591](#)
- pack\_odd, [591](#)
- round, [593](#)
- scalar\_t, [586](#)
- set, [587](#), [589](#)
- set1, [587](#), [589](#)
- shuffle, [590](#)
- signbits, [593](#)
- sll, [590](#)
- sll128, [594](#)
- sra, [587](#)
- srl, [590](#)
- srl128, [594](#)
- store, [587](#), [590](#)
- storeu, [587](#), [590](#)
- stream, [587](#), [590](#)
- sub, [592](#)
- subin, [592](#)
- transpose, [591](#)
- type\_string, [587](#)
- unpackhi, [591](#)
- unpackhi\_intrinsic, [591](#)
- unpacklo, [591](#)
- unpacklo\_intrinsic, [590](#)
- unpacklohi, [591](#)
- valid, [589](#)
- vand, [594](#)
- vandnot, [594](#)
- vect\_size, [594](#)
- vect\_t, [587](#)
- vor, [594](#)
- vxor, [594](#)
- zero, [593](#)
- Simd128\_impl< true, true, false, 8 >::Converter, [425](#)
- t, [426](#)
- v, [426](#)
- Simd128\_impl< true, true, true, 2 >, [594](#)
- add, [599](#)
- addin, [600](#)
- aligned\_allocator, [596](#)
- aligned\_vector, [597](#)
- alignment, [603](#)
- blend, [599](#)
- compliant, [597](#)
- eq, [602](#)
- fmadd, [600](#)
- fmaddin, [600](#)
- fmaddx, [600](#)
- fmaddxin, [601](#)
- fmsub, [601](#)
- fmsubin, [601](#)
- fmsubx, [601](#)
- fmsubxin, [602](#)
- fnmadd, [601](#)
- fnmaddin, [601](#)
- fnmaddx, [601](#)
- fnmaddxin, [601](#)
- gather, [597](#)
- greater, [602](#)
- greater\_eq, [602](#)
- hadd\_to\_scal, [602](#)
- is\_same\_element, [597](#)
- lesser, [602](#)
- lesser\_eq, [602](#)
- load, [597](#)
- loadu, [597](#)
- mod, [602](#)
- mul, [600](#)
- mulhi, [600](#)
- mullo, [600](#)
- mulx, [600](#)
- pack, [599](#)
- pack\_even, [599](#)
- pack\_odd, [599](#)
- round, [602](#)
- scalar\_t, [596](#)
- set, [597](#)
- set1, [597](#)
- shuffle, [598](#)
- sll, [598](#)
- sll128, [603](#)
- sra, [598](#)
- srl, [598](#)
- srl128, [603](#)
- store, [598](#)
- storeu, [598](#)
- stream, [598](#)
- sub, [600](#)
- subin, [600](#)
- transpose, [599](#)
- type\_string, [597](#)
- unpackhi, [599](#)
- unpackhi\_intrinsic, [598](#)
- unpacklo, [598](#)
- unpacklo\_intrinsic, [598](#)
- unpacklohi, [599](#)
- valid, [597](#)
- vand, [603](#)
- vandnot, [603](#)
- vect\_size, [603](#)
- vect\_t, [596](#)
- vor, [603](#)
- vxor, [603](#)
- zero, [603](#)
- Simd128\_impl< true, true, true, 2 >::Converter, [426](#)
- t, [426](#)
- v, [426](#)
- Simd128\_impl< true, true, true, 4 >, [604](#)
- add, [608](#)



addin, [608](#)  
 aligned\_allocator, [605](#)  
 aligned\_vector, [606](#)  
 alignment, [612](#)  
 blend, [608](#)  
 compliant, [606](#)  
 eq, [611](#)  
 fmadd, [609](#)  
 fmaddin, [609](#)  
 fmaddx, [609](#)  
 fmaddxin, [609](#)  
 fmsub, [610](#)  
 fmsubin, [610](#)  
 fmsubx, [610](#)  
 fmsubxin, [610](#)  
 fnmadd, [610](#)  
 fnmaddin, [610](#)  
 fnmaddx, [610](#)  
 fnmaddxin, [610](#)  
 gather, [606](#)  
 greater, [611](#)  
 greater\_eq, [611](#)  
 hadd\_to\_scal, [611](#)  
 is\_same\_element, [606](#)  
 lesser, [611](#)  
 lesser\_eq, [611](#)  
 load, [606](#)  
 loadu, [606](#)  
 mod, [611](#)  
 mul, [609](#)  
 mulhi, [609](#)  
 mullo, [609](#)  
 mulx, [609](#)  
 pack, [608](#)  
 pack\_even, [608](#)  
 pack\_odd, [608](#)  
 round, [611](#)  
 scalar\_t, [605](#)  
 set, [606](#)  
 set1, [606](#)  
 shuffle, [607](#)  
 sll, [607](#)  
 sll128, [611](#)  
 sra, [607](#)  
 srl, [607](#)  
 srl128, [612](#)  
 store, [606](#)  
 storeu, [607](#)  
 stream, [607](#)  
 sub, [608](#)  
 subin, [609](#)  
 transpose, [608](#)  
 type\_string, [606](#)  
 unpackhi, [607](#)  
 unpackhi\_intrinsic, [607](#)  
 unpacklo, [607](#)  
 unpacklo\_intrinsic, [607](#)  
 unpacklohi, [608](#)  
 valid, [606](#)  
 vand, [612](#)  
 vandnot, [612](#)  
 vect\_size, [612](#)  
 vect\_t, [605](#)  
 vor, [612](#)  
 vxor, [612](#)  
 zero, [611](#)  
 Simd128\_impl< true, true, true, 4 >::Converter, [426](#)  
   t, [426](#)  
   v, [426](#)  
 Simd128\_impl< true, true, true, 8 >, [612](#)  
   add, [617](#)  
   addin, [618](#)  
   aligned\_allocator, [615](#)  
   aligned\_vector, [615](#)  
   alignment, [622](#)  
   blend, [617](#)  
   compliant, [615](#)  
   eq, [620](#)  
   fmadd, [618](#)  
   fmaddin, [618](#)  
   fmaddx, [618](#)  
   fmaddxin, [619](#)  
   fmsub, [619](#)  
   fmsubin, [619](#)  
   fmsubx, [619](#)  
   fmsubxin, [620](#)  
   fnmadd, [619](#)  
   fnmaddin, [619](#)  
   fnmaddx, [619](#)  
   fnmaddxin, [619](#)  
   gather, [615](#)  
   get, [615](#)  
   greater, [620](#)  
   greater\_eq, [620](#)  
   hadd\_to\_scal, [620](#)  
   is\_same\_element, [615](#)  
   lesser, [620](#)  
   lesser\_eq, [620](#)  
   load, [615](#)  
   loadu, [616](#)  
   mask\_high, [620](#)  
   mod, [620](#)  
   mul, [618](#)  
   mulhi, [618](#)  
   mulhi\_fast, [620](#)  
   mullo, [618](#)  
   mulx, [618](#)  
   pack, [617](#)  
   pack\_even, [617](#)  
   pack\_odd, [617](#)  
   round, [620](#)  
   scalar\_t, [614](#)  
   set, [615](#)  
   set1, [615](#)  
   shuffle, [616](#)  
   signbits, [621](#)

- sll, [616](#)
- sll128, [621](#)
- sra, [616](#)
- srl, [616](#)
- srl128, [621](#)
- store, [616](#)
- storeu, [616](#)
- stream, [616](#)
- sub, [618](#)
- subin, [618](#)
- transpose, [617](#)
- type\_string, [615](#)
- unpackhi, [617](#)
- unpackhi\_intrinsic, [616](#)
- unpacklo, [617](#)
- unpacklo\_intrinsic, [616](#)
- unpacklohi, [617](#)
- valid, [615](#)
- vand, [621](#)
- vandnot, [621](#)
- vect\_size, [622](#)
- vect\_t, [614](#)
- vor, [621](#)
- vxor, [621](#)
- zero, [621](#)
- Simd128\_impl< true, true, true, 8 >::Converter, [426](#)
- t, [427](#)
- v, [427](#)
- simd128\_int16.inl, [874](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd128\_int16\_INL, [875](#)
- simd128\_int32.inl, [875](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd128\_int32\_INL, [875](#)
- simd128\_int64.inl, [875](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd128\_int64\_INL, [876](#)
- vect\_t, [876](#)
- Simd128i\_base, [622](#)
- sll128, [622](#)
- srl128, [622](#)
- vand, [623](#)
- vandnot, [623](#)
- vect\_t, [622](#)
- vor, [623](#)
- vxor, [623](#)
- zero, [622](#)
- Simd256
- simd256.inl, [876](#)
- simd256.inl, [876](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd256\_INL, [876](#)
- Simd256, [876](#)
- simd256\_double.inl, [876](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd256\_double\_INL, [877](#)
- simd256\_float.inl, [877](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd256\_float\_INL, [877](#)
- Simd256\_impl< ArithType, Int, Signed, Size >, [623](#)
- Simd256\_impl< true, false, true, 4 >, [623](#)
- Simd256\_impl< true, false, true, 8 >, [624](#)
- add, [628](#)
- addin, [628](#)
- aligned\_allocator, [625](#)
- aligned\_vector, [625](#)
- alignment, [631](#)
- blend, [628](#)
- blendv, [628](#)
- ceil, [630](#)
- compliant, [626](#)
- div, [628](#)
- eq, [629](#)
- floor, [630](#)
- fmadd, [629](#)
- fmaddin, [629](#)
- fmsub, [629](#)
- fmsubin, [629](#)
- fnmadd, [629](#)
- fnmaddin, [629](#)
- gather, [626](#)
- greater, [630](#)
- greater\_eq, [630](#)
- hadd, [630](#)
- hadd\_to\_scal, [631](#)
- is\_same\_element, [625](#)
- lesser, [629](#)
- lesser\_eq, [629](#)
- load, [626](#)
- loadu, [626](#)
- mod, [631](#)
- mul, [628](#)
- mulin, [628](#)
- pack, [627](#)
- pack\_even, [627](#)
- pack\_odd, [627](#)
- round, [630](#)
- scalar\_t, [625](#)
- set, [626](#)
- set1, [626](#)
- store, [626](#)
- storeu, [626](#)
- stream, [626](#)
- sub, [628](#)
- subin, [628](#)
- transpose, [627](#)
- type\_string, [625](#)
- unpackhi, [627](#)
- unpackhi\_intrinsic, [627](#)
- unpacklo, [627](#)
- unpacklo\_intrinsic, [627](#)
- unpacklohi, [627](#)
- valid, [625](#)
- vand, [630](#)
- vandnot, [630](#)

- vect\_size, [631](#)
- vect\_t, [625](#)
- vor, [630](#)
- vxor, [630](#)
- zero, [626](#)
- Simd256\_impl< true, false, true, 8 >::Converter, [427](#)
- t, [427](#)
- v, [427](#)
- Simd256\_impl< true, true, false, 2 >, [631](#)
- add, [639](#)
- addin, [639](#)
- aligned\_allocator, [633](#)
- aligned\_vector, [633](#)
- alignment, [641](#)
- blend, [639](#)
- compliant, [636](#)
- eq, [640](#)
- fmadd, [640](#)
- fmaddin, [640](#)
- fmaddx, [635](#)
- fmaddxin, [636](#)
- fmsub, [640](#)
- fmsubin, [640](#)
- fmsubx, [636](#)
- fmsubxin, [636](#)
- fnmadd, [640](#)
- fnmaddin, [640](#)
- fnmaddx, [636](#)
- fnmaddxin, [636](#)
- gather, [634](#), [637](#)
- greater, [635](#)
- greater\_eq, [635](#)
- hadd\_to\_scal, [636](#)
- half\_t, [634](#)
- is\_same\_element, [633](#)
- lesser, [635](#)
- lesser\_eq, [635](#)
- load, [634](#), [637](#)
- loadu, [634](#), [637](#)
- mod, [641](#)
- mul, [640](#)
- mulhi, [635](#)
- mullo, [640](#)
- mulx, [635](#)
- pack, [638](#)
- pack\_even, [638](#)
- pack\_odd, [638](#)
- round, [641](#)
- scalar\_t, [633](#)
- set, [634](#), [637](#)
- set1, [634](#), [636](#)
- shuffle, [638](#)
- simdHalf, [633](#)
- sll, [637](#)
- sra, [635](#)
- srl, [638](#)
- store, [634](#), [637](#)
- storeu, [635](#), [637](#)
- stream, [635](#), [637](#)
- sub, [639](#)
- subin, [639](#)
- transpose, [639](#)
- type\_string, [634](#)
- unpackhi, [638](#)
- unpackhi\_intrinsic, [638](#)
- unpacklo, [638](#)
- unpacklo\_intrinsic, [638](#)
- unpacklohi, [638](#)
- valid, [636](#)
- vect\_size, [641](#)
- vect\_t, [634](#)
- zero, [641](#)
- Simd256\_impl< true, true, false, 2 >::Converter, [427](#)
- t, [427](#)
- v, [427](#)
- Simd256\_impl< true, true, false, 4 >, [641](#)
- add, [655](#)
- addin, [655](#), [656](#)
- aligned\_allocator, [645](#)
- aligned\_vector, [645](#)
- alignment, [659](#)
- blend, [655](#)
- compliant, [651](#)
- eq, [658](#)
- fmadd, [656](#), [657](#)
- fmaddin, [657](#)
- fmaddx, [647](#), [649](#)
- fmaddxin, [647](#), [650](#)
- fmsub, [657](#), [658](#)
- fmsubin, [658](#)
- fmsubx, [647](#), [650](#)
- fmsubxin, [648](#), [650](#)
- fnmadd, [657](#)
- fnmaddin, [657](#)
- fnmaddx, [647](#), [650](#)
- fnmaddxin, [647](#), [650](#)
- gather, [646](#), [648](#), [651](#)
- greater, [646](#), [649](#)
- greater\_eq, [647](#), [649](#)
- hadd\_to\_scal, [648](#), [650](#)
- half\_t, [645](#)
- is\_same\_element, [645](#), [650](#)
- lesser, [646](#), [649](#)
- lesser\_eq, [647](#), [649](#)
- load, [646](#), [648](#), [652](#)
- loadu, [646](#), [648](#), [652](#)
- mod, [658](#)
- mul, [656](#)
- mulhi, [647](#), [649](#)
- mullo, [656](#)
- mulx, [647](#), [649](#)
- pack, [654](#)
- pack\_even, [654](#)
- pack\_odd, [654](#)
- round, [658](#)
- scalar\_t, [645](#)

- set, [645](#), [648](#), [651](#)
- set1, [645](#), [648](#), [651](#)
- shuffle, [653](#)
- shuffle\_twice, [652](#)
- simdHalf, [645](#)
- sll, [652](#)
- sra, [646](#), [649](#)
- srl, [652](#)
- store, [646](#), [648](#), [652](#)
- storeu, [646](#), [649](#), [652](#)
- stream, [646](#), [649](#), [652](#)
- sub, [656](#)
- subin, [656](#)
- transpose, [655](#)
- type\_string, [645](#), [648](#)
- unpackhi, [653](#)
- unpackhi\_intrinsic, [653](#)
- unpacklo, [653](#)
- unpacklo\_intrinsic, [653](#)
- unpacklohi, [654](#)
- valid, [650](#)
- vand, [659](#)
- vandnot, [659](#)
- vect\_size, [659](#)
- vect\_t, [645](#)
- vor, [659](#)
- vxor, [659](#)
- zero, [659](#)
- Simd256\_impl< true, true, false, 4 >::Converter, [427](#)
- t, [428](#)
- v, [428](#)
- Simd256\_impl< true, true, false, 8 >, [660](#)
- add, [667](#)
- addin, [667](#)
- aligned\_allocator, [662](#)
- aligned\_vector, [662](#)
- alignment, [669](#)
- blend, [667](#)
- compliant, [665](#)
- eq, [668](#)
- fmadd, [668](#)
- fmaddin, [668](#)
- fmaddx, [664](#)
- fmaddxin, [664](#)
- fmsub, [668](#)
- fmubin, [668](#)
- fmubx, [664](#)
- fmubxin, [664](#)
- fnmadd, [668](#)
- fnmaddin, [668](#)
- fnmaddx, [664](#)
- fnmaddxin, [664](#)
- gather, [662](#), [665](#)
- get, [665](#)
- greater, [663](#)
- greater\_eq, [663](#)
- hadd\_to\_scal, [664](#)
- half\_t, [662](#)
- is\_same\_element, [662](#)
- lesser, [663](#)
- lesser\_eq, [663](#)
- load, [662](#), [665](#)
- loadu, [663](#), [665](#)
- mask\_high, [668](#)
- mod, [669](#)
- mul, [667](#)
- mulhi, [664](#)
- mulhi\_fast, [669](#)
- mullo, [663](#)
- mulx, [664](#)
- pack, [667](#)
- pack\_even, [666](#)
- pack\_odd, [667](#)
- round, [668](#)
- scalar\_t, [662](#)
- set, [662](#), [665](#)
- set1, [662](#), [665](#)
- shuffle, [666](#)
- signbits, [669](#)
- simdHalf, [662](#)
- sll, [666](#)
- sra, [663](#)
- srl, [666](#)
- store, [663](#), [665](#)
- storeu, [663](#), [665](#)
- stream, [663](#), [666](#)
- sub, [667](#)
- subin, [667](#)
- transpose, [667](#)
- type\_string, [662](#)
- unpackhi, [666](#)
- unpackhi\_intrinsic, [666](#)
- unpacklo, [666](#)
- unpacklo\_intrinsic, [666](#)
- unpacklohi, [666](#)
- valid, [665](#)
- vect\_size, [669](#)
- vect\_t, [662](#)
- zero, [669](#)
- Simd256\_impl< true, true, false, 8 >::Converter, [428](#)
- t, [428](#)
- v, [428](#)
- Simd256\_impl< true, true, true, 2 >, [669](#)
- add, [675](#)
- addin, [675](#)
- aligned\_allocator, [671](#)
- aligned\_vector, [671](#)
- alignment, [678](#)
- blend, [675](#)
- compliant, [672](#)
- eq, [677](#)
- fmadd, [676](#)
- fmaddin, [676](#)
- fmaddx, [676](#)
- fmaddxin, [676](#)
- fmsub, [677](#)

- fmsubin, 677
- fmsubx, 677
- fmsubxin, 677
- fnmadd, 676
- fnmaddin, 676
- fnmaddx, 676
- fnmaddxin, 676
- gather, 672
- greater, 677
- greater\_eq, 677
- hadd\_to\_scal, 678
- half\_t, 671
- is\_same\_element, 672
- lesser, 677
- lesser\_eq, 677
- load, 672
- loadu, 673
- mod, 678
- mul, 675
- mulhi, 675
- mullo, 675
- mulx, 676
- pack, 674
- pack\_even, 674
- pack\_odd, 674
- round, 678
- scalar\_t, 671
- set, 672
- set1, 672
- shuffle, 673
- simdHalf, 671
- sll, 673
- sra, 673
- srl, 673
- store, 673
- storeu, 673
- stream, 673
- sub, 675
- subin, 675
- transpose, 674
- type\_string, 672
- unpackhi, 674
- unpackhi\_intrinsic, 673
- unpacklo, 674
- unpacklo\_intrinsic, 673
- unpacklohi, 674
- valid, 672
- vect\_size, 678
- vect\_t, 671
- zero, 678
- Simd256\_impl< true, true, true, 2 >::Converter, 428
  - t, 428
  - v, 428
- Simd256\_impl< true, true, true, 4 >, 678
  - add, 685, 691
  - addin, 685, 691
  - aligned\_allocator, 682
  - aligned\_vector, 682
  - alignment, 695
  - blend, 685, 691
  - compliant, 682, 688
  - eq, 687, 694
  - fmadd, 686, 692
  - fmaddin, 686, 692
  - fmaddx, 686, 692
  - fmaddxin, 686, 693
  - fmsub, 687, 693
  - fmsubin, 687, 693
  - fmsubx, 687, 693
  - fmsubxin, 687, 694
  - fnmadd, 686, 693
  - fnmaddin, 687, 693
  - fnmaddx, 687, 693
  - fnmaddxin, 687, 693
  - gather, 683, 689
  - greater, 688, 694
  - greater\_eq, 688, 694
  - hadd\_to\_scal, 688, 694
  - half\_t, 682
  - is\_same\_element, 682, 695
  - lesser, 688, 694
  - lesser\_eq, 688, 694
  - load, 683, 689
  - loadu, 683, 689
  - mod, 688, 694
  - mul, 686, 692
  - mulhi, 686, 692
  - mullo, 686, 692
  - mulx, 686, 692
  - pack, 685, 691
  - pack\_even, 684, 691
  - pack\_odd, 685, 691
  - round, 688, 694
  - scalar\_t, 682
  - set, 683, 689
  - set1, 683, 689
  - shuffle, 684, 690
  - shuffle\_twice, 684, 690
  - simdHalf, 682
  - sll, 683, 690
  - sra, 684, 690
  - srl, 684, 690
  - store, 683, 689
  - storeu, 683, 689
  - stream, 683, 689
  - sub, 685, 692
  - subin, 685, 692
  - transpose, 685, 691
  - type\_string, 682, 688
  - unpackhi, 684, 690
  - unpackhi\_intrinsic, 684, 690
  - unpacklo, 684, 690
  - unpacklo\_intrinsic, 684, 690
  - unpacklohi, 684, 690
  - valid, 682, 688
  - vand, 695

- vandnot, [695](#)
- vect\_size, [695](#)
- vect\_t, [682](#)
- vor, [695](#)
- vxor, [695](#)
- zero, [695](#)
- Simd256\_impl< true, true, true, 4 >::Converter, [428](#)
- t, [429](#)
- v, [429](#)
- Simd256\_impl< true, true, true, 8 >, [695](#)
- add, [701](#)
- addin, [701](#)
- aligned\_allocator, [698](#)
- aligned\_vector, [698](#)
- alignment, [704](#)
- blend, [700](#)
- compliant, [698](#)
- eq, [703](#)
- fmadd, [701](#)
- fmaddin, [701](#)
- fmaddx, [702](#)
- fmaddxin, [702](#)
- fmsub, [702](#)
- fmsubin, [702](#)
- fmsubx, [703](#)
- fmsubxin, [703](#)
- fnmadd, [702](#)
- fnmaddin, [702](#)
- fnmaddx, [702](#)
- fnmaddxin, [702](#)
- gather, [698](#)
- get, [698](#)
- greater, [703](#)
- greater\_eq, [703](#)
- hadd\_to\_scal, [703](#)
- half\_t, [697](#)
- is\_same\_element, [698](#)
- lesser, [703](#)
- lesser\_eq, [703](#)
- load, [699](#)
- loadu, [699](#)
- mask\_high, [703](#)
- mod, [704](#)
- mul, [701](#)
- mulhi, [701](#)
- mulhi\_fast, [703](#)
- mullo, [701](#)
- mulx, [701](#)
- pack, [700](#)
- pack\_even, [700](#)
- pack\_odd, [700](#)
- round, [703](#)
- scalar\_t, [697](#)
- set, [698](#)
- set1, [698](#)
- shuffle, [699](#)
- signbits, [704](#)
- simdHalf, [698](#)
- sll, [699](#)
- sra, [699](#)
- srl, [699](#)
- store, [699](#)
- storeu, [699](#)
- stream, [699](#)
- sub, [701](#)
- subin, [701](#)
- transpose, [700](#)
- type\_string, [698](#)
- unpackhi, [700](#)
- unpackhi\_intrinsic, [700](#)
- unpacklo, [700](#)
- unpacklo\_intrinsic, [699](#)
- unpacklohi, [700](#)
- valid, [698](#)
- vect\_size, [704](#)
- vect\_t, [697](#)
- zero, [704](#)
- Simd256\_impl< true, true, true, 8 >::Converter, [429](#)
- t, [429](#)
- v, [429](#)
- simd256\_int16.inl, [877](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd256\_int16\_INL, [878](#)
- simd256\_int32.inl, [878](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd256\_int32\_INL, [878](#)
- simd256\_int64.inl, [878](#)
- \_\_FFLASFFPACK\_fflas\_ffpack\_utils\_simd256\_int64\_INL, [878](#)
- vect\_t, [878](#)
- Simd256fp\_base, [704](#)
- Simd256i\_base, [705](#)
- vect\_t, [705](#)
- zero, [705](#)
- Simd512
- simd512.inl, [879](#)
- simd512.inl, [879](#)
- \_\_FFLASFFPACK\_simd512\_INL, [879](#)
- Simd512, [879](#)
- simd512\_double.inl, [879](#)
- \_\_FFLASFFPACK\_simd512\_double\_INL, [880](#)
- simd512\_float.inl, [880](#)
- \_\_FFLASFFPACK\_simd512\_float\_INL, [880](#)
- Simd512\_impl< ArithType, Int, Signed, Size >, [705](#)
- Simd512\_impl< true, false, true, 4 >, [705](#)
- Simd512\_impl< true, false, true, 8 >, [705](#)
- add, [710](#)
- addin, [710](#)
- aligned\_allocator, [707](#)
- aligned\_vector, [707](#)
- alignment, [712](#)
- blend, [709](#)
- blendv, [710](#)
- ceil, [712](#)
- compliant, [707](#)
- div, [710](#)

- eq, [711](#)
- floor, [712](#)
- fmadd, [710](#)
- fmaddin, [711](#)
- fmsub, [711](#)
- fmsubin, [711](#)
- fnmadd, [711](#)
- fnmaddin, [711](#)
- gather, [708](#)
- greater, [711](#)
- greater\_eq, [712](#)
- hadd, [712](#)
- hadd\_to\_scal, [712](#)
- is\_same\_element, [707](#)
- lesser, [711](#)
- lesser\_eq, [711](#)
- load, [708](#)
- loadu, [708](#)
- mul, [710](#)
- mulin, [710](#)
- pack, [709](#)
- pack\_even, [709](#)
- pack\_odd, [709](#)
- round, [712](#)
- scalar\_t, [707](#)
- set, [707](#)
- set1, [707](#)
- shuffle, [708](#)
- store, [708](#)
- storeu, [708](#)
- stream, [708](#)
- sub, [710](#)
- subin, [710](#)
- transpose, [709](#)
- type\_string, [707](#)
- unpackhi, [709](#)
- unpackhi\_intrinsic, [708](#)
- unpacklo, [709](#)
- unpacklo\_intrinsic, [708](#)
- unpacklohi, [709](#)
- valid, [707](#)
- vect\_size, [712](#)
- vect\_t, [707](#)
- zero, [707](#)
- Simd512\_impl< true, true, false, 8 >, [712](#)
- add, [721](#)
- addin, [721](#)
- aligned\_allocator, [715](#)
- aligned\_vector, [715](#)
- alignment, [723](#)
- blend, [721](#)
- compliant, [718](#)
- eq, [722](#)
- fmadd, [721](#)
- fmaddin, [721](#)
- fmaddx, [717](#)
- fmaddxin, [717](#)
- fmsub, [722](#)
- fmsubin, [722](#)
- fmsubx, [717](#)
- fmsubxin, [718](#)
- fnmadd, [721](#)
- fnmaddin, [722](#)
- fnmaddx, [717](#)
- fnmaddxin, [717](#)
- gather, [715](#), [718](#)
- greater, [716](#)
- greater\_eq, [716](#)
- hadd\_to\_scal, [718](#)
- half\_t, [715](#)
- is\_same\_element, [715](#)
- lesser, [716](#)
- lesser\_eq, [717](#)
- load, [716](#), [719](#)
- loadu, [716](#), [719](#)
- mask\_high, [722](#)
- maskstore, [716](#), [719](#)
- mod, [722](#)
- mul, [721](#)
- mulhi, [717](#)
- mulhi\_fast, [722](#)
- mullo, [717](#)
- mulx, [717](#)
- pack, [720](#)
- pack\_even, [720](#)
- pack\_odd, [720](#)
- round, [722](#)
- scalar\_t, [715](#)
- set, [715](#), [718](#)
- set1, [715](#), [718](#)
- shuffle, [719](#)
- signbits, [722](#)
- simdHalf, [715](#)
- sll, [719](#)
- sra, [716](#)
- srl, [719](#)
- store, [716](#), [719](#)
- storeu, [716](#), [719](#)
- stream, [716](#), [719](#)
- sub, [721](#)
- subin, [721](#)
- transpose, [720](#)
- type\_string, [715](#)
- unpackhi, [720](#)
- unpackhi\_intrinsic, [720](#)
- unpacklo, [720](#)
- unpacklo\_intrinsic, [719](#)
- unpacklohi, [720](#)
- valid, [718](#)
- vand, [723](#)
- vandnot, [723](#)
- vect\_size, [723](#)
- vect\_t, [715](#)
- vor, [723](#)
- vxor, [723](#)
- zero, [723](#)

- Simd512\_impl< true, true, false, 8 >::Converter, [429](#)
  - t, [429](#)
  - v, [429](#)
- Simd512\_impl< true, true, true, 8 >, [723](#)
  - add, [729](#)
  - addin, [729](#)
  - aligned\_allocator, [726](#)
  - aligned\_vector, [726](#)
  - alignment, [733](#)
  - blend, [729](#)
  - compliant, [726](#)
  - eq, [731](#)
  - fmadd, [730](#)
  - fmaddin, [730](#)
  - fmaddx, [730](#)
  - fmaddxin, [730](#)
  - fmsub, [731](#)
  - fmsubin, [731](#)
  - fmsubx, [731](#)
  - fmsubxin, [731](#)
  - fnmadd, [730](#)
  - fnmaddin, [730](#)
  - fnmaddx, [730](#)
  - fnmaddxin, [730](#)
  - gather, [726](#)
  - greater, [731](#)
  - greater\_eq, [731](#)
  - hadd\_to\_scal, [731](#)
  - half\_t, [725](#)
  - is\_same\_element, [726](#)
  - lesser, [731](#)
  - lesser\_eq, [731](#)
  - load, [727](#)
  - loadu, [727](#)
  - mask\_high, [732](#)
  - maskstore, [727](#)
  - mod, [732](#)
  - mul, [729](#)
  - mulhi, [729](#)
  - mulhi\_fast, [732](#)
  - mullo, [729](#)
  - mulx, [729](#)
  - pack, [728](#)
  - pack\_even, [728](#)
  - pack\_odd, [728](#)
  - round, [732](#)
  - scalar\_t, [725](#)
  - set, [726](#)
  - set1, [726](#)
  - shuffle, [727](#)
  - signbits, [732](#)
  - simdHalf, [725](#)
  - sll, [727](#)
  - sra, [727](#)
  - srl, [727](#)
  - store, [727](#)
  - storeu, [727](#)
  - stream, [727](#)
  - sub, [729](#)
  - subin, [729](#)
  - transpose, [728](#)
  - type\_string, [726](#)
  - unpackhi, [728](#)
  - unpackhi\_intrinsic, [728](#)
  - unpacklo, [728](#)
  - unpacklo\_intrinsic, [728](#)
  - unpacklohi, [728](#)
  - valid, [726](#)
  - vand, [732](#)
  - vandnot, [732](#)
  - vect\_size, [733](#)
  - vect\_t, [725](#)
  - vor, [732](#)
  - vxor, [732](#)
  - zero, [732](#)
- Simd512\_impl< true, true, true, 8 >::Converter, [429](#)
  - t, [430](#)
  - v, [430](#)
- simd512\_int32.inl, [880](#)
  - \_\_FFLASFFPACK\_simd512\_int32\_INL, [880](#)
- simd512\_int64.inl, [881](#)
  - \_simd512\_int64\_INL, [881](#)
  - vect\_t, [881](#)
- Simd512i\_base, [733](#)
  - vand, [734](#)
  - vandnot, [734](#)
  - vect\_t, [733](#)
  - vor, [733](#)
  - vxor, [733](#)
  - zero, [733](#)
- SIMD\_INT
  - fflas\_simd.h, [872](#)
- simd\_modular.inl, [881](#)
- SimdChooser< T, bool, bool >, [734](#)
- SimdChooser< T, false, b >, [734](#)
  - value, [734](#)
- SimdChooser< T, true, false >, [734](#)
  - value, [735](#)
- SimdChooser< T, true, true >, [735](#)
  - value, [735](#)
- simdHalf
  - Simd256\_impl< true, true, false, 2 >, [633](#)
  - Simd256\_impl< true, true, false, 4 >, [645](#)
  - Simd256\_impl< true, true, false, 8 >, [662](#)
  - Simd256\_impl< true, true, true, 2 >, [671](#)
  - Simd256\_impl< true, true, true, 4 >, [682](#)
  - Simd256\_impl< true, true, true, 8 >, [698](#)
  - Simd512\_impl< true, true, false, 8 >, [715](#)
  - Simd512\_impl< true, true, true, 8 >, [725](#)
- SimdSparseMatrix
  - FFLAS, [72](#)
- simdToType< T >, [735](#)
- Single, [735](#)
- size
  - BlockTransposeSIMD< Field, Simd, >, [409](#)
  - Info, [479](#), [480](#)



- RNSInteger< RNS >, [543](#)
- RNSIntegerMod< RNS >, [547](#)
- SIZEOF\_\_\_INT64\_T
  - config.h, [820](#)
- SIZEOF\_CHAR
  - config.h, [819](#)
- SIZEOF\_INT
  - config.h, [819](#)
- SIZEOF\_LONG
  - config.h, [819](#)
- SIZEOF\_LONG\_LONG
  - config.h, [819](#)
- SIZEOF\_SHORT
  - config.h, [820](#)
- sll
  - ScalFunctionsBase< Element, typename enable\_if<
    - is\_integral< Element >::value >::type >, [562](#)
  - Simd128\_impl< true, true, false, 2 >, [570](#)
  - Simd128\_impl< true, true, false, 4 >, [580](#)
  - Simd128\_impl< true, true, false, 8 >, [590](#)
  - Simd128\_impl< true, true, true, 2 >, [598](#)
  - Simd128\_impl< true, true, true, 4 >, [607](#)
  - Simd128\_impl< true, true, true, 8 >, [616](#)
  - Simd256\_impl< true, true, false, 2 >, [637](#)
  - Simd256\_impl< true, true, false, 4 >, [652](#)
  - Simd256\_impl< true, true, false, 8 >, [666](#)
  - Simd256\_impl< true, true, true, 2 >, [673](#)
  - Simd256\_impl< true, true, true, 4 >, [683](#), [690](#)
  - Simd256\_impl< true, true, true, 8 >, [699](#)
  - Simd512\_impl< true, true, false, 8 >, [719](#)
  - Simd512\_impl< true, true, true, 8 >, [727](#)
- sll128
  - Simd128\_impl< true, true, false, 2 >, [573](#)
  - Simd128\_impl< true, true, false, 4 >, [583](#)
  - Simd128\_impl< true, true, false, 8 >, [594](#)
  - Simd128\_impl< true, true, true, 2 >, [603](#)
  - Simd128\_impl< true, true, true, 4 >, [611](#)
  - Simd128\_impl< true, true, true, 8 >, [621](#)
  - Simd128i\_base, [622](#)
- Solve
  - FFPACK, [328](#), [372](#)
- solve.C, [805](#)
  - main, [805](#)
- Solve\_modular\_double
  - ffpack.C, [999](#)
  - ffpack\_c.h, [1019](#)
- solveLB
  - FFPACK, [348](#), [372](#)
- solveLB2
  - FFPACK, [348](#), [372](#)
- solveLB2\_modular\_double
  - ffpack.C, [1000](#)
  - ffpack\_c.h, [1020](#)
- solveLB\_modular\_double
  - ffpack.C, [1000](#)
  - ffpack\_c.h, [1019](#)
- Sparse< \_Field, SparseMatrix\_t::COO >, [735](#)
  - col, [736](#)
  - dat, [736](#)
  - delayed, [736](#)
  - Field, [736](#)
  - kmax, [736](#)
  - m, [736](#)
  - maxrow, [737](#)
  - n, [736](#)
  - nElements, [737](#)
  - nnz, [736](#)
  - row, [736](#)
- Sparse< \_Field, SparseMatrix\_t::COO\_ZO >, [737](#)
  - col, [738](#)
  - cst, [738](#)
  - dat, [738](#)
  - delayed, [738](#)
  - Field, [737](#)
  - kmax, [738](#)
  - m, [738](#)
  - maxrow, [738](#)
  - n, [738](#)
  - nElements, [738](#)
  - nnz, [738](#)
  - row, [738](#)
- Sparse< \_Field, SparseMatrix\_t::CSR >, [739](#)
  - col, [740](#)
  - dat, [740](#)
  - delayed, [739](#)
  - Field, [739](#)
  - kmax, [739](#)
  - m, [739](#)
  - maxrow, [740](#)
  - n, [739](#)
  - nElements, [740](#)
  - nnz, [739](#)
  - st, [740](#)
  - stend, [740](#)
- Sparse< \_Field, SparseMatrix\_t::CSR\_HYB >, [740](#)
  - col, [741](#)
  - dat, [741](#)
  - delayed, [741](#)
  - Field, [741](#)
  - kmax, [741](#)
  - m, [741](#)
  - maxrow, [741](#)
  - n, [741](#)
  - nElements, [741](#)
  - nMOnes, [742](#)
  - nnz, [741](#)
  - nOnes, [742](#)
  - nOthers, [742](#)
  - st, [741](#)
- Sparse< \_Field, SparseMatrix\_t::CSR\_ZO >, [742](#)
  - col, [743](#)
  - cst, [743](#)
  - dat, [744](#)
  - delayed, [743](#)
  - Field, [743](#)
  - kmax, [743](#)

- m, [743](#)
  - maxrow, [743](#)
  - n, [743](#)
  - nElements, [743](#)
  - nnz, [743](#)
  - st, [743](#)
  - stend, [743](#)
- Sparse< \_Field, SparseMatrix\_t::ELL >, [744](#)
  - col, [745](#)
  - dat, [745](#)
  - delayed, [744](#)
  - Field, [744](#)
  - kmax, [744](#)
  - ld, [745](#)
  - m, [745](#)
  - maxrow, [745](#)
  - n, [745](#)
  - nElements, [745](#)
  - nnz, [745](#)
- Sparse< \_Field, SparseMatrix\_t::ELL\_simd >, [745](#)
  - chunk, [746](#)
  - col, [747](#)
  - dat, [747](#)
  - delayed, [746](#)
  - kmax, [746](#)
  - ld, [746](#)
  - m, [746](#)
  - maxrow, [746](#)
  - n, [746](#)
  - nChunks, [747](#)
  - nElements, [746](#)
  - nnz, [746](#)
- Sparse< \_Field, SparseMatrix\_t::ELL\_simd\_ZO >, [747](#)
  - chunk, [748](#)
  - col, [748](#)
  - cst, [747](#)
  - dat, [748](#)
  - delayed, [747](#)
  - kmax, [748](#)
  - ld, [748](#)
  - m, [748](#)
  - maxrow, [748](#)
  - n, [748](#)
  - nChunks, [748](#)
  - nElements, [748](#)
  - nnz, [748](#)
- Sparse< \_Field, SparseMatrix\_t::ELL\_ZO >, [749](#)
  - col, [750](#)
  - cst, [749](#)
  - dat, [750](#)
  - delayed, [749](#)
  - Field, [749](#)
  - kmax, [749](#)
  - ld, [750](#)
  - m, [749](#)
  - maxrow, [750](#)
  - n, [749](#)
  - nElements, [750](#)
  - nnz, [750](#)
- Sparse< \_Field, SparseMatrix\_t::HYB\_ZO >, [750](#)
  - dat, [751](#)
  - delayed, [751](#)
  - Field, [751](#)
  - kmax, [751](#)
  - m, [751](#)
  - maxrow, [751](#)
  - mone, [751](#)
  - n, [751](#)
  - nElements, [751](#)
  - nnz, [751](#)
  - one, [751](#)
  - Self\_t, [751](#)
- Sparse< \_Field, SparseMatrix\_t::SELL >, [752](#)
  - chunk, [752](#)
  - chunkSize, [753](#)
  - col, [753](#)
  - dat, [754](#)
  - delayed, [752](#)
  - Field, [752](#)
  - kmax, [753](#)
  - m, [753](#)
  - maxrow, [753](#)
  - n, [753](#)
  - nChunks, [753](#)
  - nElements, [753](#)
  - nnz, [753](#)
  - perm, [753](#)
  - sigma, [753](#)
  - st, [753](#)
- Sparse< \_Field, SparseMatrix\_t::SELL\_ZO >, [754](#)
  - chunk, [755](#)
  - chunkSize, [756](#)
  - col, [756](#)
  - cst, [755](#)
  - dat, [756](#)
  - delayed, [755](#)
  - Field, [754](#)
  - kmax, [755](#)
  - m, [755](#)
  - maxrow, [755](#)
  - n, [755](#)
  - nChunks, [755](#)
  - nElements, [755](#)
  - nnz, [755](#)
  - perm, [755](#)
  - sigma, [755](#)
  - st, [755](#)
- Sparse< Field, SparseMatrix\_t, IdxT, PtrT >, [735](#)
- sparse\_delete
  - FFLAS, [146–150](#), [153](#)
- sparse\_init
  - FFLAS, [145–150](#), [153](#)
- sparse\_matrix\_traits.h, [912](#)
- sparse\_print
  - FFLAS, [147](#), [150](#), [153](#)
- SparseMatrix\_t

- FFLAS, [76](#)
- SpecRankProfile
  - FFPACK, [371](#)
- SpecRankProfile\_modular\_double
  - ffpack.C, [999](#)
  - ffpack\_c.h, [1018](#)
- splitt
  - parallel.h, [1039](#)
- SPLITTER
  - parallel.h, [1039](#)
- splitting\_0
  - parallel.h, [1038](#)
- splitting\_1
  - parallel.h, [1038](#)
- splitting\_2
  - parallel.h, [1038](#)
- splitting\_3
  - parallel.h, [1038](#)
- SpMat< Field, flag >, [756](#)
  - \_coo, [756](#)
  - \_csr, [756](#)
  - \_ell, [756](#)
- square\_inplace
  - FFLAS::\_ftranspose\_impl, [190](#)
- sra
  - ScalFunctionsBase< Element, typename enable\_if< is\_integral< Element >::value >::type >, [562](#)
  - Simd128\_impl< true, true, false, 2 >, [567](#)
  - Simd128\_impl< true, true, false, 4 >, [578](#)
  - Simd128\_impl< true, true, false, 8 >, [587](#)
  - Simd128\_impl< true, true, true, 2 >, [598](#)
  - Simd128\_impl< true, true, true, 4 >, [607](#)
  - Simd128\_impl< true, true, true, 8 >, [616](#)
  - Simd256\_impl< true, true, false, 2 >, [635](#)
  - Simd256\_impl< true, true, false, 4 >, [646](#), [649](#)
  - Simd256\_impl< true, true, false, 8 >, [663](#)
  - Simd256\_impl< true, true, true, 2 >, [673](#)
  - Simd256\_impl< true, true, true, 4 >, [684](#), [690](#)
  - Simd256\_impl< true, true, true, 8 >, [699](#)
  - Simd512\_impl< true, true, false, 8 >, [716](#)
  - Simd512\_impl< true, true, true, 8 >, [727](#)
- srl
  - ScalFunctionsBase< Element, typename enable\_if< is\_integral< Element >::value >::type >, [562](#)
  - Simd128\_impl< true, true, false, 2 >, [570](#)
  - Simd128\_impl< true, true, false, 4 >, [580](#)
  - Simd128\_impl< true, true, false, 8 >, [590](#)
  - Simd128\_impl< true, true, true, 2 >, [598](#)
  - Simd128\_impl< true, true, true, 4 >, [607](#)
  - Simd128\_impl< true, true, true, 8 >, [616](#)
  - Simd256\_impl< true, true, false, 2 >, [638](#)
  - Simd256\_impl< true, true, false, 4 >, [652](#)
  - Simd256\_impl< true, true, false, 8 >, [666](#)
  - Simd256\_impl< true, true, true, 2 >, [673](#)
  - Simd256\_impl< true, true, true, 4 >, [684](#), [690](#)
  - Simd256\_impl< true, true, true, 8 >, [699](#)
  - Simd512\_impl< true, true, false, 8 >, [719](#)
  - Simd512\_impl< true, true, true, 8 >, [727](#)
- srl128
  - Simd128\_impl< true, true, false, 2 >, [573](#)
  - Simd128\_impl< true, true, false, 4 >, [583](#)
  - Simd128\_impl< true, true, false, 8 >, [594](#)
  - Simd128\_impl< true, true, true, 2 >, [603](#)
  - Simd128\_impl< true, true, true, 4 >, [612](#)
  - Simd128\_impl< true, true, true, 8 >, [621](#)
  - Simd128i\_base, [622](#)
- sscal\_
  - config-blas.h, [815](#)
- ST
  - fflas\_transpose.h, [914](#)
- st
  - Sparse< \_Field, SparseMatrix\_t::CSR >, [740](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR\_HYB >, [741](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR\_ZO >, [743](#)
  - Sparse< \_Field, SparseMatrix\_t::SELL >, [753](#)
  - Sparse< \_Field, SparseMatrix\_t::SELL\_ZO >, [755](#)
- StatsMatrix, [756](#)
  - averageCol, [758](#)
  - averageColDifference, [758](#)
  - averageRow, [758](#)
  - averageRowDifference, [758](#)
  - coldim, [757](#)
  - denseCols, [759](#)
  - denseRows, [759](#)
  - deviationCol, [758](#)
  - deviationColDifference, [758](#)
  - deviationRow, [758](#)
  - deviationRowDifference, [758](#)
  - maxCol, [758](#)
  - maxColDifference, [758](#)
  - maxRow, [757](#)
  - maxRowDifference, [758](#)
  - minCol, [758](#)
  - minColDifference, [758](#)
  - minRow, [758](#)
  - minRowDifference, [758](#)
  - nDenseCols, [759](#)
  - nDenseRows, [759](#)
  - nEmptyCols, [759](#)
  - nEmptyColsEnd, [759](#)
  - nEmptyRows, [759](#)
  - nMOnes, [757](#)
  - nnz, [757](#)
  - nOnes, [757](#)
  - nOthers, [757](#)
  - rowdim, [757](#)
- STD\_RECINT\_SIZE
  - benchmark-fgemm-mp.C, [787](#)
  - benchmark-fgemv-mp.C, [790](#)
- STDC\_HEADERS
  - config.h, [820](#)
- stend
  - Sparse< \_Field, SparseMatrix\_t::CSR >, [740](#)
  - Sparse< \_Field, SparseMatrix\_t::CSR\_ZO >, [743](#)
- store

- Simd128\_impl< true, true, false, 2 >, [567](#), [570](#)
- Simd128\_impl< true, true, false, 4 >, [577](#), [580](#)
- Simd128\_impl< true, true, false, 8 >, [587](#), [590](#)
- Simd128\_impl< true, true, true, 2 >, [598](#)
- Simd128\_impl< true, true, true, 4 >, [606](#)
- Simd128\_impl< true, true, true, 8 >, [616](#)
- Simd256\_impl< true, false, true, 8 >, [626](#)
- Simd256\_impl< true, true, false, 2 >, [634](#), [637](#)
- Simd256\_impl< true, true, false, 4 >, [646](#), [648](#), [652](#)
- Simd256\_impl< true, true, false, 8 >, [663](#), [665](#)
- Simd256\_impl< true, true, true, 2 >, [673](#)
- Simd256\_impl< true, true, true, 4 >, [683](#), [689](#)
- Simd256\_impl< true, true, true, 8 >, [699](#)
- Simd512\_impl< true, false, true, 8 >, [708](#)
- Simd512\_impl< true, true, false, 8 >, [716](#), [719](#)
- Simd512\_impl< true, true, true, 8 >, [727](#)
- storeu
  - Simd128\_impl< true, true, false, 2 >, [567](#), [570](#)
  - Simd128\_impl< true, true, false, 4 >, [577](#), [580](#)
  - Simd128\_impl< true, true, false, 8 >, [587](#), [590](#)
  - Simd128\_impl< true, true, true, 2 >, [598](#)
  - Simd128\_impl< true, true, true, 4 >, [607](#)
  - Simd128\_impl< true, true, true, 8 >, [616](#)
  - Simd256\_impl< true, false, true, 8 >, [626](#)
  - Simd256\_impl< true, true, false, 2 >, [635](#), [637](#)
  - Simd256\_impl< true, true, false, 4 >, [646](#), [649](#), [652](#)
  - Simd256\_impl< true, true, false, 8 >, [663](#), [665](#)
  - Simd256\_impl< true, true, true, 2 >, [673](#)
  - Simd256\_impl< true, true, true, 4 >, [683](#), [689](#)
  - Simd256\_impl< true, true, true, 8 >, [699](#)
  - Simd512\_impl< true, false, true, 8 >, [708](#)
  - Simd512\_impl< true, true, false, 8 >, [716](#), [719](#)
  - Simd512\_impl< true, true, true, 8 >, [727](#)
- stream
  - Simd128\_impl< true, true, false, 2 >, [567](#), [570](#)
  - Simd128\_impl< true, true, false, 4 >, [577](#), [580](#)
  - Simd128\_impl< true, true, false, 8 >, [587](#), [590](#)
  - Simd128\_impl< true, true, true, 2 >, [598](#)
  - Simd128\_impl< true, true, true, 4 >, [607](#)
  - Simd128\_impl< true, true, true, 8 >, [616](#)
  - Simd256\_impl< true, false, true, 8 >, [626](#)
  - Simd256\_impl< true, true, false, 2 >, [635](#), [637](#)
  - Simd256\_impl< true, true, false, 4 >, [646](#), [649](#), [652](#)
  - Simd256\_impl< true, true, false, 8 >, [663](#), [666](#)
  - Simd256\_impl< true, true, true, 2 >, [673](#)
  - Simd256\_impl< true, true, true, 4 >, [683](#), [689](#)
  - Simd256\_impl< true, true, true, 8 >, [699](#)
  - Simd512\_impl< true, false, true, 8 >, [708](#)
  - Simd512\_impl< true, true, false, 8 >, [716](#), [719](#)
  - Simd512\_impl< true, true, true, 8 >, [727](#)
- strmm\_
  - config-blas.h, [815](#)
- strsm\_
  - config-blas.h, [815](#)
- sub
  - FFLAS::vectorised, [281](#)
  - FieldSimd< \_Field >, [449](#)
  - RNSIntegerMod< RNS >, [549](#)
  - ScalFunctions< Element >, [555](#)
  - Simd128\_impl< true, true, false, 2 >, [572](#)
  - Simd128\_impl< true, true, false, 4 >, [582](#)
  - Simd128\_impl< true, true, false, 8 >, [592](#)
  - Simd128\_impl< true, true, true, 2 >, [600](#)
  - Simd128\_impl< true, true, true, 4 >, [608](#)
  - Simd128\_impl< true, true, true, 8 >, [618](#)
  - Simd256\_impl< true, false, true, 8 >, [628](#)
  - Simd256\_impl< true, true, false, 2 >, [639](#)
  - Simd256\_impl< true, true, false, 4 >, [656](#)
  - Simd256\_impl< true, true, false, 8 >, [667](#)
  - Simd256\_impl< true, true, true, 2 >, [675](#)
  - Simd256\_impl< true, true, true, 4 >, [685](#), [692](#)
  - Simd256\_impl< true, true, true, 8 >, [701](#)
  - Simd512\_impl< true, false, true, 8 >, [710](#)
  - Simd512\_impl< true, true, false, 8 >, [721](#)
  - Simd512\_impl< true, true, true, 8 >, [729](#)
- sub\_r
  - FieldSimd< \_Field >, [449](#), [450](#)
- subin
  - FieldSimd< \_Field >, [449](#)
  - ScalFunctions< Element >, [555](#)
  - Simd128\_impl< true, true, false, 2 >, [572](#)
  - Simd128\_impl< true, true, false, 4 >, [582](#)
  - Simd128\_impl< true, true, false, 8 >, [592](#)
  - Simd128\_impl< true, true, true, 2 >, [600](#)
  - Simd128\_impl< true, true, true, 4 >, [609](#)
  - Simd128\_impl< true, true, true, 8 >, [618](#)
  - Simd256\_impl< true, false, true, 8 >, [628](#)
  - Simd256\_impl< true, true, false, 2 >, [639](#)
  - Simd256\_impl< true, true, false, 4 >, [656](#)
  - Simd256\_impl< true, true, false, 8 >, [667](#)
  - Simd256\_impl< true, true, true, 2 >, [675](#)
  - Simd256\_impl< true, true, true, 4 >, [685](#), [692](#)
  - Simd256\_impl< true, true, true, 8 >, [701](#)
  - Simd512\_impl< true, false, true, 8 >, [710](#)
  - Simd512\_impl< true, true, false, 8 >, [721](#)
  - Simd512\_impl< true, true, true, 8 >, [729](#)
- subin\_r
  - FieldSimd< \_Field >, [450](#)
- subp
  - FFLAS::vectorised, [280](#)
- support\_fast\_mod< double >, [759](#)
- support\_fast\_mod< float >, [760](#)
- support\_fast\_mod< int64\_t >, [760](#)
- support\_fast\_mod< T >, [759](#)
- support\_simd< T >, [760](#)
- support\_simd\_add< T >, [761](#)
- support\_simd\_mod< T >, [761](#)
- swapval
  - FFPACK, [383](#)
- SYNCH\_GROUP
  - parallel.h, [1033](#)
- SysTimer
  - FFLAS, [74](#)

## T

limits< char >, 488  
 limits< double >, 489  
 limits< float >, 489  
 limits< Givaro::Integer >, 490  
 limits< int >, 490  
 limits< long >, 491  
 limits< long long >, 492  
 limits< Reclnt::rint< K > >, 492  
 limits< Reclnt::ruint< K > >, 493  
 limits< short int >, 494  
 limits< signed char >, 494  
 limits< unsigned char >, 495  
 limits< unsigned int >, 495  
 limits< unsigned long >, 496  
 limits< unsigned long long >, 497  
 limits< unsigned short int >, 497

## t

Simd128\_impl< true, true, false, 2 >::Converter, 425  
 Simd128\_impl< true, true, false, 4 >::Converter, 425  
 Simd128\_impl< true, true, false, 8 >::Converter, 426  
 Simd128\_impl< true, true, true, 2 >::Converter, 426  
 Simd128\_impl< true, true, true, 4 >::Converter, 426  
 Simd128\_impl< true, true, true, 8 >::Converter, 427  
 Simd256\_impl< true, false, true, 8 >::Converter, 427  
 Simd256\_impl< true, true, false, 2 >::Converter, 427  
 Simd256\_impl< true, true, false, 4 >::Converter, 428  
 Simd256\_impl< true, true, false, 8 >::Converter, 428  
 Simd256\_impl< true, true, true, 2 >::Converter, 428  
 Simd256\_impl< true, true, true, 4 >::Converter, 429  
 Simd256\_impl< true, true, true, 8 >::Converter, 429  
 Simd512\_impl< true, true, false, 8 >::Converter, 429  
 Simd512\_impl< true, true, true, 8 >::Converter, 430

## TASK

parallel.h, 1033

## tBC

test-lu.C, 1091  
 test-permutations.C, 1096

## Test

Test< Elt >, 763

## test

test-maxdelayeddim.C, 1092

Test< Elt >, 761

\_mm, 764  
 \_nn, 764  
 cardinality, 763  
 doTests, 763  
 Elt\_ptr, 762  
 enable\_if\_no\_simd\_t, 762  
 enable\_if\_simd128\_t, 762  
 enable\_if\_simd256\_t, 762  
 enable\_if\_simd512\_t, 763  
 enable\_if\_t, 762  
 F, 764  
 Field, 762  
 is\_same\_element, 762  
 Residu, 762  
 run, 763  
 Test, 763  
 test\_ftranspose, 763

test-charpoly-check.C, 1054

ENABLE\_CHECKER\_charpoly, 1054  
 main, 1055  
 printPolynomial, 1055  
 TIME\_CHECKER\_CHARPOLY, 1054

test-charpoly.C, 1055

launch\_test, 1055  
 main, 1056  
 run\_with\_field, 1055

test-compressQ.C, 1056

Field, 1056  
 main, 1056  
 printvect, 1056

test-det-check.C, 1057

ENABLE\_CHECKER\_Det, 1057  
 main, 1057  
 TIME\_CHECKER\_Det, 1057

test-det.C, 1057

main, 1058  
 test\_det, 1058

test-echelon.C, 1058

\_\_FFLASFFPACK\_GAUSSJORDAN\_BASECASE, 1059  
 \_\_FFLASFFPACK\_PLUQ\_THRESHOLD, 1059  
 \_\_FFLASFFPACK\_SEQUENTIAL, 1059

main, 1060  
 run\_with\_field, 1060

test\_colechelon, 1059  
 test\_redcoechelon, 1059  
 test\_redrowechelon, 1059  
 test\_rowechelon, 1059

test-fadd.C, 1060

main, 1061  
 test\_fadd, 1061  
 test\_faddin, 1061  
 test\_fsub, 1061  
 test\_fsubin, 1061

test-fdot.C, 1061

check\_fdot, 1062  
 ENABLE\_ALL\_CHECKINGS, 1062  
 main, 1062

- run\_with\_field, 1062
- run\_with\_Integer, 1062
- test-fgemmm-check.C, 1063
  - ENABLE\_ALL\_CHECKINGS, 1063
  - launch\_MM\_dispatch, 1063
  - main, 1064
  - run\_with\_field, 1063
- test-fgemmm.C, 1064
  - check\_MM, 1065
  - ENABLE\_CHECKER\_fgemmm, 1065
  - launch\_MM, 1065
  - launch\_MM\_dispatch, 1065
  - main, 1066
  - run\_with\_field, 1066
- test-fgemv.C, 1066
  - check\_MV, 1067
  - launch\_MV, 1067
  - launch\_MV\_dispatch, 1067
  - main, 1068
  - run\_with\_field, 1067
- test-fger.C, 1068
  - check\_fger, 1069
  - launch\_fger, 1069
  - launch\_fger\_dispatch, 1069
  - main, 1069
  - run\_with\_field, 1069
  - TIME, 1068
- test-fgesv.C, 1070
  - main, 1071
  - run\_with\_field, 1070
  - test\_rect\_fgesv, 1070
  - test\_square\_fgesv, 1070
- test-finit.C, 1071
  - main, 1072
  - run\_with\_field, 1071
  - test\_freduce, 1071
- test-fscal.C, 1072
  - main, 1073
  - test\_fscal, 1072
  - test\_fscal\_in, 1073
- test-fsyr2k.C, 1073
  - check\_fsyr2k, 1074
  - ENABLE\_ALL\_CHECKINGS, 1074
  - main, 1074
  - run\_with\_field, 1074
- test-fsyrk.C, 1074
  - check\_computeS1S2, 1076
  - check\_fsyrk, 1075
  - check\_fsyrk\_bkdiag, 1076
  - check\_fsyrk\_diag, 1075
  - ENABLE\_ALL\_CHECKINGS, 1075
  - main, 1076
  - run\_with\_field, 1076
- test-fsytrf.C, 1076
  - main, 1078
  - operator<<, 1077
  - run\_with\_field, 1077
  - test\_generic\_fsytrf, 1077
  - test\_RPM\_fsytrf, 1077
- test-ftrmm.C, 1078
  - \_\_FFLASFFPACK\_SEQUENTIAL, 1078
  - check\_ftrmm, 1078
  - main, 1079
  - run\_with\_field, 1079
- test-ftrmv.C, 1079
  - \_\_FFLASFFPACK\_SEQUENTIAL, 1079
  - check\_ftrmv, 1080
  - ENABLE\_ALL\_CHECKINGS, 1079
  - main, 1080
  - run\_with\_field, 1080
- test-ftrsm-check.C, 1080
  - ENABLE\_ALL\_CHECKINGS, 1080
  - main, 1080
- test-ftrsm.C, 1081
  - \_\_FFLASFFPACK\_SEQUENTIAL, 1081
  - check\_ftrsm, 1081
  - ENABLE\_ALL\_CHECKINGS, 1081
  - main, 1082
  - run\_with\_field, 1081
- test-ftrssyr2k.C, 1082
  - check\_ftrssyr2k, 1082
  - ENABLE\_ALL\_CHECKINGS, 1082
  - main, 1083
  - run\_with\_field, 1083
- test-ftrstr.C, 1083
  - check\_ftrstr, 1084
  - ENABLE\_ALL\_CHECKINGS, 1083
  - main, 1084
  - run\_with\_field, 1084
- test-ftrsv.C, 1084
  - \_\_FFLASFFPACK\_SEQUENTIAL, 1085
  - check\_ftrsv, 1085
  - ENABLE\_ALL\_CHECKINGS, 1085
  - main, 1085
  - run\_with\_field, 1085
- test-ftrtri.C, 1085
  - \_\_FFLASFFPACK\_SEQUENTIAL, 1086
  - check\_ftrtri, 1086
  - ENABLE\_ALL\_CHECKINGS, 1086
  - main, 1086
  - run\_with\_field, 1086
- test-interfaces-c.c, 1086
  - main, 1087
- test-invert-check.C, 1087
  - ENABLE\_ALL\_CHECKINGS, 1087
  - main, 1087
- test-io.C, 1087
  - main, 1088
  - run\_with\_field, 1088
- test-lu.C, 1088
  - \_\_FFLASFFPACK\_SEQUENTIAL, 1089
  - \_\_LUDIVINE\_CUTOFF, 1089
  - BASECASE\_K, 1089
  - launch\_test, 1091
  - main, 1091
  - mvcnt, 1092

- run\_with\_field, 1091
- tBC, 1091
- test\_LUdivine, 1089
- test\_pluq, 1090
- tgemm, 1091
- timtot, 1092
- tperm, 1091
- trest, 1092
- ttrsm, 1092
- verifPLUQ, 1090
- test-maxdelayeddim.C, 1092
  - main, 1092
  - MAX\_WITH\_SIZE\_T, 1092
  - test, 1092
- test-minpoly.C, 1093
  - check\_minpoly, 1093
  - main, 1093
  - run\_with\_field, 1093
- test-multifile1.C, 1093
- test-multifile2.C, 1094
  - main, 1094
- test-nullspace.C, 1094
  - checkingMessage, 1094
  - main, 1095
  - readOrRandomMatrixWithRankAndRandomRPM, 1094
  - run\_with\_field, 1095
  - test\_nullspace, 1095
- test-permutations.C, 1095
  - checkMonotonicApplyP, 1096
  - main, 1096
  - tBC, 1096
  - tgemm, 1096
  - timtot, 1096
  - tperm, 1096
  - trest, 1096
  - ttrsm, 1096
- test-pluq-check.C, 1096
  - ENABLE\_ALL\_CHECKINGS, 1097
  - main, 1097
- test-quasisep.C, 1097
  - launch\_test, 1097
  - main, 1098
  - run\_with\_field, 1098
  - test\_BruhatGenerator, 1097
  - testLTQSRPM, 1098
- test-rankprofiles.C, 1098
  - \_\_FFLASFFPACK\_SEQUENTIAL, 1099
  - main, 1099
  - run\_with\_field, 1099
- test-rpm.C, 1099
  - checkRPM, 1099
  - checkSymmetricRPM, 1099
  - main, 1100
- test-simd.C, 1100
  - \_TEST\_ONE, 1101
  - check\_eq, 1102
  - cmp, 1102
  - eval\_func\_on\_array, 1102
  - main, 1103
  - operator<<, 1102
  - TEST\_IMPL, 1101
  - test\_impl, 1103
  - test\_impl\_base, 1102, 1103
  - TEST\_ONE\_OP, 1101
  - TEST\_ONE\_OP\_WZ, 1101
- test-solve.C, 1103
  - check\_solve, 1103
  - main, 1104
  - run\_with\_field, 1103
- test-storage-transpose.C, 1104
  - main, 1104
- test-utils.h, 1049
- test\_BruhatGenerator
  - test-quasisep.C, 1097
- test\_colechelon
  - test-echelon.C, 1059
- test\_det
  - test-det.C, 1058
- test\_fadd
  - test-fadd.C, 1061
- test\_faddin
  - test-fadd.C, 1061
- test\_freduce
  - test-finit.C, 1071
- test\_fscal
  - test-fscal.C, 1072
- test\_fscalin
  - test-fscal.C, 1073
- test\_fsub
  - test-fadd.C, 1061
- test\_fsubin
  - test-fadd.C, 1061
- test\_ftranspose
  - Test< Elt >, 763
- test\_generic\_fsytrf
  - test-fsytrf.C, 1077
- TEST\_IMPL
  - test-simd.C, 1101
- test\_impl
  - test-simd.C, 1103
- test\_impl\_base
  - test-simd.C, 1102, 1103
- test\_LUdivine
  - test-lu.C, 1089
- test\_nullspace
  - test-nullspace.C, 1095
- TEST\_ONE\_OP
  - test-simd.C, 1101
- TEST\_ONE\_OP\_WZ
  - test-simd.C, 1101
- test\_pluq
  - test-lu.C, 1090
- test\_rect\_fgesv
  - test-fgesv.C, 1070
- test\_redcoechelon



- test-echelon.C, [1059](#)
- test\_redrowechelon
  - test-echelon.C, [1059](#)
- test\_rowechelon
  - test-echelon.C, [1059](#)
- test\_RPM\_fsytrf
  - test-fsytrf.C, [1077](#)
- test\_square\_fgesv
  - test-fgesv.C, [1070](#)
- testLTQSRPM
  - test-quasisep.C, [1098](#)
- TestOneMethod
  - TestOneMethod< Simd >, [765](#)
- TestOneMethod< Simd >, [764](#)
  - Element, [765](#)
  - enable\_if\_t, [765](#)
  - evaluate\_scalar\_method, [765](#), [766](#)
  - evaluate\_simd\_method, [766](#)
  - getStatus, [766](#)
  - getTestName, [766](#)
  - inputs, [767](#)
  - name, [767](#)
  - nb\_lref, [766](#)
  - outputs\_scalar, [767](#)
  - outputs\_simd, [767](#)
  - TestOneMethod, [765](#)
  - vect\_size, [766](#)
  - vect\_t, [765](#)
  - vectElt, [765](#)
  - writeDebugData, [766](#)
  - writeResultLine, [766](#)
- tfn\_minus, [767](#)
  - operator(), [767](#)
- tfn\_minus\_eq, [767](#)
  - operator(), [768](#)
- tfn\_mul, [768](#)
  - operator(), [768](#)
- tfn\_mul\_eq, [768](#)
  - operator(), [768](#)
- tfn\_plus, [768](#)
  - operator(), [769](#)
- tfn\_plus\_eq, [769](#)
  - operator(), [769](#)
- tgemm
  - test-lu.C, [1091](#)
  - test-permutations.C, [1096](#)
- THREAD\_INDEX
  - parallel.h, [1033](#)
- THREADS
  - benchmark-fgemm-rns.C, [788](#)
- Threads, [769](#)
- threads\_fgemm
  - FFPACK, [363](#)
- threads\_ftsm
  - FFPACK, [363](#)
- THREED
  - benchmark-fgemm-rns.C, [788](#)
- ThreeD, [769](#)
- THREEDA
  - benchmark-fgemm-rns.C, [788](#)
- ThreeDAdaptive, [769](#)
- ThreeDInPlace, [770](#)
- THREEDIP
  - benchmark-fgemm-rns.C, [788](#)
- TIME
  - test-fger.C, [1068](#)
- TIME\_CHECKER\_CHARPOLY
  - test-charpoly-check.C, [1054](#)
- TIME\_CHECKER\_Det
  - test-det-check.C, [1057](#)
- Timer
  - FFLAS, [74](#)
- timer.h, [1050](#)
- timtot
  - test-lu.C, [1092](#)
  - test-permutations.C, [1096](#)
- TInverter
  - FFPACK, [345](#), [348](#)
- tmain
  - benchmark-fgemm-mp.C, [787](#)
  - benchmark-fgemv-mp.C, [790](#)
- Todo List, [9](#)
- tperm
  - test-lu.C, [1091](#)
  - test-permutations.C, [1096](#)
- transpose
  - BlockTransposeSIMD< Field, Simd, >, [410](#)
  - Simd128\_impl< true, true, false, 2 >, [571](#)
  - Simd128\_impl< true, true, false, 4 >, [581](#)
  - Simd128\_impl< true, true, false, 8 >, [591](#)
  - Simd128\_impl< true, true, true, 2 >, [599](#)
  - Simd128\_impl< true, true, true, 4 >, [608](#)
  - Simd128\_impl< true, true, true, 8 >, [617](#)
  - Simd256\_impl< true, false, true, 8 >, [627](#)
  - Simd256\_impl< true, true, false, 2 >, [639](#)
  - Simd256\_impl< true, true, false, 4 >, [655](#)
  - Simd256\_impl< true, true, false, 8 >, [667](#)
  - Simd256\_impl< true, true, true, 2 >, [674](#)
  - Simd256\_impl< true, true, true, 4 >, [685](#), [691](#)
  - Simd256\_impl< true, true, true, 8 >, [700](#)
  - Simd512\_impl< true, false, true, 8 >, [709](#)
  - Simd512\_impl< true, true, false, 8 >, [720](#)
  - Simd512\_impl< true, true, true, 8 >, [728](#)
- trest
  - test-lu.C, [1092](#)
  - test-permutations.C, [1096](#)
- trinv\_left
  - FFPACK, [310](#), [367](#)
- trinv\_left\_modular\_double
  - ffpack.C, [991](#)
  - ffpack\_c.h, [1013](#)
- TRSMBound
  - FFLAS::Protected, [212](#), [213](#)
- TRSMHelper
  - TRSMHelper< ReclterTrait, ParSeqTrait >, [770](#)
- TRSMHelper< ReclterTrait, ParSeqTrait >, [770](#)



- parseq, [771](#)
  - pMMH, [771](#)
  - TRSMHelper, [770](#)
- TTimer
  - arithprog.C, [773](#)
  - benchmark-dgemm.C, [782](#)
  - charpoly.C, [774](#)
- ttrsm
  - test-lu.C, [1092](#)
  - test-permutations.C, [1096](#)
- Tutorial, [2](#)
- TWOD
  - benchmark-fgemm-rns.C, [788](#)
- TwoD, [771](#)
- TWODA
  - benchmark-fgemm-rns.C, [788](#)
- TwoDAdaptive, [771](#)
- type
  - Argument, [404](#)
  - associatedDelayedField< const FFPACK::RNSIntegerModulus< T, X >, >, [404](#)
  - associatedDelayedField< const Givaro::Modular< T, X >, >, [405](#)
  - associatedDelayedField< const Givaro::ModularBalanced< T >, >, [405](#)
  - associatedDelayedField< const Givaro::ZRing< T >, >, [406](#)
  - associatedDelayedField< Field >, [404](#)
  - CompactElement< double >, [422](#)
  - CompactElement< Element >, [421](#)
  - CompactElement< float >, [422](#)
  - CompactElement< int16\_t >, [422](#)
  - CompactElement< int32\_t >, [422](#)
  - CompactElement< int64\_t >, [423](#)
  - is\_simd< T >, [481](#)
- TYPE\_BOOL
  - args-parser.h, [1041](#)
- TYPE\_DOUBLE
  - args-parser.h, [1041](#)
- TYPE\_INT
  - args-parser.h, [1041](#)
- TYPE\_INTEGER
  - args-parser.h, [1041](#)
- type\_integer
  - args-parser.h, [1041](#)
- TYPE\_INTLIST
  - args-parser.h, [1041](#)
- TYPE\_LONGLONG
  - args-parser.h, [1041](#)
- TYPE\_NONE
  - args-parser.h, [1041](#)
- TYPE\_STR
  - args-parser.h, [1041](#)
- type\_string
  - NoSimd< T >, [521](#)
  - Simd128\_impl< true, true, false, 2 >, [567](#)
  - Simd128\_impl< true, true, false, 4 >, [577](#)
  - Simd128\_impl< true, true, false, 8 >, [587](#)
  - Simd128\_impl< true, true, true, 2 >, [597](#)
  - Simd128\_impl< true, true, true, 4 >, [606](#)
  - Simd128\_impl< true, true, true, 8 >, [615](#)
  - Simd256\_impl< true, false, true, 8 >, [625](#)
  - Simd256\_impl< true, true, false, 2 >, [634](#)
  - Simd256\_impl< true, true, false, 4 >, [645](#), [648](#)
  - Simd256\_impl< true, true, false, 8 >, [662](#)
  - Simd256\_impl< true, true, true, 2 >, [672](#)
  - Simd256\_impl< true, true, true, 4 >, [682](#), [688](#)
  - Simd256\_impl< true, true, true, 8 >, [698](#)
  - Simd512\_impl< true, false, true, 8 >, [707](#)
  - Simd512\_impl< true, true, false, 8 >, [715](#)
  - Simd512\_impl< true, true, true, 8 >, [726](#)
- TYPE\_UINT64
  - args-parser.h, [1041](#)
- unfit
  - FFLAS::Protected, [221](#)
- unpackhi
  - ScalFunctions< Element >, [557](#)
  - Simd128\_impl< true, true, false, 2 >, [571](#)
  - Simd128\_impl< true, true, false, 4 >, [581](#)
  - Simd128\_impl< true, true, false, 8 >, [591](#)
  - Simd128\_impl< true, true, true, 2 >, [599](#)
  - Simd128\_impl< true, true, true, 4 >, [607](#)
  - Simd128\_impl< true, true, true, 8 >, [617](#)
  - Simd256\_impl< true, false, true, 8 >, [627](#)
  - Simd256\_impl< true, true, false, 2 >, [638](#)
  - Simd256\_impl< true, true, false, 4 >, [653](#)
  - Simd256\_impl< true, true, false, 8 >, [666](#)
  - Simd256\_impl< true, true, true, 2 >, [674](#)
  - Simd256\_impl< true, true, true, 4 >, [684](#), [690](#)
  - Simd256\_impl< true, true, true, 8 >, [700](#)
  - Simd512\_impl< true, false, true, 8 >, [709](#)
  - Simd512\_impl< true, true, false, 8 >, [720](#)
  - Simd512\_impl< true, true, true, 8 >, [728](#)
- unpackhi\_intrinsic
  - Simd128\_impl< true, true, false, 2 >, [571](#)
  - Simd128\_impl< true, true, false, 4 >, [580](#)
  - Simd128\_impl< true, true, false, 8 >, [591](#)
  - Simd128\_impl< true, true, true, 2 >, [598](#)
  - Simd128\_impl< true, true, true, 4 >, [607](#)
  - Simd128\_impl< true, true, true, 8 >, [616](#)
  - Simd256\_impl< true, false, true, 8 >, [627](#)
  - Simd256\_impl< true, true, false, 2 >, [638](#)
  - Simd256\_impl< true, true, false, 4 >, [653](#)
  - Simd256\_impl< true, true, false, 8 >, [666](#)
  - Simd256\_impl< true, true, true, 2 >, [673](#)
  - Simd256\_impl< true, true, true, 4 >, [684](#), [690](#)
  - Simd256\_impl< true, true, true, 8 >, [700](#)
  - Simd512\_impl< true, false, true, 8 >, [708](#)
  - Simd512\_impl< true, true, false, 8 >, [720](#)
  - Simd512\_impl< true, true, true, 8 >, [728](#)
- unpacklo
  - ScalFunctions< Element >, [557](#)
  - Simd128\_impl< true, true, false, 2 >, [571](#)
  - Simd128\_impl< true, true, false, 4 >, [581](#)
  - Simd128\_impl< true, true, false, 8 >, [591](#)
  - Simd128\_impl< true, true, true, 2 >, [598](#)

- Simd128\_impl< true, true, true, 4 >, [607](#)
- Simd128\_impl< true, true, true, 8 >, [617](#)
- Simd256\_impl< true, false, true, 8 >, [627](#)
- Simd256\_impl< true, true, false, 2 >, [638](#)
- Simd256\_impl< true, true, false, 4 >, [653](#)
- Simd256\_impl< true, true, false, 8 >, [666](#)
- Simd256\_impl< true, true, true, 2 >, [674](#)
- Simd256\_impl< true, true, true, 4 >, [684](#), [690](#)
- Simd256\_impl< true, true, true, 8 >, [700](#)
- Simd512\_impl< true, false, true, 8 >, [709](#)
- Simd512\_impl< true, true, false, 8 >, [720](#)
- Simd512\_impl< true, true, true, 8 >, [728](#)
- unpacklo\_intrinsic
  - Simd128\_impl< true, true, false, 2 >, [570](#)
  - Simd128\_impl< true, true, false, 4 >, [580](#)
  - Simd128\_impl< true, true, false, 8 >, [590](#)
  - Simd128\_impl< true, true, true, 2 >, [598](#)
  - Simd128\_impl< true, true, true, 4 >, [607](#)
  - Simd128\_impl< true, true, true, 8 >, [616](#)
  - Simd256\_impl< true, false, true, 8 >, [627](#)
  - Simd256\_impl< true, true, false, 2 >, [638](#)
  - Simd256\_impl< true, true, false, 4 >, [653](#)
  - Simd256\_impl< true, true, false, 8 >, [666](#)
  - Simd256\_impl< true, true, true, 2 >, [673](#)
  - Simd256\_impl< true, true, true, 4 >, [684](#), [690](#)
  - Simd256\_impl< true, true, true, 8 >, [699](#)
  - Simd512\_impl< true, false, true, 8 >, [708](#)
  - Simd512\_impl< true, true, false, 8 >, [719](#)
  - Simd512\_impl< true, true, true, 8 >, [728](#)
- unpacklohi
  - ScalFunctions< Element >, [558](#)
  - Simd128\_impl< true, true, false, 2 >, [571](#)
  - Simd128\_impl< true, true, false, 4 >, [581](#)
  - Simd128\_impl< true, true, false, 8 >, [591](#)
  - Simd128\_impl< true, true, true, 2 >, [599](#)
  - Simd128\_impl< true, true, true, 4 >, [608](#)
  - Simd128\_impl< true, true, true, 8 >, [617](#)
  - Simd256\_impl< true, false, true, 8 >, [627](#)
  - Simd256\_impl< true, true, false, 2 >, [638](#)
  - Simd256\_impl< true, true, false, 4 >, [654](#)
  - Simd256\_impl< true, true, false, 8 >, [666](#)
  - Simd256\_impl< true, true, true, 2 >, [674](#)
  - Simd256\_impl< true, true, true, 4 >, [684](#), [690](#)
  - Simd256\_impl< true, true, true, 8 >, [700](#)
  - Simd512\_impl< true, false, true, 8 >, [709](#)
  - Simd512\_impl< true, true, false, 8 >, [720](#)
  - Simd512\_impl< true, true, true, 8 >, [728](#)
- UnparametricTag, [771](#)
- updateD
  - FFPACK::Protected, [396](#)
- USE\_OPENMP
  - config.h, [820](#)
- UserTimer
  - FFLAS, [74](#)
- utils.h, [913](#)
- v
  - Simd128\_impl< true, true, false, 2 >::Converter, [425](#)
- Simd128\_impl< true, true, false, 4 >::Converter, [425](#)
- Simd128\_impl< true, true, false, 8 >::Converter, [426](#)
- Simd128\_impl< true, true, true, 2 >::Converter, [426](#)
- Simd128\_impl< true, true, true, 4 >::Converter, [426](#)
- Simd128\_impl< true, true, true, 8 >::Converter, [427](#)
- Simd256\_impl< true, false, true, 8 >::Converter, [427](#)
- Simd256\_impl< true, true, false, 2 >::Converter, [427](#)
- Simd256\_impl< true, true, false, 4 >::Converter, [428](#)
- Simd256\_impl< true, true, false, 8 >::Converter, [428](#)
- Simd256\_impl< true, true, true, 2 >::Converter, [428](#)
- Simd256\_impl< true, true, true, 4 >::Converter, [429](#)
- Simd256\_impl< true, true, true, 8 >::Converter, [429](#)
- Simd512\_impl< true, true, false, 8 >::Converter, [429](#)
- Simd512\_impl< true, true, true, 8 >::Converter, [430](#)
- val
  - Coo< Field >, [433](#)
  - Coo< ValT, IdxT >, [431](#), [434](#)
- valid
  - NoSimd< T >, [521](#)
  - Simd128\_impl< true, true, false, 2 >, [569](#)
  - Simd128\_impl< true, true, false, 4 >, [579](#)
  - Simd128\_impl< true, true, false, 8 >, [589](#)
  - Simd128\_impl< true, true, true, 2 >, [597](#)
  - Simd128\_impl< true, true, true, 4 >, [606](#)
  - Simd128\_impl< true, true, true, 8 >, [615](#)
  - Simd256\_impl< true, false, true, 8 >, [625](#)
  - Simd256\_impl< true, true, false, 2 >, [636](#)
  - Simd256\_impl< true, true, false, 4 >, [650](#)
  - Simd256\_impl< true, true, false, 8 >, [665](#)
  - Simd256\_impl< true, true, true, 2 >, [672](#)
  - Simd256\_impl< true, true, true, 4 >, [682](#), [688](#)
  - Simd256\_impl< true, true, true, 8 >, [698](#)
  - Simd512\_impl< true, false, true, 8 >, [707](#)
  - Simd512\_impl< true, true, false, 8 >, [718](#)
  - Simd512\_impl< true, true, true, 8 >, [726](#)
- VALUE
  - parallel.h, [1034](#)
- value
  - AlgoChooser< ModeCategories::ConvertTo< ElementCategories::RNSElementTag >, ParSeq >, [401](#)
  - AlgoChooser< ModeT, ParSeq >, [401](#)
  - ALL< false, v... >, [402](#)
  - ALL< true, v... >, [402](#)

- ALL<>, [402](#)
- AreEqual< X, X >, [403](#)
- AreEqual< X, Y >, [403](#)
- compatible\_data\_type< Field >, [423](#)
- compatible\_data\_type< Givaro::ZRing< double > >, [423](#)
- compatible\_data\_type< Givaro::ZRing< float > >, [423](#)
- ElementTraits< double >, [439](#)
- ElementTraits< Element >, [439](#)
- ElementTraits< FFPACK::rns\_double\_elt >, [439](#)
- ElementTraits< float >, [439](#)
- ElementTraits< Givaro::Integer >, [440](#)
- ElementTraits< int16\_t >, [440](#)
- ElementTraits< int32\_t >, [440](#)
- ElementTraits< int64\_t >, [441](#)
- ElementTraits< int8\_t >, [441](#)
- ElementTraits< Reclnt::rint< K > >, [441](#)
- ElementTraits< Reclnt::rmint< K, MG > >, [441](#)
- ElementTraits< Reclnt::ruint< K > >, [442](#)
- ElementTraits< uint16\_t >, [442](#)
- ElementTraits< uint32\_t >, [442](#)
- ElementTraits< uint64\_t >, [443](#)
- ElementTraits< uint8\_t >, [443](#)
- has\_minus\_eq\_impl< C >, [472](#)
- has\_minus\_impl< C >, [472](#)
- has\_mul\_eq\_impl< C >, [472](#)
- has\_mul\_impl< C >, [473](#)
- has\_operation< T >, [473](#)
- has\_plus\_eq\_impl< C >, [473](#)
- has\_plus\_impl< C >, [474](#)
- is\_all\_same< T, Args... >, [480](#)
- is\_all\_same<>, [481](#)
- is\_simd< T >, [481](#)
- ModeTraits< Field >, [512](#)
- ModeTraits< Givaro::Modular< Element, Compute > >, [513](#)
- ModeTraits< Givaro::Modular< Givaro::Integer, Compute > >, [513](#)
- ModeTraits< Givaro::Modular< int16\_t, Compute > >, [513](#)
- ModeTraits< Givaro::Modular< int32\_t, Compute > >, [514](#)
- ModeTraits< Givaro::Modular< int64\_t, uint64\_t > >, [514](#)
- ModeTraits< Givaro::Modular< int8\_t, Compute > >, [514](#)
- ModeTraits< Givaro::Modular< Reclnt::ruint< K >, Compute > >, [515](#)
- ModeTraits< Givaro::Modular< uint16\_t, Compute > >, [515](#)
- ModeTraits< Givaro::Modular< uint32\_t, Compute > >, [515](#)
- ModeTraits< Givaro::Modular< uint8\_t, Compute > >, [516](#)
- ModeTraits< Givaro::ModularBalanced< Element > >, [516](#)
- ModeTraits< Givaro::ModularBalanced< Givaro::Integer > >, [516](#)
- ModeTraits< Givaro::ModularBalanced< int16\_t > >, [517](#)
- ModeTraits< Givaro::ModularBalanced< int32\_t > >, [517](#)
- ModeTraits< Givaro::ModularBalanced< int8\_t > >, [517](#)
- ModeTraits< Givaro::Montgomery< T > >, [518](#)
- ModeTraits< Givaro::ZRing< double > >, [518](#)
- ModeTraits< Givaro::ZRing< float > >, [518](#)
- ModeTraits< Givaro::ZRing< Givaro::Integer > >, [519](#)
- need\_field\_characteristic< Field >, [519](#)
- need\_field\_characteristic< Givaro::Modular< Field > >, [520](#)
- need\_field\_characteristic< Givaro::ModularBalanced< Field > >, [520](#)
- SimdChooser< T, false, b >, [734](#)
- SimdChooser< T, true, false >, [735](#)
- SimdChooser< T, true, true >, [735](#)
- width< double >, [772](#)
- width< float >, [772](#)
- width< T >, [772](#)
- vand
  - ScalFunctions< Element >, [555](#)
  - Simd128\_impl< true, true, false, 2 >, [574](#)
  - Simd128\_impl< true, true, false, 4 >, [583](#)
  - Simd128\_impl< true, true, false, 8 >, [594](#)
  - Simd128\_impl< true, true, true, 2 >, [603](#)
  - Simd128\_impl< true, true, true, 4 >, [612](#)
  - Simd128\_impl< true, true, true, 8 >, [621](#)
  - Simd128i\_base, [623](#)
  - Simd256\_impl< true, false, true, 8 >, [630](#)
  - Simd256\_impl< true, true, false, 4 >, [659](#)
  - Simd256\_impl< true, true, true, 4 >, [695](#)
  - Simd512\_impl< true, true, false, 8 >, [723](#)
  - Simd512\_impl< true, true, true, 8 >, [732](#)
  - Simd512i\_base, [734](#)
- vandnot
  - ScalFunctions< Element >, [555](#)
  - Simd128\_impl< true, true, false, 2 >, [574](#)
  - Simd128\_impl< true, true, false, 4 >, [584](#)
  - Simd128\_impl< true, true, false, 8 >, [594](#)
  - Simd128\_impl< true, true, true, 2 >, [603](#)
  - Simd128\_impl< true, true, true, 4 >, [612](#)
  - Simd128\_impl< true, true, true, 8 >, [621](#)
  - Simd128i\_base, [623](#)
  - Simd256\_impl< true, false, true, 8 >, [630](#)
  - Simd256\_impl< true, true, false, 4 >, [659](#)
  - Simd256\_impl< true, true, true, 4 >, [695](#)
  - Simd512\_impl< true, true, false, 8 >, [723](#)
  - Simd512\_impl< true, true, true, 8 >, [732](#)
  - Simd512i\_base, [734](#)
- VEC\_ADD
  - FFLAS::vectorised, [280](#)
- VEC\_SUB
  - FFLAS::vectorised, [280](#)

- vect\_size
  - FieldSimd< \_Field >, [452](#)
  - NoSimd< T >, [521](#)
  - Simd128\_impl< true, true, false, 2 >, [574](#)
  - Simd128\_impl< true, true, false, 4 >, [584](#)
  - Simd128\_impl< true, true, false, 8 >, [594](#)
  - Simd128\_impl< true, true, true, 2 >, [603](#)
  - Simd128\_impl< true, true, true, 4 >, [612](#)
  - Simd128\_impl< true, true, true, 8 >, [622](#)
  - Simd256\_impl< true, false, true, 8 >, [631](#)
  - Simd256\_impl< true, true, false, 2 >, [641](#)
  - Simd256\_impl< true, true, false, 4 >, [659](#)
  - Simd256\_impl< true, true, false, 8 >, [669](#)
  - Simd256\_impl< true, true, true, 2 >, [678](#)
  - Simd256\_impl< true, true, true, 4 >, [695](#)
  - Simd256\_impl< true, true, true, 8 >, [704](#)
  - Simd512\_impl< true, false, true, 8 >, [712](#)
  - Simd512\_impl< true, true, false, 8 >, [723](#)
  - Simd512\_impl< true, true, true, 8 >, [733](#)
  - TestOneMethod< Simd >, [766](#)
- vect\_t
  - FieldSimd< \_Field >, [447](#)
  - NoSimd< T >, [520](#)
  - Simd128\_impl< true, true, false, 2 >, [566](#)
  - Simd128\_impl< true, true, false, 4 >, [577](#)
  - Simd128\_impl< true, true, false, 8 >, [587](#)
  - Simd128\_impl< true, true, true, 2 >, [596](#)
  - Simd128\_impl< true, true, true, 4 >, [605](#)
  - Simd128\_impl< true, true, true, 8 >, [614](#)
  - simd128\_int64.inl, [876](#)
  - Simd128i\_base, [622](#)
  - Simd256\_impl< true, false, true, 8 >, [625](#)
  - Simd256\_impl< true, true, false, 2 >, [634](#)
  - Simd256\_impl< true, true, false, 4 >, [645](#)
  - Simd256\_impl< true, true, false, 8 >, [662](#)
  - Simd256\_impl< true, true, true, 2 >, [671](#)
  - Simd256\_impl< true, true, true, 4 >, [682](#)
  - Simd256\_impl< true, true, true, 8 >, [697](#)
  - simd256\_int64.inl, [878](#)
  - Simd256i\_base, [705](#)
  - Simd512\_impl< true, false, true, 8 >, [707](#)
  - Simd512\_impl< true, true, false, 8 >, [715](#)
  - Simd512\_impl< true, true, true, 8 >, [725](#)
  - simd512\_int64.inl, [881](#)
  - Simd512i\_base, [733](#)
  - TestOneMethod< Simd >, [765](#)
- vectElt
  - ScalFunctions< Element >, [554](#)
  - TestOneMethod< Simd >, [765](#)
- verification\_PLUQ
  - benchmark-pluq.C, [801](#)
- verifPLUQ
  - test-lu.C, [1090](#)
- VERSION
  - config.h, [820](#)
- vor
  - ScalFunctions< Element >, [555](#)
  - Simd128\_impl< true, true, false, 2 >, [574](#)
  - Simd128\_impl< true, true, false, 4 >, [584](#)
  - Simd128\_impl< true, true, false, 8 >, [594](#)
  - Simd128\_impl< true, true, true, 2 >, [603](#)
  - Simd128\_impl< true, true, true, 4 >, [612](#)
  - Simd128\_impl< true, true, true, 8 >, [621](#)
  - Simd128i\_base, [623](#)
  - Simd256\_impl< true, false, true, 8 >, [630](#)
  - Simd256\_impl< true, true, false, 4 >, [659](#)
  - Simd256\_impl< true, true, true, 4 >, [695](#)
  - Simd512\_impl< true, true, false, 8 >, [723](#)
  - Simd512\_impl< true, true, true, 8 >, [732](#)
  - Simd512i\_base, [733](#)
- vxor
  - ScalFunctions< Element >, [555](#)
  - Simd128\_impl< true, true, false, 2 >, [574](#)
  - Simd128\_impl< true, true, false, 4 >, [584](#)
  - Simd128\_impl< true, true, false, 8 >, [594](#)
  - Simd128\_impl< true, true, true, 2 >, [603](#)
  - Simd128\_impl< true, true, true, 4 >, [612](#)
  - Simd128\_impl< true, true, true, 8 >, [621](#)
  - Simd128i\_base, [623](#)
  - Simd256\_impl< true, false, true, 8 >, [630](#)
  - Simd256\_impl< true, true, false, 4 >, [659](#)
  - Simd256\_impl< true, true, true, 4 >, [695](#)
  - Simd512\_impl< true, true, false, 8 >, [723](#)
  - Simd512\_impl< true, true, true, 8 >, [732](#)
  - Simd512i\_base, [733](#)
- WAIT
  - parallel.h, [1033](#)
- width< double >, [772](#)
  - value, [772](#)
- width< float >, [772](#)
  - value, [772](#)
- width< T >, [772](#)
  - value, [772](#)
- Winograd, [772](#)
  - FFLAS::BLAS3, [193](#)
- winograd.C, [778](#)
  - balanced, [779](#)
  - DOUBLE\_TO\_FLOAT\_CROSSOVER, [778](#)
  - GFOPS, [778](#)
  - main, [779](#)
- Winograd\_L\_S
  - FFLAS::BLAS3, [196](#)
- Winograd\_LR\_S
  - FFLAS::BLAS3, [196](#)
- Winograd\_R\_S
  - FFLAS::BLAS3, [197](#)
- WinogradAcc\_2\_24
  - FFLAS::BLAS3, [194](#)
- WinogradAcc\_2\_27
  - FFLAS::BLAS3, [194](#)
- WinogradAcc\_3\_21
  - FFLAS::BLAS3, [194](#)
- WinogradAcc\_3\_23
  - FFLAS::BLAS3, [193](#)
- WinogradAcc\_L\_S
  - FFLAS::BLAS3, [196](#)

WinogradAcc\_LR  
     FFLAS::BLAS3, [195](#)  
 WinogradAcc\_R\_S  
     FFLAS::BLAS3, [195](#)  
 WinogradCalc  
     FFLAS::Protected, [218](#)  
 WinogradPar, [772](#)  
 WinogradSteps  
     FFLAS::Protected, [216](#)  
 WinogradThreshold  
     FFLAS::Protected, [216](#)  
 WinoPar  
     FFLAS::BLAS3, [193](#)  
 WINOTHRESHOLD  
     fflas.h, [826](#)  
 WRITE  
     parallel.h, [1034](#)  
 write  
     RNSInteger< RNS >, [545](#)  
     RNSIntegerMod< RNS >, [550](#)  
 write\_field  
     Matio.h, [1049](#)  
 write\_matrix  
     benchmark-fgemv-mp.C, [790](#)  
     RNSIntegerMod< RNS >, [550](#)  
 write\_matrix\_long  
     RNSIntegerMod< RNS >, [551](#)  
 writeCommandString  
     FFLAS, [185](#)  
 writeDebugData  
     TestOneMethod< Simd >, [766](#)  
 writeDnsFormat  
     FFLAS, [152](#)  
 WriteMatrix  
     FFLAS, [185](#), [187](#)  
 WritePermutation  
     FFLAS, [187](#)  
 writeResultLine  
     TestOneMethod< Simd >, [766](#)  
 zero  
     FFLAS, [76](#)  
     FieldSimd< \_Field >, [450](#)  
     RNSInteger< RNS >, [545](#)  
     RNSIntegerMod< RNS >, [552](#)  
     ScalFunctions< Element >, [555](#)  
     Simd128\_impl< true, true, false, 2 >, [573](#)  
     Simd128\_impl< true, true, false, 4 >, [583](#)  
     Simd128\_impl< true, true, false, 8 >, [593](#)  
     Simd128\_impl< true, true, true, 2 >, [603](#)  
     Simd128\_impl< true, true, true, 4 >, [611](#)  
     Simd128\_impl< true, true, true, 8 >, [621](#)  
     Simd128i\_base, [622](#)  
     Simd256\_impl< true, false, true, 8 >, [626](#)  
     Simd256\_impl< true, true, false, 2 >, [641](#)  
     Simd256\_impl< true, true, false, 4 >, [659](#)  
     Simd256\_impl< true, true, false, 8 >, [669](#)  
     Simd256\_impl< true, true, true, 2 >, [678](#)  
     Simd256\_impl< true, true, true, 4 >, [695](#)  
     Simd256\_impl< true, true, true, 8 >, [704](#)  
     Simd256i\_base, [705](#)  
     Simd512\_impl< true, false, true, 8 >, [707](#)  
     Simd512\_impl< true, true, false, 8 >, [723](#)  
     Simd512\_impl< true, true, true, 8 >, [732](#)  
     Simd512i\_base, [733](#)  
 ZOSparseMatrix  
     FFLAS, [72](#)